



Shenzhen unity wireless technology co., ltd

Add: 601-603, Building B, Shenzhen Qianwan Hard Technology Industrial Park, Nanchang Community, Xixiang Street, Bao 'an District, Shenzhen

Product parameters:


品名	FPC 天线	Model	FPC
频率范围 (MHz)	2400-2500	Frequency	2400-2500
带宽 (MHz)	2400-2500	Bandwidth (MHz)	2400-2500
极化方式	线极化	Polarization Type	Linear polarization
天线增益 (dBi)	2.31	Gain (dBi)	2.31
电压驻波比	<2	VSWR	<2
输入阻抗 (Ω)	50	Input Impedance (Ω)	50
同轴线长度 (mm)	60MM	Cable length (mm)	60MM
电缆线颜色	黑色	Cable Colour	black
接口形式	二代 IPEX	Connector Type	IPEX
工作温度 (°C)	-40~+85	Operation temperature (°C)	-40~+85
存储温度 (°C)	-40~+85	Store temperat (°C)	-40~+85

ANT	E1	E2	E3
	NC	0 欧	NC

1. WIFI2. 4G Passive test data:

Freq (MHz)	Effi (%)	Gain (dBi)
2400	46.49	1.5
2410	43.34	1.23
2420	44.85	1.39
2430	45.61	1.46
2440	45.52	1.41
2450	48.71	1.66
2460	46.3	1.36
2470	46.52	1.4
2480	49.08	1.8
2490	51.91	2.2
2500	51.54	2.31

2D, 3D:

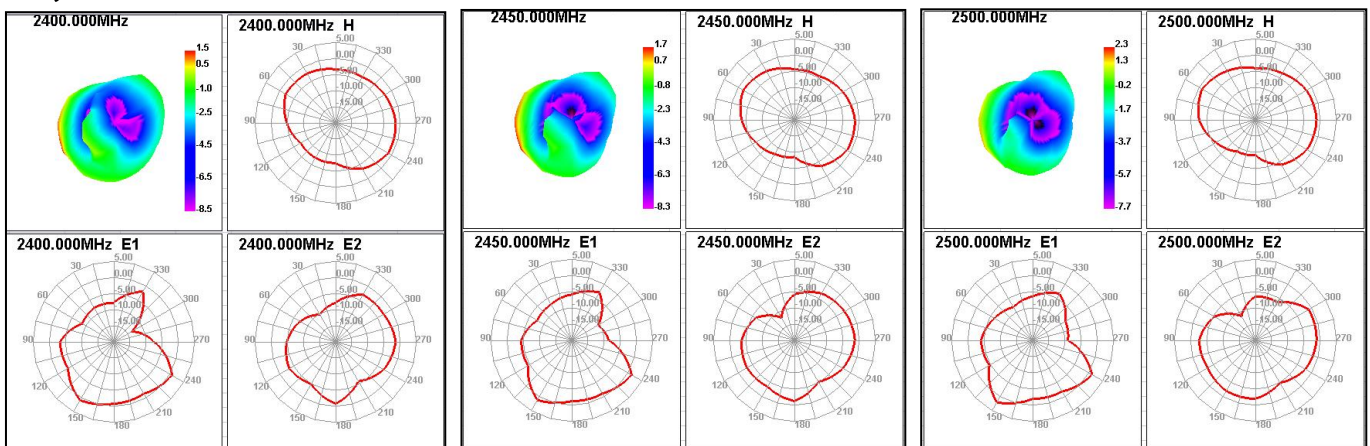

Dimension drawing:

