



TEST REPORT

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0188 Page (1) of (29)	eurofins KCTL
---	--	-------------------------------

1. Client

- Name : TheUMS Co. Ltd.
- Address : #305D, 23, Geongang-ro, Wonju-si, Gangwon-do, Republic of Korea
- Date of Receipt : 2023-06-14

2. Use of Report : Certification

3. Name of Product / Model : AIM24-SB / AIM24-SB

4. Manufacturer / Country of Origin : TheUMS Co. Ltd. / Korea

5. FCC ID : 2BB56AIM24-SB

6. Date of Test : 2023-06-21 to 2023-07-12

7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing
 (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

8. Test method used : FCC Part 15 Subpart C, 15.249

9. Test Result : Refer to the test result in the test report

Affirmation	Tested by Name : Minki Kim (Signature)	Technical Manager Name : Heesu Ahn (Signature)
-------------	---	---

2023-07-21

Eurofins KCTL Co.,Ltd.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0188 Page (2) of (29)	
---	--	---

REPORT REVISION HISTORY

Date	Revision	Page No
2023-07-21	Originally issued	-

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Frequency/channel operations.....	4
2.2.	RF power setting in TEST SW	4
3.	Antenna requirement	5
4.	Summary of tests	5
5.	Measurement uncertainty	5
6.	Test results	6
6.1.	20 dB Bandwidth.....	6
6.2.	Field strength of fundamental & harmonic	8
6.3.	AC Conducted emission	27
7.	Measurement equipment	29

1. General information

Client : TheUMS Co. Ltd.
 Address : #305D, 23, Geongang-ro, Wonju-si, Gangwon-do, Republic of Korea
 Manufacturer : TheUMS Co. Ltd.
 Address : #305D, 23, Geongang-ro, Wonju-si, Gangwon-do, Republic of Korea
 Laboratory : Eurofins KCTL Co.,Ltd.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
 CAB Identifier: KR0040
 ISED Number: 8035A
 KOLAS No.: KT231

2. Device information

Equipment under test : AIM24-SB
 Model : AIM24-SB
 Modulation technique : CW
 Number of channels : 3 ch
 Power source : DC 3.3 V
 Antenna specification : PCB Array antenna
 Antenna gain : 6.5 dBi
 Frequency range : 24 050 MHz ~ 24 250 MHz
 Software version : S_1.2
 Hardware version : UMS_T 1.4
 Test device serial No. : #U0001
 Operation temperature : -20 °C ~ 50 °C

2.1. Frequency/channel operations

This device contains the following capabilities:

24 GHz radar sensor

Ch.	Frequency (GHz)
Low	24.07
Mid	24.15
High	24.23

Table 2.1.1 24 GHz Radar

2.2. RF power setting in TEST SW

Test Condition	Frequency (GHz)	Power Setting
24 GHz Radar	24.07	Default
	24.15	
	24.23	

3. Antenna requirement

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached PCB Array Antenna on board.
- The E.U.T Complies with the requirement of §15.203, §15.249.

4. Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Test Results
15.215(c)	20 dB Bandwidth	Radiated	Pass
15.249 (a),(d),(e)	Field strength of fundamental & harmonic		Pass
15.207(a)	AC Conducted Emissions		Pass

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
3. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation.
4. The test procedure(s) in this report were performed in accordance as following.
 - ♦ ANSI C63.10-2013

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty ($\pm$)	
Radiated spurious emissions	Below 30 MHz	2.3 dB
	30 MHz to 1 000 MHz	2.5 dB
	1 000 MHz to 18 000 MHz	4.7 dB
	Above 18 000 MHz	4.8 dB
Conducted emissions	150 kHz ~ 30 MHz	2.7 dB

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0188 Page (6) of (29)	
--	--	---

6. Test results

6.1. 20 dB Bandwidth

Limit

According to §15.215(c), For Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

Test procedure

ANSI C63.10 – Section 6.9.2, 6.9.3


Occupied bandwidth (or 20 dB emission bandwidth)

The occupied bandwidth is measured as the width of the spectral envelope of the modulated signal, at an amplitude level reduced from a reference value by a specified ratio (or in decibels, a specified number of dB down from the reference value). Typical ratios, expressed in dB, are -6 dB, -20 dB, and -26 dB, corresponding to 6 dB BW, 20 dB BW, and 26 dB BW, respectively. In this subclause, the ratio is designated by “-xx dB.” The reference value is either the level of the unmodulated carrier or the highest level of the spectral envelope of the modulated signal, as stated by the applicable requirement. Some requirements might specify a specific maximum or minimum value for the “-xx dB” bandwidth; other requirements might specify that the “-xx dB” bandwidth be entirely contained within the authorized or designated frequency band

Test results

Frequency(GHz)	20 dB bandwidth(MHz)
24.07	1.35
24.15	1.77
24.23	4.23

20 dB bandwidth

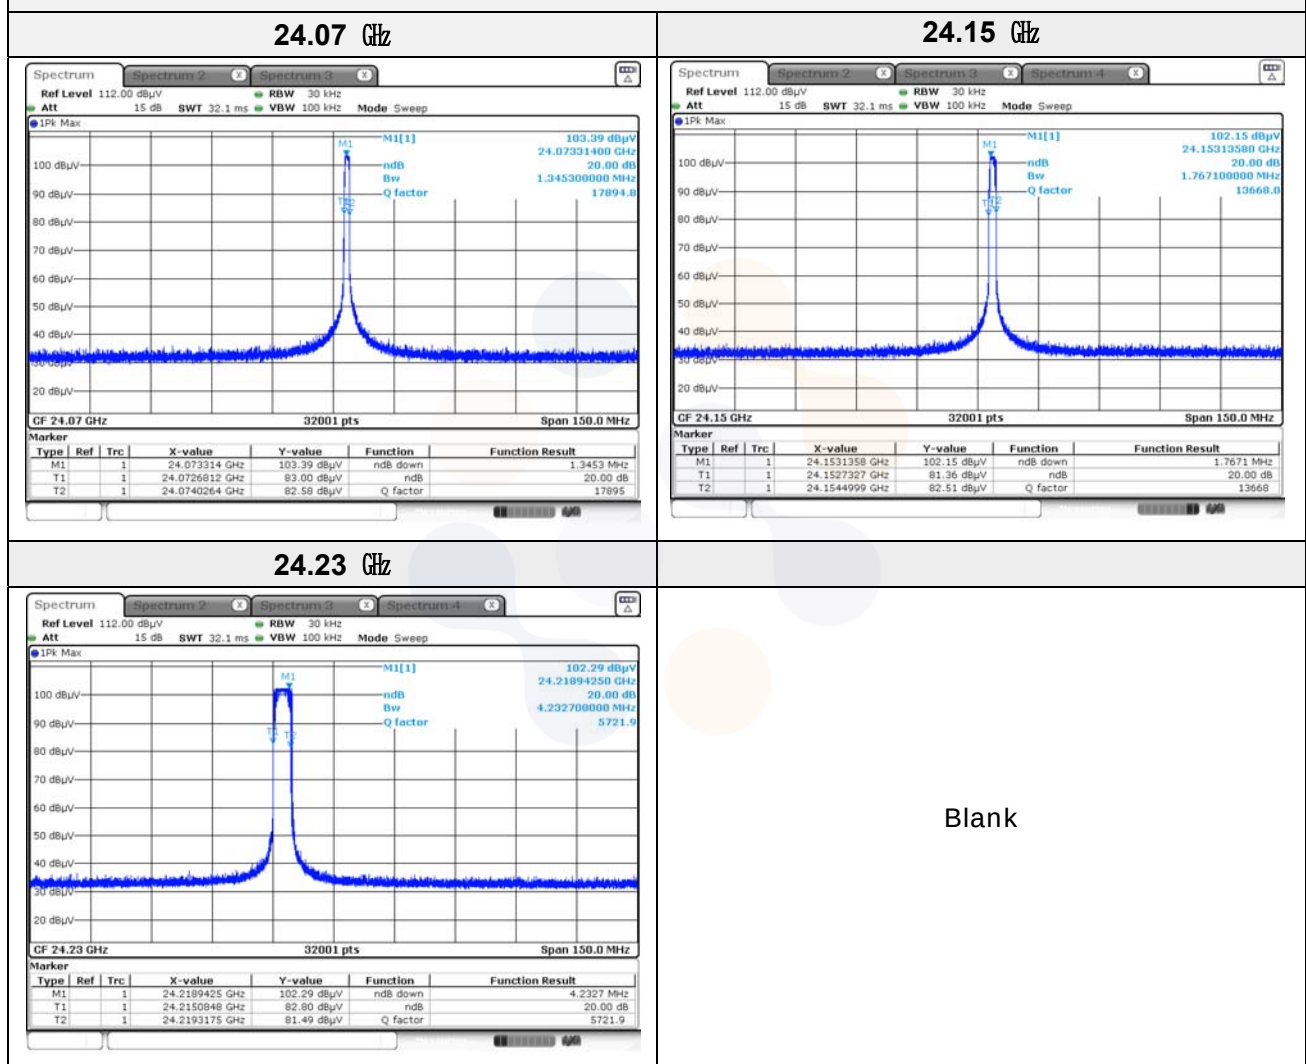


Note:

Because the measured signal is CW/CW-like, adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.


6.2. Field strength of fundamental & harmonic

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz emissions.

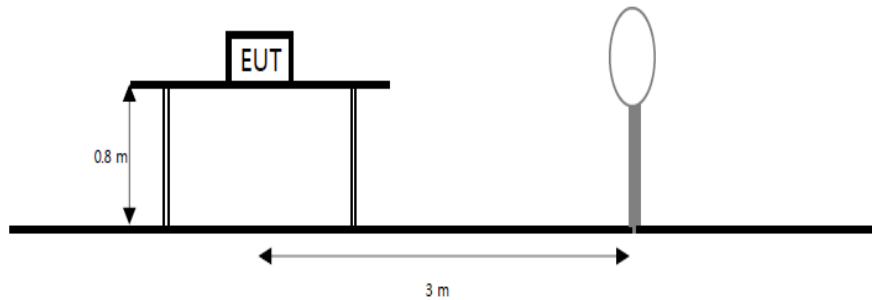


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

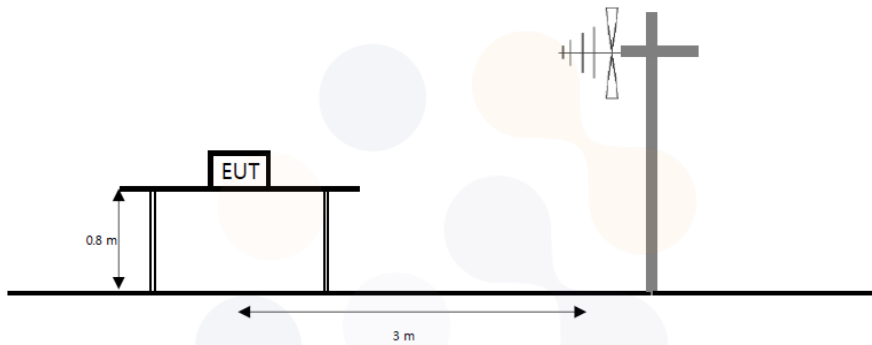

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 40 GHz emissions.

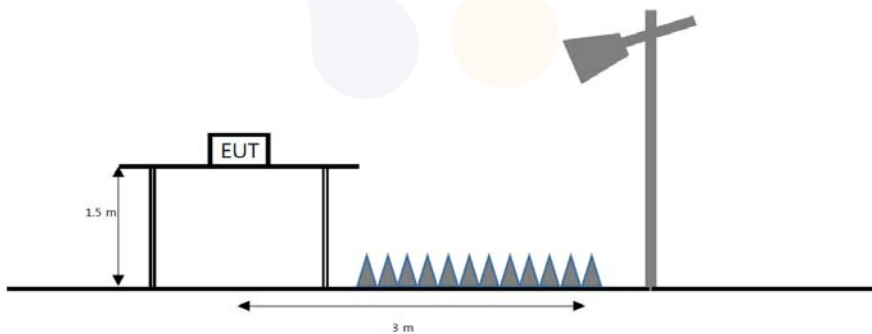

The diagram below shows the test setup that is utilized to make the measurements for emission from Above 40 GHz emissions.

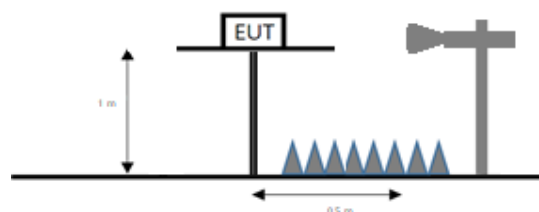

Limit

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.249(a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency (MHz)	Field strength of fundamental (mV/m)	Field strength of harmonics ($\mu\text{V}/\text{m}$)
902 – 928	50	500
2 400 – 2 483.5	50	500
5 725 – 5 875	50	500
24 000 – 24 250	250	2 500

(b) Fixed, point-to-point operation as referred to in this paragraph shall be limited to systems employing a fixed transmitter transmitting to a fixed remote location. Point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information are not allowed. Fixed, point-to-point operation is permitted in the 24.05-24.25 GHz band subject to the following conditions:

- (1) The field strength of emissions in this band shall not exceed 2 500 millivolts/meter.
- (2) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.001\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.
- (3) Antenna gain must be at least 33 dBi. Alternatively, the main lobe beamwidth must not exceed 3.5 degrees. The beamwidth limit shall apply to both the azimuth and elevation planes. At antenna gains over 33 dBi or beamwidths narrower than 3.5 degrees, power must be reduced to ensure that the field strength does not exceed 2 500 millivolts/meter.
- (c) Field strength limits are specified at a distance of 3 meters.
- (d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Notes:

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0188 Page (10) of (29)	
--	---	---

1. $f < 30 \text{ MHz}$, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$

$f \geq 30 \text{ MHz}$, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$

Where:

F_d = Distance factor in dB

D_m = Measurement distance in meters

D_s = Specification distance in meters

2. $\text{Factors(dB)} = \text{Antenna factor(dB/m)} + \text{Cable loss(dB)} + \text{or Amp. gain(dB)} - \text{or } F_d(\text{dB})$

3. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.

4. ¹⁾ means restricted band

5. Average test would be performed if the peak result were greater than the average limit.

6. Band edge Limit = The main wave limit is 250 mV/m at 3 m, attenuate 50 dB.


This Average limit, so:

$107.96 \text{ dB}\mu\text{V} - 50 \text{ dB} = 57.96 \text{ dB}\mu\text{V}$

General 15.209 limit = $54.00 \text{ dB}\mu\text{V}$

$57.96 \text{ dB}\mu\text{V}$ or $54.00 \text{ dB}\mu\text{V}$ whichever is the lesser attenuation.


This results Band edge limit $57.96 \text{ dB}\mu\text{V}$

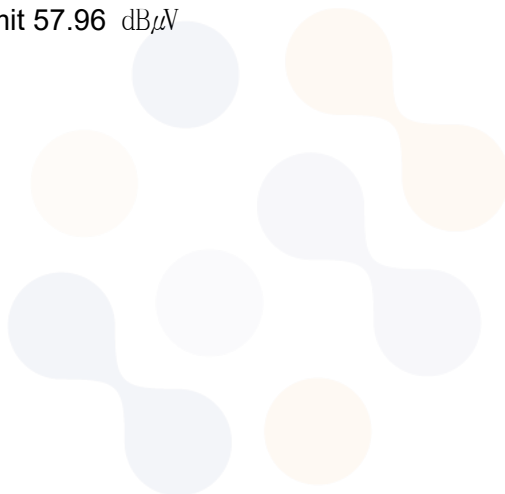

Test results

(30 ~ 1 000 MHz)–Worst case: 24 GHz radar sensor_24.07 GHz

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Quasi peak data								
72.20	V	33.60	12.20	-30.74	-	15.06	40.00	24.94
290.32	V	23.70	18.92	-30.12	-	12.50	46.00	33.50
466.02	V	23.90	22.90	-30.02	-	16.78	46.00	29.22
556.59	H	23.90	24.70	-29.82	-	18.78	46.00	27.22
747.80	H	23.90	25.50	-29.41	-	19.99	46.00	26.01
884.57	H	23.40	26.43	-28.57	-	21.26	46.00	24.74

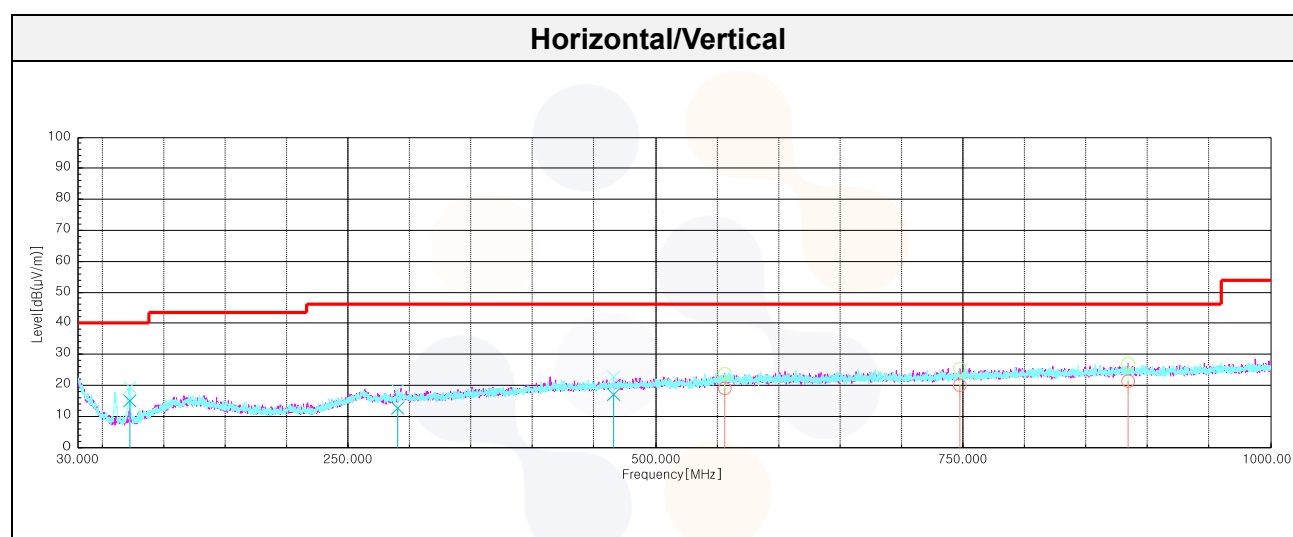


Note : The measurement results below 30 MHz is greater than 20 dB below the limit, so only the radiated spurious emissions from 30 MHz to 100 GHz were reported.

Test results

[24 GHz radar sensor_24.07 GHz]


(Field strength of fundamental)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
24 075.28	H	103.16	37.80	-39.24	-	101.72	127.96	26.24
Average Data								
24 075.66	H	100.75	37.80	-39.24	-	99.31	107.96	8.65

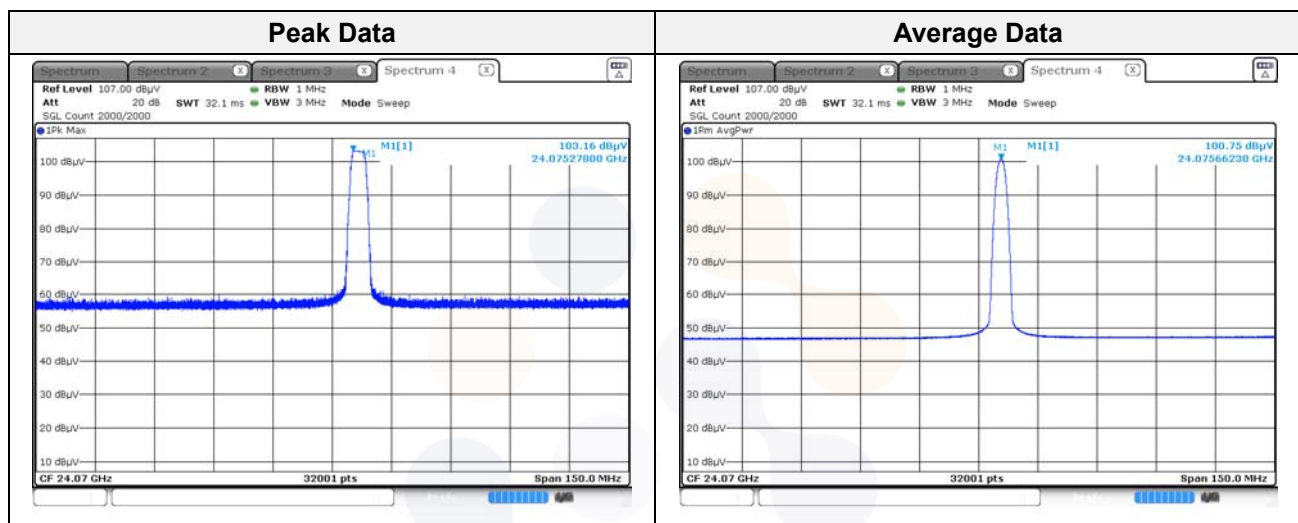

(Field strength of band edges)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
24 028.58	H	49.59	37.80	-39.43	-	47.96	77.96	30.00
24 254.48	H	50.36	37.80	-39.51	-	48.65	77.96	29.31
Average Data								
24 028.62	H	37.68	37.80	-39.43	-	36.05	57.96	21.91
24 252.27	H	37.80	37.80	-39.52	-	36.08	57.96	21.88

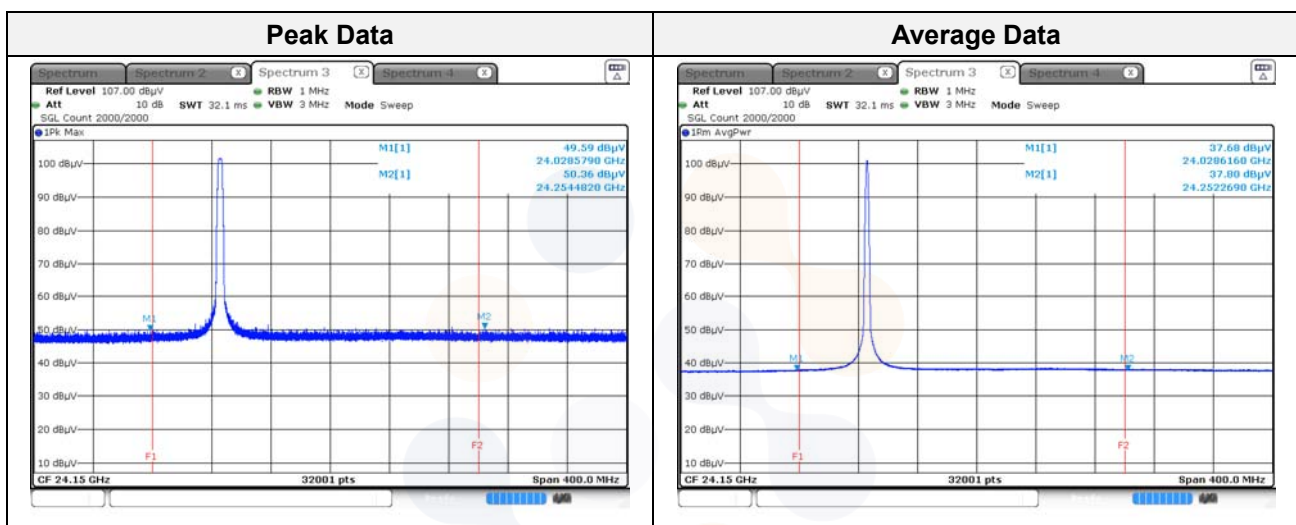

Test results

(1 000 ~ 18 000 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
12 769.54	H	57.30	39.74	-41.80	-	55.24	74.00	18.76
Average Data								
12 769.54	H	47.16	39.74	-41.80	-	45.10	54.00	8.90

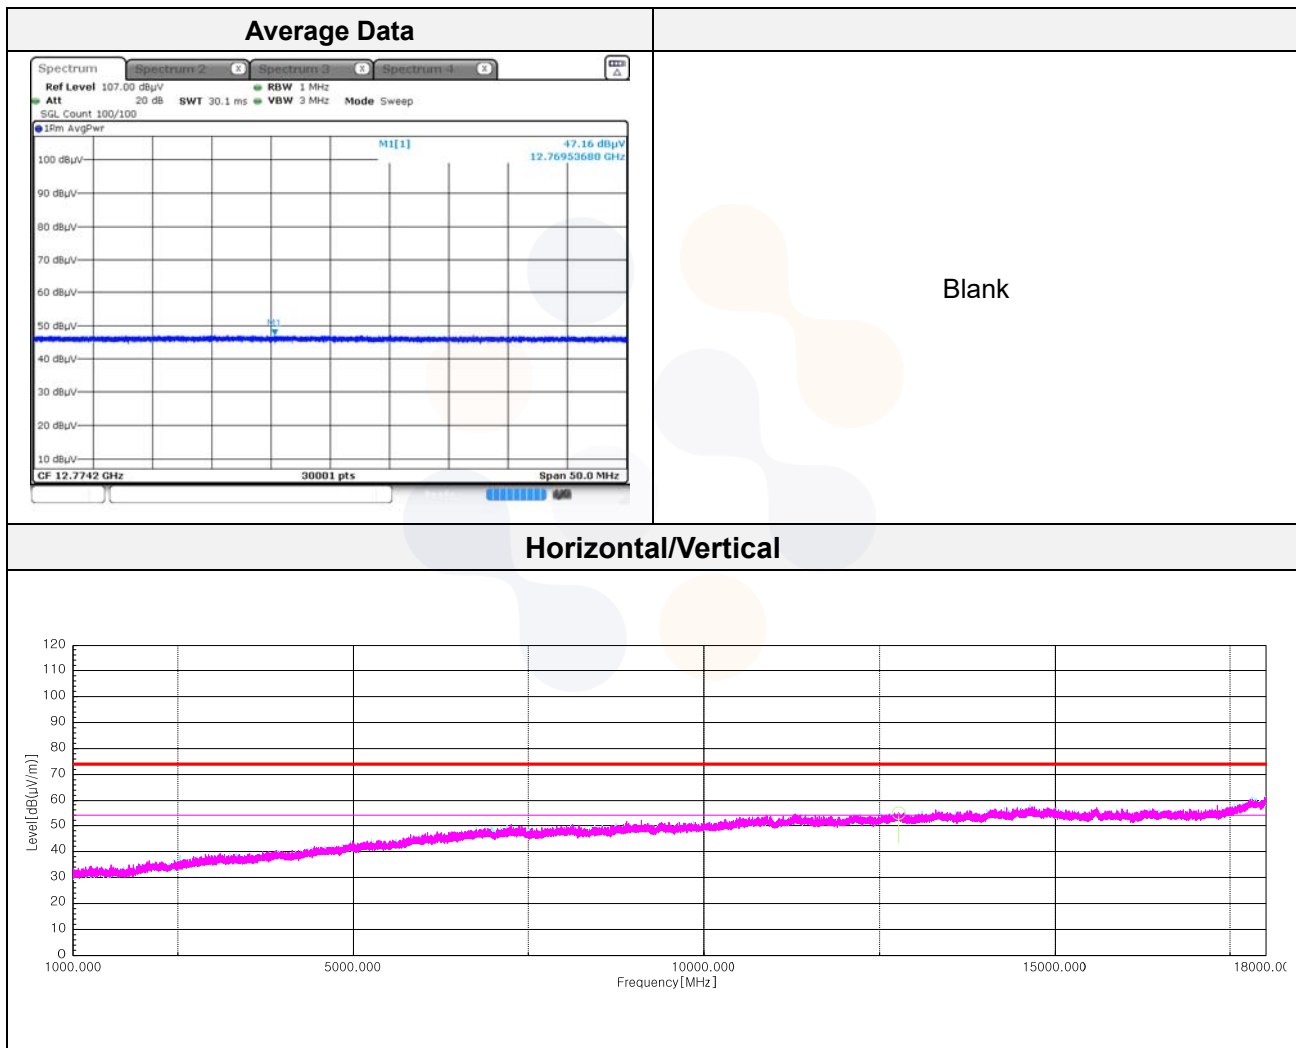

Test results

(18 000 ~ 40 000 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
24 071.95*	H	103.20	37.80	-39.25	-	101.75	-	-
26 610.76	H	47.20	37.80	-39.27	-	45.73	74.00	28.27
33 998.72	V	50.40	37.80	-40.75	-	47.45	74.00	26.55
Average Data								
26 610.76	H	38.79	37.80	-39.27	-	37.32	54.00	16.68
33 998.72	V	41.09	37.80	-40.75	-	38.14	54.00	15.86

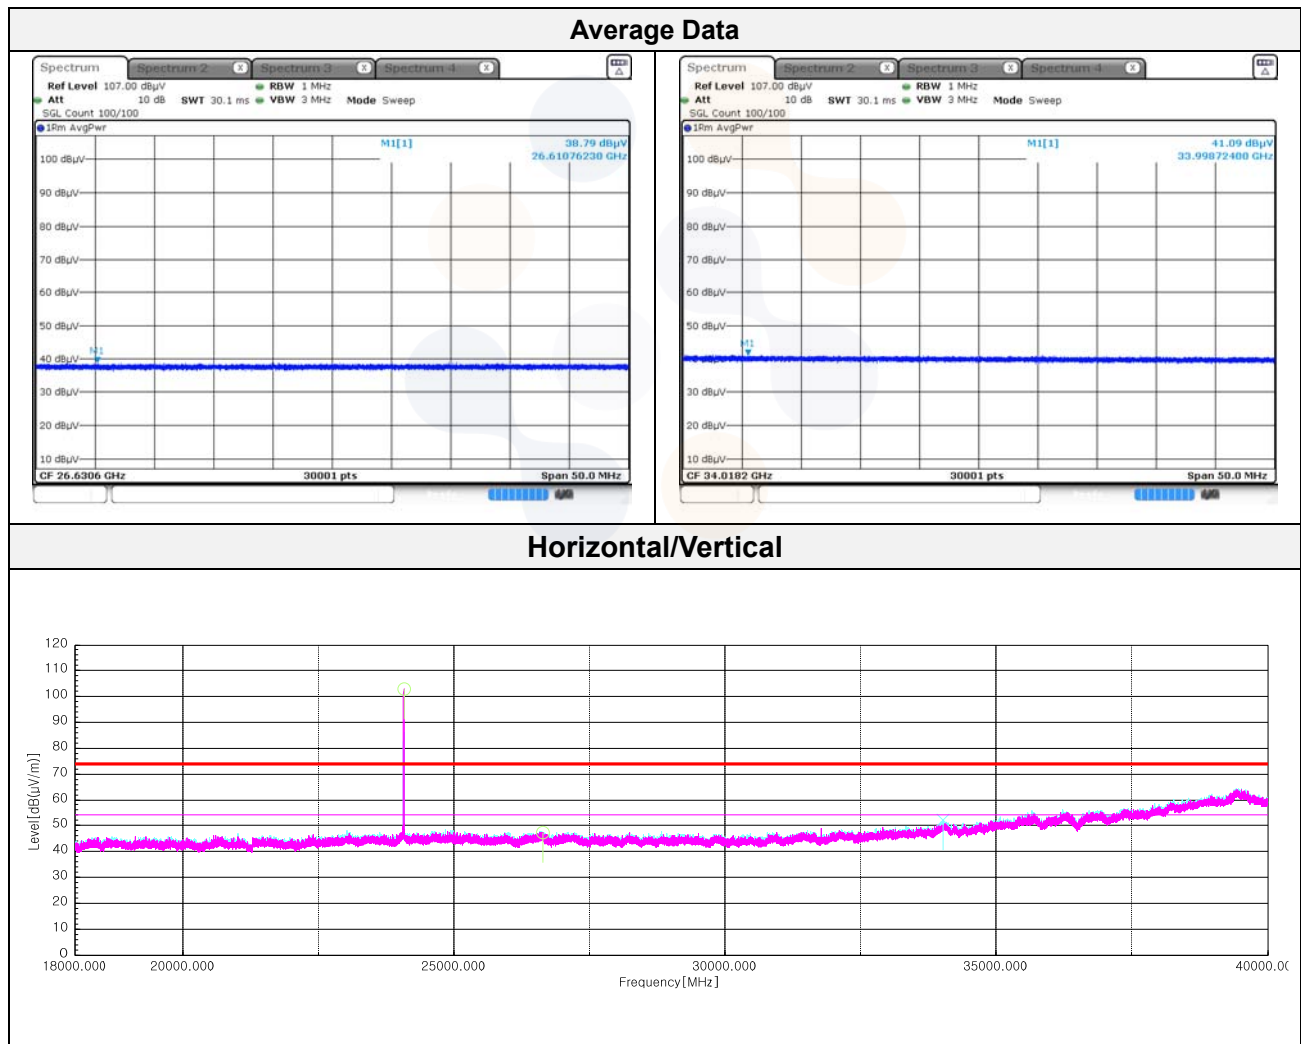


Note : * Equipment's fundamental frequency, no need to evaluate it.

Test results


(40 000 ~ 140 000 MHz)

Frequency	Pol.	Reading	Antenna Factor	Cable Loss	Mixer Loss	Distance Factor	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
49 044.00	V	34.64	41.10	11.16	-	15.56	71.34	87.96	16.62
77 649.00	V	31.75	44.80	22.56	-	15.56	83.55	87.96	4.41
92 350.00	V	23.10	47.10	0.31	29.04	15.56	83.99	87.96	3.97


Horizontal/Vertical 40 ~ 60 GHz

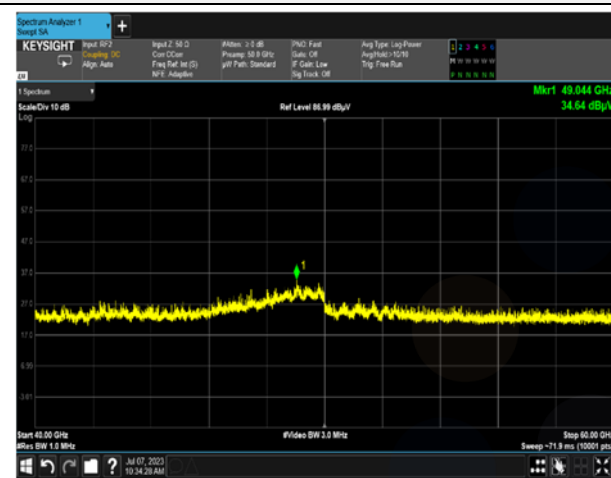

Horizontal/Vertical 60 ~ 90 GHz

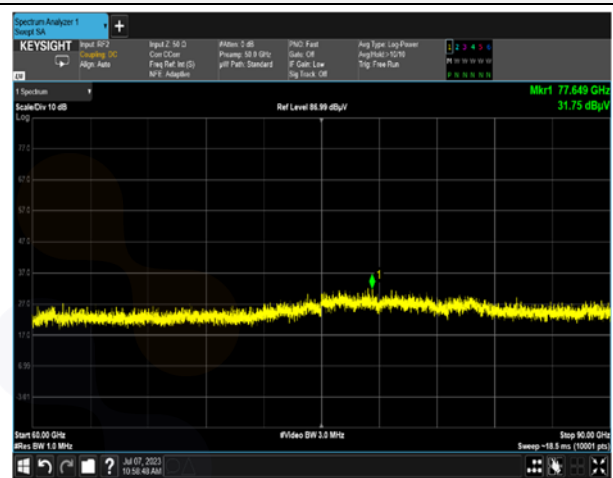

Horizontal/Vertical 90 ~ 140 GHz

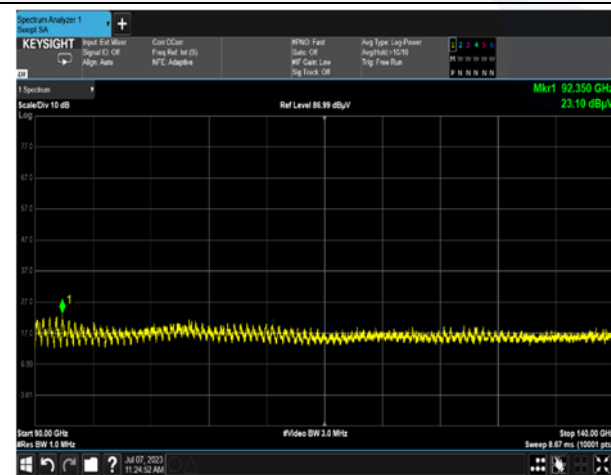

Blank

Note :


1. Distance Factor = $20 \cdot \log(3/0.5)$

Test results

[24 GHz radar sensor_24.15 GHz]


(Field strength of fundamental)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
24 155.02	H	102.27	37.80	-39.40	-	100.67	127.96	27.29
Average Data								
24 153.16	H	101.97	37.80	-39.40	-	100.37	107.96	7.59

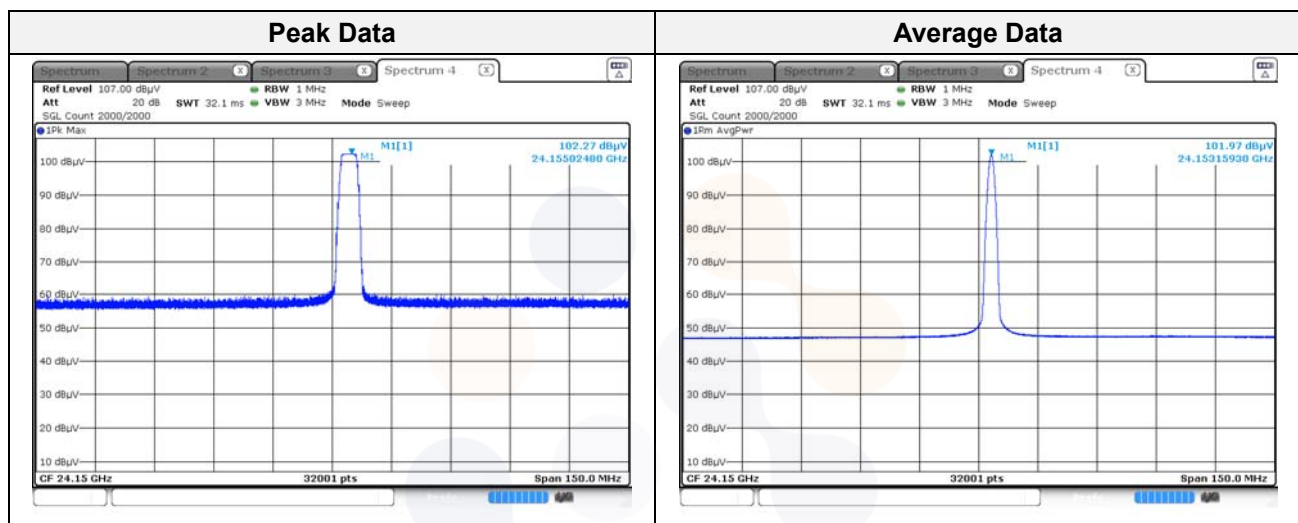

(Field strength of band edges)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
24 023.30	H	49.29	37.80	-39.45	-	47.64	77.96	30.32
24 278.11	H	50.65	37.80	-39.46	-	48.99	77.96	28.97
Average Data								
24 027.55	H	37.76	37.80	-39.43	-	36.13	57.96	21.83
24 253.28	H	38.01	37.80	-39.51	-	36.30	57.96	21.66

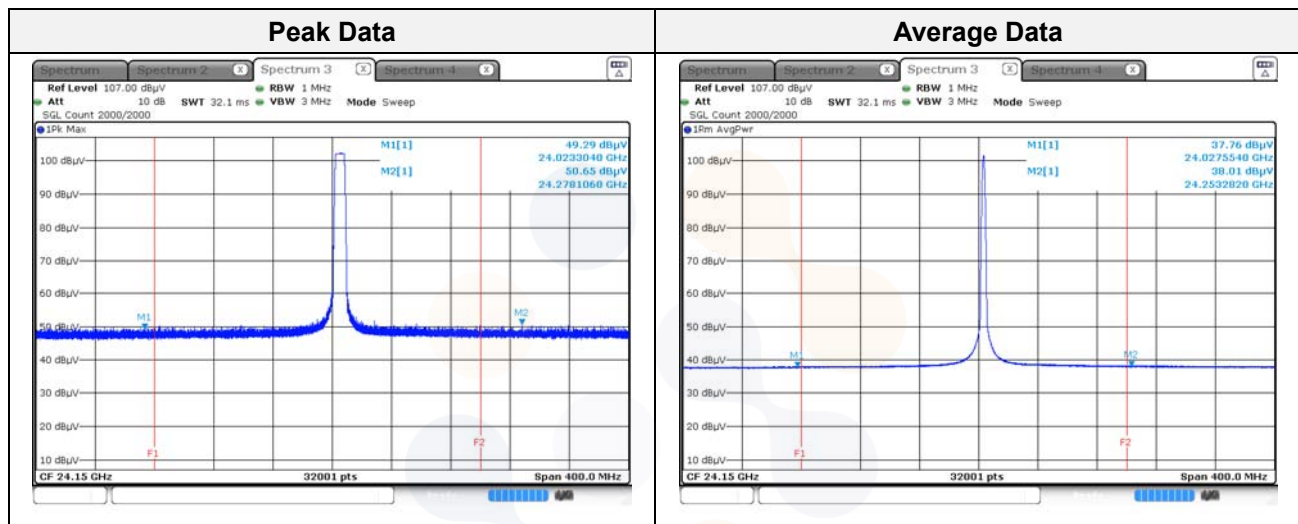

Test results

(1 000 ~ 18 000 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
12 175.97 ¹⁾	H	57.60	39.45	-42.06	-	54.99	74.00	19.01
Average Data								
12 175.97 ¹⁾	H	46.61	39.45	-42.06	-	44.00	54.00	10.00


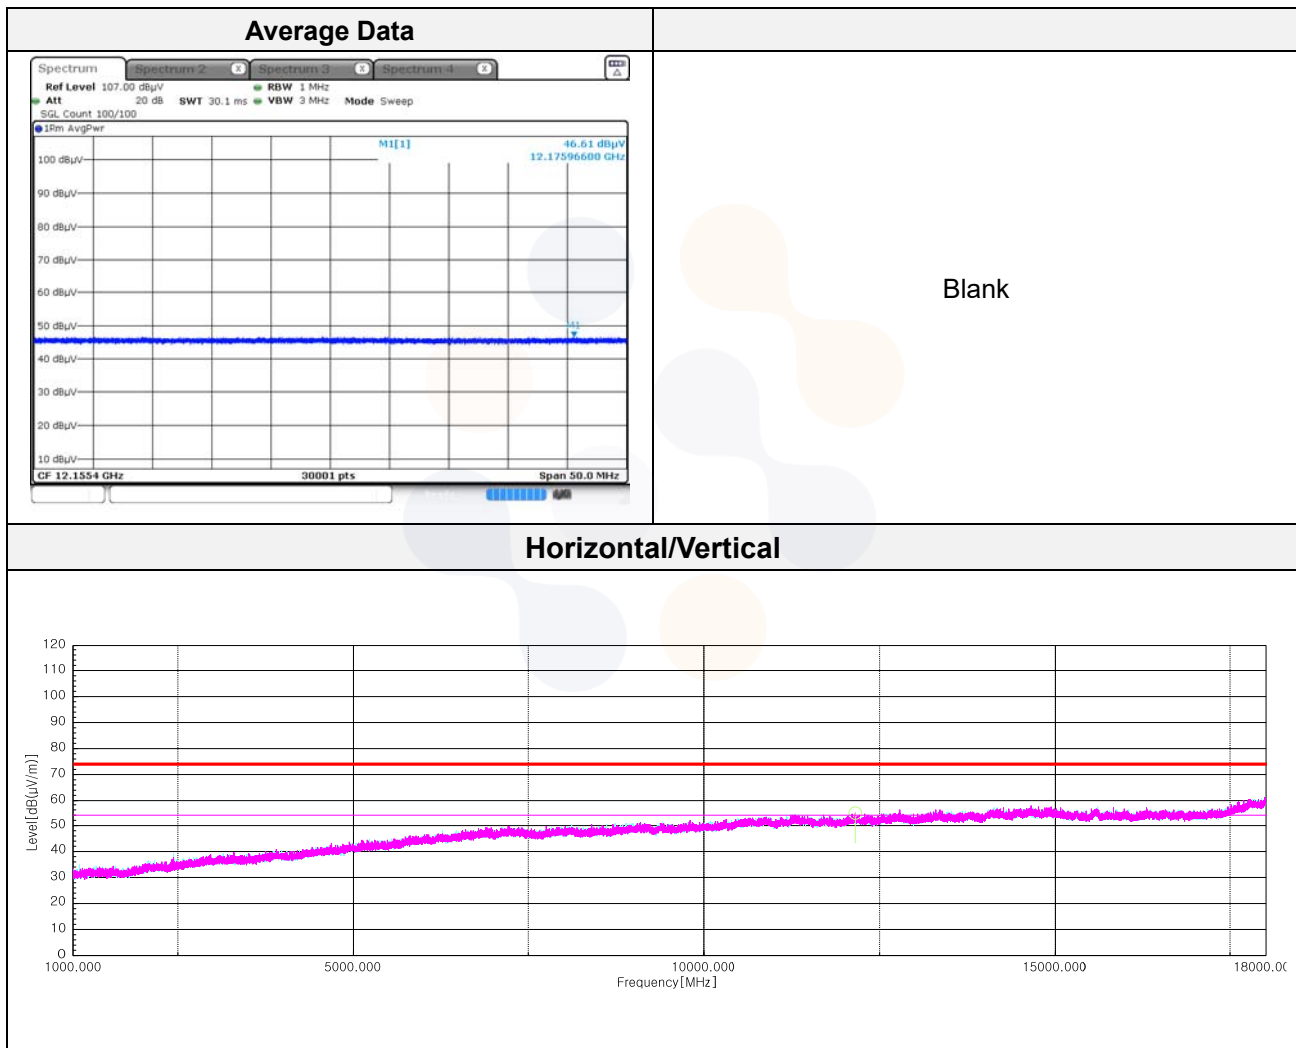


Test results


(18 000 ~ 40 000 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
24 153.15*	H	102.50	37.80	-39.40	-	100.90	-	-
27 134.77	V	48.90	37.80	-39.79	-	46.91	74.00	27.09
33 381.95	H	50.10	37.80	-41.27	-	46.63	74.00	27.37
Average Data								
27 134.77	V	40.36	37.80	-39.79	-	38.37	54.00	15.63
33 381.95	H	41.52	37.80	-41.27	-	38.05	54.00	15.95

Average Data

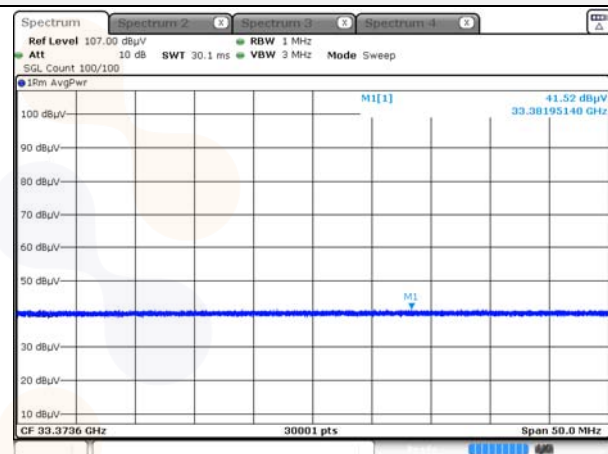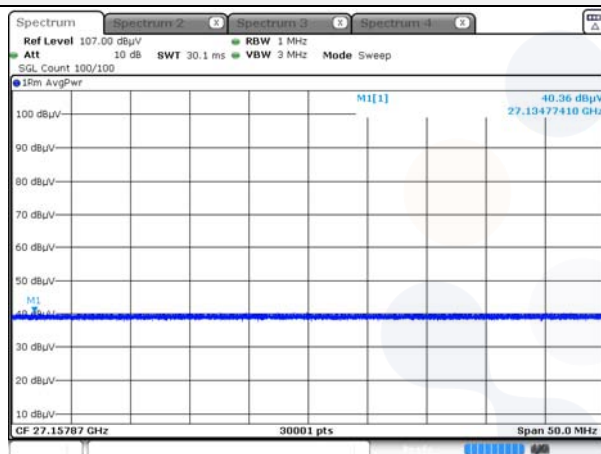


Horizontal/Vertical

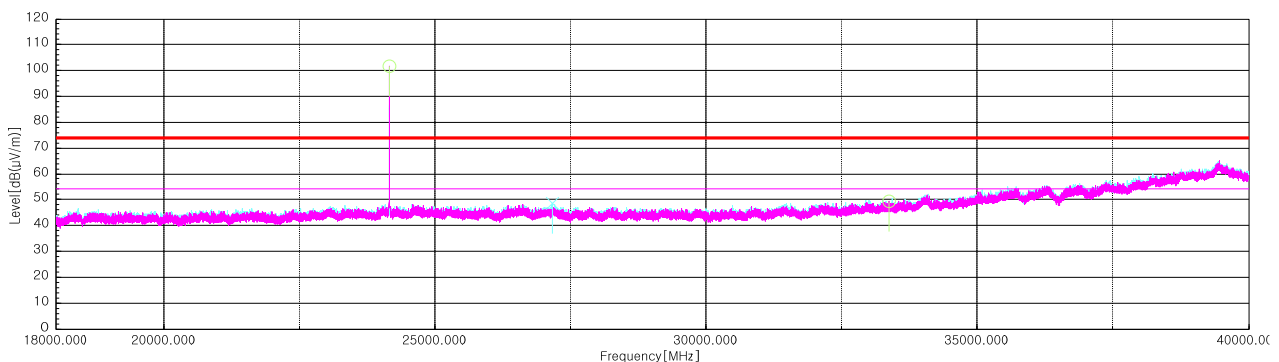

Note : * Equipment's fundamental frequency, no need to evaluate it.

Test results
(40 000 ~ 140 000 MHz)

Frequency	Pol.	Reading	Antenna Factor	Cable Loss	Mixer Loss	Distance Factor	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
49 486.00	V	34.88	41.40	11.16	-	15.56	71.88	87.96	16.08
77 052.00	V	32.07	44.80	22.50	-	15.56	83.81	87.96	4.15
92 380.00	V	21.71	47.10	0.31	29.04	15.56	82.60	87.96	5.36

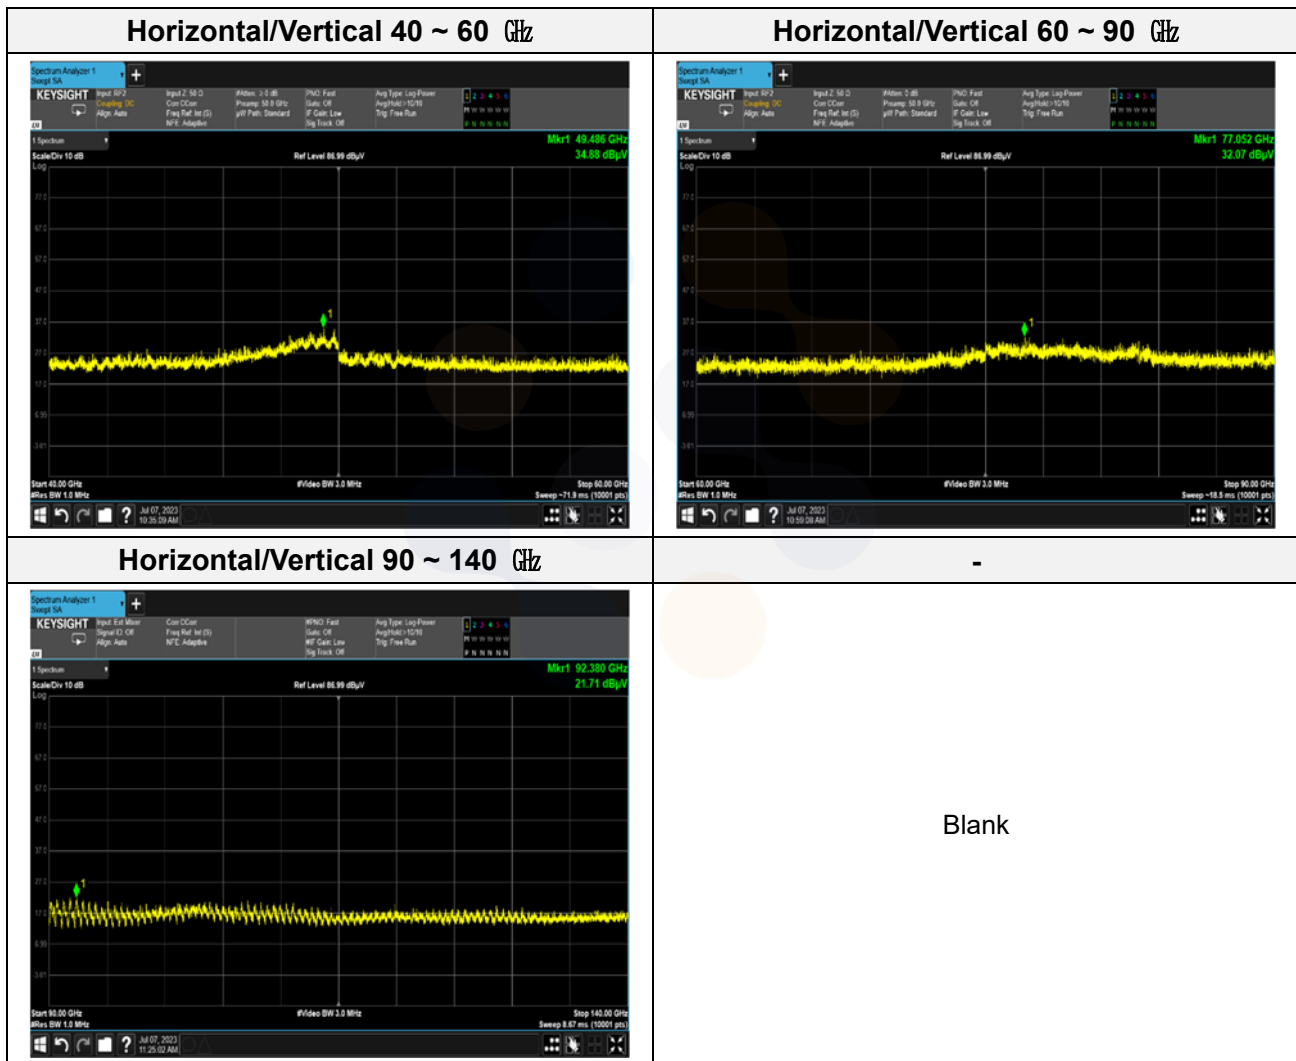

Note :


1. Distance Factor = $20 \cdot \log(3/0.5)$

Test results

[24 GHz radar sensor_24.23 GHz]


(Field strength of fundamental)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
24 218.79	H	102.15	37.80	-39.58	-	100.37	127.96	27.59
Average Data								
24 217.06	H	98.52	37.80	-39.59	-	96.73	107.96	11.23

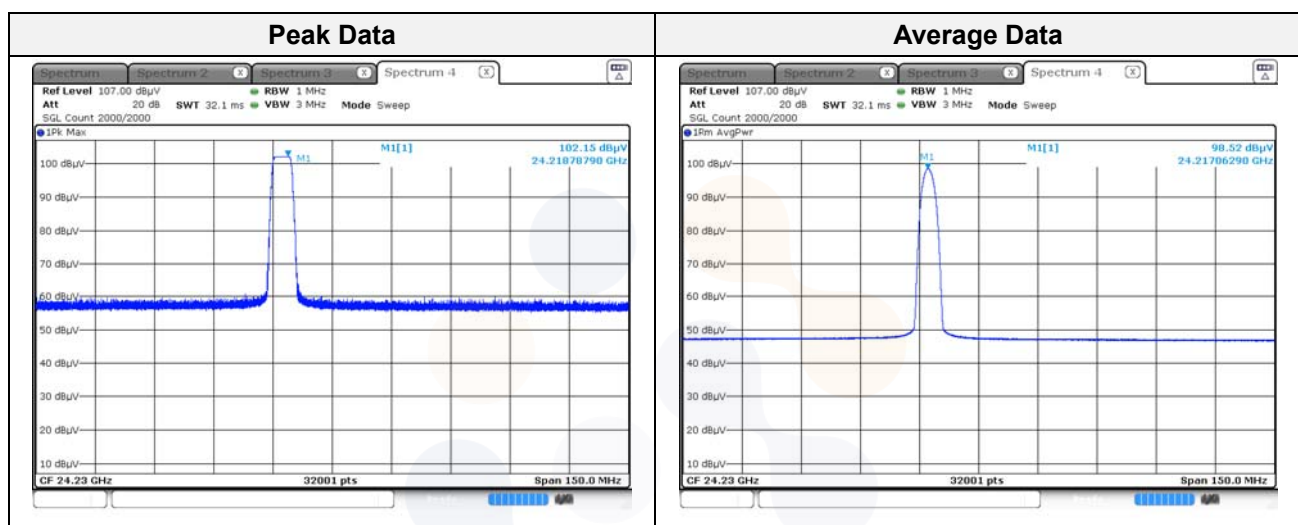

(Field strength of band edges)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
24 026.40	H	49.72	37.80	-39.43	-	48.09	77.96	29.87
24 252.71	H	50.03	37.80	-39.51	-	48.32	77.96	29.64
Average Data								
24 028.41	H	37.46	37.80	-39.43	-	35.83	57.96	22.13
24 252.76	H	38.05	37.80	-39.51	-	36.34	57.96	21.62

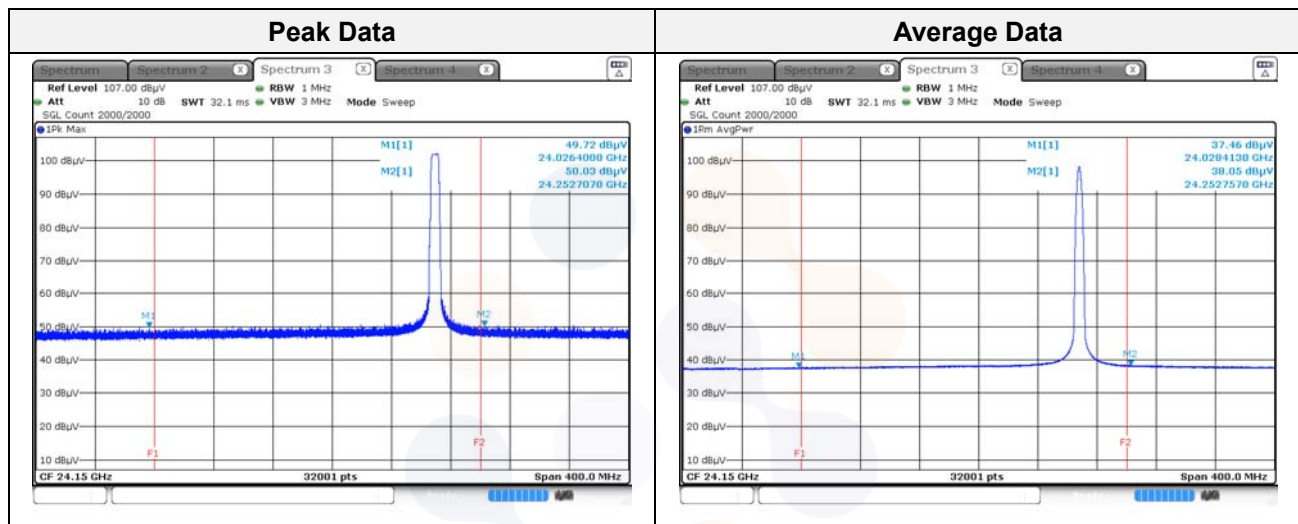

Test results

(1 000 ~ 18 000 MHz)


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
14 694.99	V	58.80	40.79	-41.83	-	57.76	74.00	16.24
Average Data								
14 694.99	V	48.07	40.79	-41.83	-	47.03	54.00	6.97

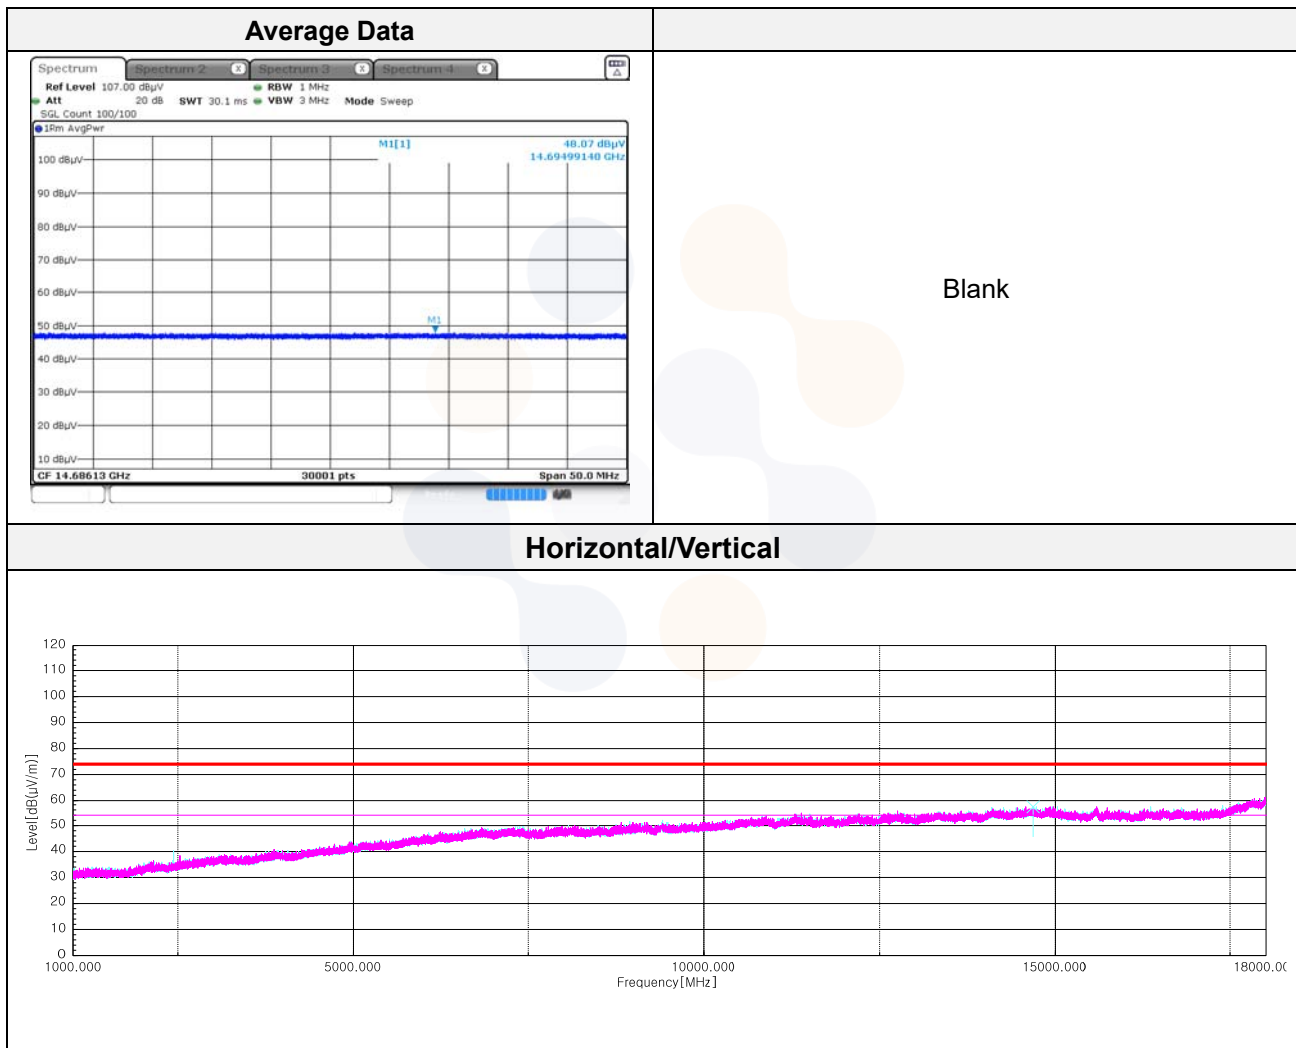

Test results

(18 000 ~ 40 000 MHz)

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
24 223.62*	H	102.70	37.80	-39.57	-	100.93	-	-
26 611.39	H	47.60	37.80	-39.28	-	46.12	74.00	27.88
32 912.14	H	49.60	37.80	-41.23	-	46.17	74.00	27.83
Average Data								
26 611.39	H	41.91	37.80	-39.28	-	40.43	54.00	13.57
32 912.14	H	43.55	37.80	-41.23	-	40.12	54.00	13.88

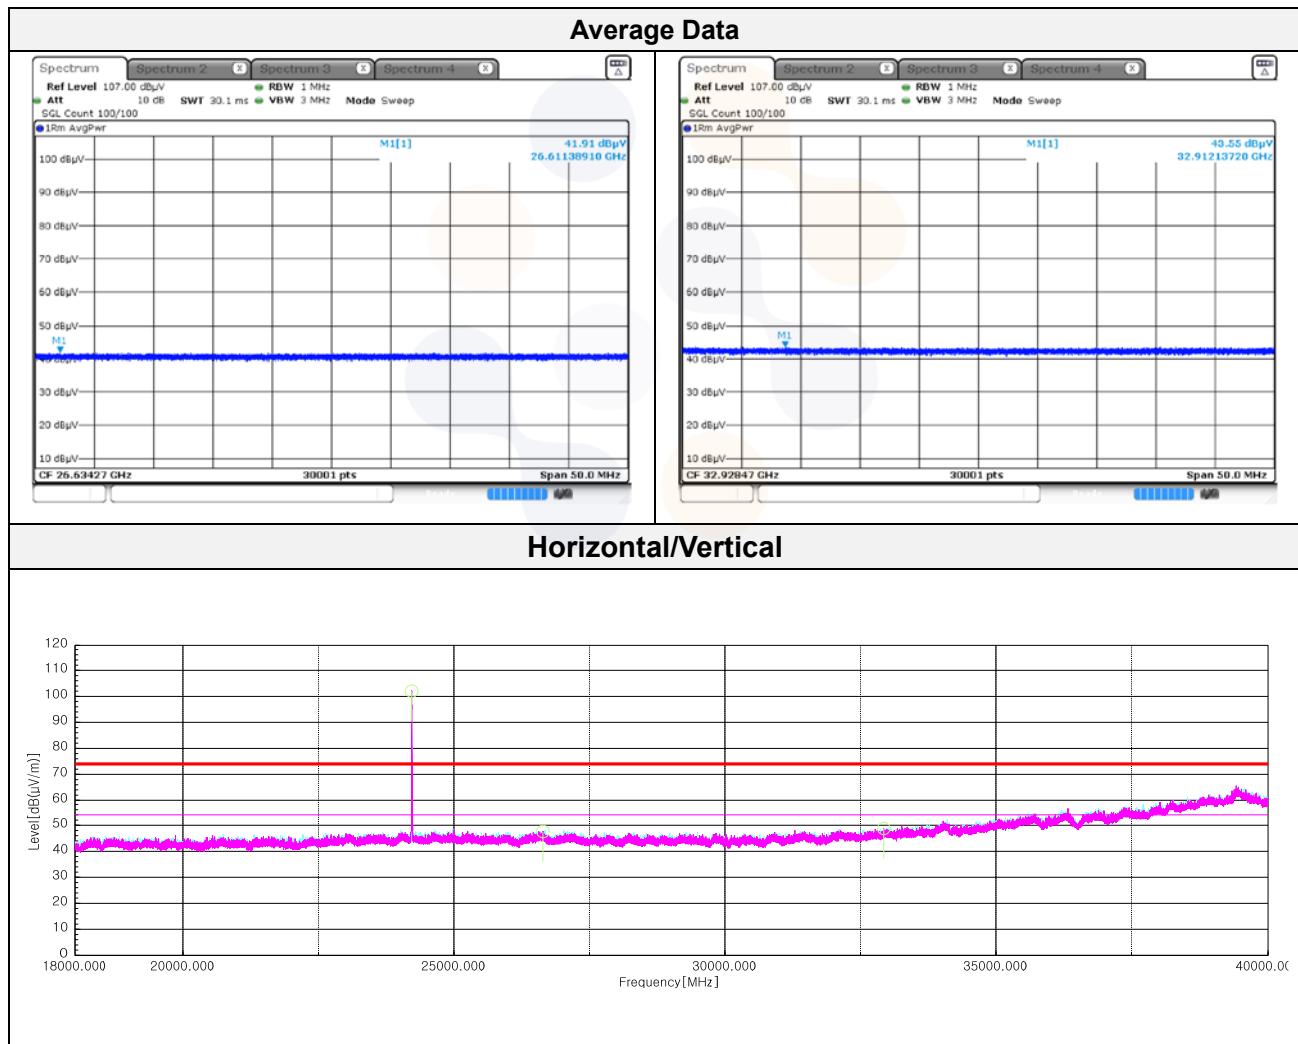


Note : Equipment's fundamental frequency, no need to evaluate it.

Test results


(40 000 ~ 140 000 MHz)

Frequency	Pol.	Reading	Antenna Factor	Cable Loss	Mixer Loss	Distance Factor	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
49 470.00	V	34.18	41.40	11.16	-	15.56	71.18	87.96	16.78
77 391.00	V	31.71	44.80	22.50	-	15.56	83.45	87.96	4.51
92 335.00	V	21.41	47.10	0.31	29.04	15.56	82.30	87.96	5.66


Horizontal/Vertical 40 ~ 60 GHz

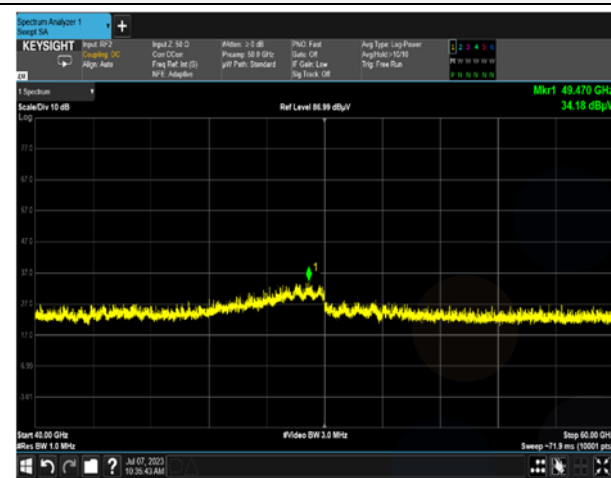

Horizontal/Vertical 60 ~ 90 GHz

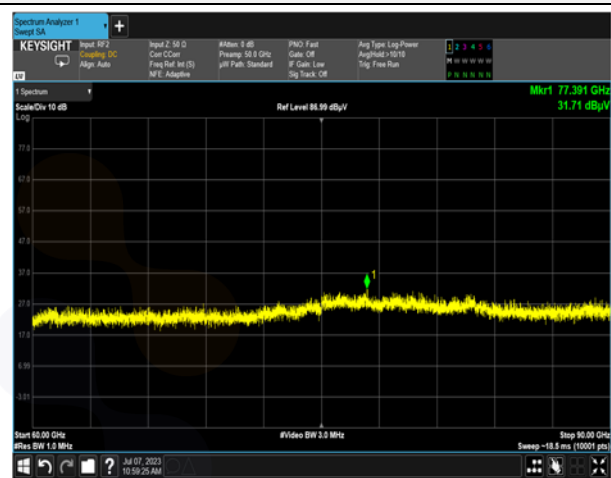

Horizontal/Vertical 90 ~ 140 GHz

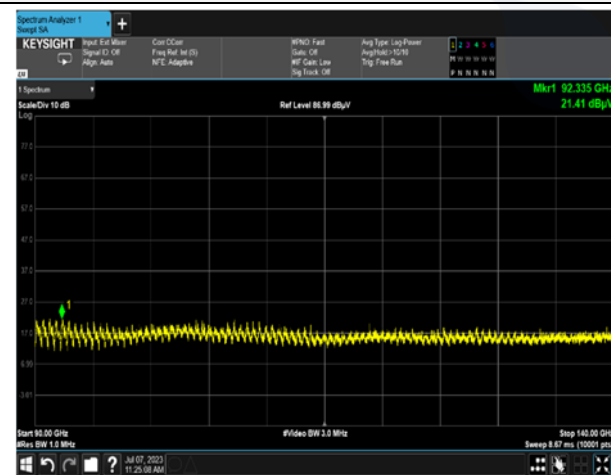


Blank

Note :

1. Distance Factor = $20 \cdot \log(3/0.5)$

6.3. AC Conducted emission

Test setup

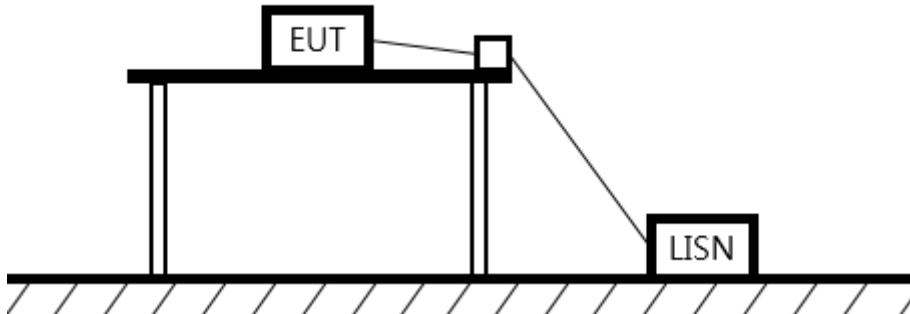

Limit


According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

Test results--Worst case: 24 GHz radar sensor_24.07 GHz

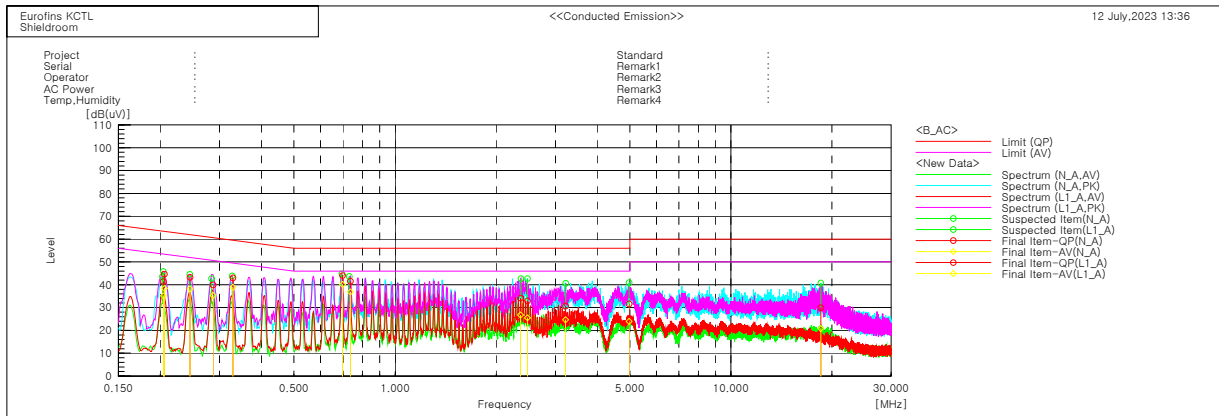

Final Result

--- N_A Phase ---										
No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.20435	31.4	25.2	10.0	41.4	35.2	63.4	53.4	22.0	18.2
2	0.28712	30.1	25.5	9.8	39.9	35.3	60.6	50.6	20.7	15.3
3	0.73572	31.7	27.0	9.9	41.6	36.9	56.0	46.0	14.4	9.1
4	2.48007	23.1	15.7	9.8	32.9	25.5	56.0	46.0	23.1	20.5
5	4.97397	21.6	14.1	9.9	31.5	24.0	56.0	46.0	24.5	22.0
6	18.51293	19.0	9.9	10.9	29.9	20.8	60.0	50.0	30.1	29.2

--- L1_A Phase ---										
No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.20572	34.6	28.4	10.0	44.6	38.4	63.4	53.4	18.8	15.0
2	0.24519	33.5	28.5	9.7	43.2	38.2	61.9	51.9	18.7	13.7
3	0.32901	33.2	29.1	9.8	43.0	38.9	59.5	49.5	16.5	10.6
4	0.69806	34.1	30.3	9.9	44.0	40.2	56.0	46.0	12.0	5.8
5	2.36398	24.3	17.0	9.8	34.1	26.8	56.0	46.0	21.9	19.2
6	3.21933	20.8	14.8	9.9	30.7	24.7	56.0	46.0	25.3	21.3

7. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSVA40	101575	24.06.19
PSA Spectrum Analyzer	Agilent	E4440A	MY46186407	24.03.22
Amplifier	SONOMA INSTRUMENT	310N	421821	23.12.14
Bilog Antenna	Teseq GmbH	CBL 6112D	63756	24.11.17
Loop Antenna	R&S	HFH2-Z2	100355	24.08.10
Spectrum Analyzer	R&S	FSV40	100988	24.07.03
Broadband PreAmplifier	SCHWARZBECK	BBV9718D	53	24.03.17
Low Noise Amplifier	TESTEK	TK-PA18H	220123-L	23.12.02
Low Noise Amplifier	TESTEK	TK-PA1840H	220234-L	23.12.02
Horn Antenna	SCHWARZBECK	BBHA9120D	2764	23.12.06
Horn Antenna	SCHWARZBECK	BBHA9170	1266	23.12.05
High Pass Filter	Wainwright Instruments GmbH	WHKX12-2805-3000-18000-40SS	SN59	23.12.14
Signal Generator	R&S	SMB100A	176206	24.01.19
TWO-LINE V - NETWORK	R&S	ENV216	101358	23.09.29
EMI TEST RECEIVER	R&S	ESCI3	100001	23.08.18
UXA Signal Analyzer	KEYSIGHT	N9041B	MY60100003	24.01.19
Millimeter Wave Source Module	OML, Inc.	S19MS-A	190725-1	24.03.22
Millimeter Wave Source Module	OML, Inc.	S12MS-A	190621-1	23.10.26
Millimeter Wave Source Module	OML, Inc.	S08MS-A	190621-1	23.10.25
Harmonic Mixer	OML, Inc.	M08HWD	190621-1	23.10.27
Horn Antenna	OML, Inc.	M19RH	190621-1	23.10.28
Horn Antenna	OML, Inc.	M12RH	190621-1	23.10.28
Horn Antenna	OML, Inc.	M08RH	190621-1	23.10.28
Horn Antenna	OML, Inc.	M19RH	190621-2	23.10.28
Horn Antenna	OML, Inc.	M12RH	190621-2	23.10.28
Horn Antenna	OML, Inc.	M08RH	190621-2	23.10.28
mmWave Single-Axis measuring jig	C&K Technologies, Inc.	N/A	N/A	N/A
Controller	INNCO SYSTEMS	CO3000	1442/54370322/P	N/A
Antenna Mast	INNCO SYSTEMS	MA4640-XP-ET	N/A	N/A
Turn Device	INNCO SYSTEMS	DS1200-S-1t	N/A	N/A
Controller	INNCO SYSTEMS	CO3000	1441/54370322/P	N/A
Antenna Mast	INNCO SYSTEMS	MA4640-XP-ET	N/A	N/A
Turn Device	INNCO SYSTEMS	DS1200-S-1t	N/A	N/A

End of test report