

SPECIFICATION

Shenzhen DreamLNK Technology Co.,Ltd.

深圳市骏晔科技有限公司


Shenzhen DreamLNK Technology Co., Ltd.

2400-2500MHz(FPC)





		I	
	Produc	ct Test Parameters	
Name	FPC Antenna	Model Type	F5- 2.4G
	Electr	ical Specifications	
Frenquency Range	2400-2500 MHz	Polarization	Vertical
Impedance	50 Ω	Radiation Direction	Omnidirectional
VSWR	≦1.3	Admitted Power	1W
Gain	3dBi±0.5	Bandwidth	135/ 46MHz
Connector Type	Cable+IPEX		
	Mecha	nical Specifications	
Dimensions	34. 3* 9. 5mm	Antenna cover	FR- 4
Connector	IPEX I	Cable Length	130±3mm
Working Temperature	(- 20℃- +70℃)	Limit Temperature	(- 40℃- +85℃)


1. S11 VSWR Return loss Smith

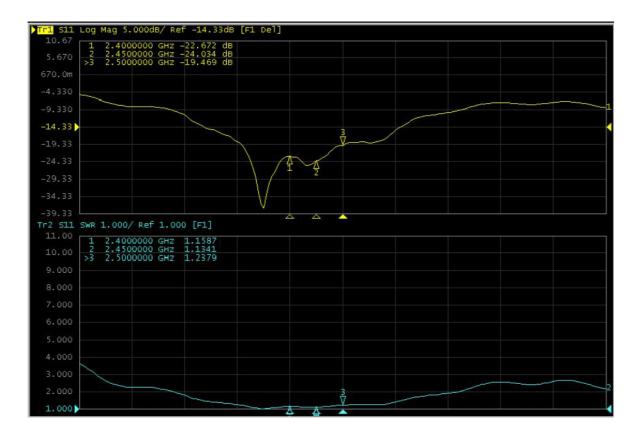

2. 2D 3DRaditation Pattern

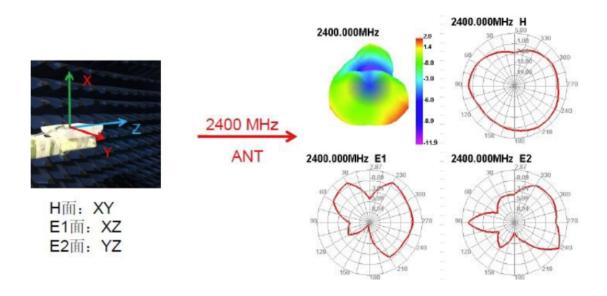

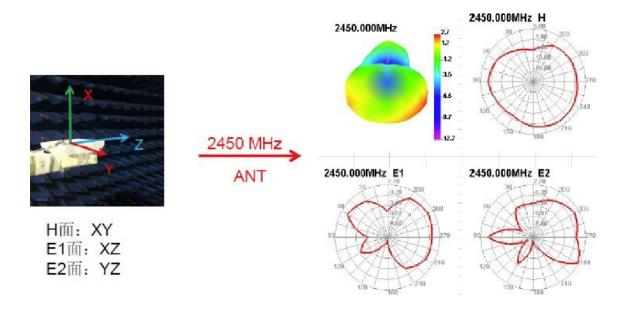

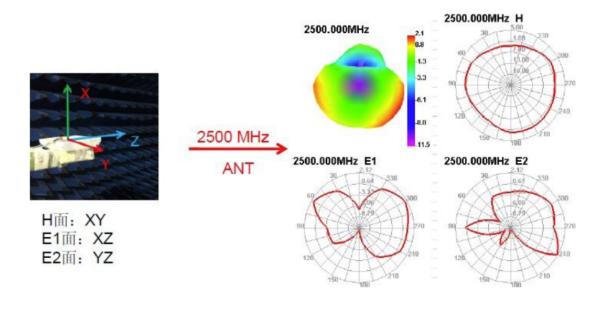

	ANT		
Frequency (MHz)	Efficiency (%)	Peak Gain (dBi)	
2400	78.85	2.87	
2410	81.9	3.15	
2420	80.32	3.13	
2430	78.25	2.98	
2440	78.23	2.88	
2450	77.33	2.7	
2460	76.85	2.53	
2470	78.23	2.47	
2480	77.21	2.39	
2490	77.45	2.37	
2500	74.34	2.12	

