



FCC TEST REPORT

For
Shen Zhen hongyuesheng Tech.Co.,Ltd

Wireless Charger

Test Model: HYS03

Prepared for : Shen Zhen hongyuesheng Tech.Co.,Ltd
Address : B1329, 2# Building, Skyworth Innovation Valley, No.8, Tangtou
1 Road, Tangtou Community, Shiyan Street, Baoan District,
Shen Zhen China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing
Street, Baoan District, Shenzhen, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : July 10, 2023
Number of tested samples : 2
Serial number : A070623121-1(Engineer sample), A070623121-2(Normal
sample)
Date of Test : July 10, 2023 ~ July 24, 2023
Date of Report : July 24, 2023



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

**FCC TEST REPORT
FCC CFR 47 PART 15C****Report Reference No.** : LCSA070623121EA**Date Of Issue** : July 24, 2023**Testing Laboratory Name** : Shenzhen LCS Compliance Testing Laboratory Ltd.**Address** : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,
Baoan District, Shenzhen, China**Testing Location/ Procedure** : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name** : Shen Zhen hongyuesheng Tech.Co.,Ltd**Address** : B1329, 2# Building, Skyworth Innovation Valley, No.8, Tangtou 1
Road, Tangtou Community, Shiyan Street, Baoan District, Shen
Zhen China**Test Specification****Standard** : FCC CFR 47 PART 15C**Test Report Form No.** : LCSEMC-1.0**TRF Originator** : Shenzhen LCS Compliance Testing Laboratory Ltd.**Master TRF** : Dated 2011-03**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : Wireless Charger**Trade Mark** : N/A**Test Model** : HYS03**Power Supply** : Input: 5V==3A, 9V==2A, 12V==1.5A
Phone Output: 15W(Max)/10W/7.5W/5W
Watch Output: 2.5W(Max)
Earphone Output: 3W(Max)**Result** : Positive**Compiled by:**

Jack Liu/ Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC TEST REPORT**

Test Report No. : LCSA070623121EA	<u>July 24, 2023</u> Date of issue
---	---------------------------------------

Test Model.....	: HYS03
EUT.....	: Wireless Charger
Applicant.....	: Shen Zhen hongyuesheng Tech.Co.,Ltd
Address.....	B1329, 2# Building, Skyworth Innovation Valley, No.8, Tangtou 1 Road, Tangtou Community, Shiyan Street, Baoan District, Shen Zhen China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Shen Zhen hongyuesheng Tech.Co.,Ltd
Address.....	B1329, 2# Building, Skyworth Innovation Valley, No.8, Tangtou 1 Road, Tangtou Community, Shiyan Street, Baoan District, Shen Zhen China
Telephone.....	: /
Fax.....	: /
Factory.....	: Shen Zhen hongyuesheng Tech.Co.,Ltd
Address.....	B1329, 2# Building, Skyworth Innovation Valley, No.8, Tangtou 1 Road, Tangtou Community, Shiyan Street, Baoan District, Shen Zhen China
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	July 24, 2023	Initial Issue	--



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1 Description of Device (EUT)	6
1.2 Support equipment List	6
1.3 External I/O Cable	6
1.4 Description of Test Facility	6
1.5 Statement of the Measurement Uncertainty	7
1.6 Measurement Uncertainty	7
1.7 Description of Test Modes	8
2. TEST METHODOLOGY	10
2.1 EUT Configuration	10
2.2 EUT Exercise	10
2.3 General Test Procedures	10
2.3.1 Conducted Emissions	10
2.3.2 Radiated Emissions	10
2.4. Test Sample	10
3. SYSTEM TEST CONFIGURATION	11
3.1 Justification	11
3.2 EUT Exercise Software	11
3.3 Special Accessories	11
3.4 Block Diagram/Schematics	11
3.5 Equipment Modifications	11
3.6 Test Setup	11
4. SUMMARY OF TEST EQUIPMENT	12
5. SUMMARY OF TEST RESULT	13
6. POWER LINE CONDUCTED MEASUREMENT	14
7. RADIATED EMISSION MEASUREMENT	17
7.1. Block Diagram of Test Setup	17
7.2. Radiated Emission Limit	18
7.3. EUT Configuration on Measurement	18
7.4. Operating Condition of EUT	18
7.5. Measuring Setting	18
7.6. Test Procedure	19
7.7. Test Results	20
8. 20 DB BANDWIDTH MEASUREMENT	25
8.1. Block Diagram of Test Setup	25
8.2. Test Procedure	25
8.3. Test Results	26
9. PHOTOGRAPHS OF TEST SETUP	27
10. EXTERNAL PHOTOGRAPHS OF THE EUT	27
11. INTERNAL PHOTOGRAPHS OF THE EUT	27





1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT	: Wireless Charger
Test Model	: HYS03
Power Supply	: Input: 5V==3A, 9V==2A,12V==1.5A Phone Output: 15W(Max)/10W/7.5W/5W Watch Output: 2.5W(Max) Earphone Output: 3W(Max)
Hardware Version	: V1.0
Software Version	: LY6105B-00818522
Wireless Charging	:
Operating Frequency	: 111.0~205.0KHz
Modulation Type	: ASK
Antenna Type	: Coil Antenna

1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN TIANYIN ELECTRONICS CO., LTD	Power Adapter	TPA-46050200UU	--	FCC
HONOR	Phone	V30Pro	--	FCC
--	Smart Watch	G2	--	FCC
--	Earphone	ES62-WE-TA	--	FCC

Note: Auxiliary equipment is provided by the laboratory.

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Type-C Port	1	N/A

1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.





1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.





1.7 Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Modulation Type: CW (ASK)

Test Modes		
Mode 1	AC/DC Adapter (12V/1.5A) + EUT + Phone + Smart Watch + Earphone (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter (12V/1.5A) + EUT + Phone + Smart Watch + Earphone (Battery Status: <50%)	Record
Mode 3	AC/DC Adapter (12V/1.5A) + EUT + Phone + Smart Watch + Earphone (Battery Status: <100%)	Record
Mode 4	AC/DC Adapter (9V/2A) + EUT + Phone + Smart Watch + Earphone (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter (9V/2A) + EUT + Phone + Smart Watch + Earphone (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter (9V/2A) + EUT + Phone + Smart Watch + Earphone (Battery Status: <100%)	Pre-tested
Mode 7	AC/DC Adapter (5V/3A) + EUT + Phone + Smart Watch + Earphone (Battery Status: <1%)	Pre-tested
Mode 8	AC/DC Adapter (5V/3A) + EUT + Phone + Smart Watch + Earphone (Battery Status: <50%)	Pre-tested
Mode 9	AC/DC Adapter (5V/3A) + EUT + Phone + Smart Watch + Earphone (Battery Status: <100%)	Pre-tested
Mode 10	AC/DC Adapter (12V/1.5A) + EUT + Smart Watch + Earphone (Battery Status: <1%)	Pre-tested
Mode 11	AC/DC Adapter (12V/1.5A) + EUT + Smart Watch + Earphone (Battery Status: <50%)	Pre-tested
Mode 12	AC/DC Adapter (12V/1.5A) + EUT + Smart Watch + Earphone (Battery Status: <100%)	Pre-tested
Mode 13	AC/DC Adapter (9V/2A) + EUT + Smart Watch + Earphone (Battery Status: <1%)	Pre-tested
Mode 14	AC/DC Adapter (9V/2A) + EUT + Smart Watch + Earphone (Battery Status: <50%)	Pre-tested
Mode 15	AC/DC Adapter (9V/2A) + EUT + Smart Watch + Earphone (Battery Status: <100%)	Pre-tested
Mode 16	AC/DC Adapter (5V/3A) + EUT + Smart Watch + Earphone (Battery Status: <1%)	Pre-tested
Mode 17	AC/DC Adapter (5V/3A) + EUT + Smart Watch + Earphone (Battery Status: <50%)	Pre-tested
Mode 18	AC/DC Adapter (5V/3A) + EUT + Smart Watch + Earphone (Battery Status: <100%)	Pre-tested
Mode 19	AC/DC Adapter (12V/1.5A) + EUT + Phone + Earphone (Battery Status: <1%)	Pre-tested
Mode 20	AC/DC Adapter (12V/1.5A) + EUT + Phone + Earphone (Battery Status: <50%)	Pre-tested
Mode 21	AC/DC Adapter (12V/1.5A) + EUT + Phone + Earphone (Battery Status: <100%)	Pre-tested
Mode 22	AC/DC Adapter (9V/2A) + EUT + Phone + Earphone (Battery Status: <1%)	Pre-tested
Mode 23	AC/DC Adapter (9V/2A) + EUT + Phone + Earphone (Battery Status: <50%)	Pre-tested
Mode 24	AC/DC Adapter (9V/2A) + EUT + Phone + Earphone (Battery Status: <100%)	Pre-tested
Mode 25	AC/DC Adapter (5V/3A) + EUT + Phone + Earphone (Battery Status: <1%)	Pre-tested
Mode 26	AC/DC Adapter (5V/3A) + EUT + Phone + Earphone (Battery Status: <50%)	Pre-tested
Mode 27	AC/DC Adapter (5V/3A) + EUT + Phone + Earphone (Battery Status: <100%)	Pre-tested
Mode 28	AC/DC Adapter (12V/1.5A) + EUT + Phone + Smart Watch (Battery Status: <1%)	Pre-tested
Mode 29	AC/DC Adapter (12V/1.5A) + EUT + Phone + Smart Watch (Battery Status: <50%)	Pre-tested
Mode 30	AC/DC Adapter (12V/1.5A) + EUT + Phone + Smart Watch (Battery Status: <100%)	Pre-tested
Mode 31	AC/DC Adapter (9V/2A) + EUT + Phone + Smart Watch (Battery Status: <1%)	Pre-tested
Mode 32	AC/DC Adapter (9V/2A) + EUT + Phone + Smart Watch (Battery Status: <50%)	Pre-tested
Mode 33	AC/DC Adapter (9V/2A) + EUT + Phone + Smart Watch (Battery Status: <100%)	Pre-tested
Mode 34	AC/DC Adapter (5V/3A) + EUT + Phone + Smart Watch (Battery Status: <1%)	Pre-tested
Mode 35	AC/DC Adapter (5V/3A) + EUT + Phone + Smart Watch (Battery Status: <50%)	Pre-tested
Mode 36	AC/DC Adapter (5V/3A) + EUT + Phone + Smart Watch (Battery Status: <100%)	Pre-tested
Mode 37	AC/DC Adapter (12V/1.5A) + EUT + Earphone (Battery Status: <1%)	Pre-tested
Mode 38	AC/DC Adapter (12V/1.5A) + EUT + Earphone (Battery Status: <50%)	Pre-tested
Mode 39	AC/DC Adapter (12V/1.5A) + EUT + Earphone (Battery Status: <100%)	Pre-tested
Mode 40	AC/DC Adapter (9V/2A) + EUT + Earphone (Battery Status: <1%)	Pre-tested
Mode 41	AC/DC Adapter (9V/2A) + EUT + Earphone (Battery Status: <50%)	Pre-tested
Mode 42	AC/DC Adapter (9V/2A) + EUT + Earphone (Battery Status: <100%)	Pre-tested
Mode 43	AC/DC Adapter (5V/3A) + EUT + Earphone (Battery Status: <1%)	Pre-tested





Mode 44	AC/DC Adapter (5V/3A) + EUT + Earphone (Battery Status: <50%)	Pre-tested
Mode 45	AC/DC Adapter (5V/3A) + EUT + Earphone (Battery Status: <100%)	Pre-tested
Mode 46	AC/DC Adapter (12V/1.5A) + EUT + Smart Watch (Battery Status: <1%)	Pre-tested
Mode 47	AC/DC Adapter (12V/1.5A) + EUT + Smart Watch (Battery Status: <50%)	Pre-tested
Mode 48	AC/DC Adapter (12V/1.5A) + EUT + Smart Watch (Battery Status: <100%)	Pre-tested
Mode 49	AC/DC Adapter (9V/2A) + EUT + Smart Watch (Battery Status: <1%)	Pre-tested
Mode 50	AC/DC Adapter (9V/2A) + EUT + Smart Watch (Battery Status: <50%)	Pre-tested
Mode 51	AC/DC Adapter (9V/2A) + EUT + Smart Watch (Battery Status: <100%)	Pre-tested
Mode 52	AC/DC Adapter (5V/3A) + EUT + Smart Watch (Battery Status: <1%)	Pre-tested
Mode 53	AC/DC Adapter (5V/3A) + EUT + Smart Watch (Battery Status: <50%)	Pre-tested
Mode 54	AC/DC Adapter (5V/3A) + EUT + Smart Watch (Battery Status: <100%)	Pre-tested
Mode 55	AC/DC Adapter (12V/1.5A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 56	AC/DC Adapter (12V/1.5A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 57	AC/DC Adapter (12V/1.5A) + EUT + Phone (Battery Status: <100%)	Pre-tested
Mode 58	AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 59	AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 60	AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: <100%)	Pre-tested
Mode 61	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 62	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 63	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: <100%)	Pre-tested
Note: All test modes were pre-tested, but we only recorded the TM1-TM3 worst case in this report.		





2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the normal operating mode for Hopping Numbers and Dwell Time test and a continuous transmits mode for other tests.

According to its specifications, the EUT must comply with the requirements of the Section 15.207 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz and 1.5 m above ground plane above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.

2.4. Test Sample

The application provides 2 samples to meet requirement;

Sample Number	Description
Sample 1(A070623121-1)	Engineer sample – continuous transmit
Sample 2(A070623121-2)	Normal sample – Intermittent transmit





3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a normal condition.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
/	/	/	/	/	/	/	/

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.





4. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2023-06-15	2024-06-14
2	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2022-10-29	2023-10-28
3	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2023-06-15	2024-06-14
4	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
5	EMI Test Software	AUDIX	E3	/	N/A	N/A
6	EMI Test Receiver	R&S	ESR 7	101181	2023-06-15	2024-06-14
7	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-08-29	2024-08-28
8	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
9	EMI Test Receiver	R&S	ESPI	101940	2022-08-17	2023-08-16
10	Artificial Mains	R&S	ENV216	101288	2023-06-15	2024-06-14
11	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2023-06-15	2024-06-14
12	EMI Test Software	Farad	EZ	/	N/A	N/A
13	Broadband Preamplifier	SCHWARZBECK	BBV9745	9719-025	2023-06-15	2024-06-14





5. SUMMARY OF TEST RESULT

FCC Rules	Description of Test	Test Sample	Result
§15.207(a)	AC Conducted Emissions	Sample 1	Compliant
§15.209	Radiated Spurious Emissions	Sample 1	Compliant
§15.215	20 dB Bandwidth	Sample 1	Compliant

Remark: The measurement uncertainty is not included in the test result.


N/A – Not Applicable!!!





6. POWER LINE CONDUCTED MEASUREMENT

6.1. Block Diagram of Test Setup

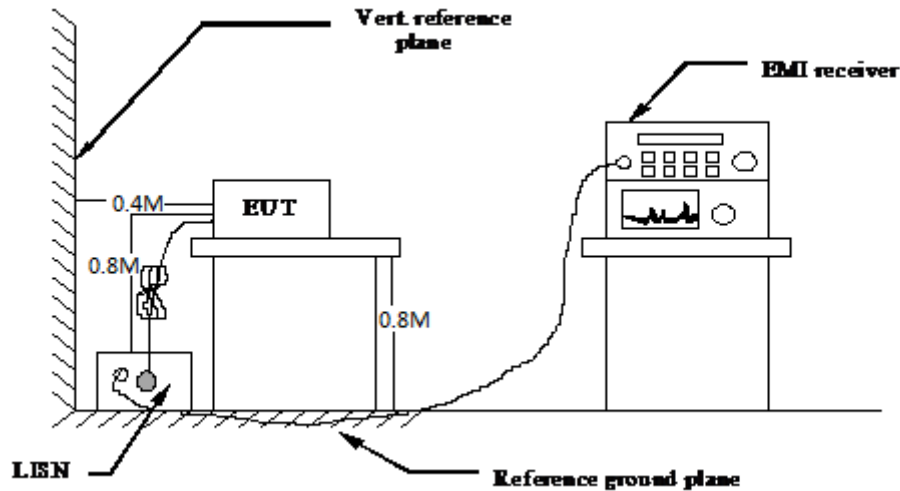

6.2. Standard Applicable

According to §15.207: For all the consumer devices which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test Results

PASS


The test data please refer to following page.

Temperature	23.5°C	Humidity	53.6%
Test Engineer	Joker Hu	Configurations	Transmit



**AC Power Line Conducted Emission (Power input to adapter @ AC 120V/60Hz (Worst Case))**

Line

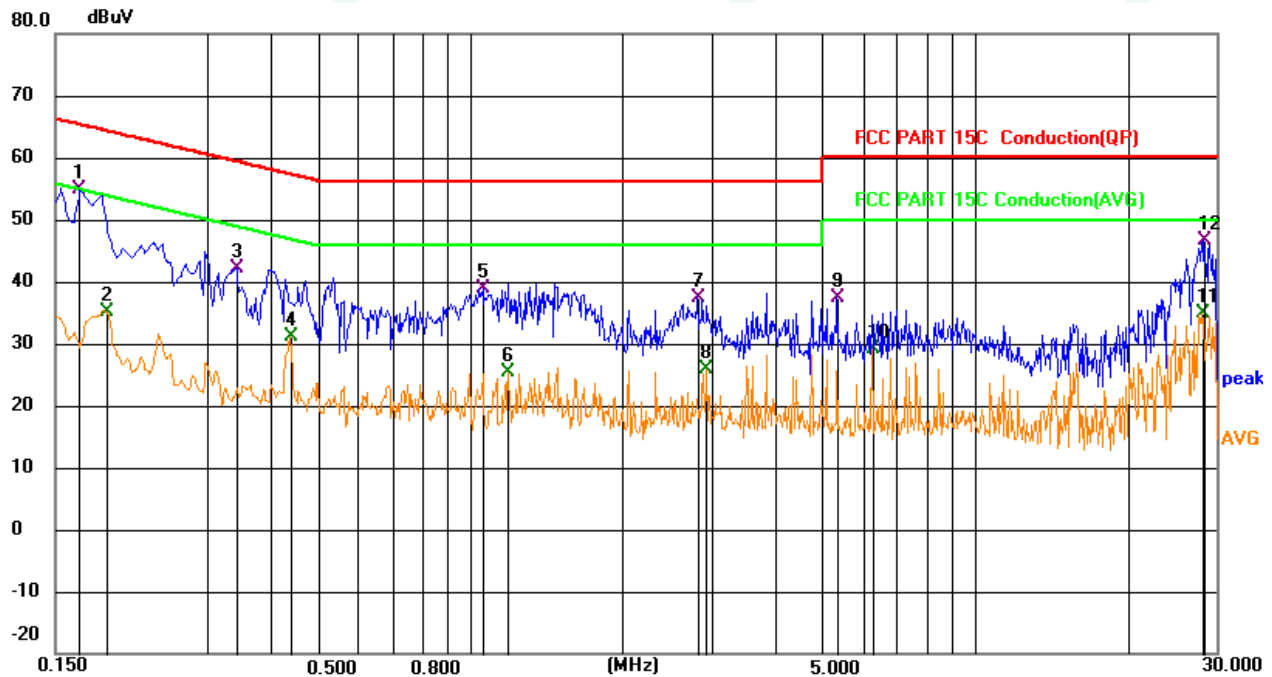


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1	*	0.1680	35.25	19.63	54.88	65.06	-10.18	QP
2		0.1893	15.59	19.63	35.22	54.07	-18.85	AVG
3		0.3436	22.49	19.63	42.12	59.12	-17.00	QP
4		0.4381	11.50	19.64	31.14	47.10	-15.96	AVG
5		1.0545	19.24	19.65	38.89	56.00	-17.11	QP
6		1.1849	5.68	19.66	25.34	46.00	-20.66	AVG
7		2.8141	17.69	19.68	37.37	56.00	-18.63	QP
8		2.9310	6.11	19.68	25.79	46.00	-20.21	AVG
9		5.3161	17.79	19.70	37.49	60.00	-22.51	QP
10		6.2341	9.47	19.70	29.17	50.00	-20.83	AVG
11		28.0861	14.90	20.07	34.97	50.00	-15.03	AVG
12		28.3741	26.50	20.07	46.57	60.00	-13.43	QP





Neutral

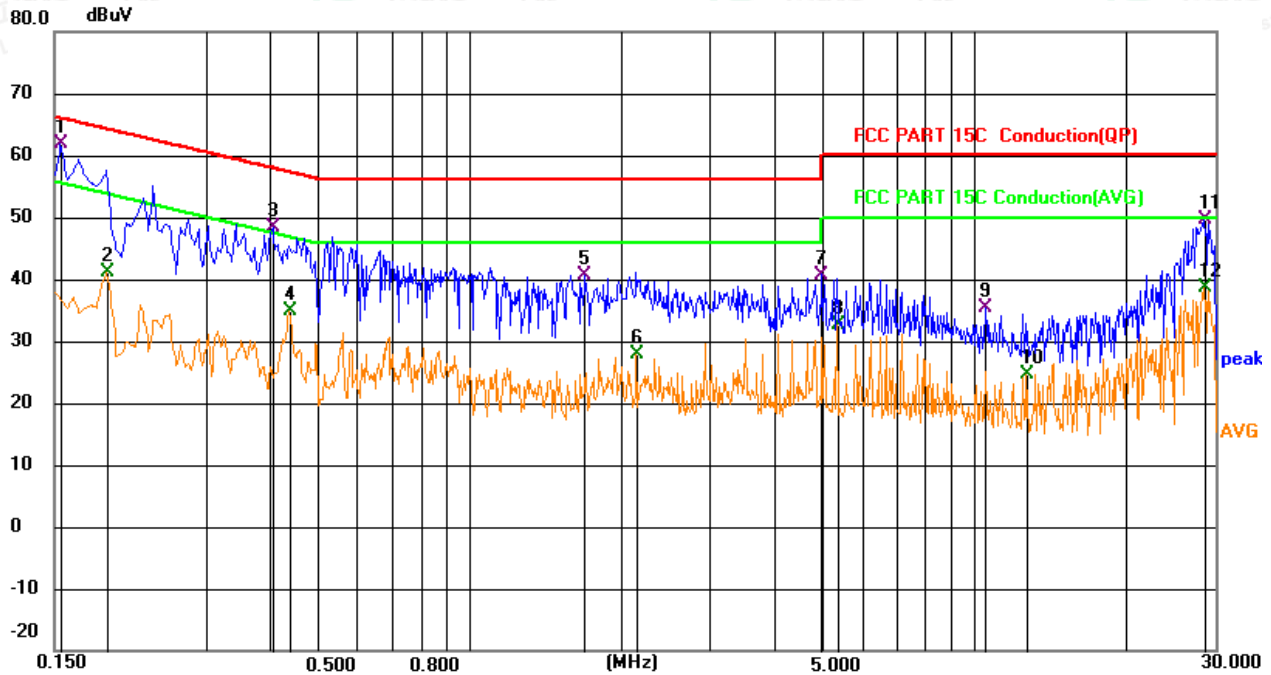

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.1545	42.36	19.63	61.99	65.75	-3.76	QP
2		0.1906	21.48	19.63	41.11	54.01	-12.90	AVG
3		0.4066	28.73	19.63	48.36	57.72	-9.36	QP
4		0.4381	15.30	19.64	34.94	47.10	-12.16	AVG
5		1.6935	21.00	19.67	40.67	56.00	-15.33	QP
6		2.1435	8.27	19.69	27.96	46.00	-18.04	AVG
7		4.9785	20.95	19.80	40.75	56.00	-15.25	QP
8		5.3431	12.93	19.80	32.73	50.00	-17.27	AVG
9		10.5226	15.48	19.84	35.32	60.00	-24.68	QP
10		12.6601	4.90	19.85	24.75	50.00	-25.25	AVG
11		28.4641	29.45	20.08	49.53	60.00	-10.47	QP
12		28.4641	18.62	20.08	38.70	50.00	-11.30	AVG

***Note: Pre-scan all modes and recorded the worst case results in this report.

Margin=Reading level + Correct – Limit



Correct Factor= Liss Factor+Cable Factor





7. RADIATED EMISSION MEASUREMENT

7.1. Block Diagram of Test Setup

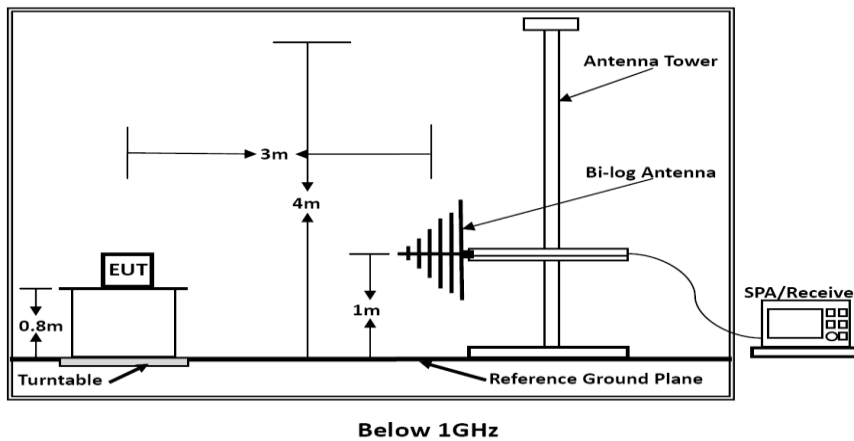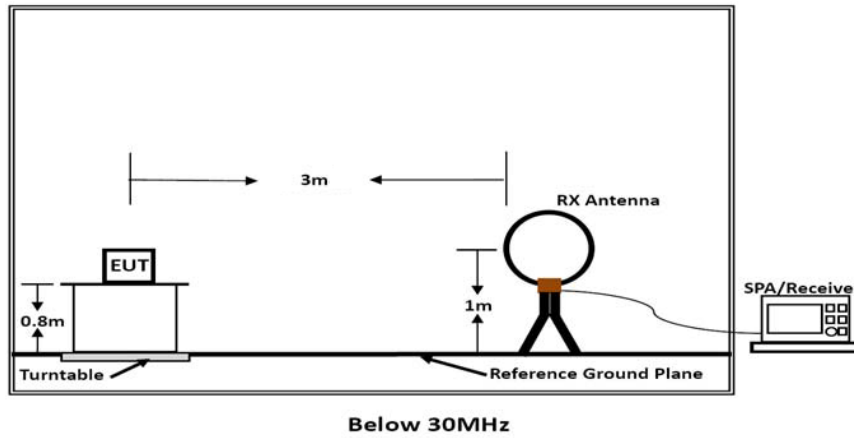



7.2. Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

7.3. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

(1) Setup the EUT as shown in Section 7.1.

7.5. Measuring Setting



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

7.6. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.





2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

7.7. Test Results

PASS.

Only report the worst test data (Mode 1) in test report;

The test data please refer to following page:

Temperature	23.8°C	Humidity	52.5%
Test Engineer	Joker Hu	Configurations	Transmit





0.009 MHz – 30 MHz
0 degree



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1110	85.35	-9.71	75.64	106.82	-31.18	QP
2	0.1406	63.58	-9.78	53.80	104.58	-50.78	QP
3	0.3246	59.29	-9.73	49.56	97.36	-47.80	QP
4	0.4275	49.01	-9.71	39.30	94.98	-55.68	QP
5	0.5588	48.01	-9.65	38.36	72.66	-34.30	QP
6	0.6521	49.49	-9.57	39.92	71.32	-31.40	QP





90 degree



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1111	84.77	-9.71	75.06	106.62	-31.56	QP
2	0.1406	65.85	-9.78	56.07	104.58	-48.51	QP
3	0.3245	59.88	-9.73	50.15	97.36	-47.21	QP
4	0.4208	55.09	-9.72	45.37	95.11	-49.74	QP
5	0.5586	45.97	-9.65	36.32	72.66	-36.34	QP
6	1.1317	42.94	-9.26	33.68	66.53	-32.85	QP

Remark: 1). Measured at antenna position 0 degree and 90 degree.


2). $\text{Margin} = \text{Reading level} + \text{Factor} - \text{Limit}$

$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Pre-amplifier Factor}$





Temperature	23.8℃	Humidity	52.1%
Test Engineer	Joker Hu	Configurations	Transmit

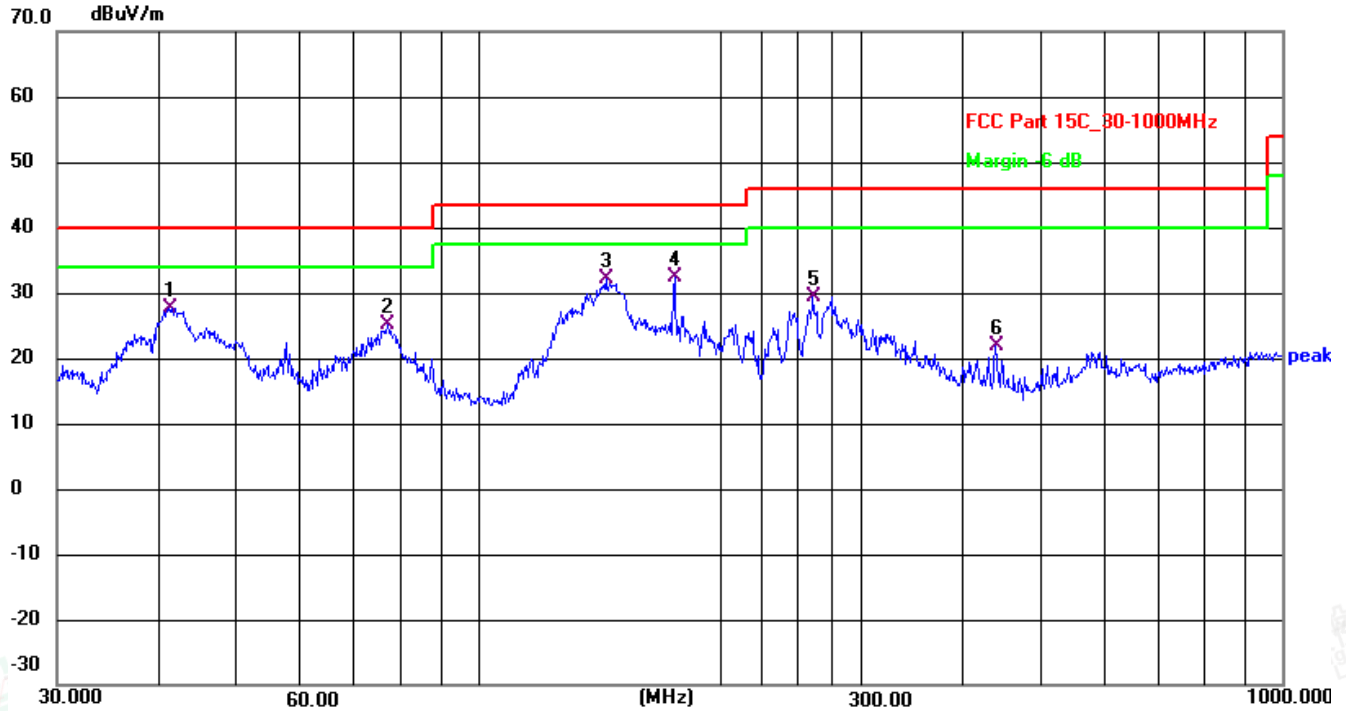
Below 1GHz*Horizontal*

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.2765	44.99	-17.38	27.61	40.00	-12.39	QP
2	77.3210	44.84	-19.77	25.07	40.00	-14.93	QP
3	144.3347	52.45	-20.43	32.02	43.50	-11.48	QP
4	175.6516	51.34	-19.05	32.29	43.50	-11.21	QP
5	261.0582	44.81	-15.49	29.32	46.00	-16.68	QP
6	440.1962	35.91	-13.95	21.96	46.00	-24.04	QP





Vertical

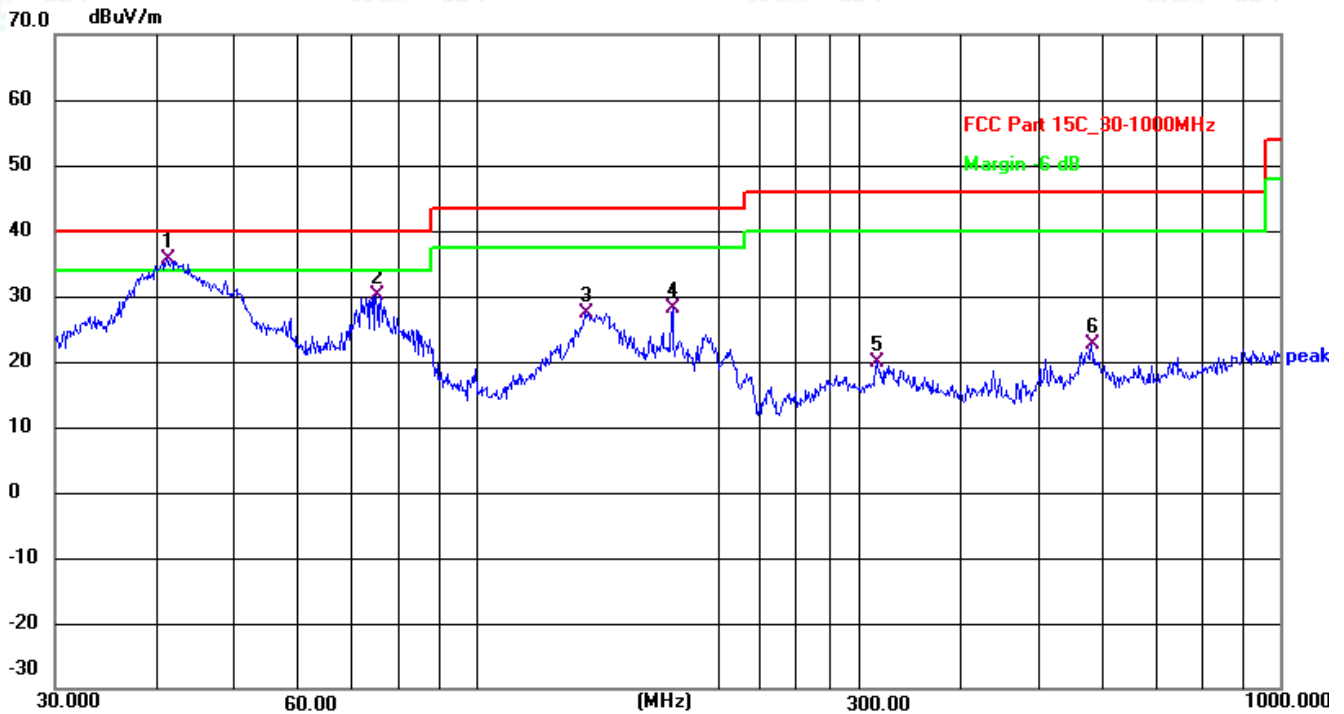

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.2765	53.09	-17.38	35.71	40.00	-4.29	QP
2	75.1822	49.85	-19.68	30.17	40.00	-9.83	QP
3	136.9391	48.23	-20.80	27.43	43.50	-16.07	QP
4	175.6516	47.11	-19.05	28.06	43.50	-15.44	QP
5	315.4806	34.51	-14.74	19.77	46.00	-26.23	QP
6	582.7424	33.28	-10.73	22.55	46.00	-23.45	QP

1). Emission level (dBuV/m) = 20 log Emission level (uV/m).

2). Margin=Reading level + Factor- Limit.


Correct Factor=Antenna Factor+Cable Factor- Pre-amplifier Factor





8. 20 DB BANDWIDTH MEASUREMENT

8.1. Block Diagram of Test Setup

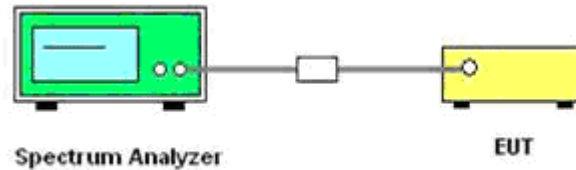

8.2. Test Procedure

Use the following spectrum analyzer settings:

Span = 300Hz

RBW = 1Hz

VBW = 3Hz

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).






8.3. Test Results

Test Result Of 20dB Bandwidth Measurement		
Test Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
0.111	0.117	Non-Specified

Result: Pass

Please refer to the following page for test plot.

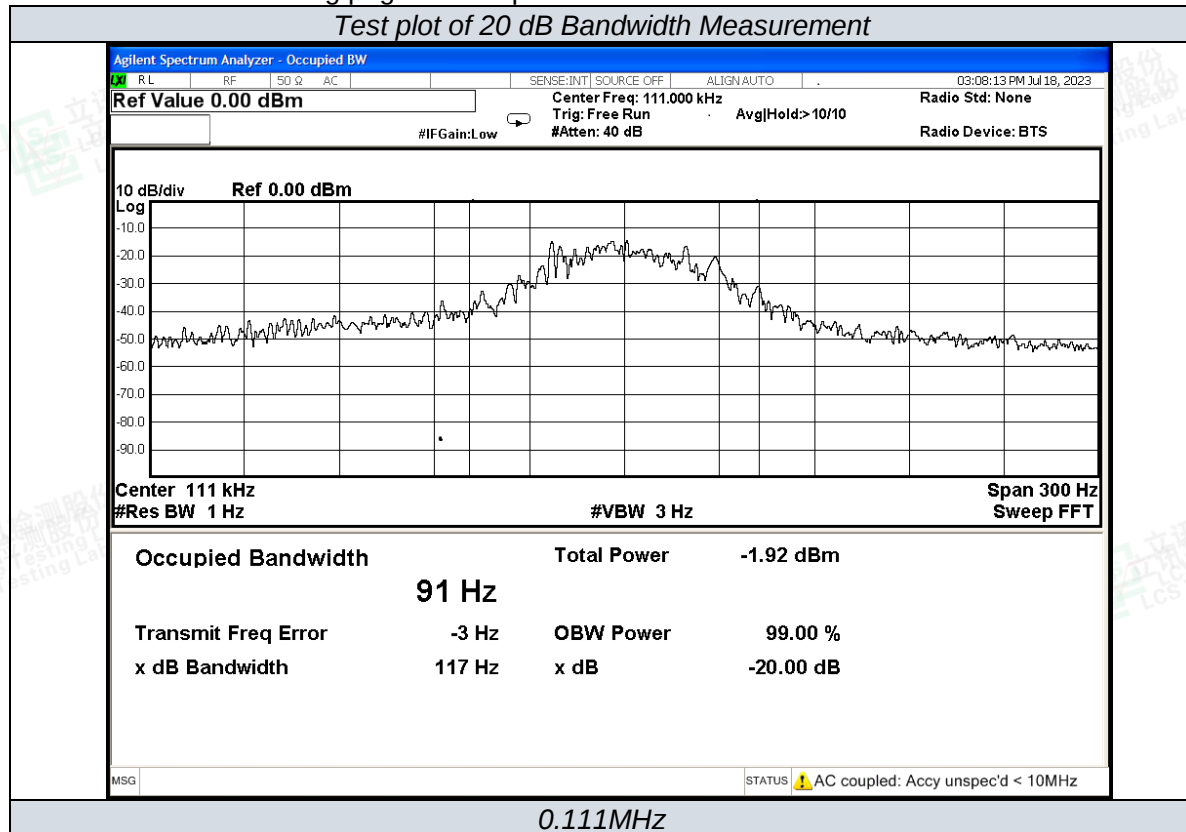



9. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for Test Setup Photos of the EUT.

10. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

11. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----

