



TEST REPORT

Report No.: CTC2025510503

FCC ID: 2BB6E-GLMD25A01

Applicant: UCLOUDLINK (SINGAPORE) PTE.LTD

Address: 80 ROBINSON ROAD #02-00 SINGAPORE(068898)

Manufacturer: UCLOUDLINK (SINGAPORE) PTE.LTD

Address: 80 ROBINSON ROAD #02-00 SINGAPORE(068898)

Product Name: 4G Wireless Data Terminal

Trade Mark: GlocalMe

Model/Type reference: GLMD25A01

Listed Model(s): /

Standard: CFR47 PART 22H, 24E, 27

Test Report Form No.: CTC-TR-117_A2

Master TRF: Dated 2025-05-12

Date of receipt of test sample.: Aug. 11, 2025

Date of testing: Aug. 11, 2025 ~ Aug. 27, 2025

Date of issue: Aug. 28, 2025

Result: **PASS**

Compiled by:

(Printed name+signature) Jim Jiang

Supervised by:

(Printed name+signature) Eric Zhang

Approved by:

(Printed name+signature) Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

**Table of Contents**

	Page
1. SUMMARY.....	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION.....	3
1.3. TEST DESCRIPTION	3
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	6
1.6. ENVIRONMENTAL CONDITIONS.....	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION.....	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	9
2.4. MEASUREMENT INSTRUMENTS LIST	13
3. TEST ITEM AND RESULTS	15
3.1. CONDUCTED OUTPUT POWER.....	15
3.2. PEAK-TO-AVERAGE RATIO.....	16
3.3. OCCUPY BANDWIDTH	17
3.4. OUT OF BAND EMISSION AT ANTENNA TERMINALS	18
3.5. RECEIVER SPURIOUS EMISSIONS AT ANTENNA TERMINAL	19
3.6. BAND EDGE COMPLIANCE.....	20
3.7. RADIATED POWER MEASUREMENT	22
3.8. RADIATED SPURIOUS EMISSION	42
3.9. FREQUENCY STABILITY.....	57



1. SUMMARY

1.1. Test Standards

FCC Rules Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

FCC Rules Part 22: PRIVATE LAND MOBILE RADIO SERVICES.

FCC Part 22 Subpart H: Cellular Radiotelephone Service.

FCC Rules Part 24: PUBLIC MOBILE SERVICES

FCC Rules Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

ANSI C63.26: 2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

KDB 971168 D01 Power Meas License Digital Systems v03: MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

RSS-Gen Issue 5: General Requirements for Compliance of Radio Apparatus.

RSS-130 Issue 2: Mobile Broadband Services (MBS) Equipment Operating in the Frequency Bands 698-756 MHz and 777-787 MHz

RSS-132 Issue 4: Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz.

RSS-133 Issue 7: 2 GHz Personal Communications Services.

RSS-139 Issue 4: Advanced Wireless Services Equipment Operating in the Bands 1710-1780 MHz and 2110-2180 MHz

RSS-199 Issue 4: Broadband Radio Service (BRS) Equipment Operating in the Band 2500–2690 MHz

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2025510503	Aug. 28, 2025	Original

1.3. Test Description

Test Item	Section in CFR 47	RSS Rule	Result	Test Engineer
Conducted Output Power	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50	RSS-130(4.4) RSS-132(5.4) RSS-133(6.4) RSS-139(6.4)	Pass	Jim Jiang
Peak-to-Average Ratio	Part 24.232 Part 27.50	RSS-130(4.4) RSS-132(5.4) RSS-133(6.4) RSS-139(6.4)	Pass	Jim Jiang
99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53	RSS-GEN(6.6) RSS-130(3.1) RSS-133(6.5) RSS-139(6.5) RSS-199(4.2)	Pass	Jim Jiang
Band Edge	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	RSS-130(4.6) RSS-132(5.5) RSS-133(6.5) RSS-139(6.5)	Pass	Jim Jiang

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-117_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cncaq.com](http://www.vz.cncaq.com)



Conducted Spurious Emissions	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	RSS-130(4.6) RSS-132(5.5) RSS-133(6.5) RSS-139(6.5)	Pass	Jim Jiang
Frequency stability VS Temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54	RSS-GEN(6.11) RSS-130(4.3) RSS-132(5.3) RSS-133(6.3) RSS-199(4.3)	Pass	Jim Jiang
Frequency stability VS Voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54	RSS-GEN(6.11) RSS-132(5.3) RSS-133(6.3) RSS-139(6.3) RSS-199(4.3)	Pass	Jim Jiang
ERP and EIRP	Part 22.913(a) Part 24.232(b) Part 27.50	RSS-130(4.4) RSS-132(5.4) RSS-133(6.4) RSS-139(6.4) RSS-199(4.4)	Pass	Jim Jiang
Radiated Spurious Emissions	Part 2.1053 Part 22.917 Part 24.238 Part 27.53	RSS-130(4.6) RSS-132(5.5) RSS-133(6.5) RSS-139(6.5) RSS-199(4.5)	Pass	Jim Jiang
Receiver Spurious Emissions	/	RSS-GEN(7.1.3)	N/A	N/A

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Address: Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC)Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTC Laboratories, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	20°C-25°C
Relative Humidity:	50 %-55 %
Air Pressure:	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	UCLOUDLINK (SINGAPORE) PTE.LTD
Address:	80 ROBINSON ROAD #02-00 SINGAPORE(068898)
Manufacturer:	UCLOUDLINK (SINGAPORE) PTE.LTD
Address:	80 ROBINSON ROAD #02-00 SINGAPORE(068898)

2.2. General Description of EUT

Product Name:	4G Wireless Data Terminal	
Trade Mark:	GlocalMe	
Model/Type reference:	GLMD25A01	
Listed Model(s):	/	
Model Difference:	/	
Sample ID:	CTC250801-004-S002	
Power supply:	Input: 5Vdc 2A	
Hardware version:	/	
Software version:	/	
LTE		
Operation Band:	FDD Band 2: UL: 1850.7MHz~1909.3MHz, DL: 1930.7MHz~1989.3MHz FDD Band 4: UL: 1710.7MHz~1754.3MHz, DL: 2110.7MHz~2154.3MHz FDD Band 5: UL: 824.7MHz~848.3MHz, DL: 869.7MHz~893.3MHz FDD Band 7: UL: 2502.5MHz~2567.5MHz, DL: 2622.5MHz~2687.5MHz FDD Band 12: UL: 699.7MHz~715.3MHz, DL: 729.7MHz~745.3MHz FDD Band 13: UL: 779.5MHz~784.5MHz, DL: 748.5MHz~751.0MHz FDD Band 17: UL: 706.5MHz~713.5MHz, DL: 736.5MHz~743.5MHz FDD Band 25: UL: 1850.7MHz~1914.3MHz, DL: 1930.7MHz~1994.3MHz FDD Band 26 (824~849MHz): UL: 824MHz~849MHz, DL: 869MHz~894MHz TDD Band 38: UL: 2570MHz~2620MHz, DL: 2570MHz~2620MHz TDD Band 41: UL: 2498.5MHz~2687.5MHz, DL: 2498.5MHz~2687.5MHz FDD Band 66: UL: 1710.7MHz~1779.3MHz, DL: 2110.7MHz~2179.3MHz	
Modulation Type:	QPSK, 16QAM	
Antenna Type:	FPC Antenna	
Antenna Gain:	Main Antenna: Band 2: 1.4dBi Max Band 4: 0.2dBi Max Band 5: -4.7dBi Max Band 7: 1.7dBi Max Band 12: -16.1dBi Max Band 13: -7.3dBi Max Band 17: -16.1dBi Max	

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-117_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://www.yz.cncaq.com)



	Band 25: 1.4dBi Max Band 26: -4.7dBi Max Band 38: 0.8dBi Max Band 41: 1.7dBi Max Band 66: 0.4dBi Max
--	------------------------------------------------------------------------------------------------------------------



2.3. Description of Test Modes and Test Frequency

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing.

Test Frequency:

FDD Band 2

Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	1.4	18607	1850.7	607	1930.7
	3	18615	1851.5	615	1931.5
	5	18625	1852.5	625	1932.5
	10	18650	1855	650	1935
	15 [1]	18675	1857.5	675	1937.5
	20 [1]	18700	1860	700	1940
Mid Range	1.4/3/5/10 15 [1]/20 [1]	18900	1880	900	1960
	High Range	1.4	19193	1909.3	1193
		3	19185	1908.5	1185
		5	19175	1907.5	1175
		10	19150	1905	1150
		15 [1]	19125	1902.5	1125
	20 [1]	19100	1900	1100	1980

NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.

FDD Band 4

Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	1.4	19957	1710.7	1957	2110.7
	3	19965	1711.5	1965	2111.5
	5	19975	1712.5	1975	2112.5
	10	20000	1715	2000	2115
	15	20025	1717.5	2025	2117.5
	20	20050	1720	2050	2120
Mid Range	1.4/3/5/10/15/20	20175	1732.5	2175	2132.5
	High Range	1.4	20393	1754.3	2393
		3	20385	1753.5	2385
		5	20375	1752.5	2375
		10	20350	1750	2350
		15	20325	1747.5	2325
	20	20300	1745	2300	2145

FDD Band 5

Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	1.4	20407	824.7	2407	869.7
	3	20415	825.5	2415	870.5
	5	20425	826.5	2425	871.5
	10 [1]	20450	829	2450	874
Mid Range	1.4/3/5 10 [1]	20525	836.5	2525	881.5
	High Range	1.4	20643	848.3	2643
		3	20635	847.5	2635
		5	20625	846.5	2625
	10 [1]	20600	844	2600	889

NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.



FDD Band 7

Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Low Range	5	20775	2502.5	2775	2622.5
	10	20800	2505	2800	2625
	15	20825	2507.5	2825	2627.5
	20 [1]	20850	2510	2850	2630
Mid Range	5/10/15	21100	2535	3100	2655
	20 [1]				
High Range	5	21425	2567.5	3425	2687.5
	10	21400	2565	3400	2685
	15	21375	2562.5	3375	2682.5
	20 [1]	21350	2560	3350	2680
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					

FDD Band 12

Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Low Range	1.4	23017	699.7	5017	729.7
	3	23025	700.5	5025	730.5
	5 [1]	23035	701.5	5035	731.5
	10 [1]	23060	704	5060	734
Mid Range	1.4/3	23095	707.5	5095	737.5
	5 [1]/10 [1]				
High Range	1.4	23173	715.3	5173	745.3
	3	23165	714.5	5165	744.5
	5 [1]	23155	713.5	5155	743.5
	10 [1]	23130	711	5130	741
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					

FDD Band 13

Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Low Range	5 [1]	23205	779.5	5205	748.5
	10 [1]	23230	782	5230	751
Mid Range	5 [1]/10 [1]	23230	782	5230	751
High Range	5 [1]	23255	784.5	5255	753.5
	10 [1]	23230	782	5230	751
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					

FDD Band 17

Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Low Range	5 [1]	23755	706.5	5755	736.5
	10 [1]	23780	709	5780	739
Mid Range	5 [1]/10 [1]	23790	710	5790	740
High Range	5 [1]	23825	713.5	5825	743.5
	10 [1]	23800	711	5800	741
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					



FDD Band 25

Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	1.4	26047	1850.7	8047	1930.7
	3	26055	1851.5	8055	1931.5
	5	26065	1852.5	8065	1932.5
	10	26090	1855	8090	1935
	15 [1]	26115	1857.5	8115	1937.5
	20 [1]	26140	1860	8140	1940
Mid Range	1.4/3/5/10 15 [1]/20 [1]	26365	1882.5	8365	1962.5
High Range	1.4	26683	1914.3	8683	1994.3
	3	26675	1913.5	8675	1993.5
	5	26665	1912.5	8665	1992.5
	10	26640	1910	8640	1990
	15 [1]	26615	1907.5	8615	1987.5
	20 [1]	26590	1905	8590	1985

NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.

FDD Band 26

Test channel	Bandwidth(MHz)	N _{UL}	Frequency of Uplink (MHz)
Low Range	1.4	26797	824.7
	3	26805	825.5
	5	26815	826.5
	10	26840	829.0
	15	26865	831.5
Mid Range	1.4/3/5/10/15	26915	836.5
High Range	1.4	27033	848.3
	3	27025	847.5
	5	27015	846.5
	10	26990	844.0
	15	26965	841.5

TDD Band 38

Test Frequency ID	Bandwidth [MHz]	EARFCN	Frequency (UL and DL) [MHz]
Low Range	5	37775	2572.5
	10	37800	2575
	15	37825	2577.5
	20	37850	2580
Mid Range	5/10/15/20	38000	2595
High Range	5	38225	2617.5
	10	38200	2615
	15	38175	2612.5
	20	38150	2610

TDD Band 41

Test Frequency ID	Bandwidth [MHz]	EARFCN	Frequency (UL and DL) [MHz]
Low Range	5	39675	2498.5
	10	39700	2501
	15	39725	2503.5
	20	39750	2506
Mid Range	5/10/15/20	40620	2593
High Range	5	41565	2687.5
	10	41540	2685
	15	41515	2682.5
	20	41490	2680

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-117_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : www.cncacq.com



FDD Band 66

Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	1.4	131979	1710.7	66443	2110.7
	3	131987	1711.5	66451	2111.5
	5	131997	1712.5	66461	2112.5
	10	132022	1715	66486	2115
	15	132047	1717.5	66511	2117.5
	20	132072	1720	66536	2120
Mid Range Tx ¹	1.4/3/5/10/15/20	132322	1745	66786	2145
Mid Range	1.4/3/5/10/15/20	132422	1755	66886	2155
Paired High Range ²	1.4	132665	1779.3	67129	2179.3
	3	132657	1778.5	67121	2178.5
	5	132647	1777.5	67111	2177.5
	10	132622	1775	67086	2175
	15	132597	1772.5	67061	2172.5
	20	132572	1770	67036	2170
High Range ³	1.4	NA	NA	67329	2199.3
	3	NA	NA	67321	2198.5
	5	NA	NA	67311	2197.5
	10	NA	NA	67286	2195
	15	NA	NA	67261	2192.5
	20	NA	NA	67236	2190

Note 1: Applicable for transmitter testing.

Note 2: Applicable if UL is configured on the CC.

Note 3: Applicable if no UL is configured on the CC.

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-117_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://www.yz.cncaq.com)



2.4. Measurement Instruments List

RF Test System – SRD						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 23, 2025	Mar. 24, 2026
2	MXA Signal Analyzer	Keysight	N9020A	MY52091402	Dec. 13, 2024	Dec. 12, 2025
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 13, 2024	Dec. 12, 2025
4	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 13, 2024	Dec. 12, 2025
5	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 25, 2025	Mar. 24, 2026
6	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 25, 2025	Mar. 24, 2026
7	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 13, 2024	Dec. 12, 2025
8	RF Control Unit	Tonscend	JS0806-2	/	Mar. 25, 2025	Mar. 24, 2026
9	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 25, 2025	Mar. 24, 2026
10	RF Cable	HUBER+SUHNER	SUCOFLEX101PE	RF-08	Apr. 15, 2025	Apr. 16, 2026
Test Software						
Name		Manufacturer			Software Version	
JS1120-3		Tonscend			V2.6.88.0346	

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-117_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



Radiated emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 25, 2024	Dec. 24, 2025
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 26, 2024	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 13, 2024	Dec. 12, 2025
4	Broadband Amplifier	Schwarzbeck	BBV9743B	259	Dec. 13, 2024	Dec. 12, 2025
5	Mirowave Broadband Amplifier	Schwarzbeck	BBV9718C	111	Dec. 13, 2024	Dec. 12, 2025
6	RE33L-001	COMM	/	014 (9kHz-1GHz)	Feb. 09, 2025	Feb. 08, 2026
7	RE33L-002	COMM	/	015 (9kHz-1GHz)	Feb. 09, 2025	Feb. 08, 2026
8	RE33H-001	SUHBER SUCOFLEX	/	016 (1GHz-18GHz)	Feb. 09, 2025	Feb. 08, 2026
9	RE33H-002	HUBENR	/	017 (1GHz-18GHz)	Feb. 09, 2025	Feb. 08, 2026
10	RE33H-003	HUBENR	/	018 (1GHz-18GHz)	Feb. 09, 2025	Feb. 08, 2026
11	RE33H-003	HUBENR	/	019 (18GHz-40GHz)	Feb. 09, 2025	Feb. 08, 2026
12	3m chamber 3	YIHENG	EE106	/	Aug. 29, 2023	Aug. 28, 2026
13	SHF-EHF Horn Antenna	Schwarzbeck	BBHA 9170	013551	Dec. 13, 2024	Dec. 12, 2025
14	Low noise Amplifier	Tonscend	TAP180040048	AP24C8060348	Dec. 13, 2024	Dec. 12, 2025
Test Software						
Name		Manufacturer			Software Version	
EZ-EMC		FARA			FA-03A2	

- Note: 1. The Cal. Interval was one year.
2. The Cal. Interval was three years of the antenna.
3. The cable loss has been calculated in test result which connection between each test instruments.



3. TEST ITEM AND RESULTS


Conducted Output Power

LIMIT

Conducted Output Power: N/A

TEST CONFIGURATION

- For Conducted output Power



Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

- For Conducted output Power
1. The transmitter output port was connected to base station.
 2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
 3. Set EUT at maximum power through base station.
 4. Select lowest, middle, and highest channels for each band and different modulation.
 5. Measure the maximum PK burst power and maximum Avg. burst power.

TEST RESULTS

Please see the appendix for every tested band.


3.2. Peak-to-Average Ratio

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13dB.

TEST CONFIGURATION

- For Peak-to-Average Ratio

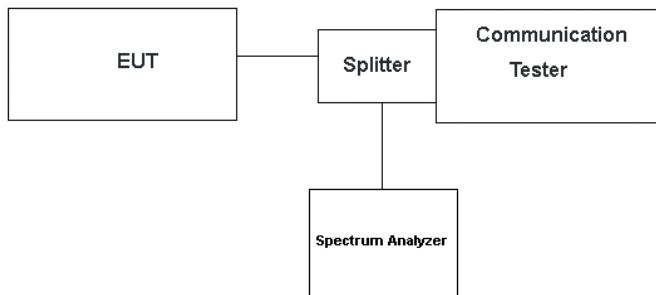

TEST PROCEDURE


- For Peak-to-Average Ratio
1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
 2. The EUT was connected to spectrum and communication tester via a splitter
 3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
 6. Record the deviation as Peak to Average Ratio.

TEST RESULTS

Please see the appendix for every tested band.

3.3. Occupy Bandwidth

TEST CONFIGURATION

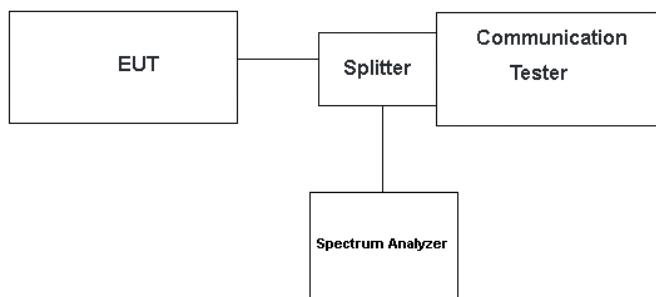

TEST PROCEDURE

1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer
2. RBW was set to about 1% of emission BW, $VBW \geq 3$ times RBW.
3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Please see the appendix for every tested band.



3.4. Out of band emission at antenna terminals

LIMIT

§ 22.917, §24.238, §27.53 (c), (g), (h), §90.691, §90.543 (Band 14)

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

§ 27.53 (a) (Band 30, 40)

The minimum permissible attenuation level of any spurious emissions is $70 + 10 \log (P)$ dB where transmitting power (P) in Watts.

§ 27.53 (m) (Band 7, 41)


The minimum permissible attenuation level of any spurious emissions is $55 + 10 \log (P)$ dB where transmitting power (P) in Watts.

§ 96.41

(e) 3.5 GHz Emissions and Interference Limits—

(2) Additional protection levels. Notwithstanding paragraph (d)(1) of this section, the conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz .

TEST CONFIGURATION

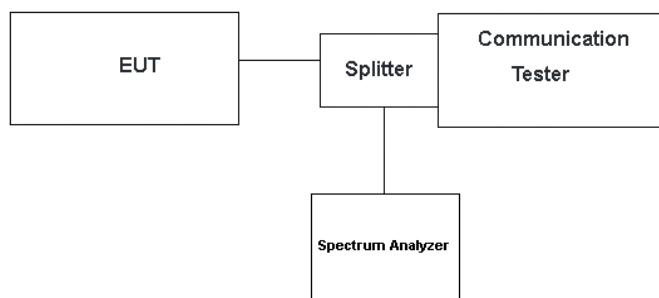

TEST PROCEDURE

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set at 1MHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.
3. For the out of band: Set the RBW = 1MHz VBW \geqslant 3 times RBW, Start=30MHz, Stop= 10th harmonic.

TEST RESULTS

Please see the appendix for every tested band.




3.5. Receiver Spurious Emissions at Antenna Terminal

LIMIT

RSS-GEN7.1.3, Receiver-spurious emissions at any discrete frequency shall not exceed 2 nW in the band 30-1000 MHz, nor 5 nW above 1000 MHz.

TEST CONFIGURATION

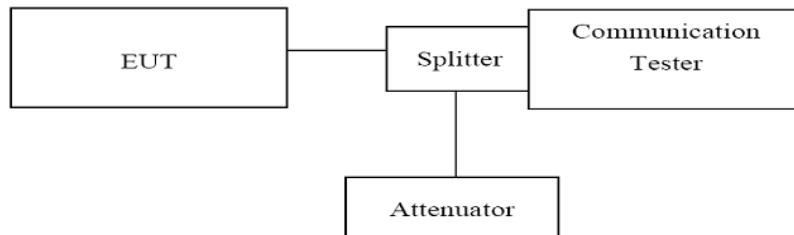

TEST PROCEDURE

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.
3. Set the RBW= 100kHz, VBW =300kHz, below 1GHz
4. Set the RBW= 1MHz, VBW = 3MHz, above1GHz
5. Start=30MHz, Stop= 10th harmonic

TEST RESULTS

Note: Not Applicable.



3.6. Band Edge compliance

LIMIT

§ 22.917, §24.238, §27.53(h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the

transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§ 90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum

adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any

emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10$

$\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of

the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission

shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels,

whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in

kilohertz and where f is greater than 37.5 kHz.

§ 27.53 (Band 30)

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed

only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

§ 27.53 (Band 13)

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(4) of this section is based on the use of measurement



instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40dBm/MHz).

§ 27.53 (Band 12, 17, 71)

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

§ 27.53 (Band 7, 41)

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph

(m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC: §96.41


(e) 3.5 GHz Emissions and Interference Limits—(1) General protection levels. Except as otherwise specified in paragraph

(e)(2) of this section, for channel and frequency assignments made by the SAS to CBSDs, the conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and

less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz. The upper and lower SAS assigned channel edges are the upper and lower limits of any channel assigned to a CBSD by an SAS, or in the case of multiple contiguous channels, the upper and lower limits of the combined contiguous channels.

(2) Additional protection levels. Notwithstanding paragraph (d)(1) of this section, the conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

TEST CONFIGURATION

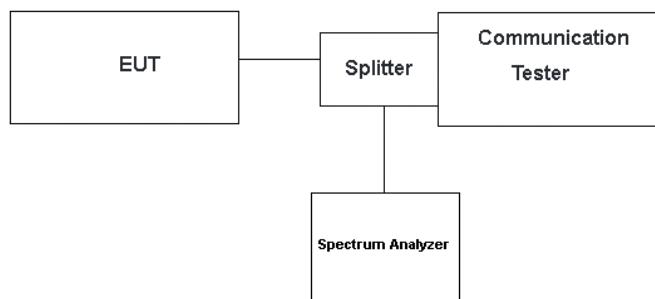

TEST PROCEDURE

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. RBW was set to about 1% of emission BW, $VBW \geq 3$ times RBW.

TEST RESULTS

Please see the appendix for every tested band.

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-117_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : www.cncacq.com

3.7. Radiated Power Measurement

LIMIT

LTE FDD Band 2: 2W(33dBm) EIRP

LTE FDD Band 4: 1W(30dBm) EIRP

LTE FDD Band 5: 7W(38.45dBm) ERP

LTE FDD Band 7: 2W(33dBm) EIRP

LTE FDD Band 12: 3W(34.77dBm) ERP

LTE FDD Band 13: 3W(34.77dBm) ERP

LTE FDD Band 17: 3W(34.77dBm) ERP

LTE FDD Band 18: 7W(38.45dBm) ERP

LTE FDD Band 19: 7W(38.45dBm) ERP

LTE FDD Band 25: 2W(33dBm) EIRP

LTE FDD Band 26: 7W(38.45dBm) ERP

LTE FDD Band 30: 0.25W(23.97dBm) EIRP

LTE TDD Band 38/41: 2W(33dBm) EIRP


LTE FDD Band 66: 1W(30dBm) EIRP

LTE FDD Band 71: 2W(34.77dBm) ERP


FCC: §2.1046, §22.913, §24.232, §27.50, §90.635, §90.541, and §96.41

TEST CONFIGURATION

For the actual test configuration, please refer to the related Item – EUT Test Photos.

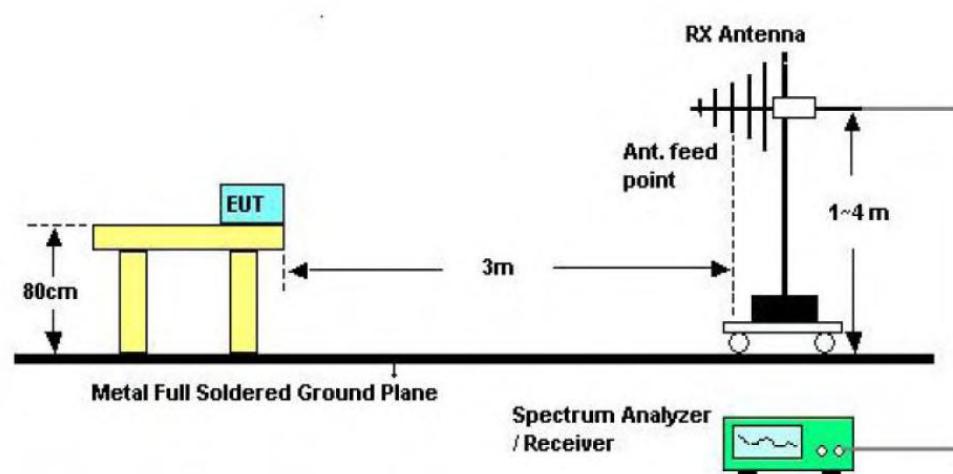

Below 1GHz

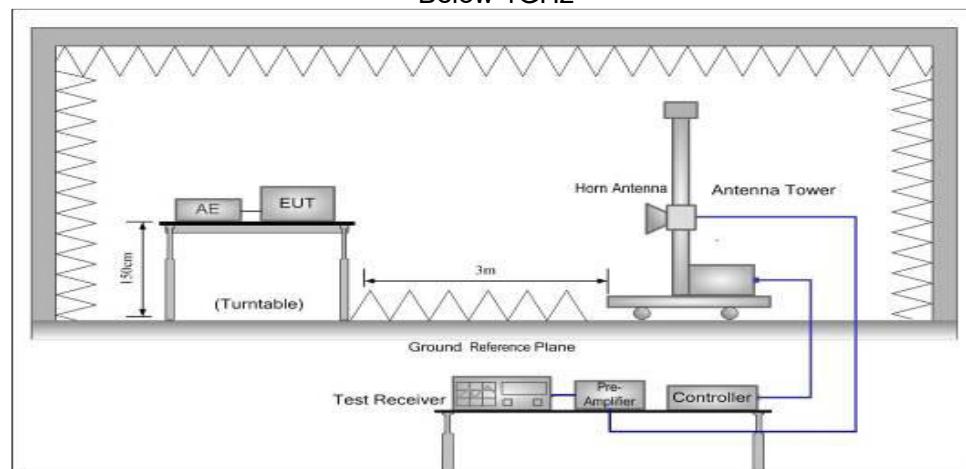

Above 1GHz

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-117_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://www.yz.cncaq.com)



TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, and the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier should be connected to the Signal Source output port. And the cable should be connecting between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
We used N5182A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST RESULTS

Remark:

1. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, and test data recorded in this report.



LTE Band 2 - 1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.86	19.96	≤33	PASS
	Mid	22.47	20.01		
	High	22.03	19.89		
16QAM	Low	22.72	20.12	≤33	PASS
	Mid	22.89	19.80		
	High	22.87	19.65		

LTE Band 2 - 3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.45	19.99	≤33	PASS
	Mid	22.63	19.77		
	High	22.62	19.60		
16QAM	Low	22.40	20.03	≤33	PASS
	Mid	22.05	19.92		
	High	22.02	20.27		

LTE Band 2 - 5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.65	19.88	≤33	PASS
	Mid	22.86	20.08		
	High	22.85	20.18		
16QAM	Low	22.66	20.03	≤33	PASS
	Mid	22.94	20.13		
	High	22.60	20.15		



LTE Band 2 - 10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.51	19.71	≤33	PASS
	Mid	22.51	20.24		
	High	22.07	20.21		
16QAM	Low	22.95	20.18	≤33	PASS
	Mid	22.08	20.26		
	High	22.14	19.78		

LTE Band 2 - 15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.39	20.38	≤33	PASS
	Mid	22.59	20.12		
	High	22.93	20.03		
16QAM	Low	22.53	20.32	≤33	PASS
	Mid	22.67	19.72		
	High	22.40	20.14		

LTE Band 2 - 20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.91	20.58	≤33	PASS
	Mid	22.68	19.69		
	High	22.53	20.49		
16QAM	Low	22.91	20.22	≤33	PASS
	Mid	22.87	20.27		
	High	22.06	20.42		

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-117_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://www.yz.cncaq.com)



LTE Band 4 - 1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.95	20.60	≤30	PASS
	Mid	23.49	20.30		
	High	23.10	20.59		
16QAM	Low	23.26	20.31	≤30	PASS
	Mid	23.63	20.30		
	High	23.28	20.44		

LTE Band 4 - 3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.16	20.29	≤30	PASS
	Mid	23.56	20.29		
	High	23.05	20.30		
16QAM	Low	22.97	20.29	≤30	PASS
	Mid	23.03	20.12		
	High	23.43	20.57		

LTE Band 4 - 5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.04	19.97	≤30	PASS
	Mid	22.98	19.95		
	High	23.61	19.69		
16QAM	Low	23.02	20.04	≤30	PASS
	Mid	22.89	20.43		
	High	23.40	20.31		



LTE Band 4 - 10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.85	20.21	≤30	PASS
	Mid	23.54	20.09		
	High	23.32	20.02		
16QAM	Low	23.18	20.46	≤30	PASS
	Mid	23.49	19.95		
	High	23.23	20.39		

LTE Band 4 - 15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.09	20.42	≤30	PASS
	Mid	22.93	20.10		
	High	23.09	20.00		
16QAM	Low	22.92	20.46	≤30	PASS
	Mid	22.95	20.19		
	High	22.96	20.49		

LTE Band 4 - 20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.04	20.30	≤30	PASS
	Mid	23.00	19.75		
	High	22.92	20.16		
16QAM	Low	23.42	20.28	≤30	PASS
	Mid	23.66	20.52		
	High	23.48	20.26		

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-117_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://www.yz.cncaq.com)



LTE Band 5 - 1.4MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.99	19.74	≤38.45	PASS
	Mid	23.45	19.64		
	High	23.71	19.83		
16QAM	Low	23.35	19.98	≤38.45	PASS
	Mid	23.34	20.29		
	High	23.43	19.68		

LTE Band 5 - 3MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.54	20.15	≤38.45	PASS
	Mid	23.47	20.13		
	High	23.08	20.32		
16QAM	Low	23.42	19.98	≤38.45	PASS
	Mid	23.55	20.06		
	High	23.14	20.08		

LTE Band 5 - 5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.02	20.33	≤38.45	PASS
	Mid	22.87	20.55		
	High	22.99	20.28		
16QAM	Low	23.14	19.75	≤38.45	PASS
	Mid	23.07	20.35		
	High	23.69	19.95		



LTE Band 5 - 10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.08	20.12	≤38.45	PASS
	Mid	23.53	20.56		
	High	22.85	20.48		
16QAM	Low	23.03	19.80	≤38.45	PASS
	Mid	22.84	20.40		
	High	23.22	19.75		

LTE Band 7 - 5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.47	20.56	≤33	PASS
	Mid	23.22	19.88		
	High	23.40	19.68		
16QAM	Low	23.10	20.05	≤33	PASS
	Mid	23.25	20.34		
	High	23.18	19.70		

LTE Band 7 - 10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.85	20.06	≤33	PASS
	Mid	23.17	20.01		
	High	22.85	19.71		
16QAM	Low	23.28	19.74	≤33	PASS
	Mid	23.50	20.08		
	High	22.89	20.05		



LTE Band 7 - 15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.99	20.54	≤33	PASS
	Mid	23.73	20.02		
	High	23.50	19.61		
16QAM	Low	23.11	20.06	≤33	PASS
	Mid	22.96	20.58		
	High	23.23	19.98		

LTE Band 7 - 20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.82	20.06	≤33	PASS
	Mid	23.36	20.40		
	High	22.88	19.88		
16QAM	Low	23.36	20.18	≤33	PASS
	Mid	23.14	19.68		
	High	23.10	20.12		

LTE Band 12 - 1.4MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.95	20.12	≤34.77	PASS
	Mid	23.63	19.66		
	High	22.85	20.57		
16QAM	Low	23.52	20.23	≤34.77	PASS
	Mid	23.01	20.59		
	High	23.61	20.32		



LTE Band 12 - 3MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.06	19.83	≤34.77	PASS
	Mid	23.60	19.83		
	High	23.33	20.41		
16QAM	Low	23.69	19.83	≤34.77	PASS
	Mid	22.88	20.52		
	High	23.03	19.92		

LTE Band 12 - 5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.17	20.48	≤34.77	PASS
	Mid	23.07	20.28		
	High	23.03	20.02		
16QAM	Low	23.75	20.28	≤34.77	PASS
	Mid	23.30	20.15		
	High	23.47	20.01		

LTE Band 12 -10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.04	20.37	≤34.77	PASS
	Mid	23.01	20.57		
	High	23.22	20.32		
16QAM	Low	23.67	19.73	≤34.77	PASS
	Mid	23.64	20.21		
	High	23.56	20.08		



LTE Band 13 - 5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.75	19.78	≤34.77	PASS
	Mid	23.79	19.82		
	High	23.06	19.80		
16QAM	Low	23.16	20.49	≤34.77	PASS
	Mid	22.92	20.01		
	High	22.94	20.27		

LTE Band 13 - 10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Mid	23.14	19.93	≤34.77	PASS
16QAM	Mid	23.49	20.52	≤34.77	PASS

LTE Band 17 - 5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.00	19.60	≤34.77	PASS
	Mid	23.37	19.99		
	High	23.50	19.67		
16QAM	Low	23.01	20.22	≤34.77	PASS
	Mid	22.82	20.55		
	High	22.80	19.61		



LTE Band 17 - 10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.38	20.09	≤34.77	PASS
	Mid	23.16	20.12		
	High	23.30	19.63		
16QAM	Low	23.62	20.32	≤34.77	PASS
	Mid	23.13	20.54		
	High	23.54	20.01		

LTE Band 25 - 1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.49	20.06	≤33	PASS
	Mid	22.96	20.00		
	High	22.91	19.84		
16QAM	Low	23.33	20.21	≤33	PASS
	Mid	23.66	19.64		
	High	23.34	20.25		

LTE Band 25 - 3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.01	19.64	≤33	PASS
	Mid	23.18	19.64		
	High	23.50	19.92		
16QAM	Low	23.60	19.97	≤33	PASS
	Mid	22.99	19.88		
	High	23.76	19.91		



LTE Band 25 - 5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.57	20.31	≤33	PASS
	Mid	23.33	19.94		
	High	23.69	20.11		
16QAM	Low	23.09	19.51	≤33	PASS
	Mid	23.14	19.82		
	High	23.22	19.49		

LTE Band 25 - 10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.57	20.01	≤33	PASS
	Mid	23.36	19.81		
	High	22.87	19.40		
16QAM	Low	22.77	19.78	≤33	PASS
	Mid	22.74	20.16		
	High	23.68	19.94		

LTE Band 25 - 15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.42	20.27	≤33	PASS
	Mid	23.41	20.02		
	High	23.61	20.21		
16QAM	Low	23.16	19.68	≤33	PASS
	Mid	23.02	19.51		
	High	23.02	19.49		



LTE Band 25 - 20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.62	19.70	≤33	PASS
	Mid	22.99	19.69		
	High	23.21	19.78		
16QAM	Low	23.03	19.75	≤33	PASS
	Mid	23.63	19.77		
	High	23.09	19.96		

LTE Band 26 (824-849) - 1.4MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.80	20.16	≤38.45	PASS
	Mid	23.07	20.18		
	High	22.95	20.01		
16QAM	Low	22.94	20.16	≤38.45	PASS
	Mid	22.77	19.72		
	High	23.00	19.78		

LTE Band 26 (824-849) - 3MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.98	20.37	≤38.45	PASS
	Mid	23.58	20.20		
	High	23.19	19.43		
16QAM	Low	23.50	20.05	≤38.45	PASS
	Mid	23.50	19.62		
	High	22.78	20.08		



LTE Band 26 (824-849) - 5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.05	19.57	≤38.45	PASS
	Mid	23.36	20.36		
	High	23.23	20.38		
16QAM	Low	23.45	20.23	≤38.45	PASS
	Mid	22.77	20.27		
	High	23.17	19.98		

LTE Band 26 (824-849) - 10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.91	20.14	≤38.45	PASS
	Mid	22.78	20.24		
	High	22.88	19.82		
16QAM	Low	22.79	20.28	≤38.45	PASS
	Mid	23.55	19.43		
	High	23.40	19.77		

LTE Band 26 (824-849) - 15MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.97	19.49	≤38.45	PASS
	Mid	22.81	20.32		
	High	23.67	19.65		
16QAM	Low	23.52	19.89	≤38.45	PASS
	Mid	23.54	20.30		
	High	23.63	19.76		



LTE Band 38 - 5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.87	19.78	≤33	PASS
	Mid	23.37	20.26		
	High	23.65	19.63		
16QAM	Low	23.25	19.98	≤33	PASS
	Mid	22.75	20.04		
	High	23.68	19.99		

LTE Band 38 - 10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.51	19.54	≤33	PASS
	Mid	23.44	20.18		
	High	23.54	19.55		
16QAM	Low	22.81	19.63	≤33	PASS
	Mid	22.79	19.69		
	High	23.14	20.29		

LTE Band 38 - 15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.78	19.65	≤33	PASS
	Mid	23.10	19.63		
	High	23.10	19.64		
16QAM	Low	23.03	19.81	≤33	PASS
	Mid	23.60	20.06		
	High	23.39	19.81		



LTE Band 38 - 20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.61	19.85	≤33	PASS
	Mid	23.70	20.16		
	High	22.99	19.51		
16QAM	Low	23.17	20.22	≤33	PASS
	Mid	23.34	20.23		
	High	23.55	19.43		

LTE Band 41 - 5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.81	20.05	≤33	PASS
	Mid	23.08	20.28		
	High	23.68	19.81		
16QAM	Low	23.38	19.80	≤33	PASS
	Mid	23.51	20.19		
	High	22.93	20.35		

LTE Band 41 - 10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.04	19.79	≤33	PASS
	Mid	23.07	19.77		
	High	23.52	20.05		
16QAM	Low	23.56	19.92	≤33	PASS
	Mid	23.59	20.38		
	High	22.75	20.17		

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-117_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



LTE Band 41 - 15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.22	20.34	≤33	PASS
	Mid	23.31	19.53		
	High	23.33	19.68		
16QAM	Low	23.64	19.88	≤33	PASS
	Mid	23.63	20.20		
	High	23.35	19.55		

LTE Band 41 - 20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.38	20.28	≤33	PASS
	Mid	22.88	19.85		
	High	22.86	20.17		
16QAM	Low	23.31	19.78	≤33	PASS
	Mid	22.78	19.80		
	High	23.07	20.24		

LTE Band 66 – 1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.47	20.08	≤30	PASS
	Mid	23.14	19.82		
	High	22.81	20.05		
16QAM	Low	23.27	19.98	≤30	PASS
	Mid	23.58	19.50		
	High	23.60	20.31		



LTE Band 66 – 3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.39	19.45	≤30	PASS
	Mid	23.03	19.47		
	High	23.22	20.24		
16QAM	Low	23.68	20.16	≤30	PASS
	Mid	23.22	20.38		
	High	23.51	19.93		

LTE Band 66 – 5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.47	19.70	≤30	PASS
	Mid	22.90	19.66		
	High	23.58	19.89		
16QAM	Low	22.71	19.79	≤30	PASS
	Mid	23.48	19.76		
	High	23.38	20.36		

LTE Band 66 – 10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.23	19.83	≤30	PASS
	Mid	23.39	19.50		
	High	23.40	20.40		
16QAM	Low	23.38	19.84	≤30	PASS
	Mid	23.04	19.83		
	High	23.24	20.12		



LTE Band 66 – 15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	23.62	19.79	≤30	PASS
	Mid	22.85	20.14		
	High	23.64	19.62		
16QAM	Low	23.50	19.56	≤30	PASS
	Mid	22.93	20.36		
	High	23.42	19.99		

LTE Band 66 – 20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.96	20.27	≤30	PASS
	Mid	23.13	20.29		
	High	23.66	19.72		
16QAM	Low	23.01	20.01	≤30	PASS
	Mid	23.48	20.01		
	High	23.57	19.96		

3.8. Radiated Spurious Emission

LIMIT

§ 22.917(a), §24.238(a), §27.53 (g), (h), §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

§ 27.53 (Band 13)

(c) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40 dBm/MHz).

FCC: § 90.669 Emission limits. (Band 26)

(a) On any frequency in an MTA licensee's spectrum block that is adjacent to a non-MTA frequency, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 plus $10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation.

§ 27.53 (a) (Band 30)


For mobile and portable stations operating in the 2305-2315 MHz: by a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log(P)$ dB above 2365 MHz.


§ 27.53 (m) (Band 7, 41)

At least $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

TEST CONFIGURATION

For the actual test configuration, please refer to the related Item – EUT Test Photos.

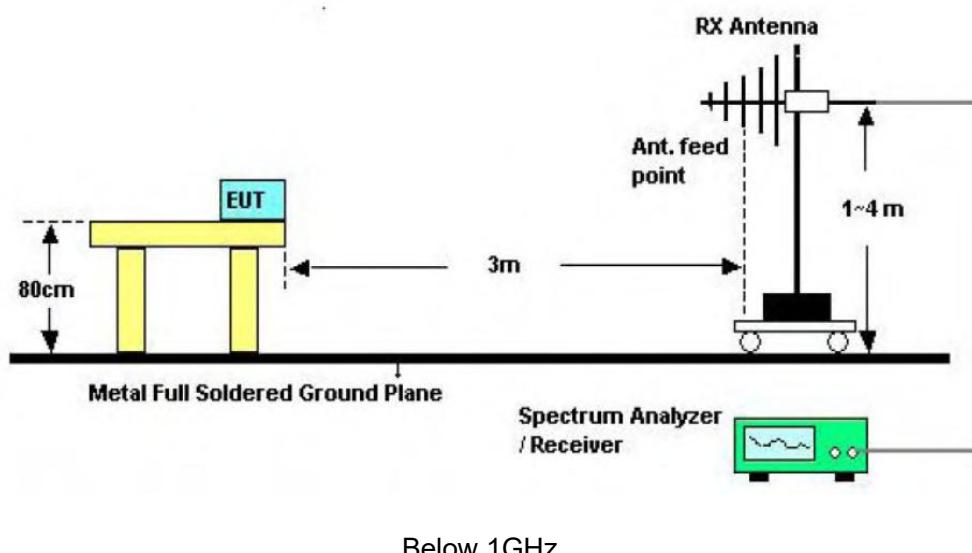

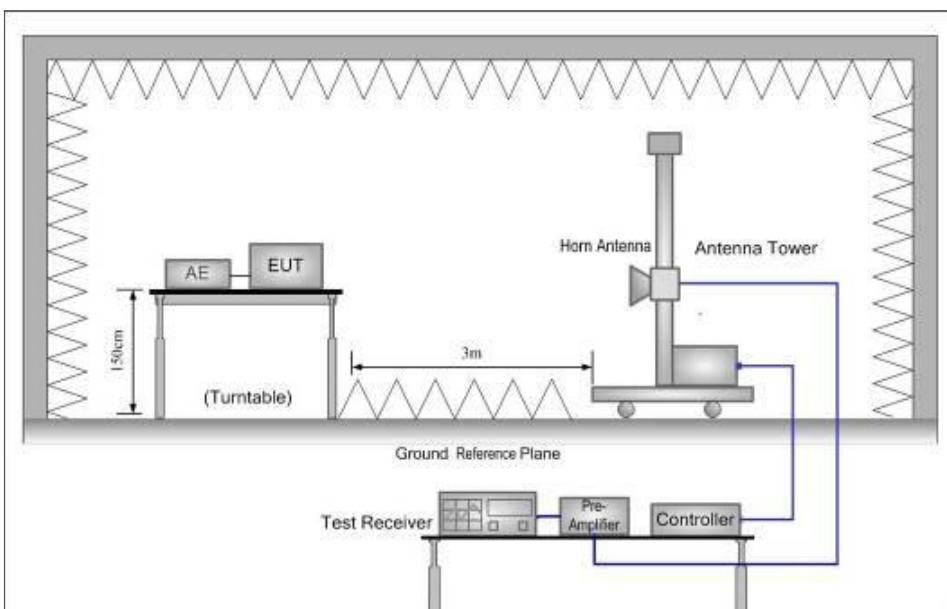

Above 1GHz

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, and the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier should be connected to the Signal Source output port. And the cable should be connecting between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:



7. Power(EIRP)=PMea- PAg - Pcl + Ga

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$

8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

9. Test frequency range should extend to 10th harmonic of highest fundamental frequency.

TEST RESULTS

Remark:

1. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, and test data recorded in this report.
2. We test all modulation types, all bandwidths, and record the worst case at the maximum bandwidth of each modulation.



Measured data (worst case):

Band 2 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
20MHz	QPSK	L	3720.00	-40.80	Vertical	-13.00	Pass
			5580.00	-49.24	Vertical		
			3720.00	-45.92	Horizontal		
			5580.00	-54.67	Horizontal		
20MHz	QPSK	M	3760.00	-42.52	Vertical	-13.00	Pass
			5640.00	-48.81	Vertical		
			3760.00	-41.07	Horizontal		
			5640.00	-54.75	Horizontal		
20MHz	QPSK	H	3800.00	-41.28	Vertical	-13.00	Pass
			5700.00	-48.63	Vertical		
			3800.00	-40.37	Horizontal		
			5700.00	-54.66	Horizontal		
20MHz	16QAM	L	3720.00	-42.16	Vertical	-13.00	Pass
			5580.00	-48.00	Vertical		
			3720.00	-42.64	Horizontal		
			5580.00	-53.17	Horizontal		
20MHz	16QAM	M	3760.00	-42.65	Vertical	-13.00	Pass
			5640.00	-49.90	Vertical		
			3760.00	-42.88	Horizontal		
			5640.00	-54.46	Horizontal		
20MHz	16QAM	H	3800.00	-42.18	Vertical	-13.00	Pass
			5700.00	-48.81	Vertical		
			3800.00	-40.87	Horizontal		
			5700.00	-52.61	Horizontal		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 20dB and not show in test report.



Band 4 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
20MHz	QPSK	L	3440.00	-40.01	Vertical	-13.00	Pass
			5160.00	-48.19	Vertical		
			3440.00	-45.90	Horizontal		
			5160.00	-53.26	Horizontal		
20MHz	QPSK	M	3465.00	-42.53	Vertical	-13.00	Pass
			5197.50	-49.89	Vertical		
			3465.00	-41.63	Horizontal		
			5197.50	-53.04	Horizontal		
20MHz	QPSK	H	3490.00	-41.41	Vertical	-13.00	Pass
			5235.00	-48.29	Vertical		
			3490.00	-42.55	Horizontal		
			5235.00	-54.57	Horizontal		
20MHz	16QAM	L	3440.00	-42.62	Vertical	-13.00	Pass
			5160.00	-48.03	Vertical		
			3440.00	-40.30	Horizontal		
			5160.00	-53.85	Horizontal		
20MHz	16QAM	M	3465.00	-42.89	Vertical	-13.00	Pass
			5197.50	-47.16	Vertical		
			3465.00	-42.23	Horizontal		
			5197.50	-54.41	Horizontal		
20MHz	16QAM	H	3490.00	-40.38	Vertical	-13.00	Pass
			5235.00	-49.59	Vertical		
			3490.00	-41.40	Horizontal		
			5235.00	-53.72	Horizontal		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 20dB and not show in test report.



Band 5 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
10MHz	QPSK	L	3430.00	-42.67	Vertical	-13.00	Pass
			5145.00	-48.00	Vertical		
			3430.00	-45.28	Horizontal		
			5145.00	-53.74	Horizontal		
10MHz	QPSK	M	3465.00	-41.40	Vertical	-13.00	Pass
			5197.50	-48.97	Vertical		
			3465.00	-42.05	Horizontal		
			5197.50	-53.28	Horizontal		
10MHz	QPSK	H	3500.00	-42.93	Vertical	-13.00	Pass
			5250.00	-48.45	Vertical		
			3500.00	-40.17	Horizontal		
			5250.00	-52.58	Horizontal		
10MHz	16QAM	L	3430.00	-42.21	Vertical	-13.00	Pass
			5145.00	-47.60	Vertical		
			3430.00	-42.35	Horizontal		
			5145.00	-52.39	Horizontal		
10MHz	16QAM	M	3465.00	-42.52	Vertical	-13.00	Pass
			5197.50	-49.15	Vertical		
			3465.00	-40.36	Horizontal		
			5197.50	-54.25	Horizontal		
10MHz	16QAM	H	3500.00	-40.00	Vertical	-13.00	Pass
			5250.00	-47.26	Vertical		
			3500.00	-40.94	Horizontal		
			5250.00	-54.32	Horizontal		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 20dB and not show in test report.



Band 7 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
20MHz	QPSK	L	5020.00	-40.23	Vertical	-25.00	Pass
			7530.00	-47.95	Vertical		
			5020.00	-46.13	Horizontal		
			7530.00	-54.26	Horizontal		
20MHz	QPSK	M	5070.00	-42.14	Vertical	-25.00	Pass
			7605.00	-48.33	Vertical		
			5070.00	-40.10	Horizontal		
			7605.00	-53.08	Horizontal		
20MHz	QPSK	H	5120.00	-42.73	Vertical	-25.00	Pass
			7680.00	-49.56	Vertical		
			5120.00	-41.81	Horizontal		
			7680.00	-54.51	Horizontal		
20MHz	16QAM	L	5020.00	-42.47	Vertical	-25.00	Pass
			7530.00	-48.50	Vertical		
			5020.00	-42.59	Horizontal		
			7530.00	-54.40	Horizontal		
20MHz	16QAM	M	5070.00	-40.63	Vertical	-25.00	Pass
			7605.00	-48.63	Vertical		
			5070.00	-40.38	Horizontal		
			7605.00	-54.62	Horizontal		
20MHz	16QAM	H	5120.00	-42.85	Vertical	-25.00	Pass
			7680.00	-49.63	Vertical		
			5120.00	-42.74	Horizontal		
			7680.00	-52.16	Horizontal		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 20dB and not show in test report.



Band 12 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
10MHz	QPSK	L	1408.00	-40.78	Vertical	-13.00	Pass
			2112.00	-48.06	Vertical		
			1408.00	-45.29	Horizontal		
			2112.00	-54.33	Horizontal		
10MHz	QPSK	M	1415.00	-41.06	Vertical	-13.00	Pass
			2122.50	-49.95	Vertical		
			1415.00	-41.52	Horizontal		
			2122.50	-54.71	Horizontal		
10MHz	QPSK	H	1422.00	-41.04	Vertical	-13.00	Pass
			2133.00	-48.42	Vertical		
			1422.00	-40.33	Horizontal		
			2133.00	-52.60	Horizontal		
10MHz	16QAM	L	1408.00	-40.76	Vertical	-13.00	Pass
			2112.00	-49.38	Vertical		
			1408.00	-41.68	Horizontal		
			2112.00	-52.05	Horizontal		
10MHz	16QAM	M	1415.00	-40.47	Vertical	-13.00	Pass
			2122.50	-49.79	Vertical		
			1415.00	-42.59	Horizontal		
			2122.50	-52.38	Horizontal		
10MHz	16QAM	H	1422.00	-40.63	Vertical	-13.00	Pass
			2133.00	-47.90	Vertical		
			1422.00	-41.62	Horizontal		
			2133.00	-52.20	Horizontal		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 20dB and not show in test report.



Band 13 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
10MHz	QPSK	L	1564.00	-42.58	Vertical	-13	Pass
			2346.00	-48.56	Vertical		
			1564.00	-46.01	Horizontal		
			2346.00	-53.47	Horizontal		
10MHz	QPSK	M	1564.00	-42.96	Vertical	-13	Pass
			2346.00	-48.36	Vertical		
			1564.00	-40.94	Horizontal		
			2346.00	-54.82	Horizontal		
10MHz	QPSK	H	1564.00	-40.43	Vertical	-13	Pass
			2346.00	-48.97	Vertical		
			1564.00	-40.95	Horizontal		
			2346.00	-53.23	Horizontal		
10MHz	16QAM	L	1564.00	-40.28	Vertical	-13	Pass
			2346.00	-48.38	Vertical		
			1564.00	-40.22	Horizontal		
			2346.00	-53.30	Horizontal		
10MHz	16QAM	M	1564.00	-40.33	Vertical	-13	Pass
			2346.00	-48.02	Vertical		
			1564.00	-40.16	Horizontal		
			2346.00	-53.91	Horizontal		
10MHz	16QAM	H	1564.00	-42.19	Vertical	-13	Pass
			2346.00	-48.22	Vertical		
			1564.00	-41.00	Horizontal		
			2346.00	-53.02	Horizontal		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 20dB and not show in test report.



Band 17 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
10MHz	QPSK	L	1418.00	-40.21	Vertical	-13.00	Pass
			2127.00	-47.62	Vertical		
			1418.00	-45.37	Horizontal		
			2127.00	-53.27	Horizontal		
10MHz	QPSK	M	1420.00	-40.67	Vertical	-13.00	Pass
			2130.00	-49.10	Vertical		
			1420.00	-41.58	Horizontal		
			2130.00	-52.57	Horizontal		
10MHz	QPSK	H	1422.00	-40.70	Vertical	-13.00	Pass
			2133.00	-49.72	Vertical		
			1422.00	-41.38	Horizontal		
			2133.00	-52.41	Horizontal		
10MHz	16QAM	L	1418.00	-42.64	Vertical	-13.00	Pass
			2127.00	-49.01	Vertical		
			1418.00	-40.33	Horizontal		
			2127.00	-54.54	Horizontal		
10MHz	16QAM	M	1420.00	-41.01	Vertical	-13.00	Pass
			2130.00	-48.57	Horizontal		
			1420.00	-41.79	Vertical		
			2130.00	-54.36	Horizontal		
10MHz	16QAM	H	1422.00	-41.99	Vertical	-13.00	Pass
			2133.00	-47.69	Horizontal		
			1422.00	-40.06	Vertical		
			2133.00	-53.85	Horizontal		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 20dB and not show in test report.



Band 25 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
20MHz	QPSK	L	3720.00	-40.73	Vertical	-13.00	Pass
			5580.00	-49.65	Vertical		
			3720.00	-45.06	Horizontal		
			5580.00	-53.50	Horizontal		
20MHz	QPSK	M	3765.00	-40.19	Vertical	-13.00	Pass
			5647.50	-49.14	Vertical		
			3765.00	-42.59	Horizontal		
			5647.50	-54.23	Horizontal		
20MHz	QPSK	H	3810.00	-42.65	Vertical	-13.00	Pass
			5715.00	-47.35	Vertical		
			3810.00	-42.58	Horizontal		
			5715.00	-52.03	Horizontal		
20MHz	16QAM	L	3720.00	-40.91	Vertical	-13.00	Pass
			5580.00	-49.99	Vertical		
			3720.00	-41.33	Horizontal		
			5580.00	-54.12	Horizontal		
20MHz	16QAM	M	3765.00	-42.34	Vertical	-13.00	Pass
			5647.50	-49.14	Horizontal		
			3765.00	-42.78	Vertical		
			5647.50	-54.82	Horizontal		
20MHz	16QAM	H	3810.00	-41.54	Vertical	-13.00	Pass
			5715.00	-48.44	Horizontal		
			3810.00	-42.89	Vertical		
			5715.00	-52.40	Horizontal		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 20dB and not show in test report.



Band 26 (824-849) Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
15MHz	QPSK	L	1663.00	-40.87	Vertical	-13.00	Pass
			2494.50	-49.14	Vertical		
			1663.00	-46.44	Horizontal		
			2494.50	-53.31	Horizontal		
15MHz	QPSK	M	1673.00	-41.35	Vertical	-13.00	Pass
			2509.50	-47.89	Vertical		
			1673.00	-40.86	Horizontal		
			2509.50	-54.13	Horizontal		
15MHz	QPSK	H	1683.00	-41.34	Vertical	-13.00	Pass
			2524.50	-49.83	Vertical		
			1683.00	-42.55	Horizontal		
			2524.50	-53.80	Horizontal		
15MHz	16QAM	L	1663.00	-40.10	Vertical	-13.00	Pass
			2494.50	-48.09	Vertical		
			1663.00	-42.28	Horizontal		
			2494.50	-53.02	Horizontal		
15MHz	16QAM	M	1673.00	-40.48	Vertical	-13.00	Pass
			2509.50	-49.27	Vertical		
			1673.00	-42.69	Horizontal		
			2509.50	-52.37	Horizontal		
15MHz	16QAM	H	1683.00	-42.70	Vertical	-13.00	Pass
			2524.50	-47.60	Vertical		
			1683.00	-40.04	Horizontal		
			2524.50	-52.56	Horizontal		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 20dB and not show in test report.



Band 38 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
20MHz	QPSK	L	5160.00	-41.97	Vertical	-25.00	Pass
			7740.00	-48.08	Vertical		
			5160.00	-45.36	Horizontal		
			7740.00	-52.75	Horizontal		
20MHz	QPSK	M	5190.00	-41.51	Vertical	-25.00	Pass
			7785.00	-48.04	Vertical		
			5190.00	-41.79	Horizontal		
			7785.00	-53.05	Horizontal		
20MHz	QPSK	H	5220.00	-40.13	Vertical	-25.00	Pass
			7830.00	-49.41	Vertical		
			5220.00	-40.90	Horizontal		
			7830.00	-54.57	Horizontal		
20MHz	16QAM	L	5160.00	-40.30	Vertical	-25.00	Pass
			7740.00	-47.48	Vertical		
			5160.00	-40.14	Horizontal		
			7740.00	-54.25	Horizontal		
20MHz	16QAM	M	5190.00	-40.16	Vertical	-25.00	Pass
			7785.00	-49.96	Vertical		
			5190.00	-42.45	Horizontal		
			7785.00	-52.15	Horizontal		
20MHz	16QAM	H	5220.00	-41.77	Vertical	-25.00	Pass
			7830.00	-47.87	Vertical		
			5220.00	-40.84	Horizontal		
			7830.00	-54.50	Horizontal		

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-117_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://www.yz.cncaq.com)



Band 41 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
20MHz	QPSK	L	5012.00	-41.96	Vertical	-25.00	Pass
			7518.00	-49.70	Vertical		
			5012.00	-46.95	Horizontal		
			7518.00	-52.78	Horizontal		
20MHz	QPSK	M	5186.00	-42.08	Vertical	-25.00	Pass
			7779.00	-49.17	Vertical		
			5186.00	-40.39	Horizontal		
			7779.00	-53.57	Horizontal		
20MHz	QPSK	H	5360.00	-40.41	Vertical	-25.00	Pass
			8040.00	-48.73	Vertical		
			5360.00	-40.90	Horizontal		
			8040.00	-52.90	Horizontal		
20MHz	16QAM	L	5012.00	-41.48	Vertical	-25.00	Pass
			7518.00	-48.22	Vertical		
			5012.00	-41.17	Horizontal		
			7518.00	-54.19	Horizontal		
20MHz	16QAM	M	5186.00	-41.70	Vertical	-25.00	Pass
			7779.00	-49.06	Vertical		
			5186.00	-42.94	Horizontal		
			7779.00	-53.34	Horizontal		
20MHz	16QAM	H	5360.00	-42.38	Vertical	-25.00	Pass
			8040.00	-48.17	Vertical		
			5360.00	-42.62	Horizontal		
			8040.00	-53.18	Horizontal		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 20dB and not show in test report.



Band 66 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
20MHz	QPSK	L	3440.00	-41.45	Vertical	-13.00	Pass
			5160.00	-48.94	Vertical		
			3440.00	-46.25	Horizontal		
			5160.00	-53.18	Horizontal		
20MHz	QPSK	M	3490.00	-42.46	Vertical	-13.00	Pass
			5235.00	-47.84	Vertical		
			3490.00	-42.14	Horizontal		
			5235.00	-53.36	Horizontal		
20MHz	QPSK	H	3540.00	-40.14	Vertical	-13.00	Pass
			5310.00	-48.99	Vertical		
			3540.00	-40.73	Horizontal		
			5310.00	-52.53	Horizontal		
20MHz	16QAM	L	3440.00	-41.27	Vertical	-13.00	Pass
			5160.00	-49.31	Vertical		
			3440.00	-41.25	Horizontal		
			5160.00	-53.87	Horizontal		
20MHz	16QAM	M	3490.00	-41.68	Vertical	-13.00	Pass
			5235.00	-48.88	Vertical		
			3490.00	-41.57	Horizontal		
			5235.00	-53.59	Horizontal		
20MHz	16QAM	H	3540.00	-40.61	Vertical	-13.00	Pass
			5310.00	-48.88	Vertical		
			3540.00	-41.40	Horizontal		
			5310.00	-52.15	Horizontal		

Remark:


1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 20dB and not show in test report.

3.9. Frequency Stability

LIMIT

Cellular Band: $\pm 2.5\text{ppm}$ PCS Band: Within the authorized frequency block

TEST CONFIGURATION

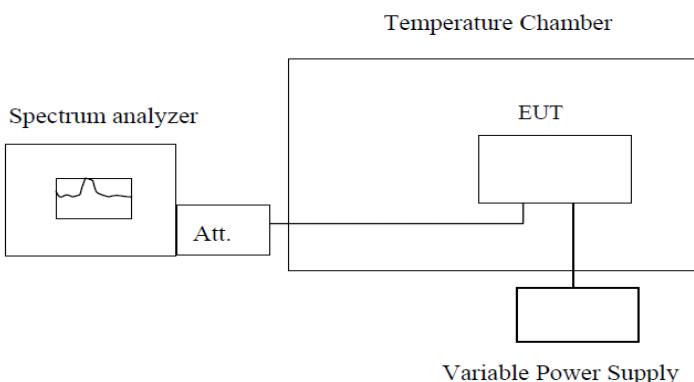

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -5°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of +30°C reached.
7. Reduce the input voltage to specified extreme voltage variation (+/- 10%) and endpoint, record the maximum frequency change.

TEST RESULTS

Please see the appendix for every tested band.

*****THE END*****