

FCC/ISED - TEST REPORT

Report Number : **6895025107001** Date of Issue: **2025-07-15**

Model/HVIN : **HM1010**

Product Type : Security Camera

Applicant : Anona Security Technology Limited.

Address : 8 The Green, Ste A Dover DE 19901, America

Manufacturer : Anona Security Technology Limited.

Address : 8 The Green, Ste A Dover DE 19901, America

Test Result : ☒ **Positive** ☐ Negative

Total pages including
Appendices : **238**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
8	Systems Test Configuration	10
9	Technical Requirement	12
9.2	Conducted Output Power & EIRP	15
9.3	6dB Bandwidth and 99% Occupied Bandwidth	17
9.4	Power Spectral Density	60
9.5	Spurious RF Conducted Emissions	99
9.6	Band Edge Testing	165
9.7	Spurious Radiated Emissions for Transmitter	185
10	Test Equipment List	236
11	System Measurement Uncertainty	238

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu,
Nantou, Nanshan District,
Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration 514049

No.:

FCC Designation CN5009
Number:

ISED CAB CN0077
identifier

IC Registration 10320A
No.:

3 Description of the Equipment Under Test

Product:	Security Camera
Model no.:	HM1010
Hardware Version Identification No. (HVIN)	HM1010
Product Marketing Name (PMN)	Security Camera
Software version:	1.1.138
Brand name:	Anona
FCC ID:	2BB7K-1010
IC:	30992-1010
Options and accessories:	Adapter, Power Cable
Rating:	5VDC, 2A powered by adapter
Adapter Rating:	Manufacture: Jiangxi Jian Aohai Technology Co., Ltd. Model: A319-050200U-US2 Input: 100-240VAC, 50/60Hz, Max 0.3A Output: 5VDC, 2A
RF Transmission Frequency:	2412MHz-2462MHz for 802.11b/g/n20/ax20 (Wi-Fi) 2422MHz-2452MHz for 802.11n40/ax40 (Wi-Fi)
No. of Operated Channel:	11 for 802.11b/g/n20/ax20 (Wi-Fi) 7 for 802.11n40/ax40 (Wi-Fi)
Modulation:	802.11b: BPSK, QPSK, CCK, 802.11g/802.11n20/802.11n40: BPSK, QPSK, 16-QAM, 64-QAM 802.11ax20/802.11ax40: BPSK, QPSK, 16-QAM, 64-QAM/256-QAM/1024-QAM
Antenna:	Type: On-Board PCB antenna 2.14 dBi for 2400-2483.5MHz; 2.45 dBi for 5150-5825MHz
Description of the EUT:	The Equipment Under Test (EUT) is a Security Camera which supports Low Energy Bluetooth(1M) and Wi-Fi operated at 2.4GHz and U-NII-1(5150-5250MHz), U-NII-2A(5250-5350MHz), U-NII-2C(5470-5725MHz) and U-NII-3(5745-5825MHz). This report is only for 2.4GHz Wi-Fi.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2024 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 April 2018 + Amendment 1 March 2019 + Amendment 2 February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3 August 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C/ RSS-247 Issue 3/RSS-Gen Issue 5						
Test Condition		Test Site	Test Result			Test Environment
			Pass	Fail	N/A	
§15.207 & RSS-GEN 8.8	Conducted emission AC power port	Site 1	☒	☐	☐	T: 23.5°C H: 46.4%
§15.247 (b) (3) & RSS-247 5.4(d)	Conducted peak output power	Site 1	☒	☐	☐	T: 23.5°C H: 46.9%
RSS-247 5.4(d)	Equivalent Isotropic Radiated Power	Site 1	☒	☐	☐	T: 23.5°C H: 46.9%
§15.247(a)(2) & RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	Site 1	☒	☐	☐	T: 23.5°C H: 46.9%
§15.247(e) & RSS-247 5.2(b)	Power spectral density	Site 1	☒	☐	☐	T: 23.5°C H: 46.9%
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	Site 1	☒	☐	☐	T: 23.5°C H: 46.9%
§15.247(d) & RSS-247 5.5	Band edge	Site 1	☒	☐	☐	T: 23.5°C H: 46.9%
§15.247(d) & §15.209 & §15.205 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	Site 1	☒	☐	☐	T: 22.8°C H: 47.8%
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 2	☒	☐	☐	--

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an On-Board PCB antenna, which gain is 2.14dBi. In accordance to §15.203 & RSS-Gen 6.8, it is considered sufficiently to comply with the provisions of this section.

Note 3: T :Temperature, H: Humidity

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2BB7K-1010, IC: 30992-1010, complies with Section 15.205, 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules and RSS-247, RSS-GEN.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.


Sample Received Date: 2025-06-12

Testing Start Date: 2025-06-12

Testing End Date: 2025-06-28


TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:



John Zhi
Section Manager



Prepared by:


Sanvin Zheng
Project Engineer


Tested by:


Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


AC Power Line Conducted Emission test setups

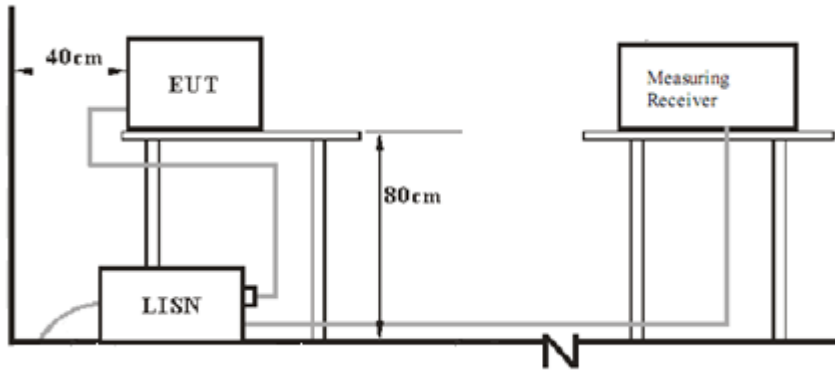


9KHz - 30MHz

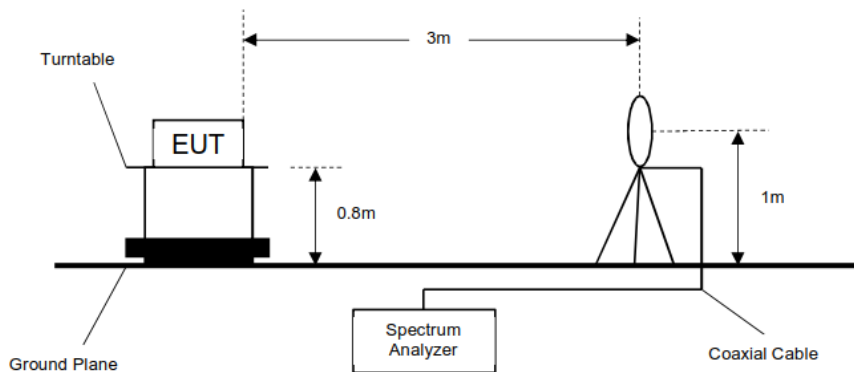


30MHz - 1GHz

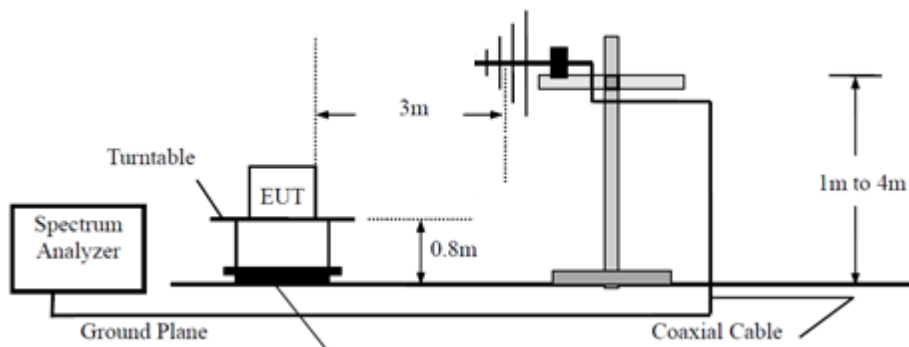

Above 1GHz

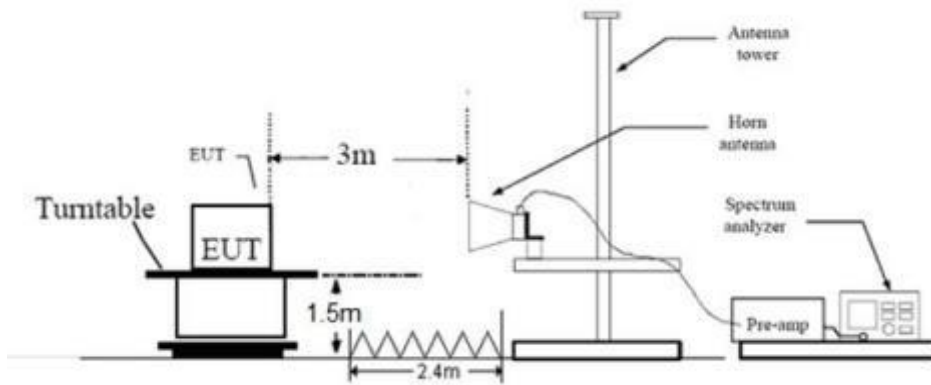

7.2 Conducted RF test setups



8 Systems Test Configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model NO.	S/N
Notebook	LENOVO	X220	---

Cables Used During Test:

Cable	Length	Shielded/unshielded	With / without ferrite
USB cable	100cm	Unshielded	Without Ferrite

Test software information:

Test Software Version	SecureCRT.exe			
Mode	Channel(MHz)	RU Tone	Setting TX Power	Data Rate
11b	2412	/	38	11b LONG 1 Mbps
	2437	/	38	
	2462	/	38	
11g	2412	/	42	11g 6 Mbps
	2437	/	42	
	2462	/	42	
11n HT20	2412	/	46	MCS0 6.5 Mbps
	2437	/	46	
	2462	/	46	
11n HT40	2422	/	45	MCS0 13.5 Mbps (40MHz)
	2437	/	45	
	2452	/	45	
11ax HE20	2412	26 Tone	2B	MCS0 8 Mbps
		52 Tone	2B	
		106 Tone	2B	
		242 Tone	2B	
	2437	26 Tone	2B	
		52 Tone	2B	
		106 Tone	2B	
		242 Tone	2B	
	2462	26 Tone	2B	
		52 Tone	2B	
		106 Tone	2B	
		242 Tone	2B	
11ax HE40	2422	26 Tone	26	MCS0 16 Mbps
		52 Tone	26	
		106 Tone	26	
		242 Tone	26	
		484 Tone	26	
	2437	26 Tone	26	
		26 Tone	26	

		52 Tone	26	
		106 Tone	26	
		242 Tone	26	
		484 Tone	26	
	2452	26 Tone	26	
		52 Tone	26	
		106 Tone	26	
		242 Tone	26	
		484 Tone	26	

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Limit


According to §15.207 & RSS-GEN 8.8, conducted Emission limit as below:

Frequency MHz	QP Limit dBμV	AV Limit dBμV
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Conducted Emission

Product Type : Security Camera
M/N : HM1010
Operating Condition : Transmit
Test Specification : Line
Comment : AC 120V/60Hz

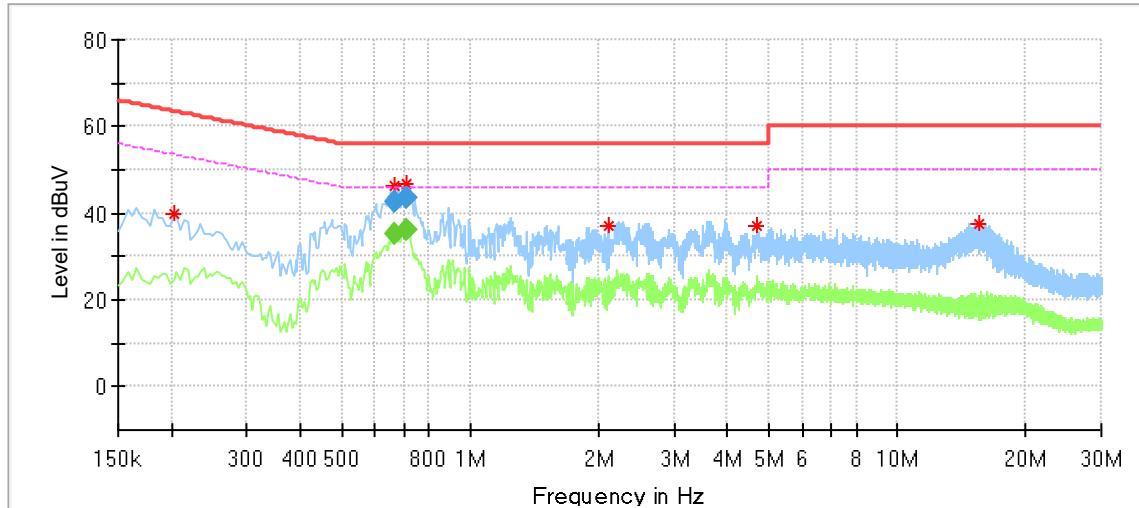

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.202000	39.87	---	63.53	23.66	L1	10.30
0.661500	46.34	---	56.00	9.66	L1	10.32
0.709500	46.68	---	56.00	9.32	L1	10.32
2.102000	37.19	---	56.00	18.81	L1	10.36
4.702000	37.00	---	56.00	19.00	L1	10.45
15.506000	37.38	---	60.00	22.62	L1	10.94

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.661500	---	35.21	46.00	10.79	L1	10.32
0.661500	42.42	---	56.00	13.58	L1	10.32
0.709500	---	36.25	46.00	9.75	L1	10.32
0.709500	43.55	---	56.00	12.45	L1	10.32

Remark:


*Level=Reading Level + Correction Factor

**Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Security Camera
M/N : HM1010
Operating Condition : Transmit
Test Specification : Neutral
Comment : AC 120V/60Hz

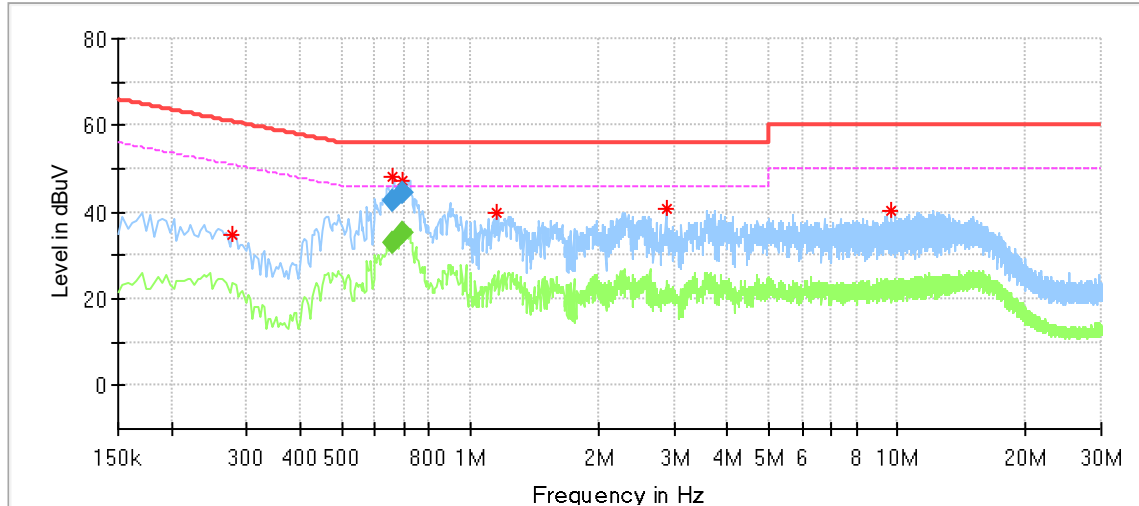

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.278000	34.69	---	60.88	26.19	N	10.29
0.657500	48.13	---	56.00	7.87	N	10.35
0.697500	47.36	---	56.00	8.64	N	10.38
1.158000	40.00	---	56.00	16.00	N	10.32
2.870000	40.69	---	56.00	15.31	N	10.38
9.694000	40.11	---	60.00	19.89	N	10.69

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.657500	---	33.12	46.00	12.88	N	10.35
0.657500	42.68	---	56.00	13.32	N	10.35
0.697500	---	35.10	46.00	10.90	N	10.38
0.697500	44.37	---	56.00	11.63	N	10.38

Remark:

*Level=Reading Level + Correction Factor


**Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted Output Power & EIRP

Test Method

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 4) Measure the peak power of the transmitter. This measurement is a peak over both the ON and OFF periods of the transmitter.

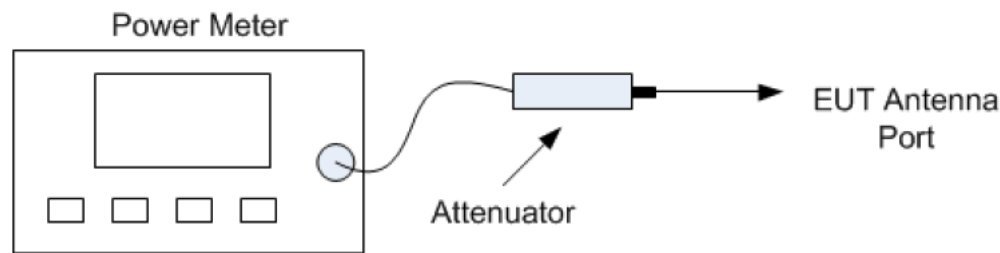

Power meter conducted test setup

Limits

According to §15.247 (b) (3) & RSS-247 5.4(d), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

According to & RSS-247 5.4(d), EIRP limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤4	≤36

Test result as below table

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Gain (dBi)	Conducted Power (dBm)	EIRP (dBm)	Conducted Power Limit (dBm)	EIRP Limit (dBm)	Verdict
802.11b	SISO	2412	/	/	1	2.14	19.83	21.97	<=30	<=36	Pass
		2437	/	/	1	2.14	19.51	21.65	<=30	<=36	Pass
		2462	/	/	1	2.14	19.74	21.88	<=30	<=36	Pass
802.11g	SISO	2412	/	/	1	2.14	17.01	19.15	<=30	<=36	Pass
		2437	/	/	1	2.14	16.21	18.35	<=30	<=36	Pass
		2462	/	/	1	2.14	16.76	18.90	<=30	<=36	Pass
802.11n (HT20)	SISO	2412	/	/	1	2.14	17.54	19.68	<=30	<=36	Pass
		2437	/	/	1	2.14	17.10	19.24	<=30	<=36	Pass
		2462	/	/	1	2.14	16.56	18.70	<=30	<=36	Pass
802.11n (HT40)	SISO	2422	/	/	1	2.14	17.48	19.62	<=30	<=36	Pass
		2437	/	/	1	2.14	17.09	19.23	<=30	<=36	Pass
		2452	/	/	1	2.14	17.21	19.35	<=30	<=36	Pass
802.11ax (HEW20)	SISO	2412	RU26	0	1	2.14	12.78	14.92	<=30	<=36	Pass
			RU52	37	1	2.14	12.26	14.40	<=30	<=36	Pass
			RU106	53	1	2.14	12.06	14.20	<=30	<=36	Pass
			RU242	61	1	2.14	11.97	14.11	<=30	<=36	Pass
		2437	RU26	4	1	2.14	11.89	14.03	<=30	<=36	Pass
			RU52	38	1	2.14	11.93	14.07	<=30	<=36	Pass
			RU106	53	1	2.14	11.76	13.90	<=30	<=36	Pass
			RU242	61	1	2.14	11.58	13.72	<=30	<=36	Pass
		2462	RU26	8	1	2.14	13.75	15.89	<=30	<=36	Pass
			RU52	40	1	2.14	12.67	14.81	<=30	<=36	Pass
			RU106	54	1	2.14	12.37	14.51	<=30	<=36	Pass
			RU242	61	1	2.14	11.93	14.07	<=30	<=36	Pass
802.11ax (HEW40)	SISO	2422	RU26	0	1	2.14	13.24	15.38	<=30	<=36	Pass
			RU52	37	1	2.14	11.77	13.91	<=30	<=36	Pass
			RU106	53	1	2.14	11.43	13.57	<=30	<=36	Pass
			RU242	61	1	2.14	10.67	12.81	<=30	<=36	Pass
			RU484	65	1	2.14	10.87	13.01	<=30	<=36	Pass
		2437	RU26	8	1	2.14	12.05	14.19	<=30	<=36	Pass
			RU52	40	1	2.14	12.10	14.24	<=30	<=36	Pass
			RU106	54	1	2.14	11.14	13.28	<=30	<=36	Pass
			RU242	61	1	2.14	10.45	12.59	<=30	<=36	Pass
			RU484	65	1	2.14	10.64	12.78	<=30	<=36	Pass
		2452	RU26	17	1	2.14	15.80	17.94	<=30	<=36	Pass
			RU52	44	1	2.14	11.21	13.35	<=30	<=36	Pass
			RU106	56	1	2.14	11.13	13.27	<=30	<=36	Pass
			RU242	62	1	2.14	10.84	12.98	<=30	<=36	Pass
			RU484	65	1	2.14	10.50	12.64	<=30	<=36	Pass

Note1: E.I.R.P = Measured Power + Antenna Gain



9.3 6dB Bandwidth and 99% Occupied Bandwidth

Test Method for 6 dB Bandwidth

- 1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
- 3. Use the following spectrum analyzer settings:
RBW=1% to 5% of the occupied bandwidth but not less than 100kHz, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
- 5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Test Method for 99 % Bandwidth

- 1. Connect EUT test port to spectrum analyzer.
Use the following spectrum analyzer settings:
RBW=1% to 5% of OBW, or a minimum of 1 MHz if this is not possible due to a large OBW, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 2. Use the occupied bandwidth measurement capability of test receiver.
- 3. Allow the trace to stabilize, record the occupied bandwidth value.

Limit


6dB bandwidth Limit [kHz]	99% bandwidth Limit [kHz]
≥500	--

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	8.732	>=0.5	Pass
		2437	/	/	1	8.794	>=0.5	Pass
		2462	/	/	1	8.796	>=0.5	Pass
802.11g	SISO	2412	/	/	1	17.033	>=0.5	Pass
		2437	/	/	1	16.969	>=0.5	Pass
		2462	/	/	1	16.817	>=0.5	Pass
802.11n (HT20)	SISO	2412	/	/	1	18.151	>=0.5	Pass
		2437	/	/	1	18.278	>=0.5	Pass
		2462	/	/	1	18.264	>=0.5	Pass
802.11n (HT40)	SISO	2422	/	/	1	36.228	>=0.5	Pass
		2437	/	/	1	36.460	>=0.5	Pass
		2452	/	/	1	36.224	>=0.5	Pass
802.11ax (HEW20)	SISO	2412	RU26	0	1	2.176	>=0.5	Pass
			RU52	37	1	4.253	>=0.5	Pass
			RU106	53	1	8.433	>=0.5	Pass
			RU242	61	1	18.850	>=0.5	Pass
		2437	RU26	4	1	2.887	>=0.5	Pass
			RU52	38	1	4.248	>=0.5	Pass
			RU106	53	1	8.247	>=0.5	Pass
			RU242	61	1	18.838	>=0.5	Pass
		2462	RU26	8	1	2.318	>=0.5	Pass
			RU52	40	1	4.229	>=0.5	Pass
			RU106	54	1	8.480	>=0.5	Pass
			RU242	61	1	18.787	>=0.5	Pass
802.11ax (HEW40)	SISO	2422	RU26	0	1	2.399	>=0.5	Pass
			RU52	37	1	4.353	>=0.5	Pass
			RU106	53	1	8.518	>=0.5	Pass
			RU242	61	1	18.901	>=0.5	Pass
			RU484	65	1	38.383	>=0.5	Pass
		2437	RU26	8	1	2.668	>=0.5	Pass
			RU52	40	1	4.564	>=0.5	Pass
			RU106	54	1	8.476	>=0.5	Pass
			RU242	61	1	18.361	>=0.5	Pass
			RU484	65	1	38.317	>=0.5	Pass
		2452	RU26	17	1	2.379	>=0.5	Pass
			RU52	44	1	4.320	>=0.5	Pass
			RU106	56	1	8.697	>=0.5	Pass
			RU242	62	1	18.277	>=0.5	Pass
			RU484	65	1	38.391	>=0.5	Pass


Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	12.785	/	Pass
		2437	/	/	1	12.970	/	Pass
		2462	/	/	1	12.945	/	Pass
802.11g	SISO	2412	/	/	1	18.081	/	Pass
		2437	/	/	1	17.959	/	Pass
		2462	/	/	1	18.040	/	Pass
802.11n (HT20)	SISO	2412	/	/	1	18.896	/	Pass
		2437	/	/	1	18.815	/	Pass
		2462	/	/	1	18.856	/	Pass
802.11n (HT40)	SISO	2422	/	/	1	38.705	/	Pass
		2437	/	/	1	37.469	/	Pass
		2452	/	/	1	38.106	/	Pass
802.11ax (HEW20)	SISO	2412	RU26	0	1	19.583	/	Pass
			RU52	37	1	19.639	/	Pass
			RU106	53	1	19.376	/	Pass
			RU242	61	1	20.449	/	Pass
		2437	RU26	4	1	19.291	/	Pass
			RU52	38	1	18.928	/	Pass
			RU106	53	1	19.400	/	Pass
			RU242	61	1	20.519	/	Pass
		2462	RU26	8	1	20.509	/	Pass
			RU52	40	1	19.848	/	Pass
			RU106	54	1	22.295	/	Pass
			RU242	61	1	20.182	/	Pass
802.11ax (HEW40)	SISO	2422	RU26	0	1	22.676	/	Pass
			RU52	37	1	23.508	/	Pass
			RU106	53	1	23.633	/	Pass
			RU242	61	1	25.090	/	Pass
			RU484	65	1	38.987	/	Pass
		2437	RU26	8	1	25.368	/	Pass
			RU52	40	1	25.455	/	Pass
			RU106	54	1	24.409	/	Pass
			RU242	61	1	24.386	/	Pass
			RU484	65	1	38.732	/	Pass
		2452	RU26	17	1	19.096	/	Pass
			RU52	44	1	23.528	/	Pass
			RU106	56	1	23.207	/	Pass
			RU242	62	1	31.209	/	Pass
			RU484	65	1	38.848	/	Pass




6 dB Bandwidth

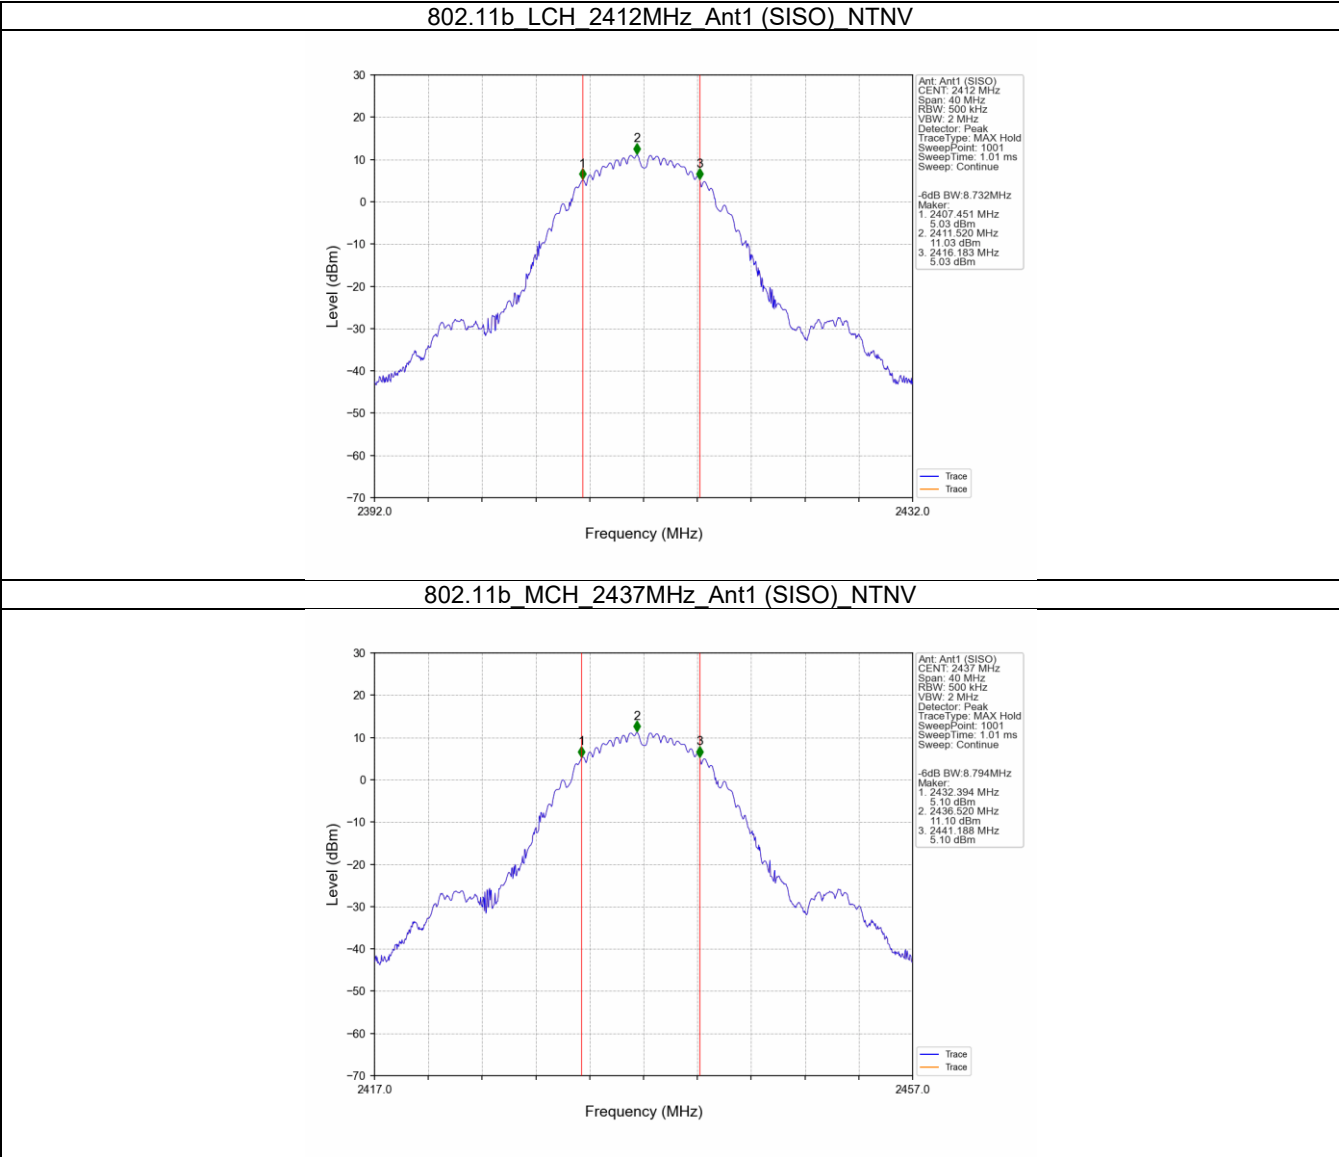


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

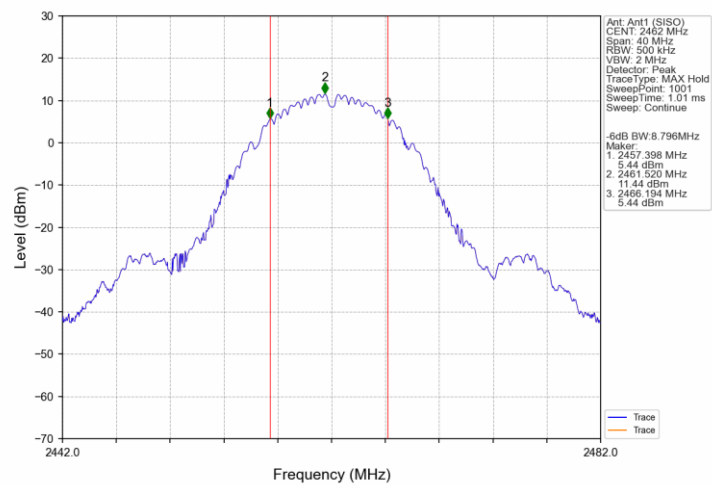


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

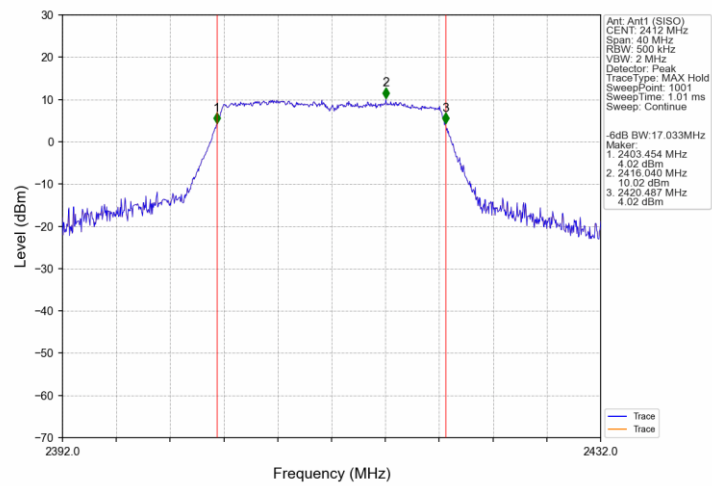


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

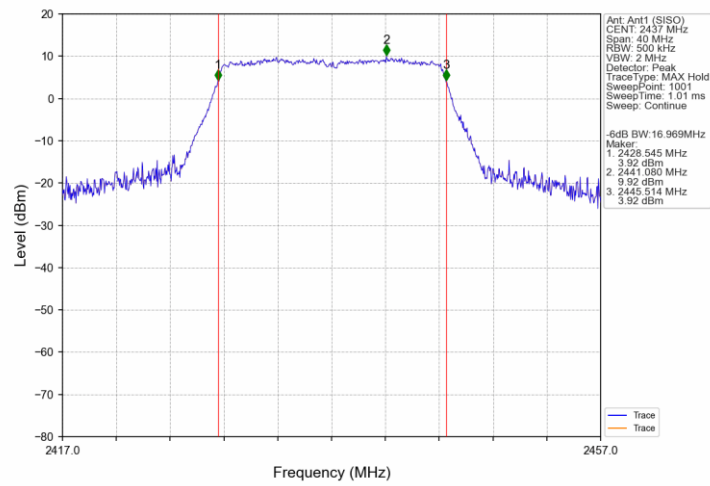


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

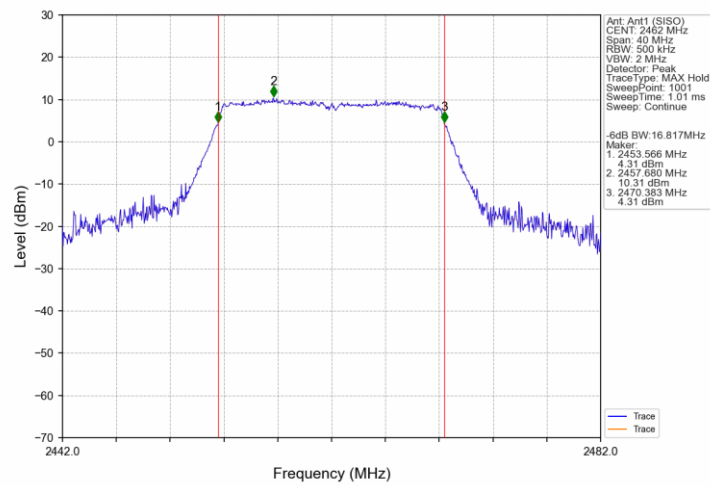


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

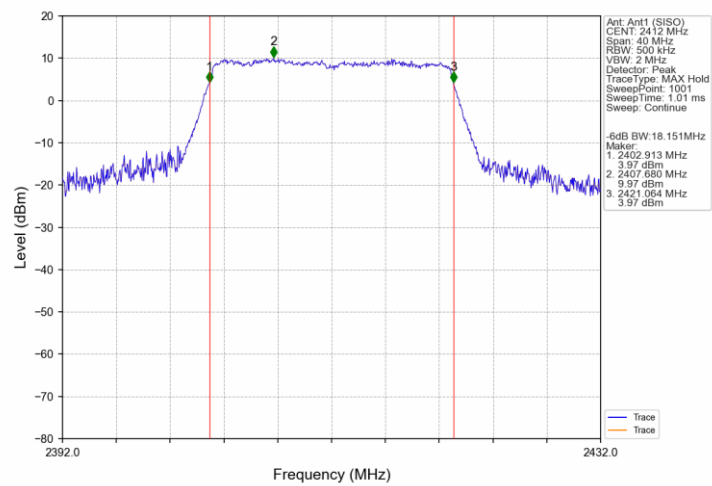


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

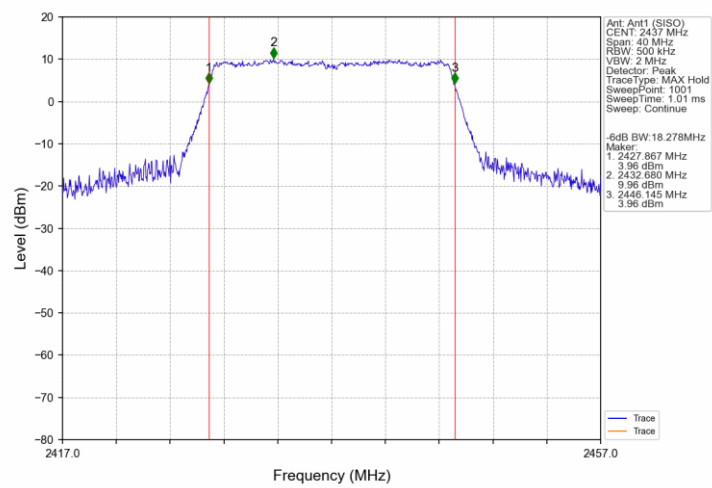


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

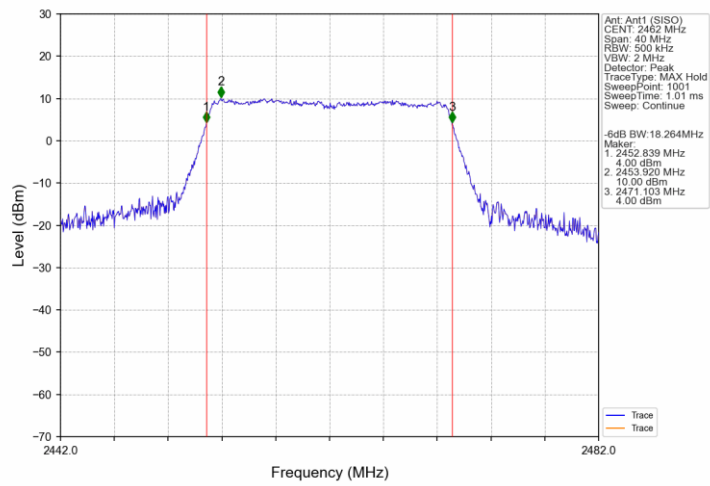


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

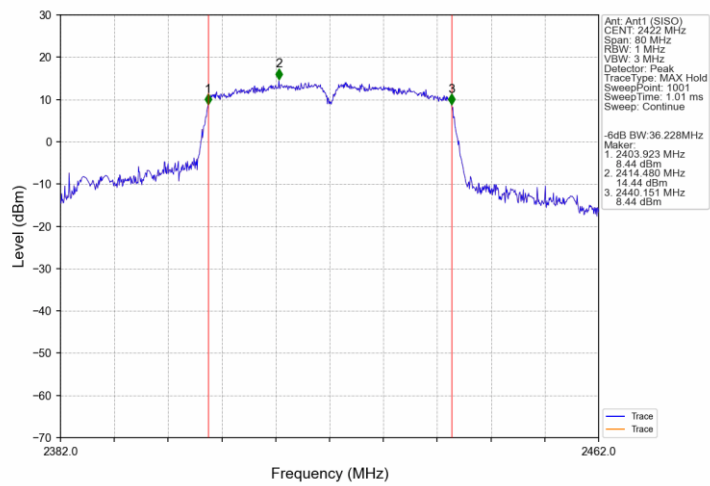


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

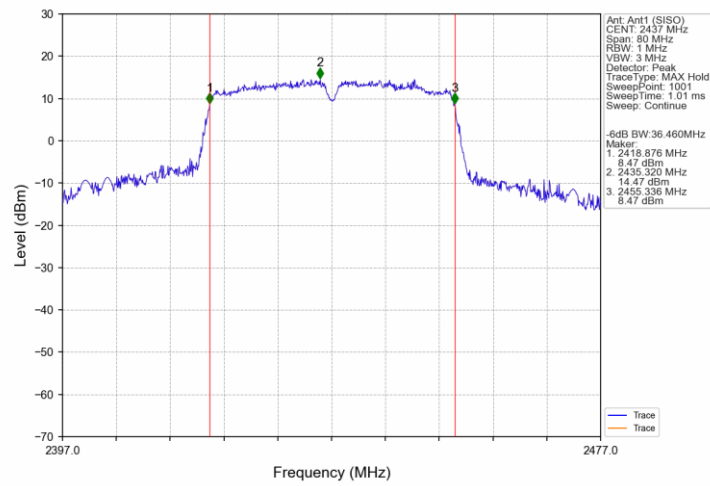


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

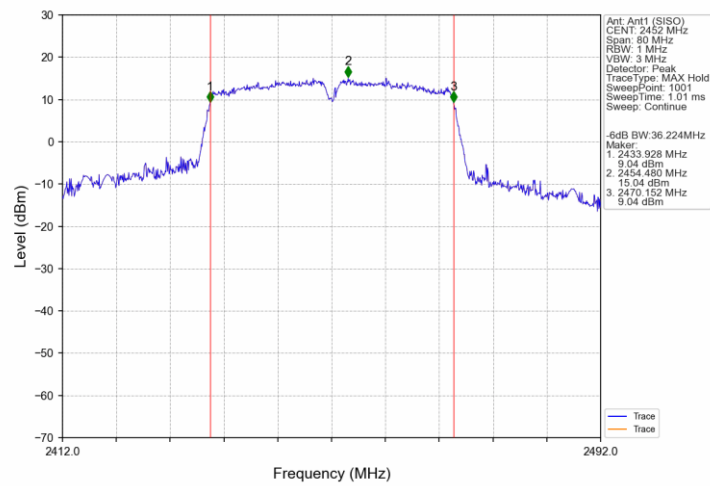


802.11ax(HEW20)_LCH_2412MHz_RU26_0_Ant1 (SISO)_NTNV

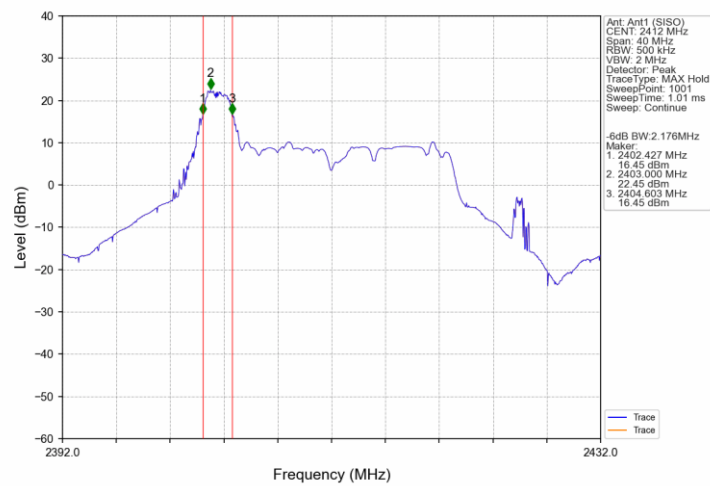


802.11ax(HEW20)_LCH_2412MHz_RU52_37_Ant1 (SISO)_NTNV

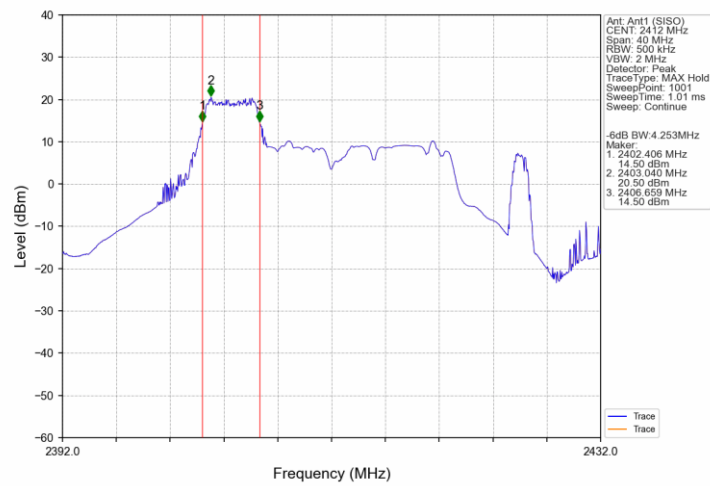


802.11ax(HEW20)_LCH_2412MHz_RU106_53_Ant1 (SISO)_NTNV

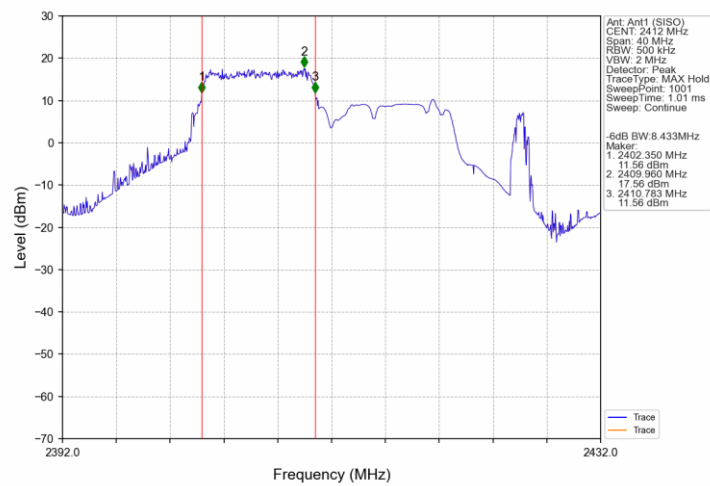


802.11ax(HEW20)_LCH_2412MHz_RU242_61_Ant1 (SISO)_NTNV

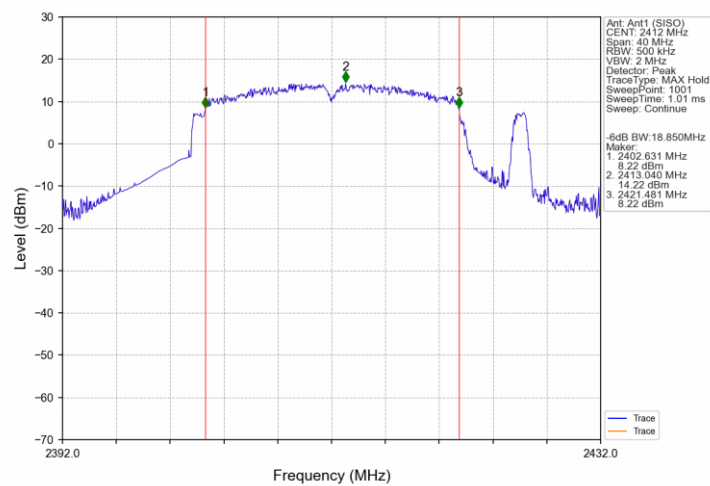


802.11ax(HEW20)_MCH_2437MHz_RU26_4_Ant1 (SISO)_NTNV

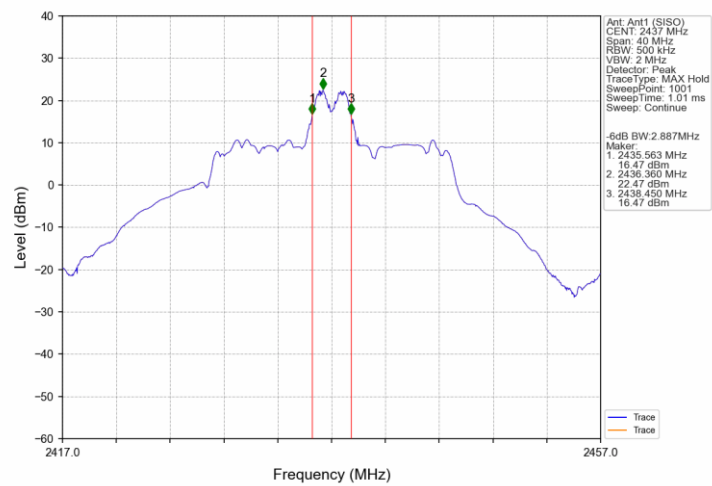


802.11ax(HEW20)_MCH_2437MHz_RU52_38_Ant1 (SISO)_NTNV

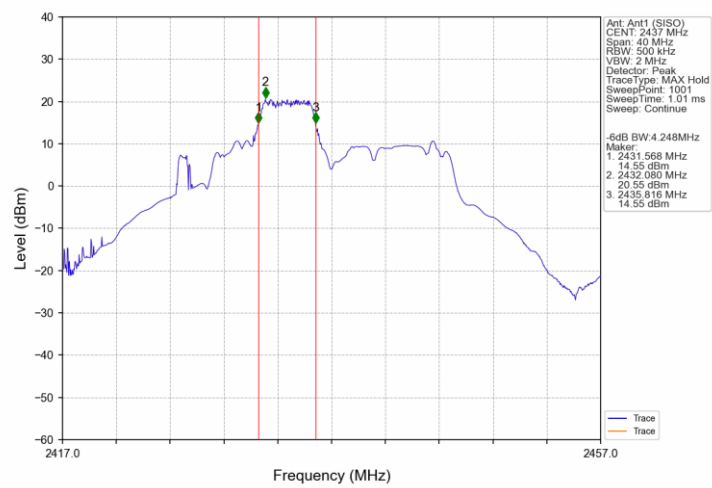


802.11ax(HEW20)_MCH_2437MHz_RU106_53_Ant1 (SISO)_NTNV

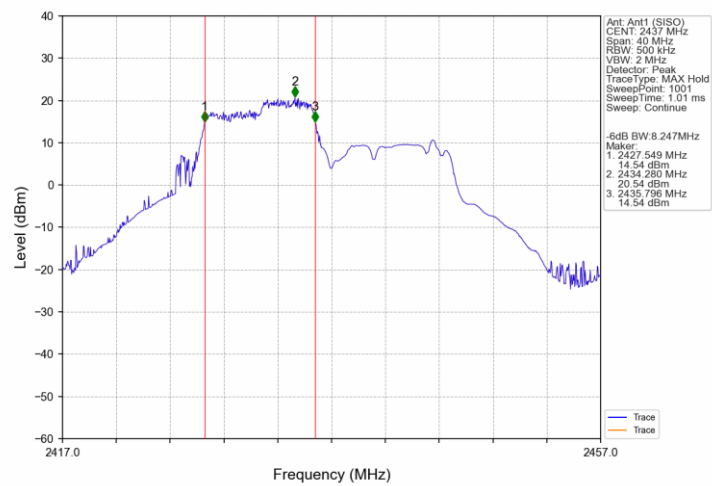


802.11ax(HEW20)_MCH_2437MHz_RU242_61_Ant1 (SISO)_NTNV

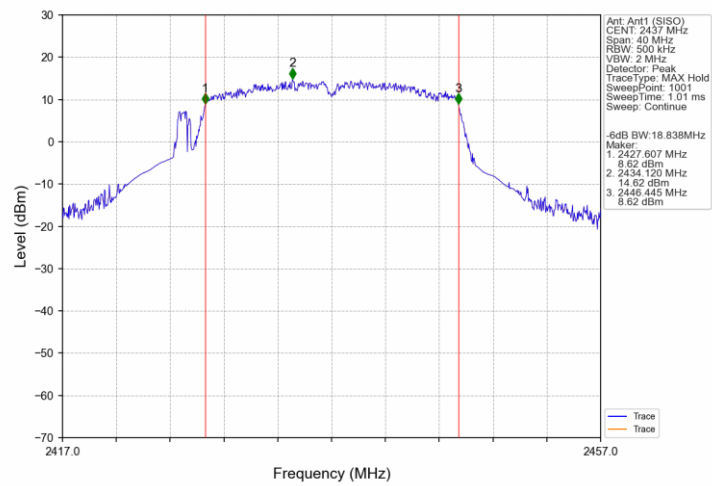


802.11ax(HEW20)_HCH_2462MHz_RU26_8_Ant1 (SISO)_NTNV

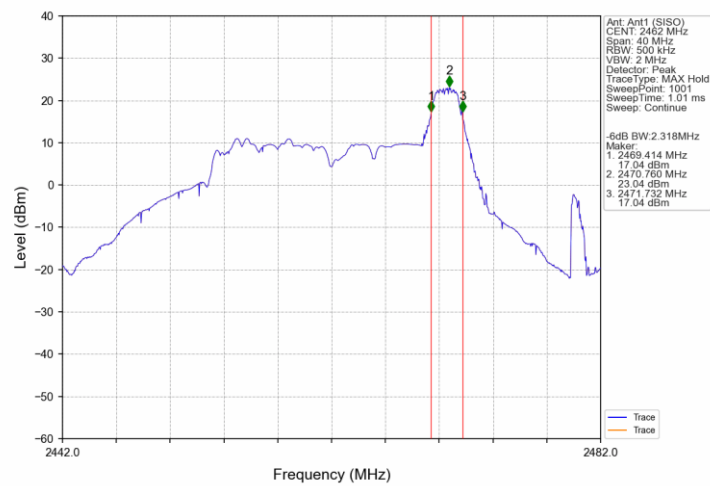


802.11ax(HEW20)_HCH_2462MHz_RU52_40_Ant1 (SISO)_NTNV

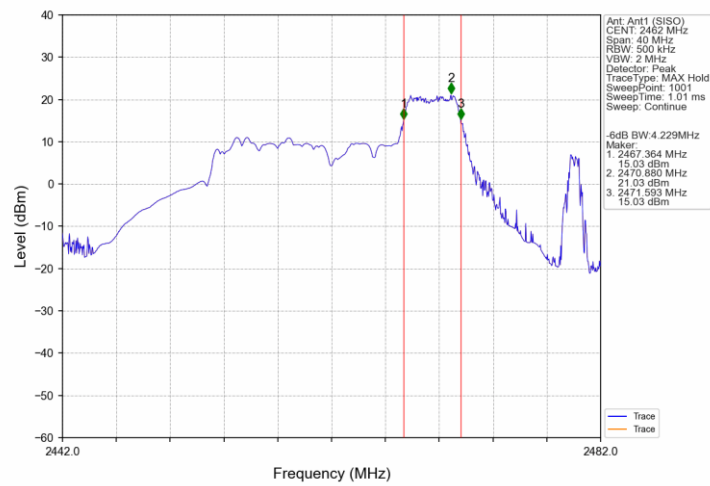


802.11ax(HEW20)_HCH_2462MHz_RU106_54_Ant1 (SISO)_NTNV

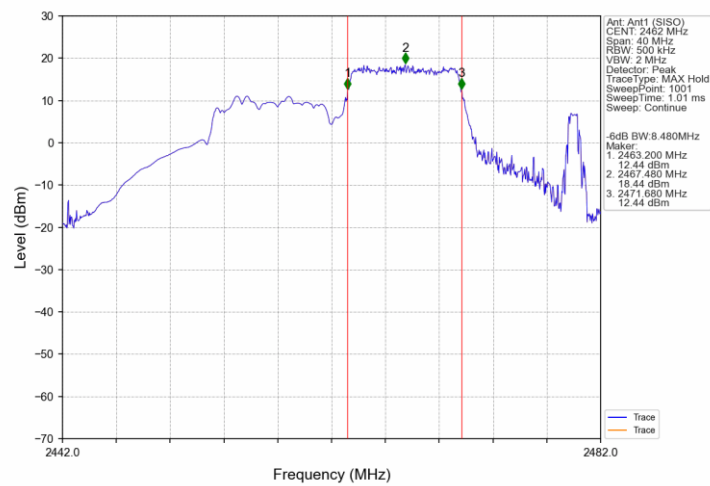


802.11ax(HEW20)_HCH_2462MHz_RU242_61_Ant1 (SISO)_NTNV

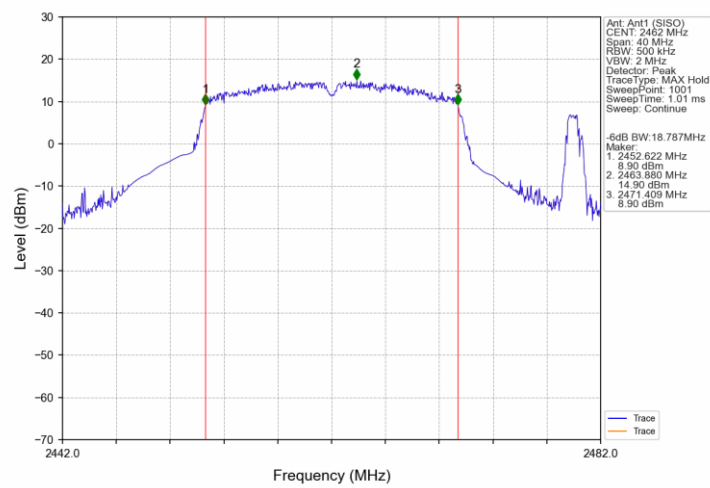


802.11ax(HEW40)_LCH_2422MHz_RU26_0_Ant1 (SISO)_NTNV

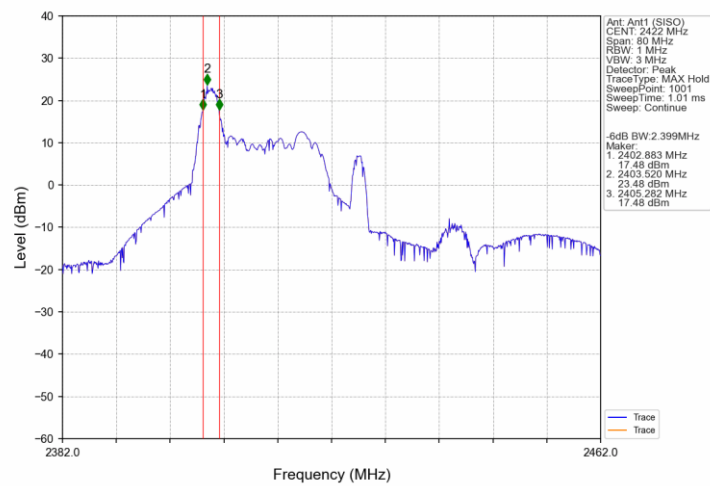


802.11ax(HEW40)_LCH_2422MHz_RU52_37_Ant1 (SISO)_NTNV

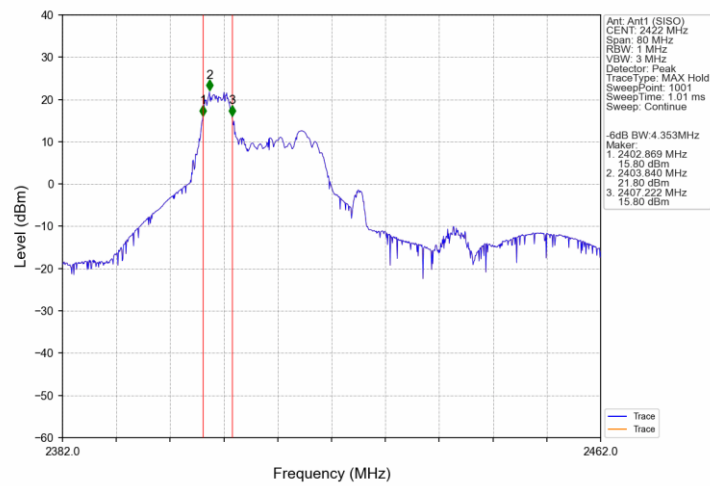


802.11ax(HEW40)_LCH_2422MHz_RU106_53_Ant1 (SISO)_NTNV

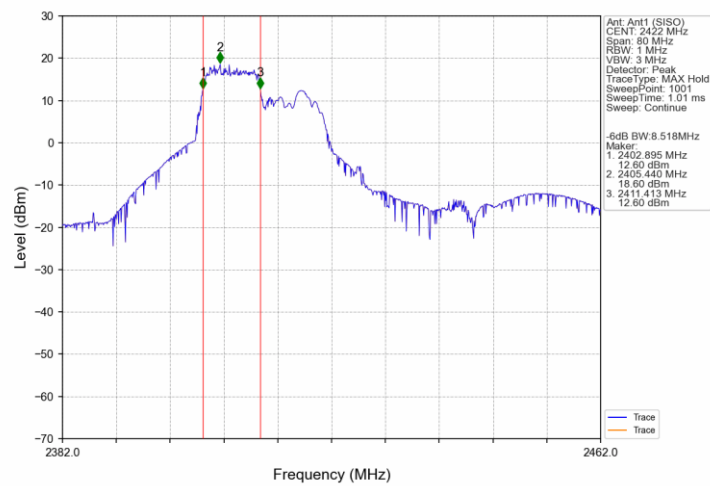


802.11ax(HEW40)_LCH_2422MHz_RU242_61_Ant1 (SISO)_NTNV

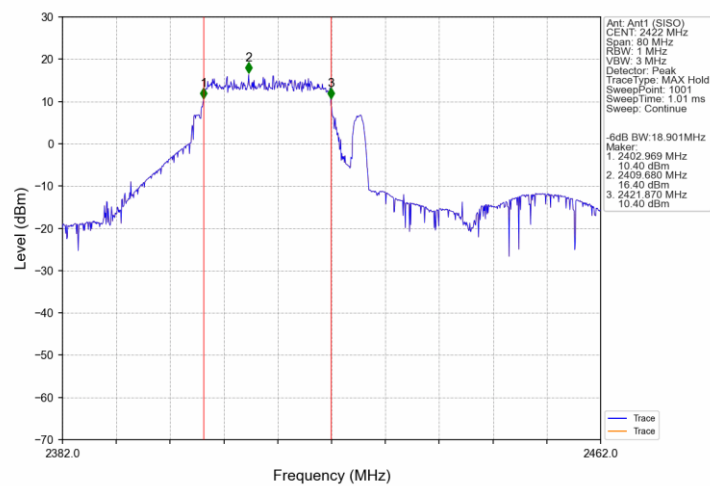


802.11ax(HEW40)_LCH_2422MHz_RU484_65_Ant1 (SISO)_NTNV

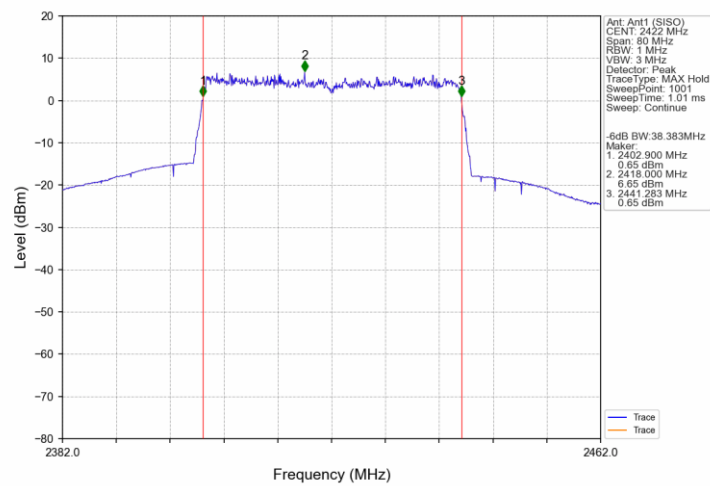


802.11ax(HEW40)_MCH_2437MHz_RU26_8_Ant1 (SISO)_NTNV

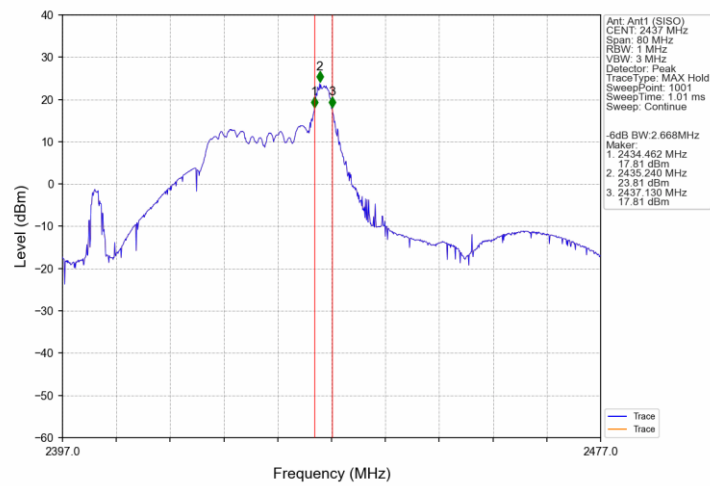


802.11ax(HEW40)_MCH_2437MHz_RU52_40_Ant1 (SISO)_NTNV

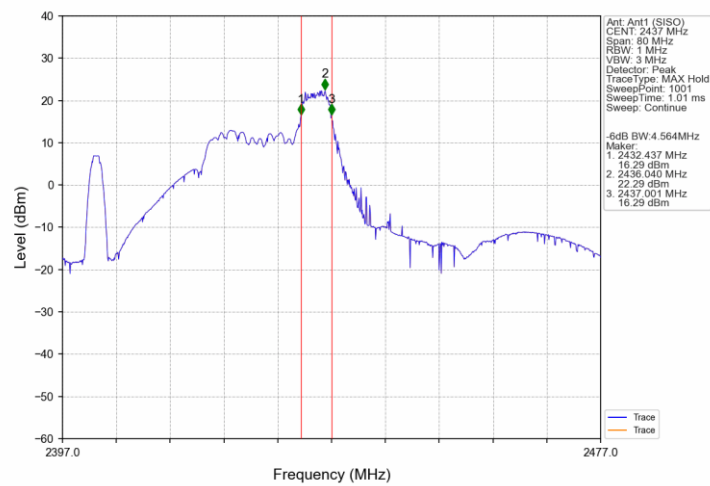


802.11ax(HEW40)_MCH_2437MHz_RU106_54_Ant1 (SISO)_NTNV

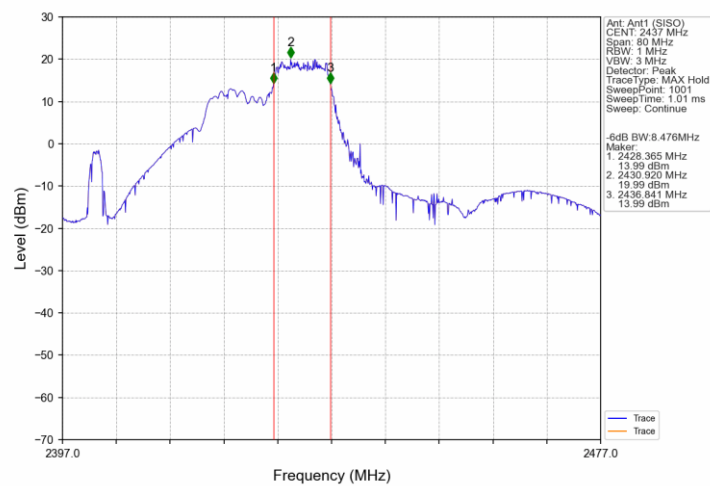


802.11ax(HEW40)_MCH_2437MHz_RU242_61_Ant1 (SISO)_NTNV

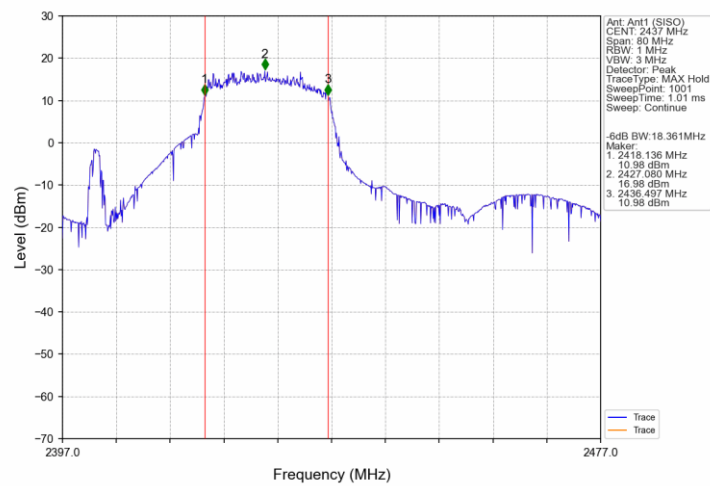


802.11ax(HEW40)_MCH_2437MHz_RU484_65_Ant1 (SISO)_NTNV

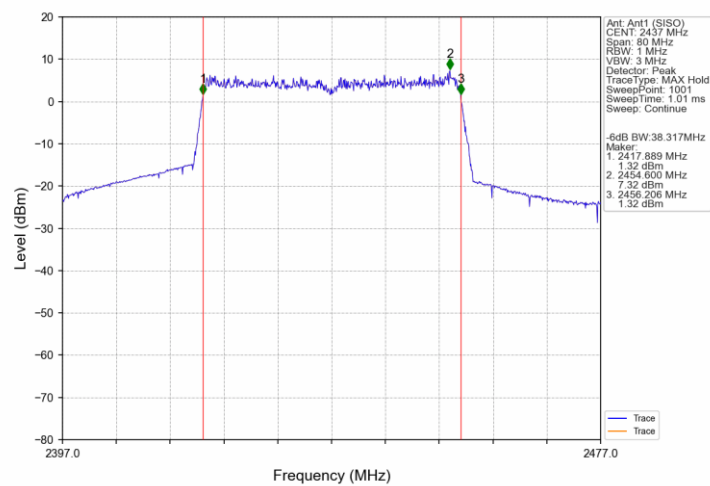


802.11ax(HEW40)_HCH_2452MHz_RU26_17_Ant1 (SISO)_NTNV

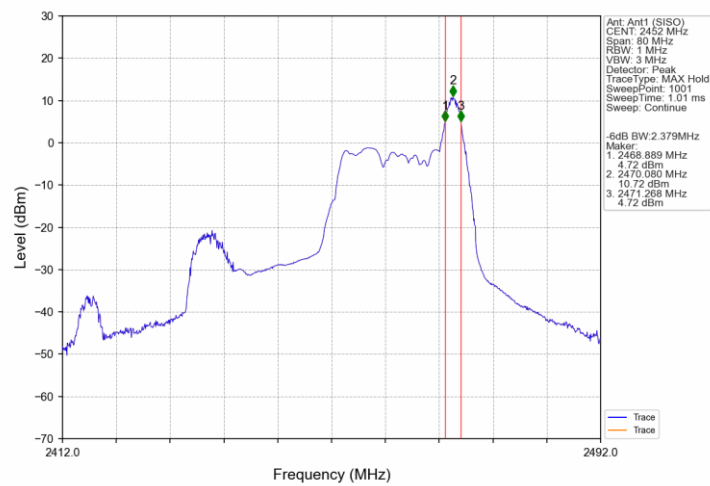


802.11ax(HEW40)_HCH_2452MHz_RU52_44_Ant1 (SISO)_NTNV

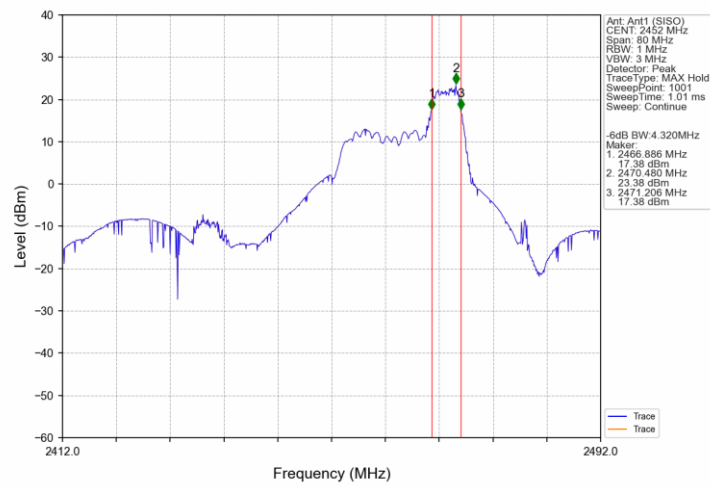


802.11ax(HEW40)_HCH_2452MHz_RU106_56_Ant1 (SISO)_NTNV

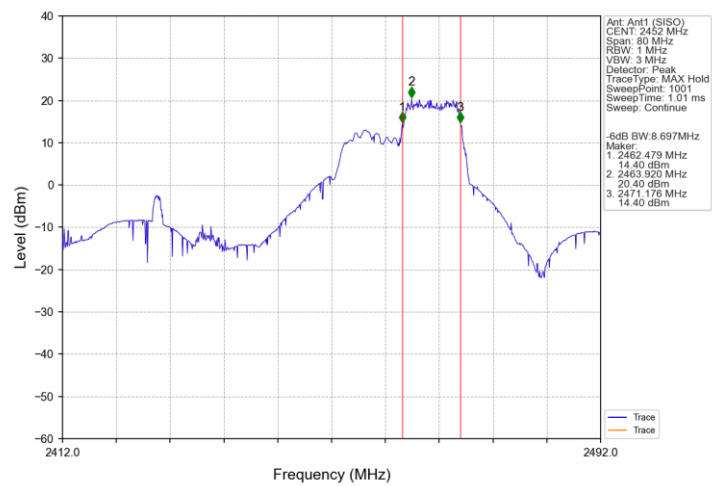

802.11ax(HEW40)_HCH_2452MHz_RU242_62_Ant1 (SISO)_NTNV

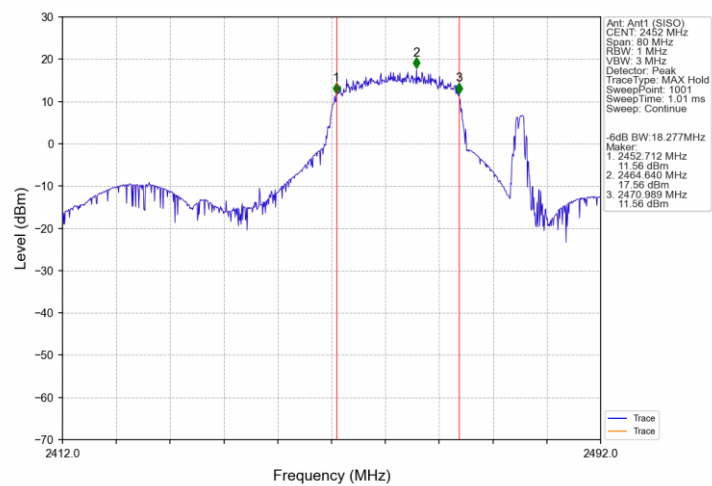


802.11ax(HEW40)_HCH_2452MHz_RU484_65_Ant1 (SISO)_NTNV

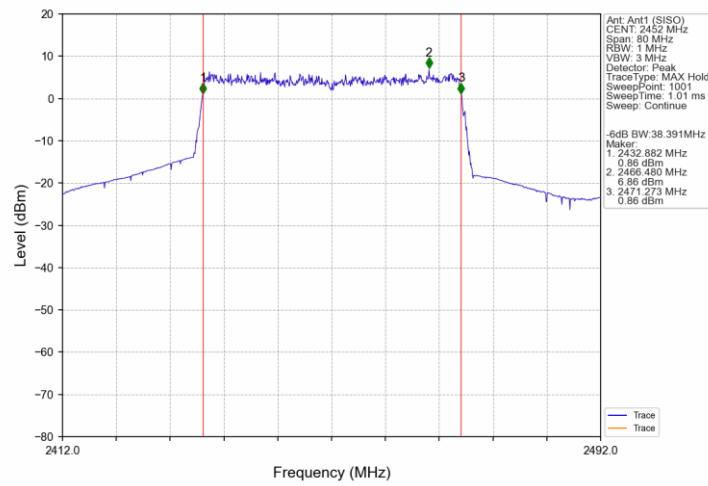




99% Bandwidth


802.11b LCH 2412MHz Ant1 (SISO) NTN

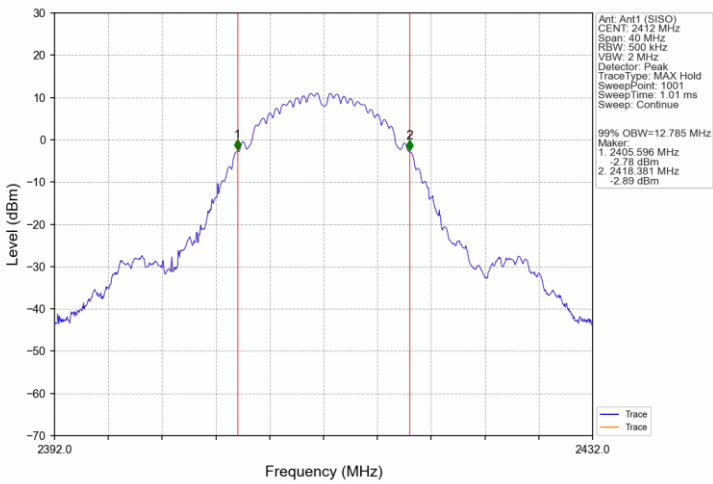


802.11b MCH 2437MHz Ant1 (SISO) NTN

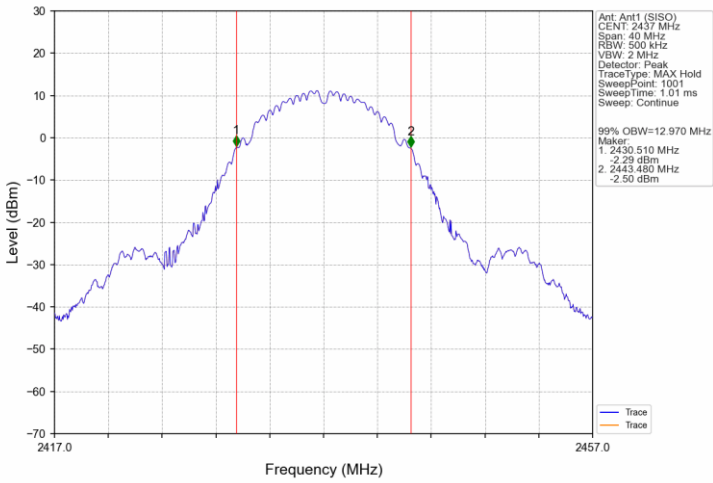


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

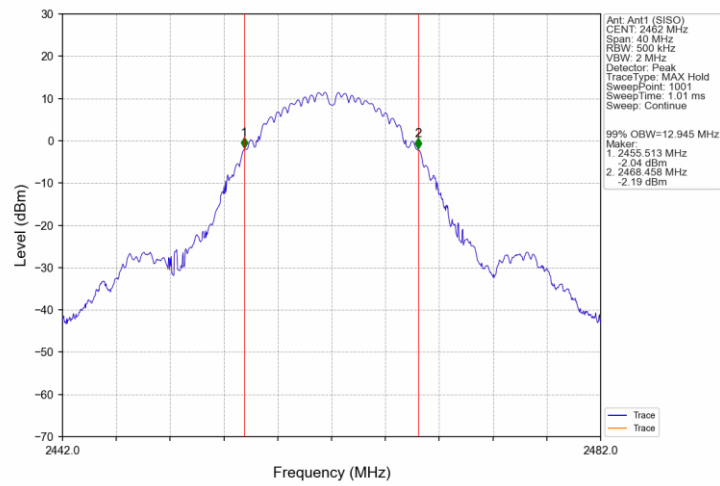


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

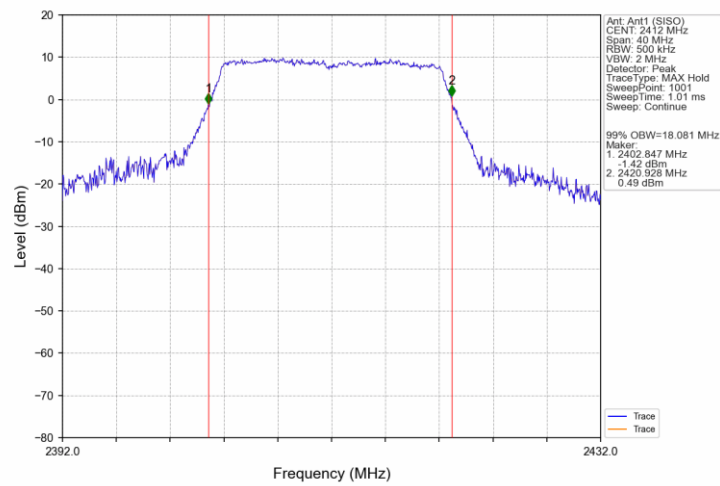


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

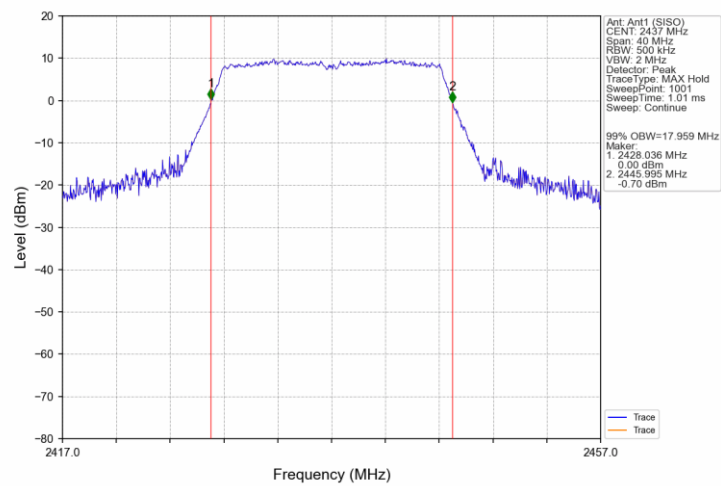


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

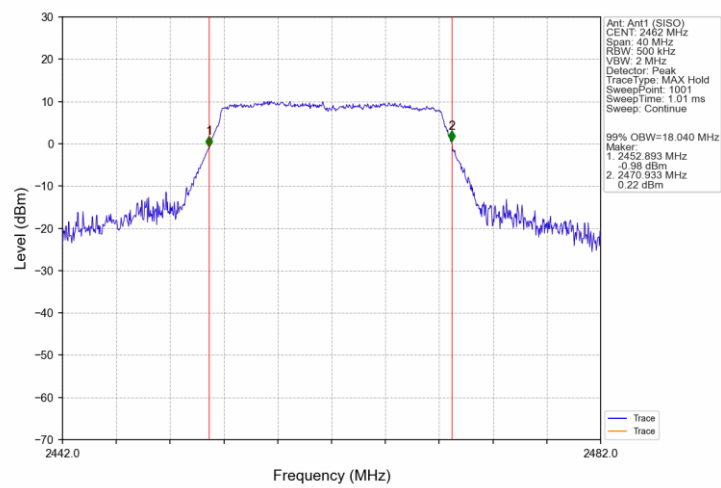


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

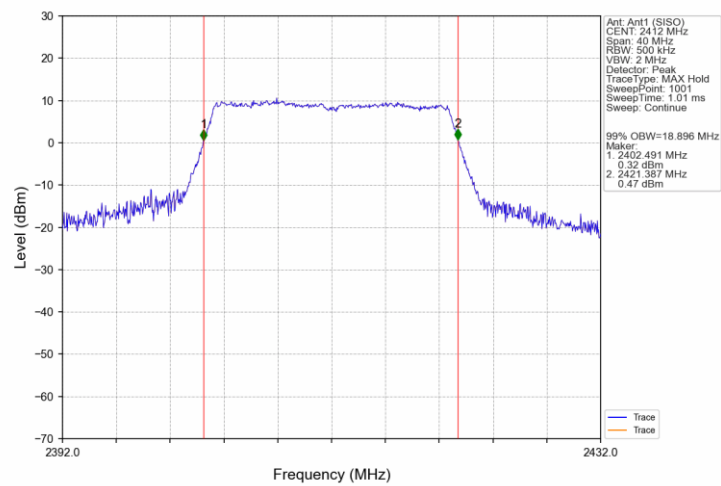


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

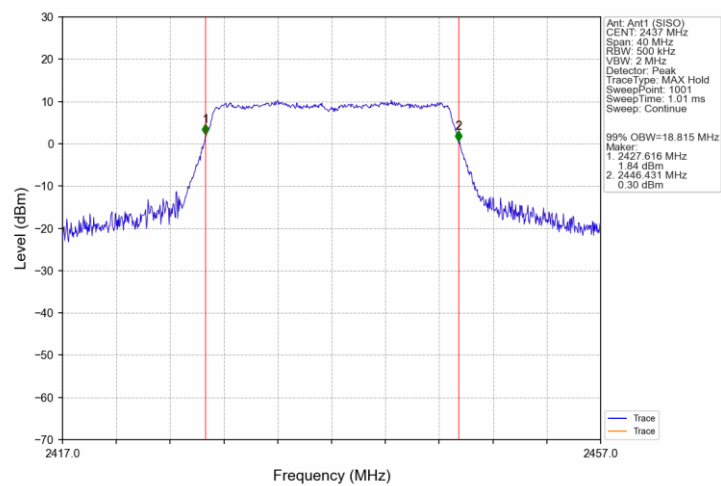


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

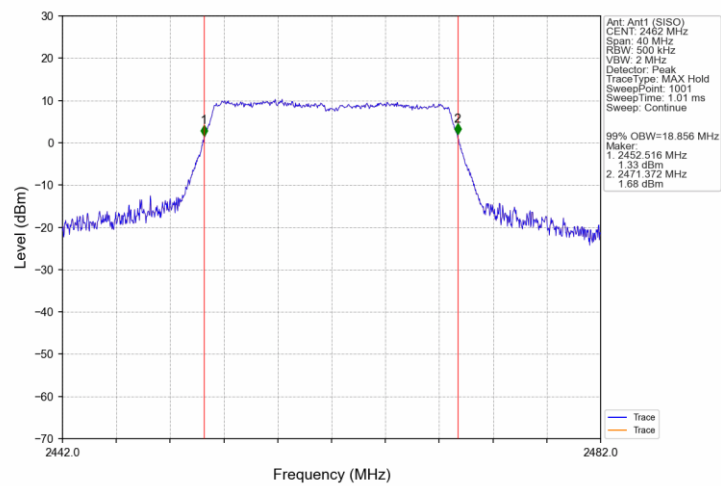


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

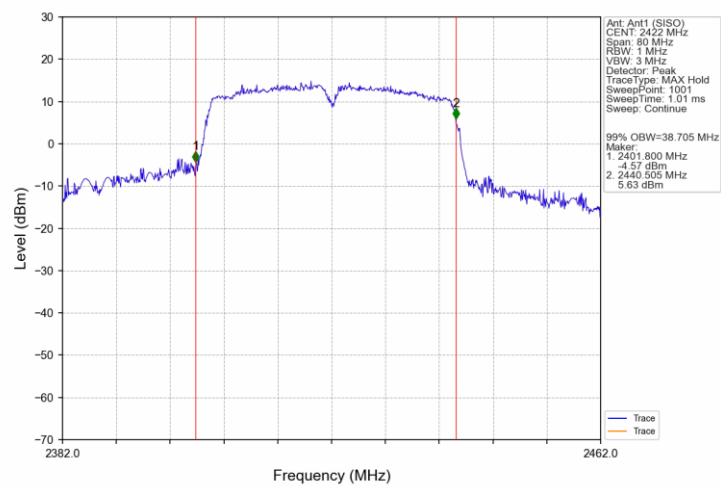


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

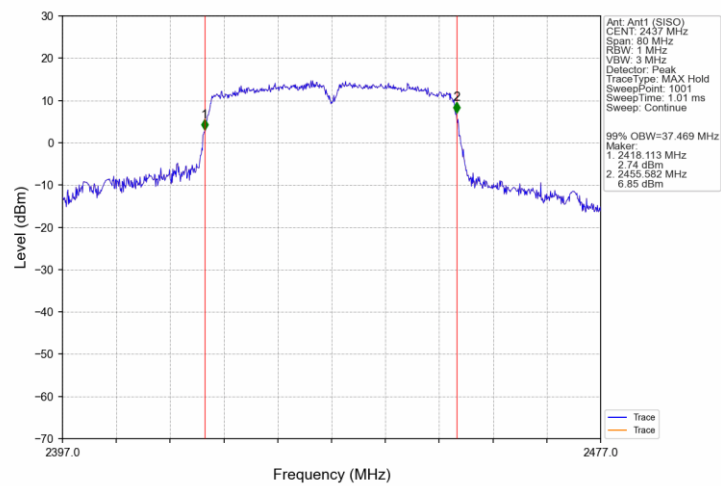


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

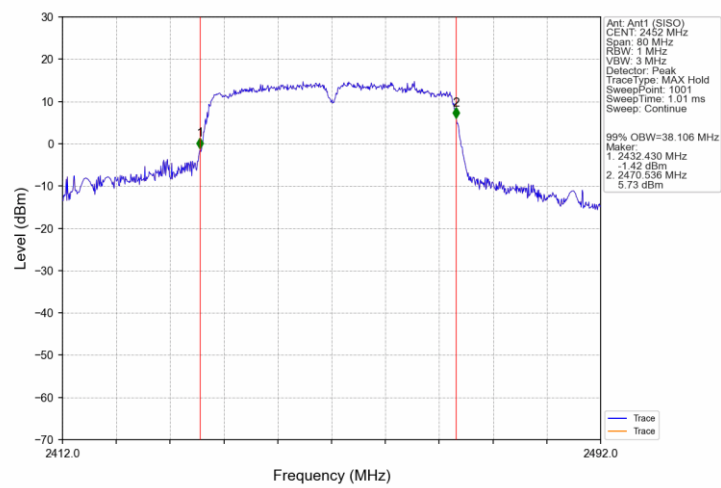


802.11ax(HEW20)_LCH_2412MHz_RU26_0_Ant1 (SISO)_NTNV

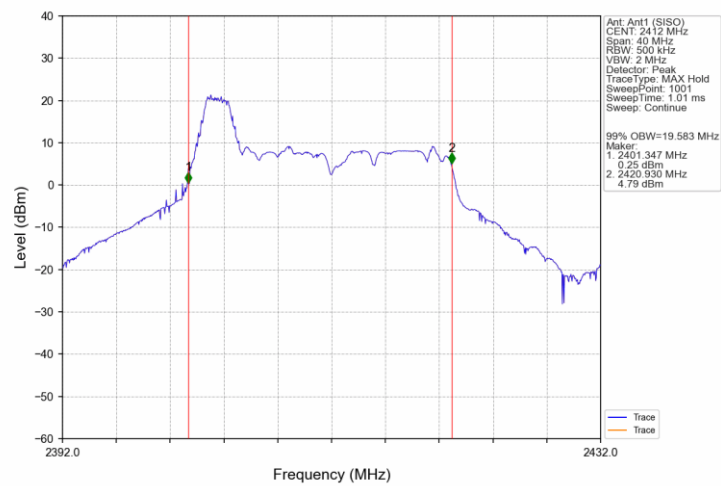


802.11ax(HEW20)_LCH_2412MHz_RU52_37_Ant1 (SISO)_NTNV

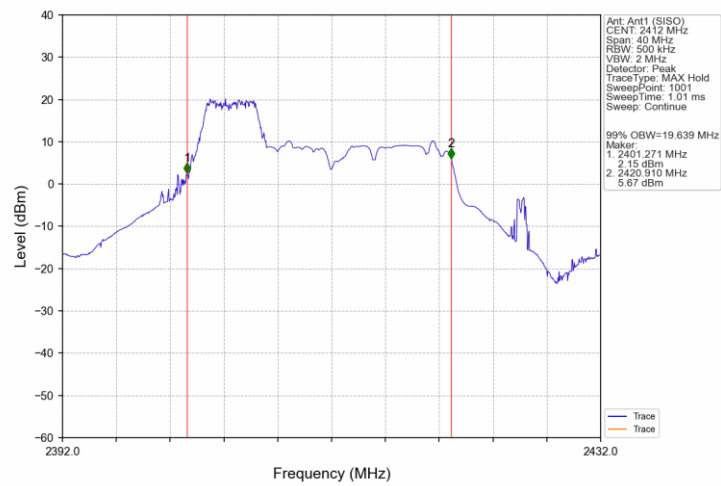


802.11ax(HEW20)_LCH_2412MHz_RU106_53_Ant1 (SISO)_NTNV

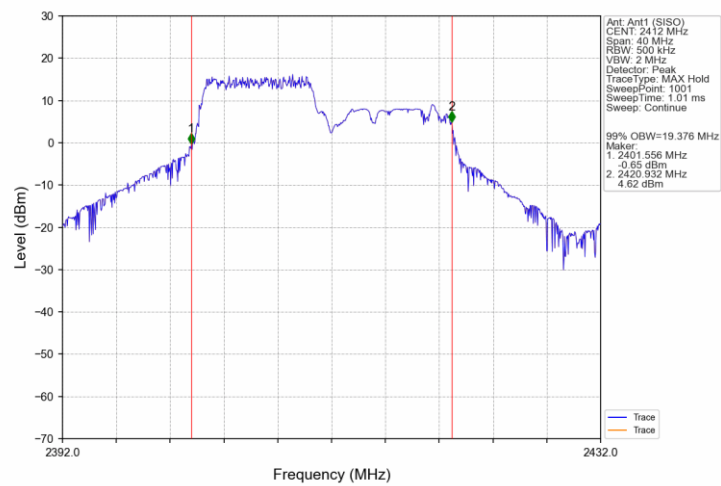


802.11ax(HEW20)_LCH_2412MHz_RU242_61_Ant1 (SISO)_NTNV

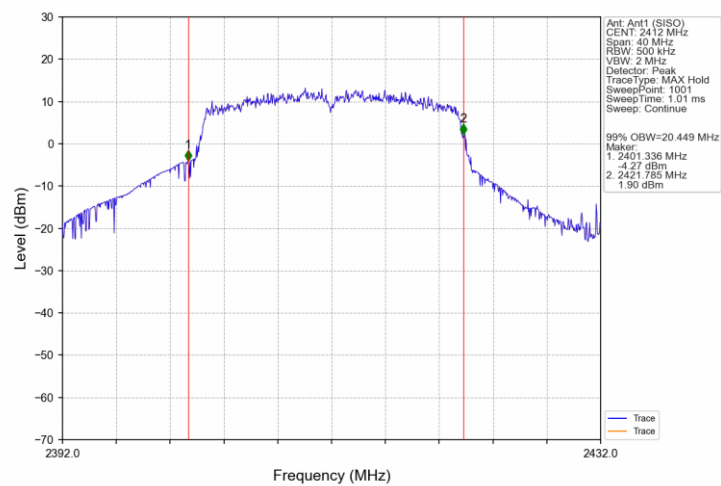


802.11ax(HEW20)_MCH_2437MHz_RU26_4_Ant1 (SISO)_NTNV

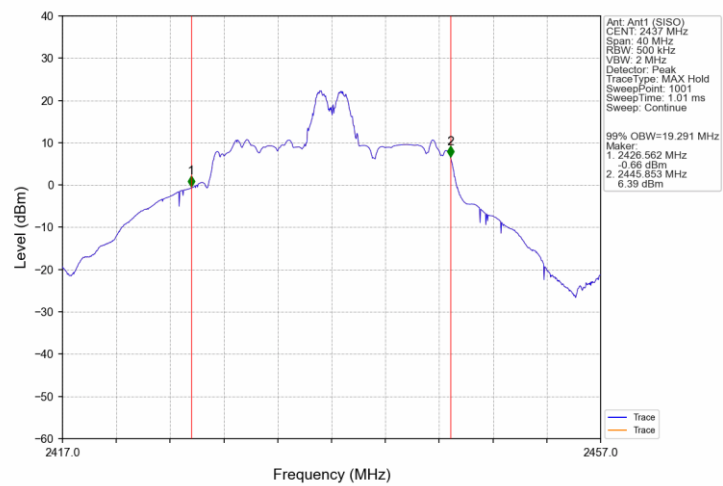


802.11ax(HEW20)_MCH_2437MHz_RU52_38_Ant1 (SISO)_NTNV

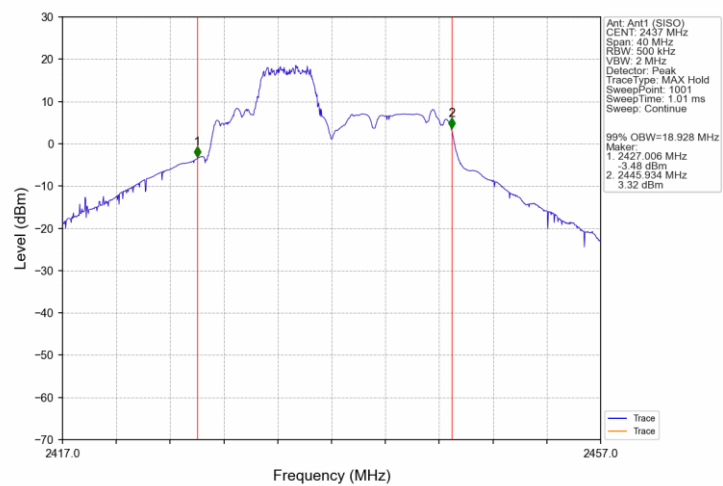


802.11ax(HEW20)_MCH_2437MHz_RU106_53_Ant1 (SISO)_NTNV

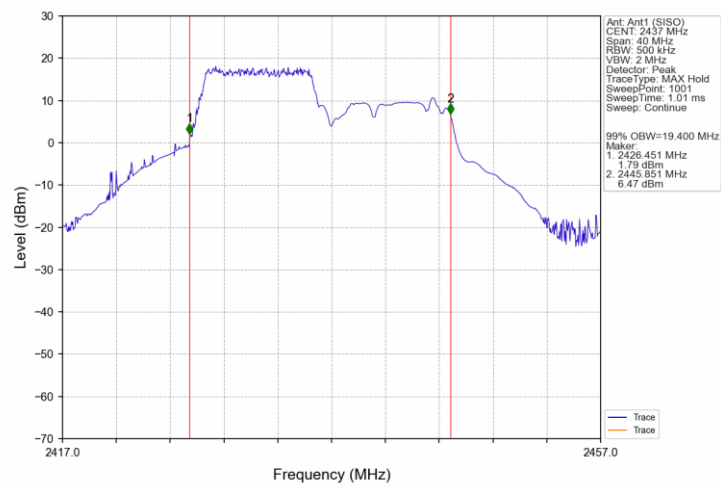


802.11ax(HEW20)_MCH_2437MHz_RU242_61_Ant1 (SISO)_NTNV

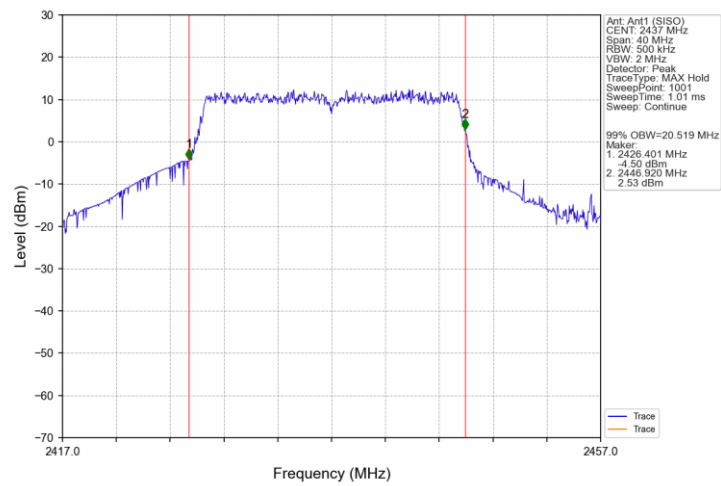


802.11ax(HEW20)_HCH_2462MHz_RU26_8_Ant1 (SISO)_NTNV

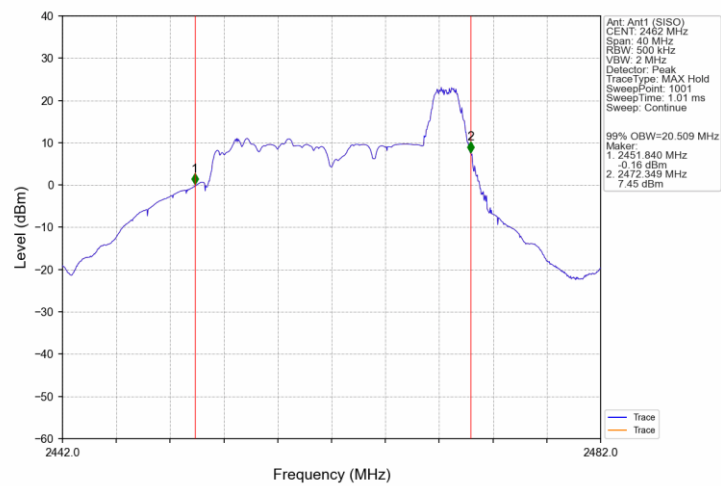


802.11ax(HEW20)_HCH_2462MHz_RU52_40_Ant1 (SISO)_NTNV

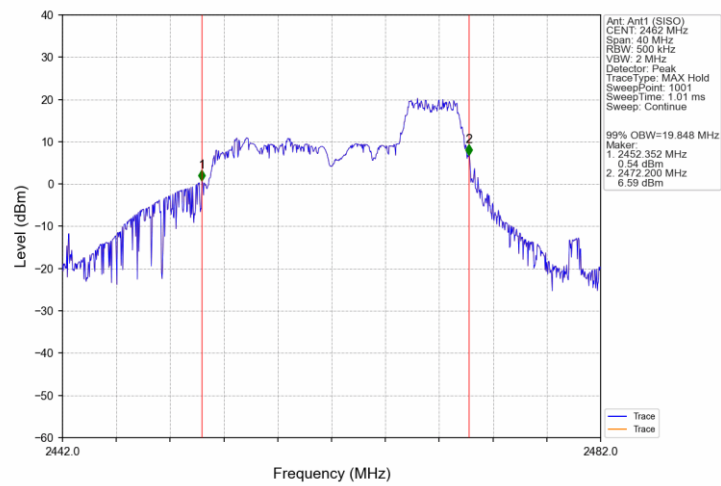


802.11ax(HEW20)_HCH_2462MHz_RU106_54_Ant1 (SISO)_NTNV

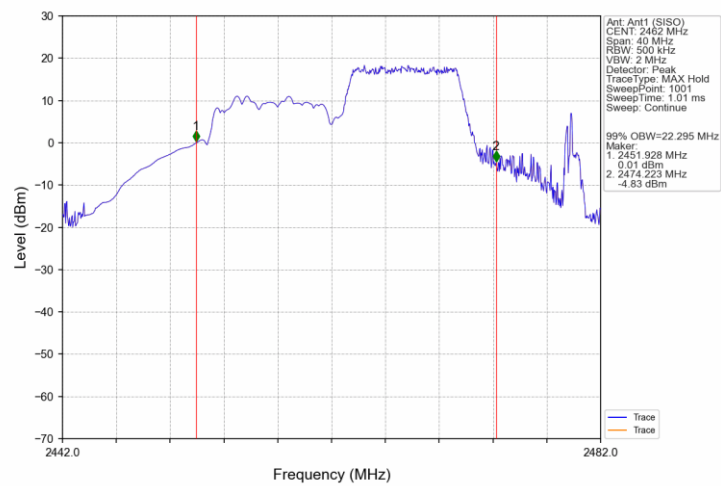


802.11ax(HEW20)_HCH_2462MHz_RU242_61_Ant1 (SISO)_NTNV

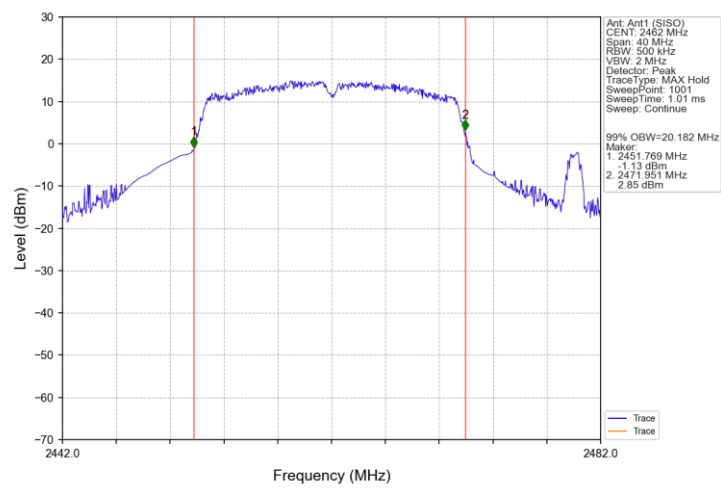


802.11ax(HEW40)_LCH_2422MHz_RU26_0_Ant1 (SISO)_NTNV

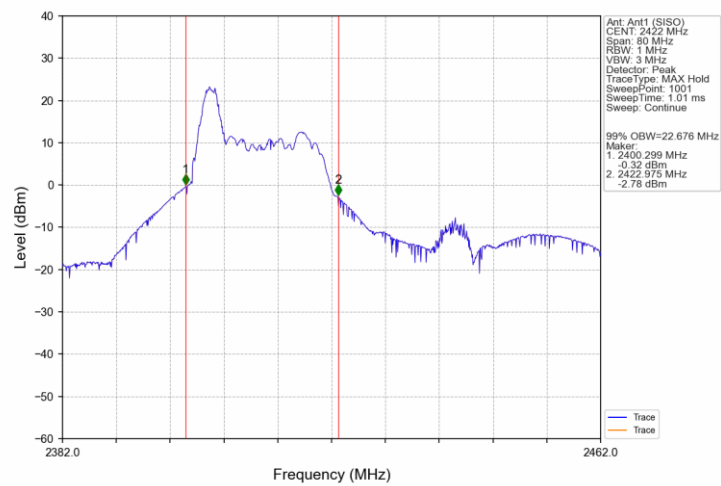


802.11ax(HEW40)_LCH_2422MHz_RU52_37_Ant1 (SISO)_NTNV

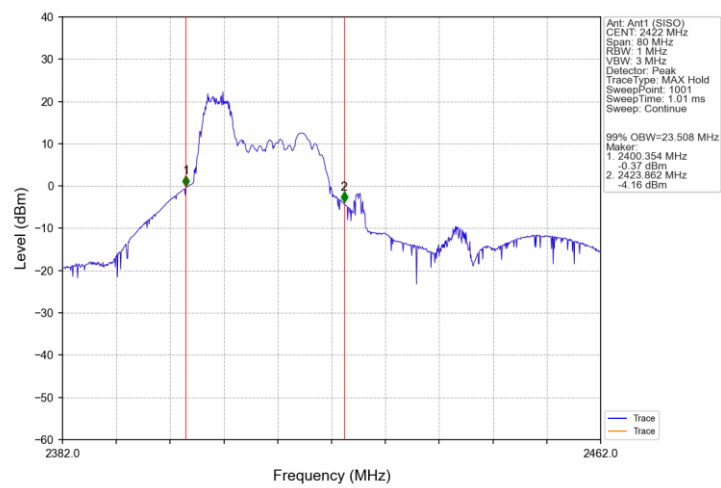


802.11ax(HEW40)_LCH_2422MHz_RU106_53_Ant1 (SISO)_NTNV

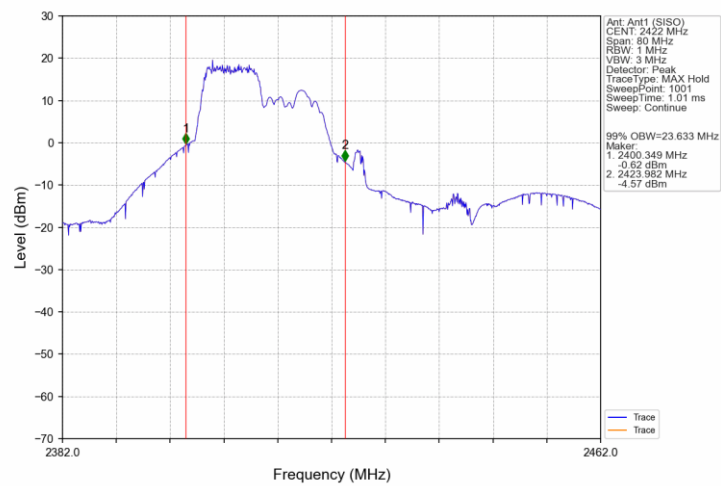


802.11ax(HEW40)_LCH_2422MHz_RU242_61_Ant1 (SISO)_NTNV

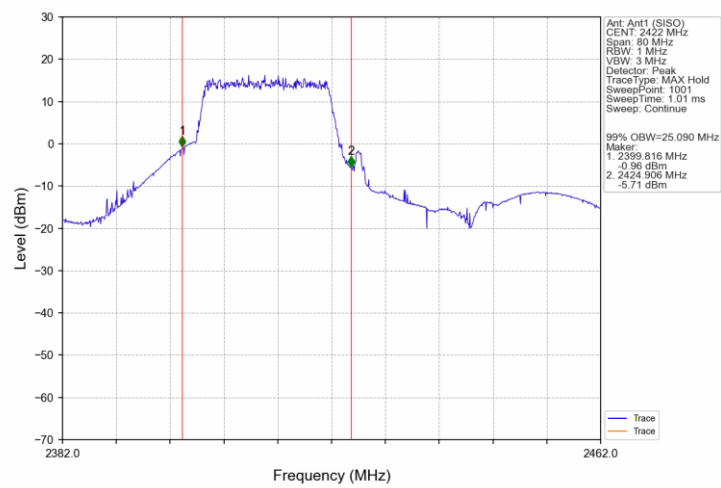


802.11ax(HEW40)_LCH_2422MHz_RU484_65_Ant1 (SISO)_NTNV

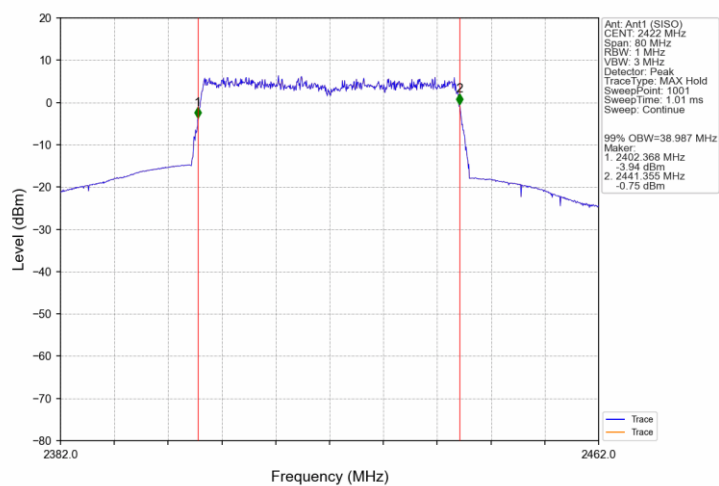

802.11ax(HEW40)_MCH_2437MHz_RU26_8_Ant1 (SISO)_NTNV

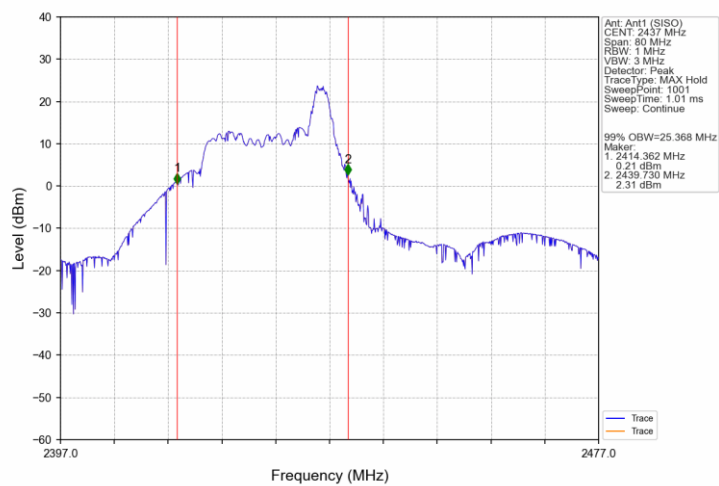

802.11ax(HEW40)_MCH_2437MHz_RU52_40_Ant1 (SISO)_NTNV

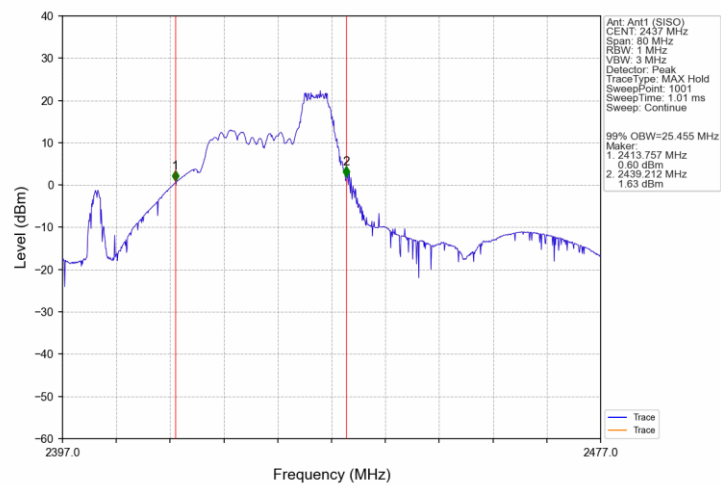

802.11ax(HEW40)_MCH_2437MHz_RU106_54_Ant1 (SISO)_NTNV

