

FCC/ISED - TEST REPORT

Report Number : **6895025106901** Date of Issue: **2025-07-15**

Model/HVIN : **HM1010**

Product Type : Security Camera

Applicant : Anona Security Technology Limited.

Address : 8 The Green, Ste A Dover DE 19901, America

Manufacturer : Anona Security Technology Limited.

Address : 8 The Green, Ste A Dover DE 19901, America

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including
Appendices : **45**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups.....	8
8	Systems Test Configuration	10
9	Technical Requirement.....	11
9.2	Conducted Peak Output Power & EIRP	14
9.3	Power Spectral Density	17
9.4	6 dB Bandwidth and 99% Occupied Bandwidth.....	19
9.5	Spurious RF Conducted Emissions	22
9.6	Band Edge.....	26
9.7	Spurious Radiated Emissions for Transmitter	29
10	Test Equipment List	43
11	System Measurement Uncertainty	45

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu,
Nantou, Nanshan District,
Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

IC Registration No.: 10320A

ISED CAB identifier CN0077

3 Description of the Equipment Under Test

Product:	Security Camera
Model no.:	HM1010
Hardware Version Identification No. (HVIN)	HM1010
Product Marketing Name (PMN)	Security Camera
Software version:	1.1.138
Brand name:	Anona
FCC ID:	2BB7K-1010
IC:	30992-1010
Options and accessories:	Adapter, Power Cable
Rating:	5VDC, 2A powered by adapter
Adapter Rating:	Manufacture: Jiangxi Jian Aohai Technology Co., Ltd. Model: A319-050200U-US2 Input: 100-240VAC, 50/60Hz, Max 0.3A Output: 5VDC, 2A
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	40
Modulation:	GFSK
Antenna:	Type: On-Board PCB antenna 2.14 dBi for 2400-2483.5MHz; 2.45 dBi for 5150-5825MHz
Description of the EUT:	The Equipment Under Test (EUT) is a Security Camera which supports Low Energy Bluetooth(1M) and Wi-Fi operated at 2.4GHz and U-NII-1(5150-5250MHz), U-NII-2A(5250-5350MHz), U-NII-2C(5470-5725MHz) and U-NII-3(5745-5825MHz). This report is only for Bluetooth Low Energy.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2024 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 April 2018 + Amendment 1 March 2019 + Amendment 2 February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3 August 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C/ RSS-247 Issue 3/RSS-Gen Issue 5						
Test Condition		Test Site	Test Result			Test Environment
			Pass	Fail	N/A	
§15.207 & RSS-GEN 8.8	Conducted emission AC power port	Site 1	☒	☐	☐	T: 23.0°C H: 46.8%
§15.247 (b) (3) & RSS-247 5.4(d)	Conducted peak output power	Site 1	☒	☐	☐	T: 23.7°C H: 47.5%
RSS-247 5.4(d)	Equivalent Isotropic Radiated Power	Site 1	☒	☐	☐	T: 23.7°C H: 47.5%
§15.247(a)(2) & RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	Site 1	☒	☐	☐	T: 23.7°C H: 47.5%
§15.247(e) & RSS-247 5.2(b)	Power spectral density	Site 1	☒	☐	☐	T: 23.7°C H: 47.5%
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	Site 1	☒	☐	☐	T: 23.7°C H: 47.5%
§15.247(d) & RSS-247 5.5	Band edge	Site 1	☒	☐	☐	T: 23.7°C H: 47.5%
§15.247(d) & §15.209 & §15.205 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	Site 1	☒	☐	☐	T: 22.5°C H: 48.9%
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 2	☒	☐	☐	--

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an On-Board PCB antenna, which gain is 2.14dBi. In accordance to §15.203 & RSS-Gen 6.8, it is considered sufficiently to comply with the provisions of this section.

Note 3: T :Temperature, H: Humidity.

6 General Remarks

This submittal(s) (test report) is intended for FCC ID: 2BB7K-1010, IC: 30992-1010, complies with Section 15.205, 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules and RSS-247, RSS-GEN.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.


Sample Received Date: 2025-06-12

Testing Start Date: 2025-06-12

Testing End Date: 2025-06-28


TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:



John Zhi
Section Manager



Prepared by:


Sanvin Zheng
Project Engineer


Tested by:


Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


AC Power Line Conducted Emission test setups

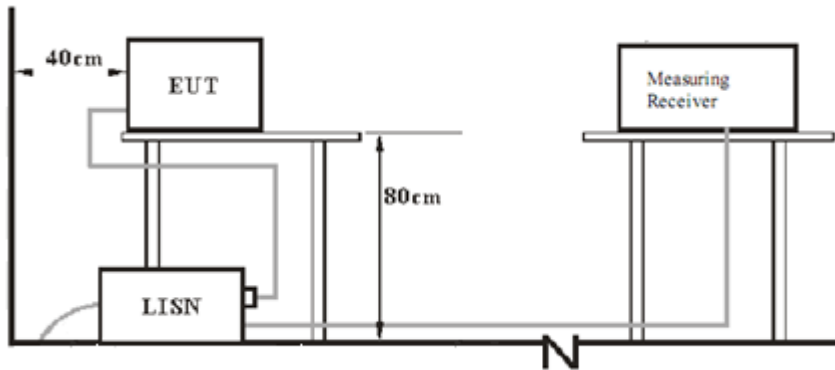


9KHz - 30MHz

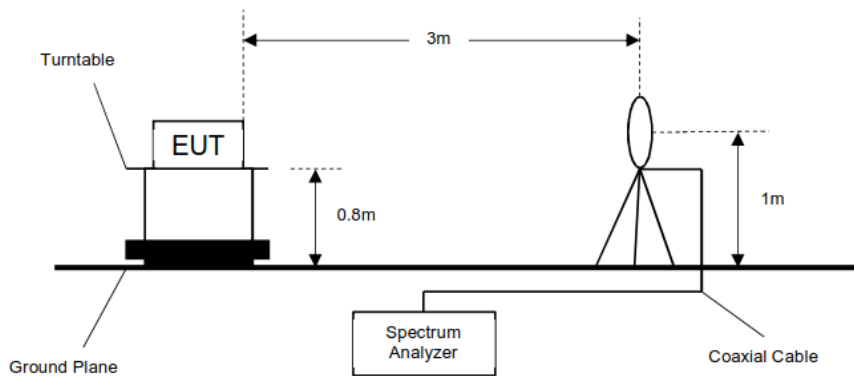


30MHz - 1GHz

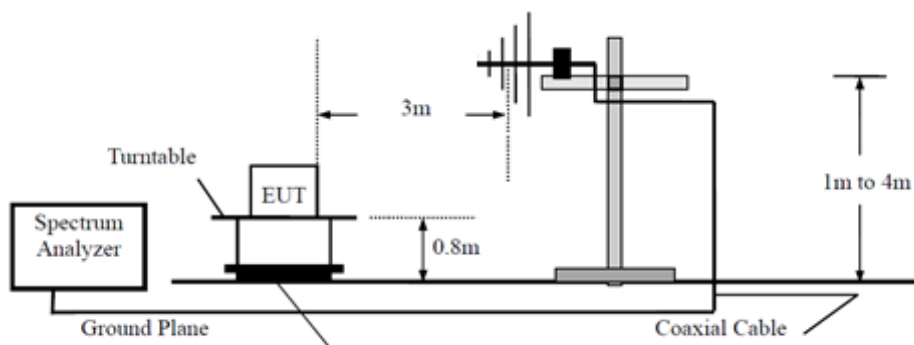

Above 1GHz

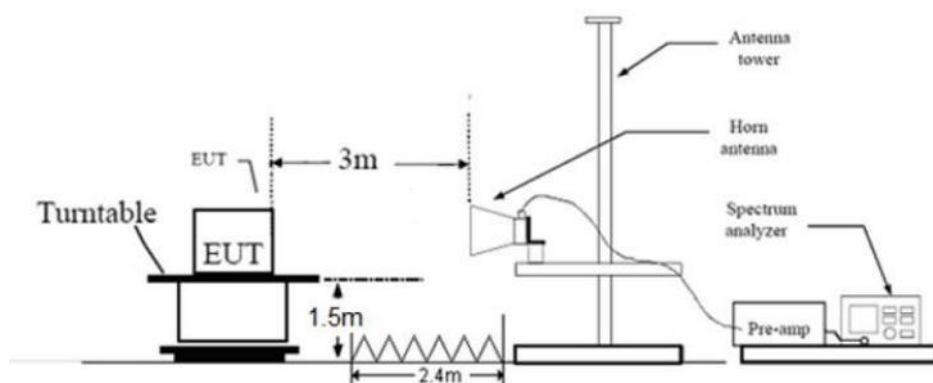

7.2 Conducted RF test setups



8 Systems Test Configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model NO.	S/N
Notebook	LENOVO	X220	---

Cables Used During Test:

Cable	Length	Shielded/unshielded	With / without ferrite
USB-C Cable	100cm	Unshielded	Without Ferrite

Test software information:

Test Software Version	SecureCRT.exe		
Modulation	Setting TX Power	Packet Type	
GFSK	04	PRBS9	

The system was configured to non-hopping mode, testing channel 0, 19, 39.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Limit


According to §15.207 & RSS-GEN 8.8, conducted Emission limit as below:

Frequency MHz	QP Limit dBμV	AV Limit dBμV
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Conducted Emission

Product Type : Security Camera
 M/N : HM1010
 Operating Condition : Transmit
 Test Specification : Line
 Comment : AC 120V/60Hz

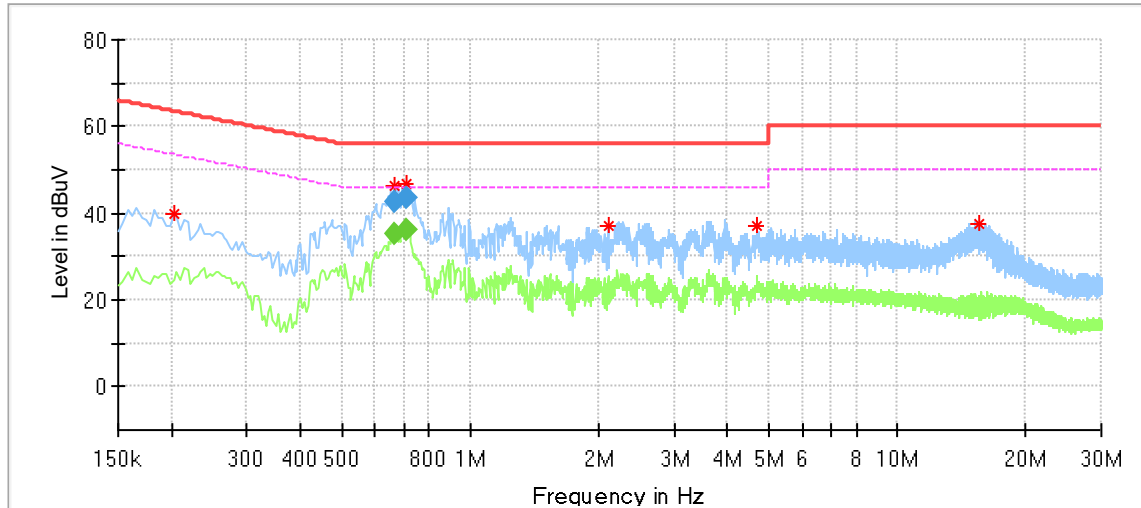

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.202000	39.87	---	63.53	23.66	L1	10.30
0.661500	46.34	---	56.00	9.66	L1	10.32
0.709500	46.68	---	56.00	9.32	L1	10.32
2.102000	37.19	---	56.00	18.81	L1	10.36
4.702000	37.00	---	56.00	19.00	L1	10.45
15.506000	37.38	---	60.00	22.62	L1	10.94

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.661500	---	35.21	46.00	10.79	L1	10.32
0.661500	42.42	---	56.00	13.58	L1	10.32
0.709500	---	36.25	46.00	9.75	L1	10.32
0.709500	43.55	---	56.00	12.45	L1	10.32

Remark:


*Level=Reading Level + Correction Factor

**Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Security Camera
M/N : HM1010
Operating Condition : Transmit
Test Specification : Neutral
Comment : AC 120V/60Hz

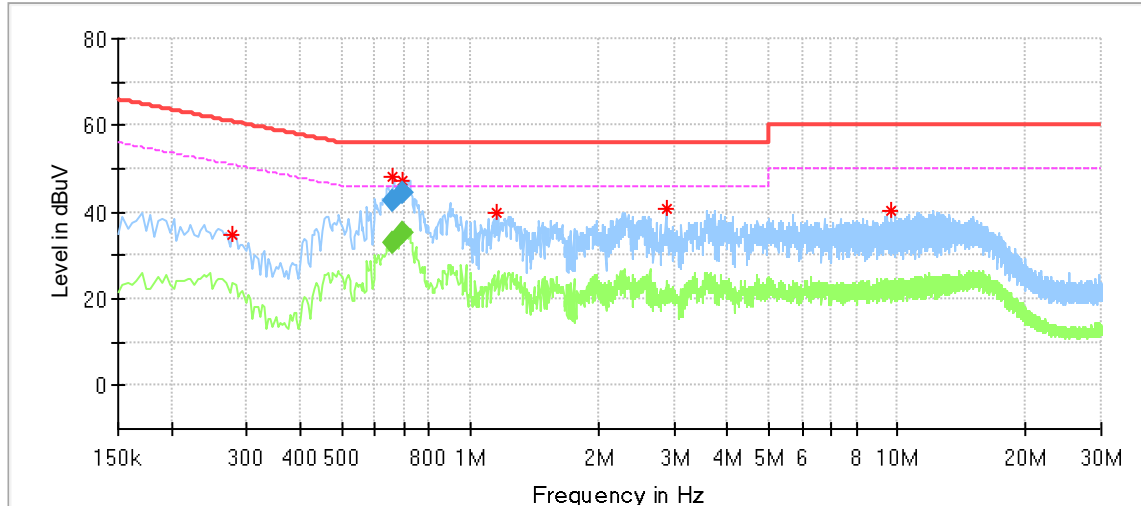

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.278000	34.69	---	60.88	26.19	N	10.29
0.657500	48.13	---	56.00	7.87	N	10.35
0.697500	47.36	---	56.00	8.64	N	10.38
1.158000	40.00	---	56.00	16.00	N	10.32
2.870000	40.69	---	56.00	15.31	N	10.38
9.694000	40.11	---	60.00	19.89	N	10.69

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.657500	---	33.12	46.00	12.88	N	10.35
0.657500	42.68	---	56.00	13.32	N	10.35
0.697500	---	35.10	46.00	10.90	N	10.38
0.697500	44.37	---	56.00	11.63	N	10.38

Remark:

*Level=Reading Level + Correction Factor

**Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted Peak Output Power & EIRP

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 5 times the 6dB bandwidth, centered on a channel need to test,
RBW > the 6dB bandwidth of the emission being measured, VBW $\geq$ 3RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

Limits

According to §15.247 (b) (3) & RSS-247 5.4(d), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30


According to & RSS-247 5.4(d), EIRP limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 4	≤ 36


Conducted Peak Output Power & EIRP

Frequency MHz	Mode	Conducted Peak Output Power dBm	Antenna Gain dBi	EIRP dBm	Result
Bottom channel 2402MHz	LE 1Mbps	-4.76	2.14	-2.62	Pass
Middle channel 2440MHz	LE 1Mbps	-2.52	2.14	-0.38	Pass
Top channel 2480MHz	LE 1Mbps	-0.40	2.14	1.74	Pass

BLE_1M_LCH_2402MHz_Ant1_NTNV

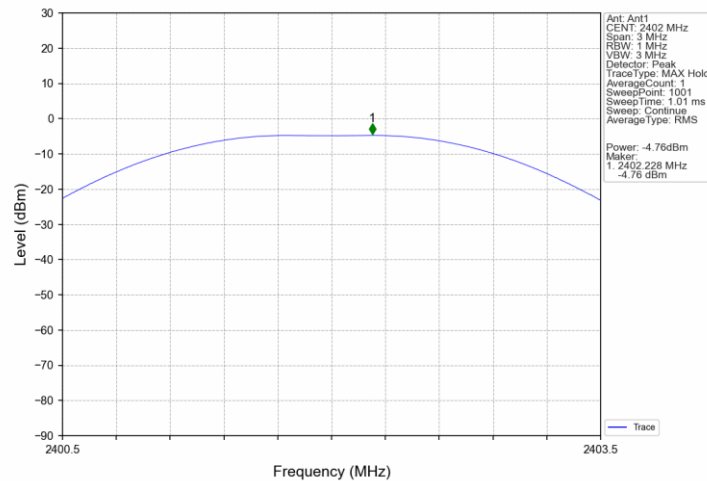


BLE_1M_MCH_2440MHz_Ant1_NTNV

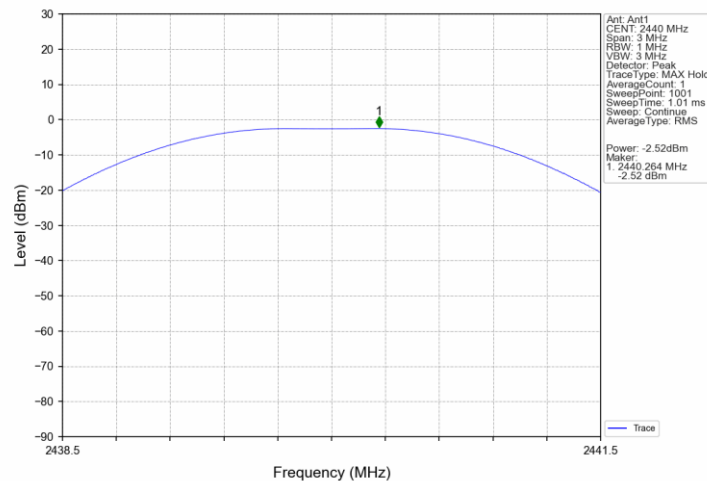



BLE_1M_HCH_2480MHz_Ant1_NTNV

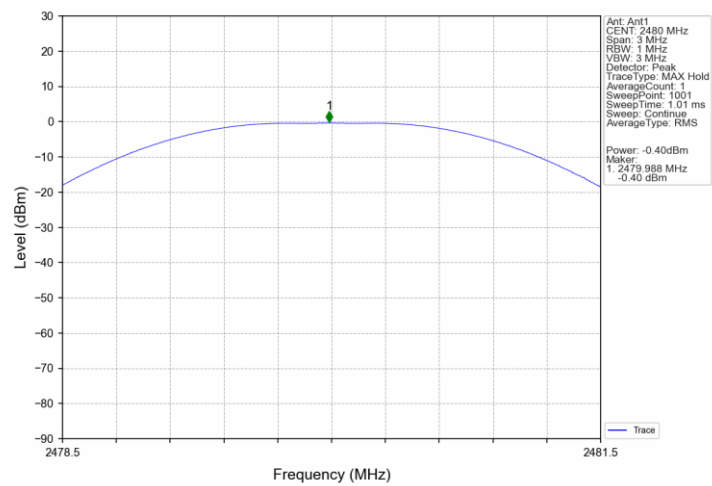

9.3 Power Spectral Density

Test Method

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm/3KHz]

≤ 8


Test result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
BLE_1M	SISO	2402	-21.36	≤ 8	Pass
		2440	-18.82	≤ 8	Pass
		2480	-16.72	≤ 8	Pass


BLE_1M_LCH_2402MHz_Ant1_NTNV

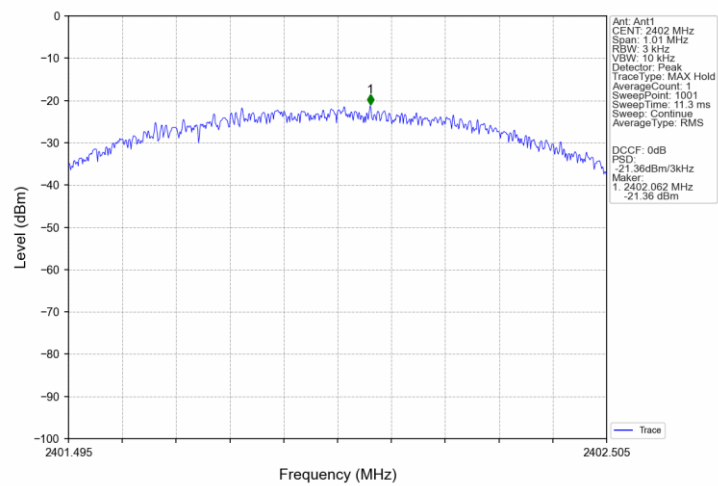

BLE_1M_MCH_2440MHz_Ant1_NTNV

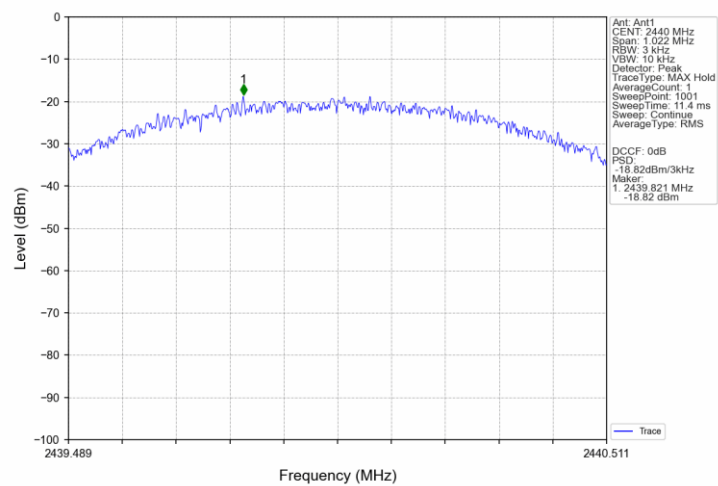

BLE_1M_HCH_2480MHz_Ant1_NTNV

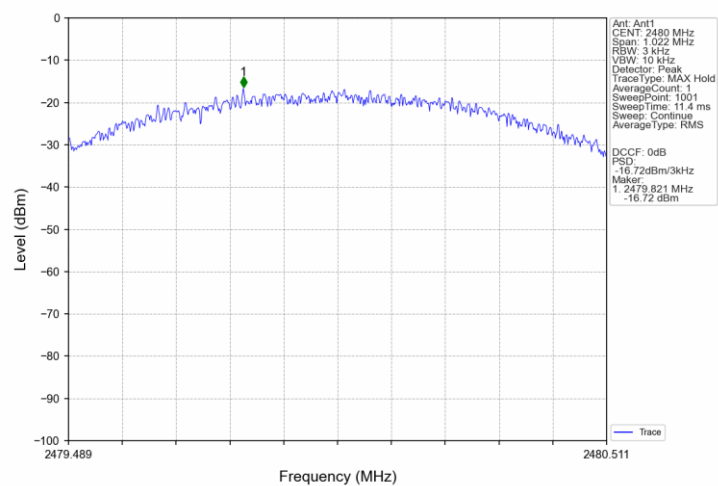

9.4 6 dB Bandwidth and 99% Occupied Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set center frequency to the nominal EUT channel center frequency
3. Set RBW = 1% to 5% of the OBW but not less than 100kHz, VBW $\geq 3 \times$ RBW Detector = Peak. Trace mode = max hold. Sweep = auto Trace = max hold
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
5. Record the results in the test report.

Limit

Limit [kHz]

≥ 500

Test Method for 99 % Bandwidth

1. Set center frequency to the nominal EUT channel center frequency
2. Set span = 1.5 times to 5.0 times the OBW. Set RBW = 1 % to 5 % of the OBW Set VBW ≥ 3 RBW Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize.
3. Use the 99 % power bandwidth function of the instrument.
4. Record the results in the test report.

Limit

Limit [kHz]


Test result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
BLE_1M	SISO	2402	1	0.673	≥ 0.5	Pass
		2440	1	0.681	≥ 0.5	Pass
		2480	1	0.681	≥ 0.5	Pass


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
BLE_1M	SISO	2402	1	1.029	/	Pass
		2440	1	1.032	/	Pass
		2480	1	1.033	/	Pass

6 dB Bandwidth


BLE_1M_LCH_2402MHz_Ant1_NTNV

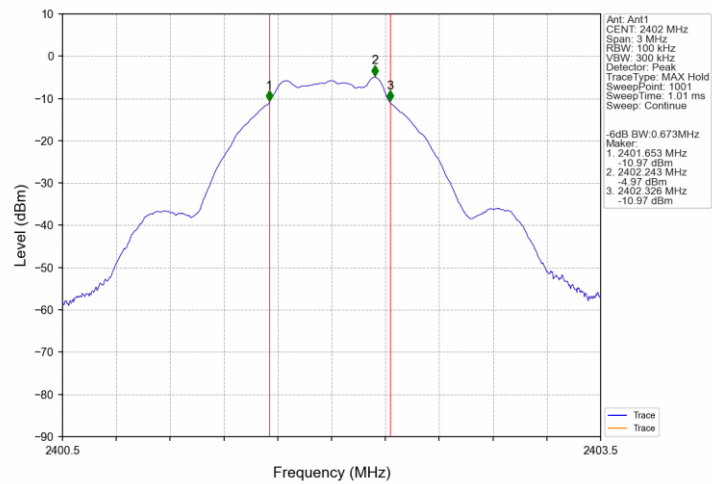

BLE_1M_MCH_2440MHz_Ant1_NTNV

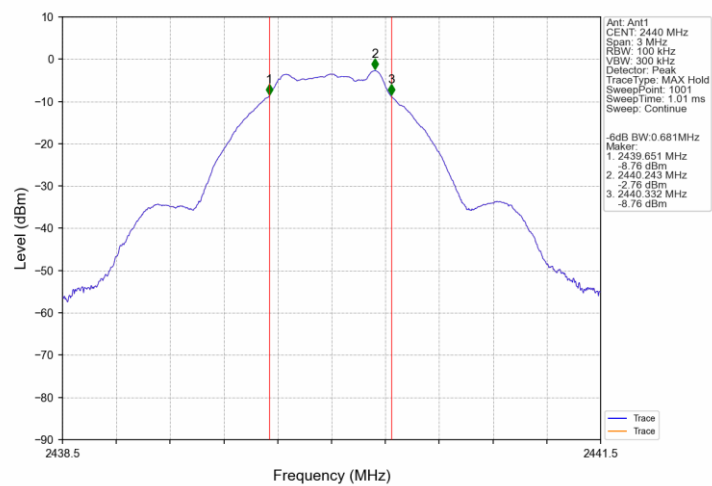


BLE_1M_HCH_2480MHz_Ant1_NTNV

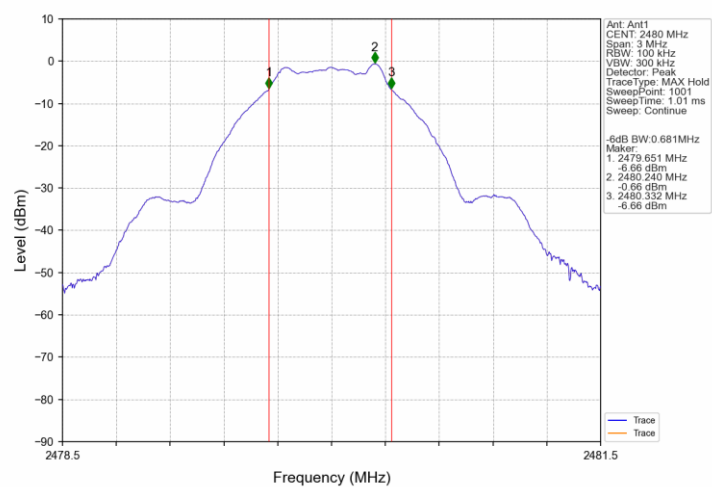


99% Bandwidth


BLE_1M_LCH_2402MHz_Ant1_NTNV

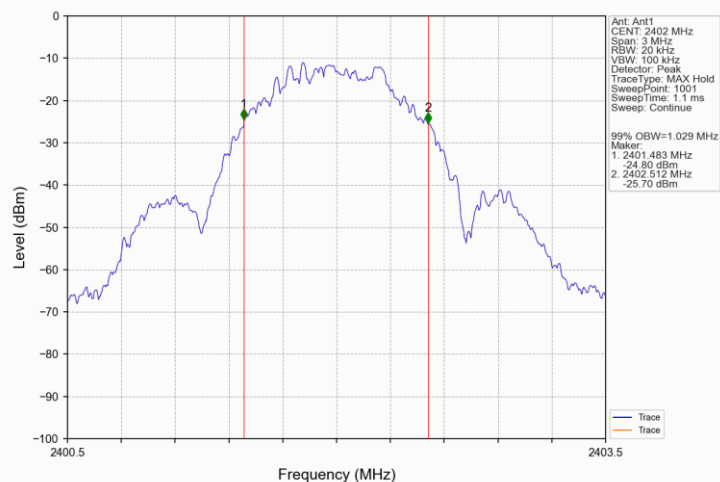

BLE_1M_MCH_2440MHz_Ant1_NTNV

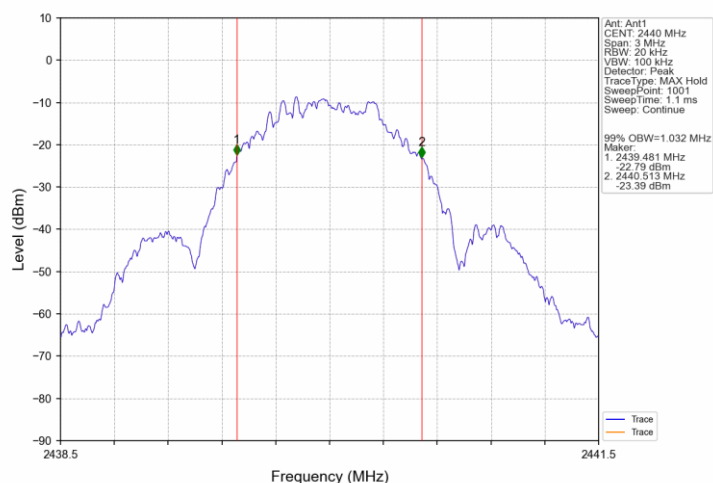

BLE_1M_HCH_2480MHz_Ant1_NTNV

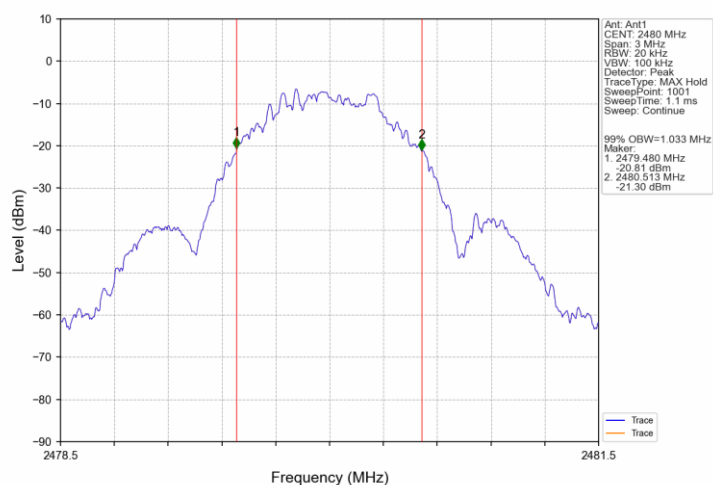

9.5 Spurious RF Conducted Emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
BLE_1M	SISO	2402	1	-4.96	-24.96	Pass
		2440	1	-2.74	-22.74	Pass
		2480	1	-0.64	-20.64	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


BLE_1M_LCH_2402MHz_Ant1_NTNV

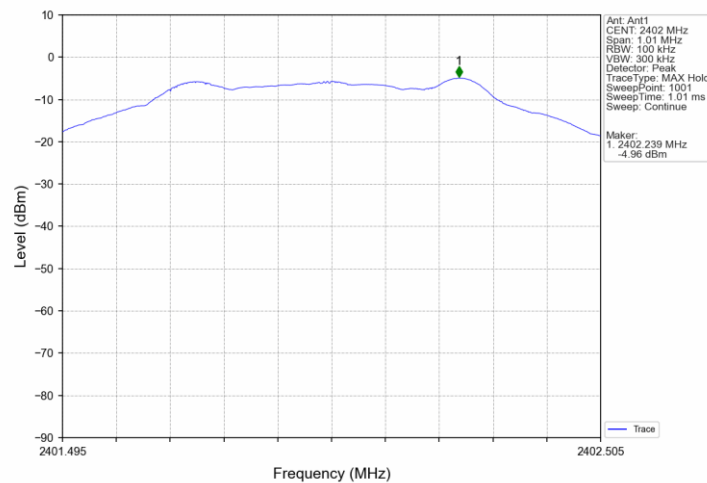


BLE_1M_MCH_2440MHz_Ant1_NTNV

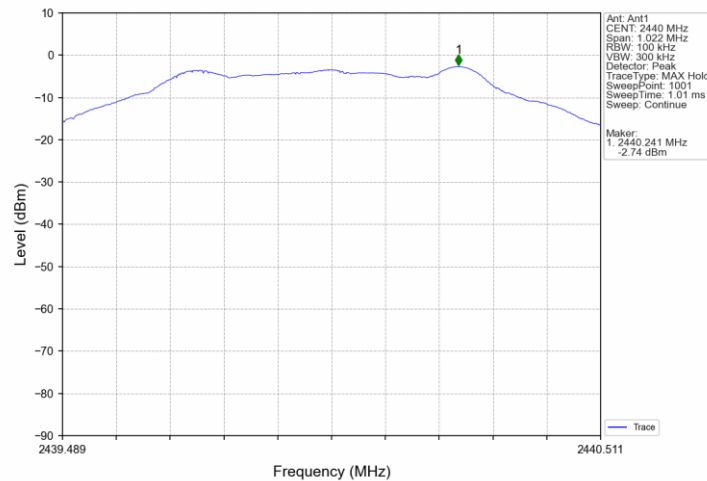


BLE_1M_HCH_2480MHz_Ant1_NTNV

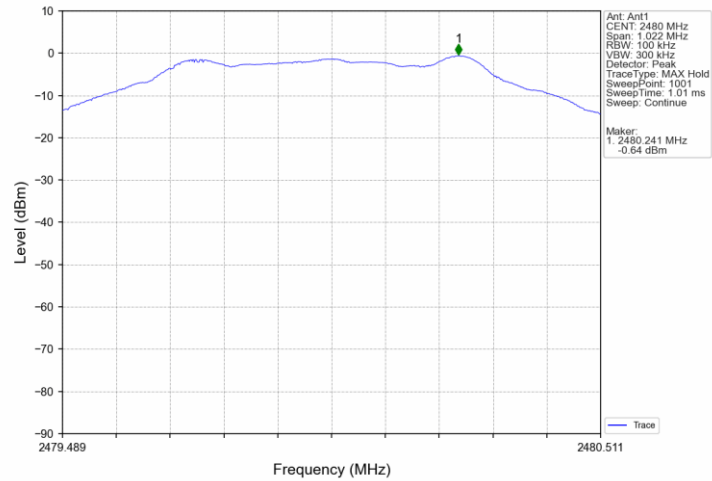


BLE_1M_LCH_2402MHz_Ant1_NTNV

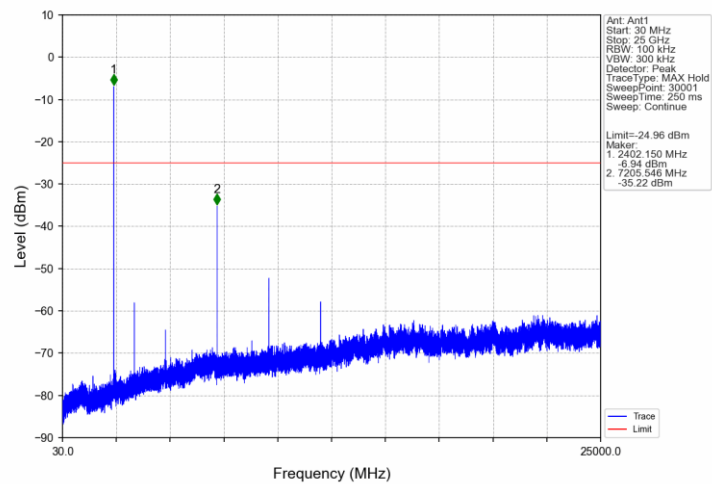

BLE_1M_MCH_2440MHz_Ant1_NTNV

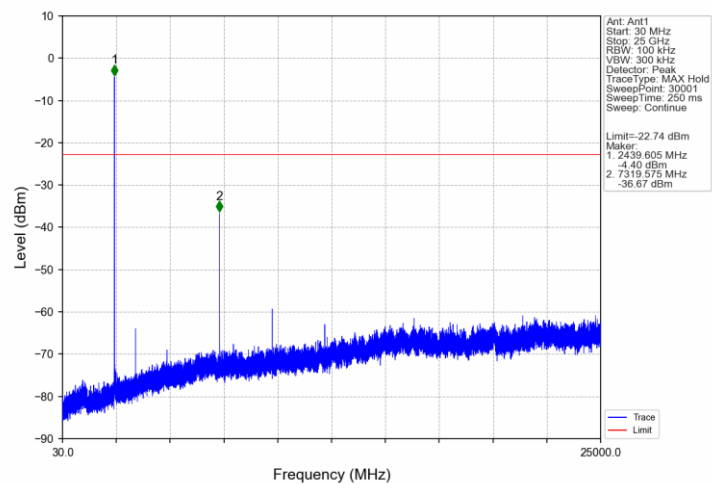

BLE_1M_HCH_2480MHz_Ant1_NTNV

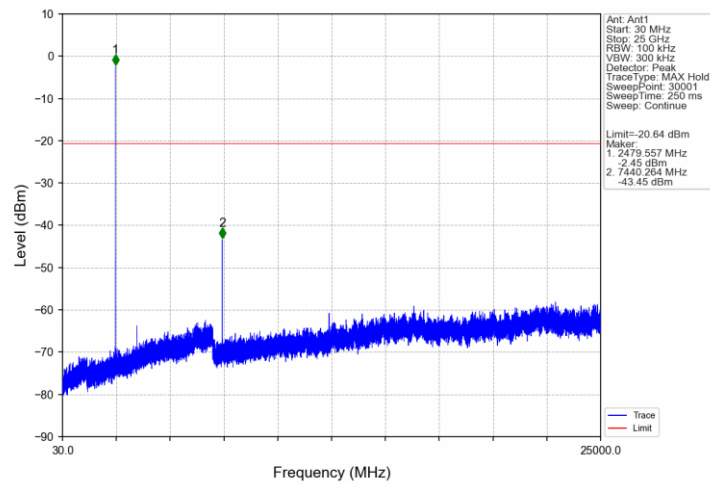

9.6 Band Edge

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS-247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.

Frequency Range MHz	Limit (dBc)
30-25000	-20

Band edge testing


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
BLE_1M	SISO	2402	1	-4.96
		2440	1	-2.74
		2480	1	-0.64

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
BLE_1M	SISO	2402	1	-4.96	-24.96	Pass
		2440	1	-2.74	-22.74	Pass
		2480	1	-0.64	-20.64	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


BLE_1M_LCH_2402MHz_Ant1_NTNV

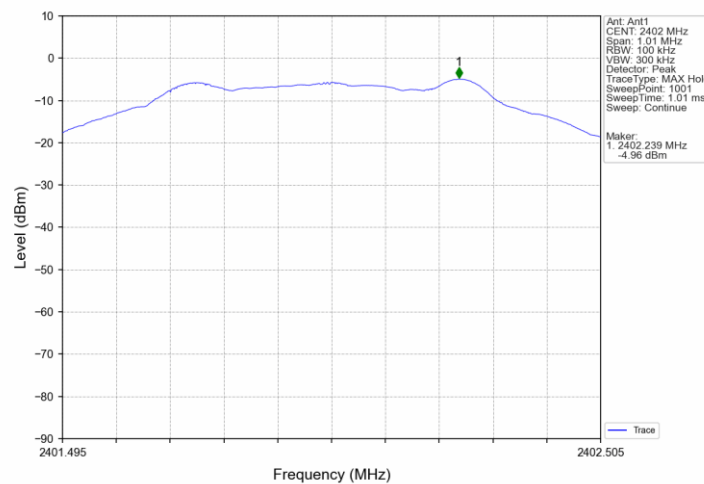


BLE_1M_MCH_2440MHz_Ant1_NTNV

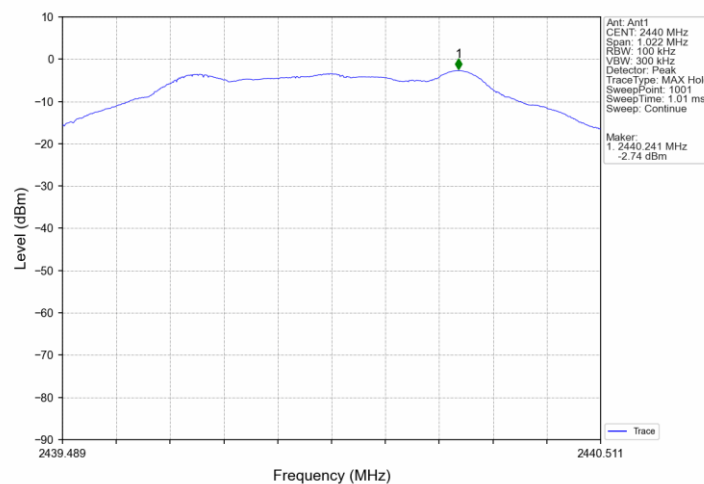


BLE_1M_HCH_2480MHz_Ant1_NTNV

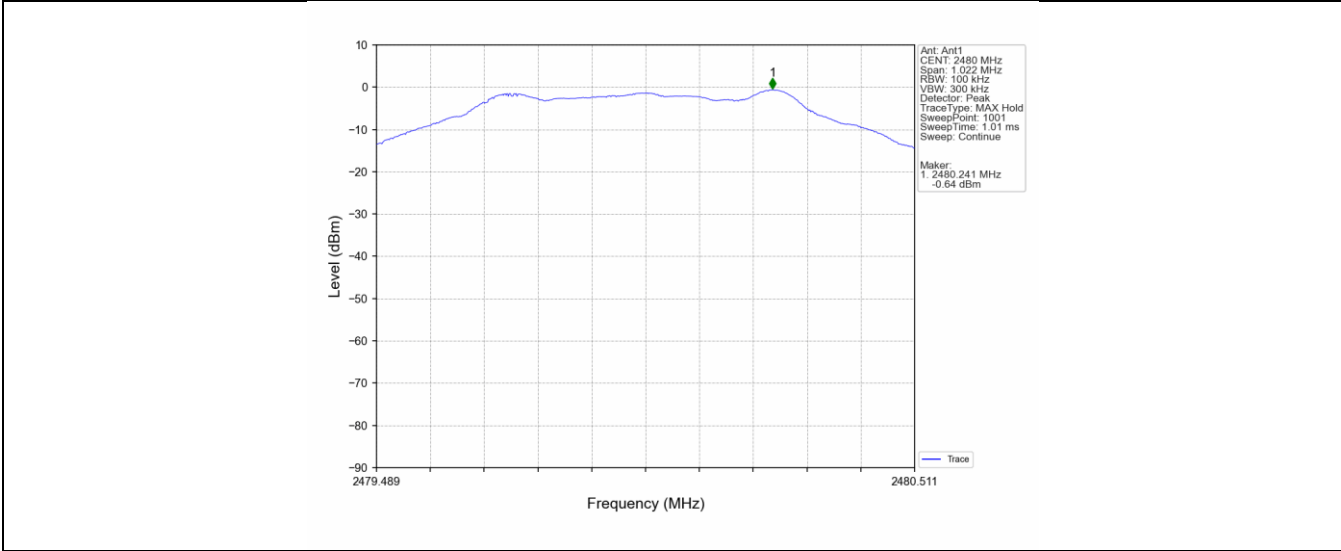

BLE_1M_LCH_2402MHz_Ant1_NTNV

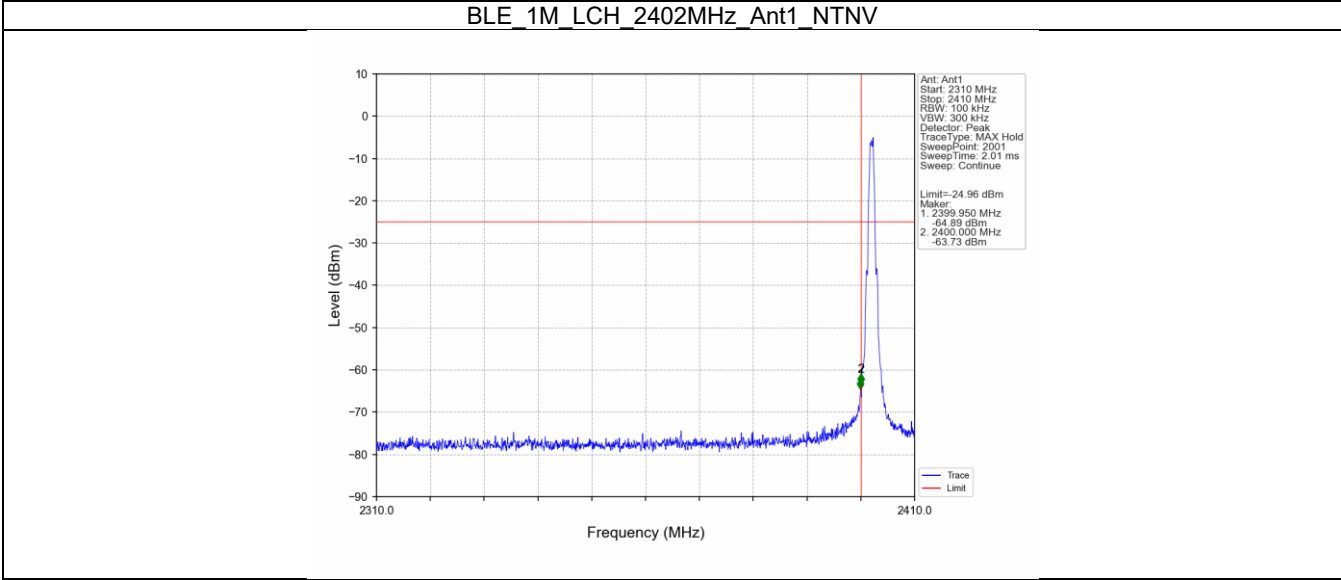

BLE_1M_HCH_2480MHz_Ant1_NTNV

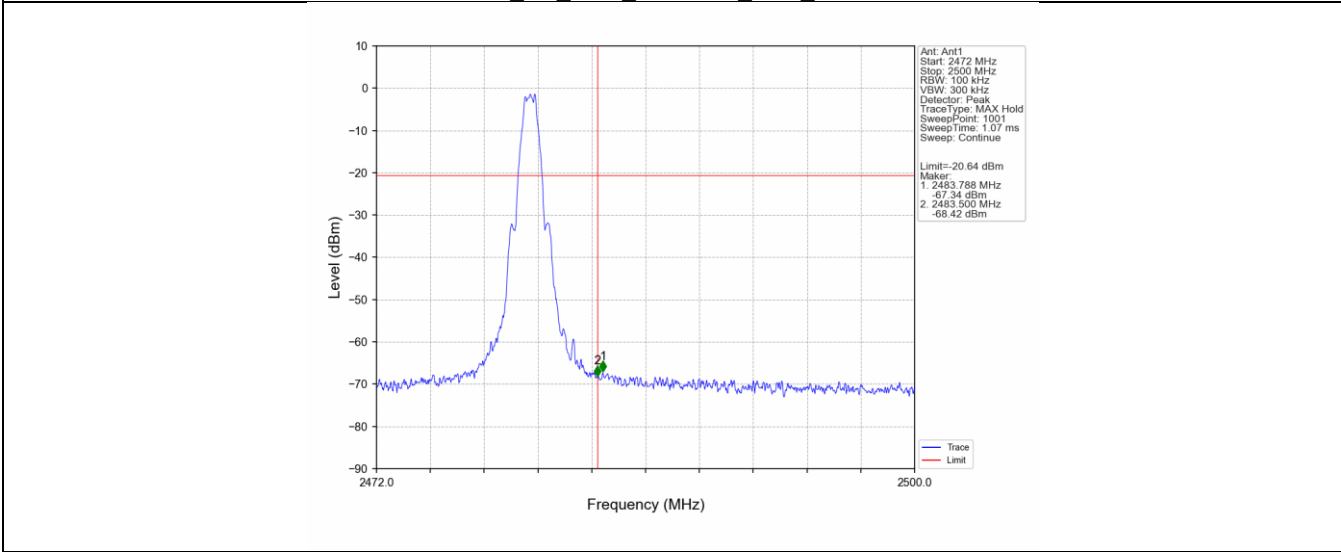

9.7 Spurious Radiated Emissions for Transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following test receiver settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) VBW \ [3 × RBW].

c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction

factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS 247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a) and RSS-Gen section 8.9, must also comply with the radiated emission limits specified in § 15.209(a) and RSS-Gen section 8.10.

Frequency MHz	Field Strength $\mu\text{V/m}$	Field Strength $\text{dB}\mu\text{V/m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3


Note 1: Limit $3\text{m}(\text{dB}\mu\text{V/m}) = \text{Limit } 300\text{m}(\text{dB}\mu\text{V/m}) + 40\text{Log}(300\text{m}/3\text{m})$ (Below 30MHz)

Note 2: Limit $3\text{m}(\text{dB}\mu\text{V/m}) = \text{Limit } 30\text{m}(\text{dB}\mu\text{V/m}) + 40\text{Log}(30\text{m}/3\text{m})$ (Below 30MHz)


Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

FCC_Test data_9kHz to 30MHz (worst case)

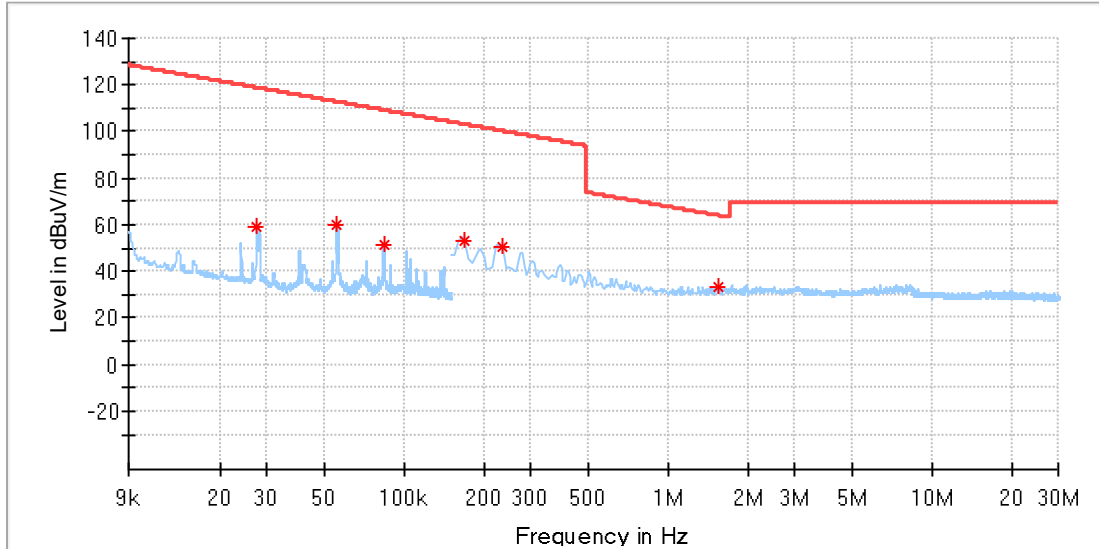


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027612	58.86	118.77	59.91	H	270.0	19.88
0.055483	60.36	112.71	52.35	H	251.0	19.92
0.083260	51.63	109.19	57.55	H	242.0	19.92
0.169900	53.31	103.00	49.69	H	224.0	19.89
0.234575	50.32	100.20	49.87	H	263.0	19.88
1.557925	33.60	63.78	30.18	H	358.0	20.00

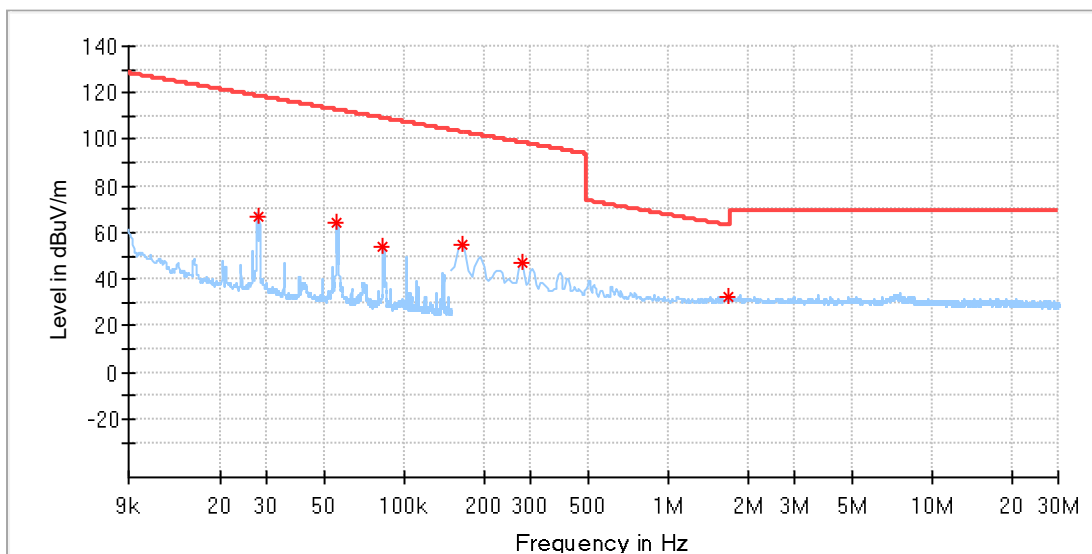


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.028082	66.97	118.62	51.65	V	41.0	19.88
0.055389	64.46	112.73	48.27	V	333.0	19.92
0.083166	54.25	109.20	54.95	V	206.0	19.92
0.164925	54.40	103.25	48.86	V	331.0	19.89
0.279350	47.30	98.68	51.37	V	204.0	19.90
1.687275	32.83	63.09	30.26	V	272.0	20.02

ISED_Test data_9kHz to 30MHz (worst case)

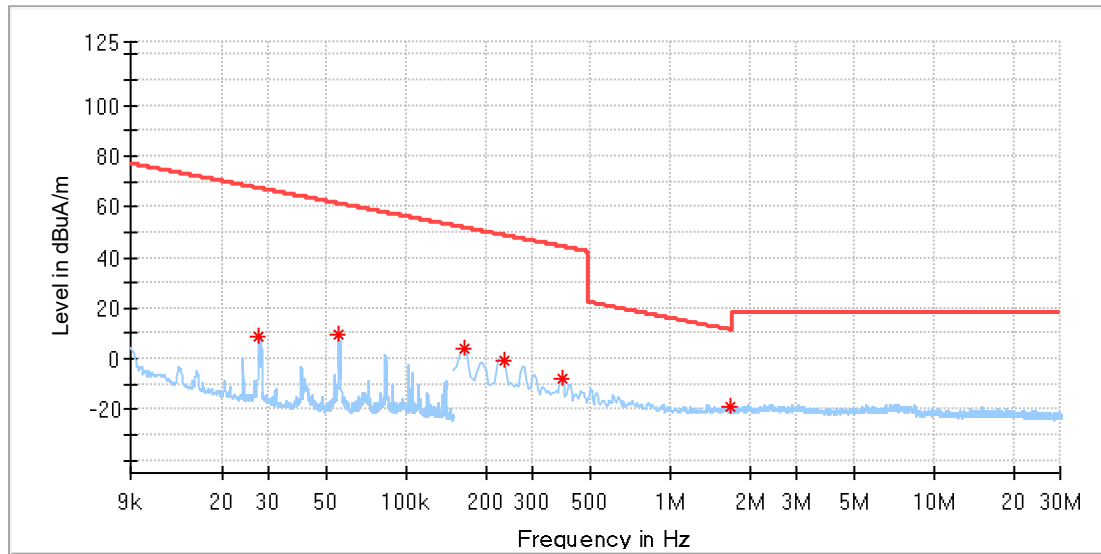


Frequency (MHz)	MaxPeak (dBuA/m)	Limit (dBuA/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027612	8.56	67.26	58.70	H	251.0	-31.65
0.055389	9.50	61.21	51.72	H	260.0	-31.61
0.164925	3.83	51.73	47.90	H	290.0	-31.64
0.234575	-0.80	48.67	49.47	H	280.0	-31.65
0.388800	-7.91	44.28	52.20	H	270.0	-31.63
1.697225	-18.72	11.40	30.12	H	192.0	-31.51

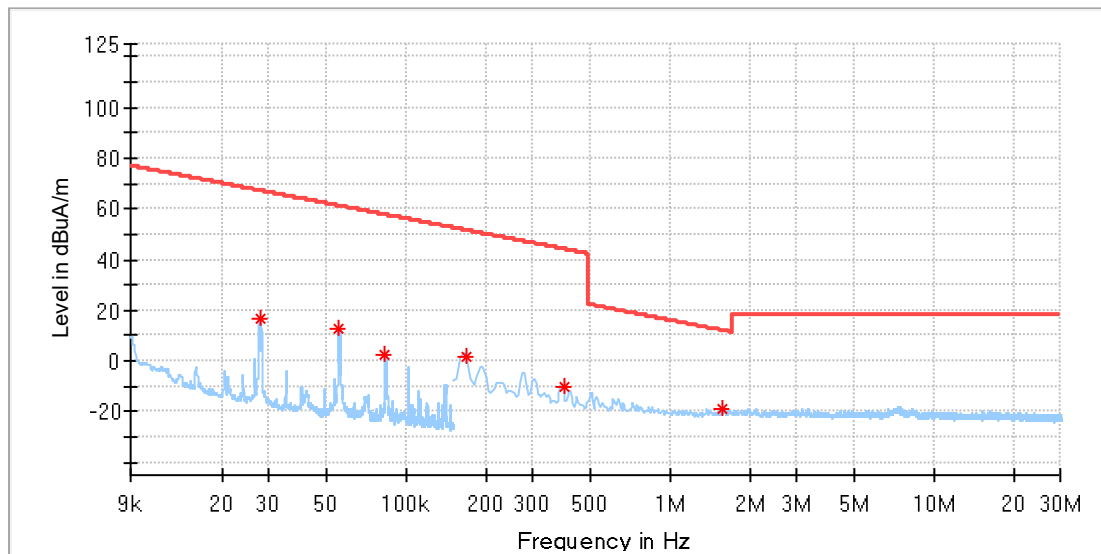


Frequency (MHz)	MaxPeak (dBuA/m)	Limit (dBuA/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027753	16.72	67.22	50.50	V	151.0	-31.65
0.055389	12.98	61.21	48.23	V	142.0	-31.61
0.083072	2.38	57.69	55.31	V	306.0	-31.61
0.169900	1.84	51.47	49.63	V	0.0	-31.64
0.393775	-10.53	44.17	54.70	V	203.0	-31.63
1.572850	-18.56	12.07	30.63	V	0.0	-31.53

Test data_30MHz to 1000MHz (worst case)

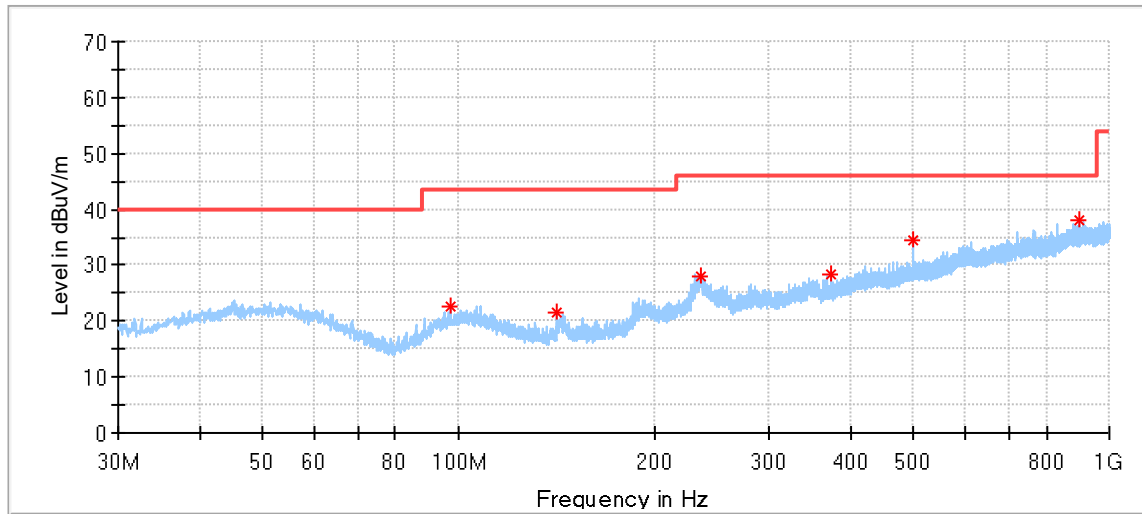


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
97.307222	22.75	43.50	20.75	200.0	H	171.0	15.88
141.550000	21.71	43.50	21.79	200.0	H	118.0	12.41
236.017222	28.16	46.00	17.84	200.0	H	55.0	17.11
373.380000	28.23	46.00	17.77	200.0	H	118.0	20.23
499.965000	34.32	46.00	11.68	200.0	H	107.0	22.93
900.036111	38.07	46.00	7.93	100.0	H	97.0	28.86

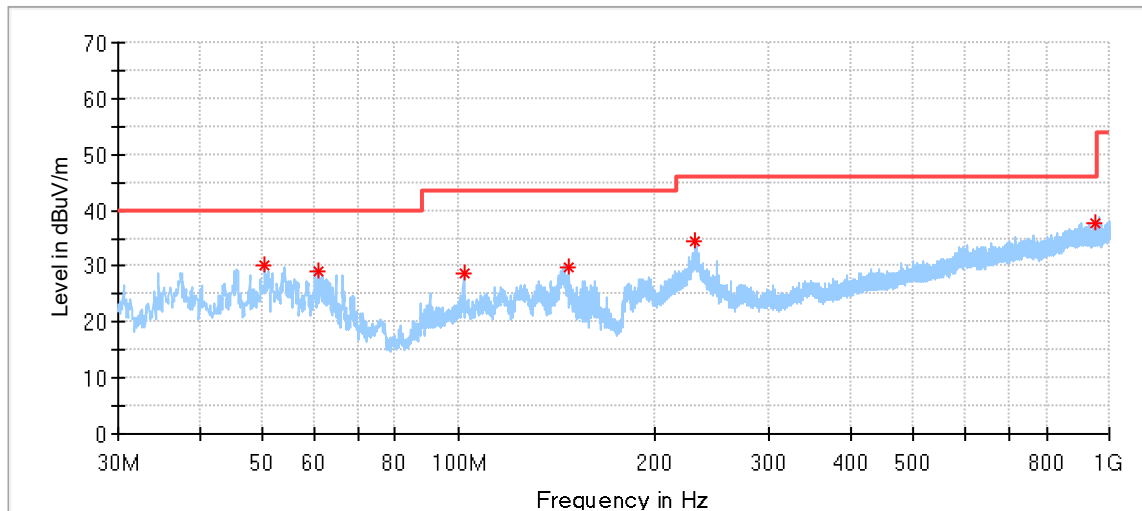


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.370000	30.29	40.00	9.71	100.0	V	68.0	18.09
60.770556	29.19	40.00	10.81	100.0	V	68.0	16.76
101.833889	28.86	43.50	14.64	100.0	V	26.0	16.36
148.070556	29.71	43.50	13.79	100.0	V	57.0	12.44
230.358889	34.31	46.00	11.69	100.0	V	173.0	16.86
954.571667	37.72	46.00	8.28	100.0	V	131.0	29.12

Test data 1GHz to 18GHz

BLE_1Mbps_Low Channel:

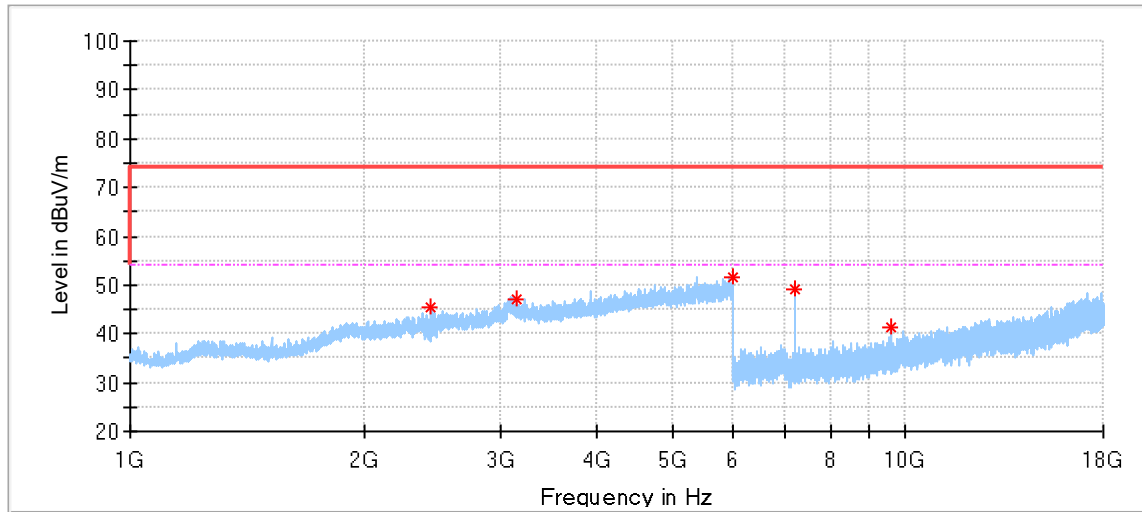

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2447.000000	45.41	74.00	28.59	150.0	H	332.0	-0.96
3145.500000	47.03	74.00	26.97	150.0	H	87.0	1.60
5988.000000	51.78	74.00	22.22	150.0	H	195.0	8.46
7206.000000	49.22	74.00	24.78	150.0	H	184.0	8.94
9608.500000	41.22	74.00	32.78	150.0	H	92.0	12.59

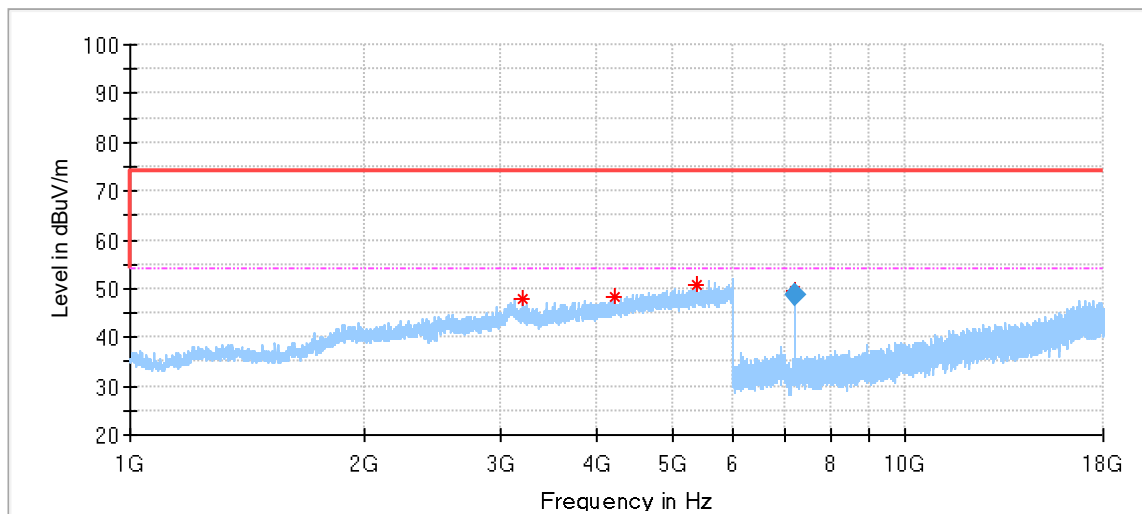


Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3207.000000	47.83	74.00	26.17	150.0	V	134.0	1.44
4228.000000	48.39	74.00	25.61	150.0	V	62.0	3.58
5377.500000	50.95	74.00	23.05	150.0	V	265.0	7.18
7205.500000	49.58	74.00	24.42	150.0	V	329.0	8.94


Final_Result

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.500000	48.63	54.00	5.37	150.0	V	329.0	8.94

BLE_1Mbps _Middle Channel:

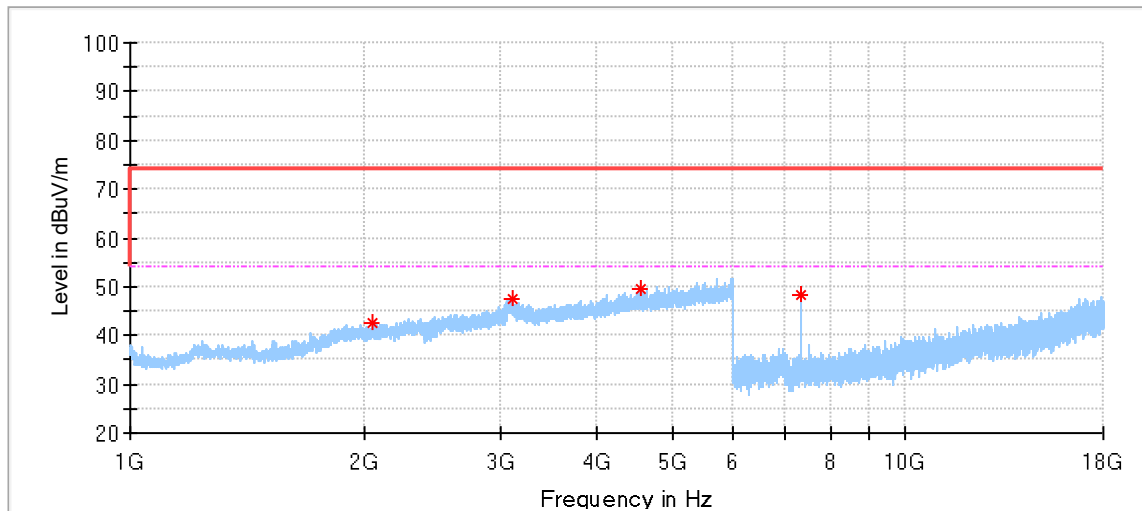


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2059.500000	42.74	74.00	31.26	150.0	H	340.0	-2.99
3108.500000	47.63	74.00	26.37	150.0	H	134.0	2.48
4568.000000	49.70	74.00	24.30	150.0	H	26.0	5.08
7319.500000	48.12	74.00	25.88	150.0	H	84.0	9.62

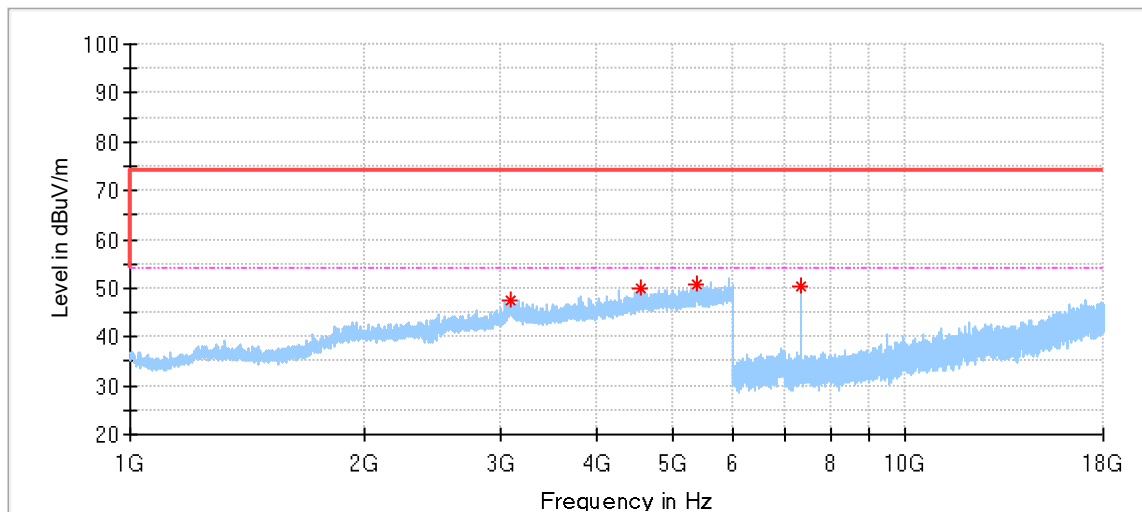


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3092.000000	47.56	74.00	26.44	150.0	V	233.0	2.56
4550.500000	49.84	74.00	24.16	150.0	V	160.0	4.93
5387.000000	50.66	74.00	23.34	150.0	V	210.0	7.19
7320.000000	50.41	74.00	23.59	150.0	V	329.0	9.62

BLE_1Mbps_High Channel:

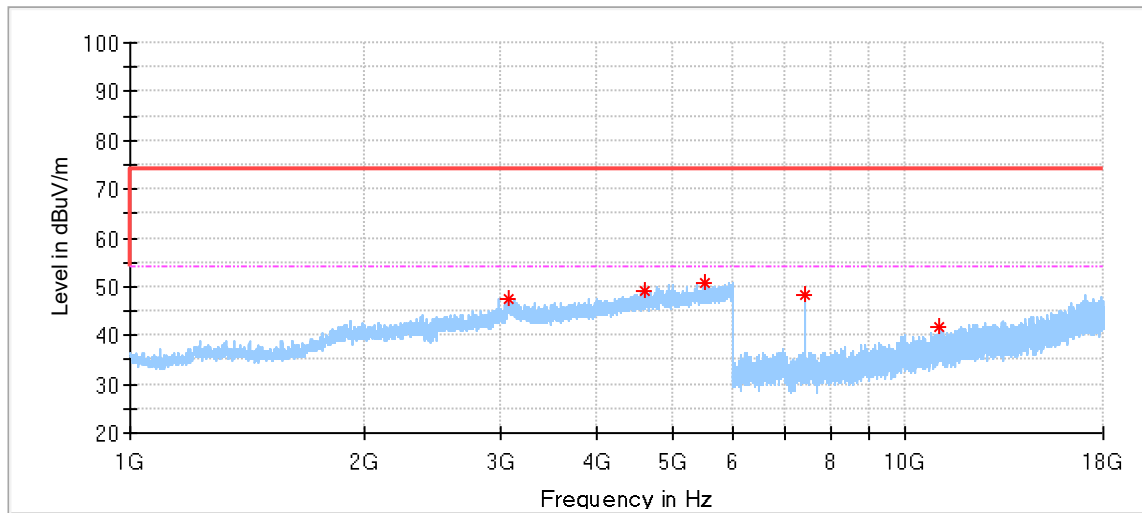


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3082.500000	47.68	74.00	26.32	150.0	H	98.0	2.31
4599.500000	49.10	74.00	24.90	150.0	H	292.0	5.24
5511.500000	50.67	74.00	23.33	150.0	H	244.0	7.26
7439.500000	48.20	74.00	25.80	150.0	H	59.0	9.58
11071.000000	41.85	74.00	32.15	150.0	H	356.0	14.48

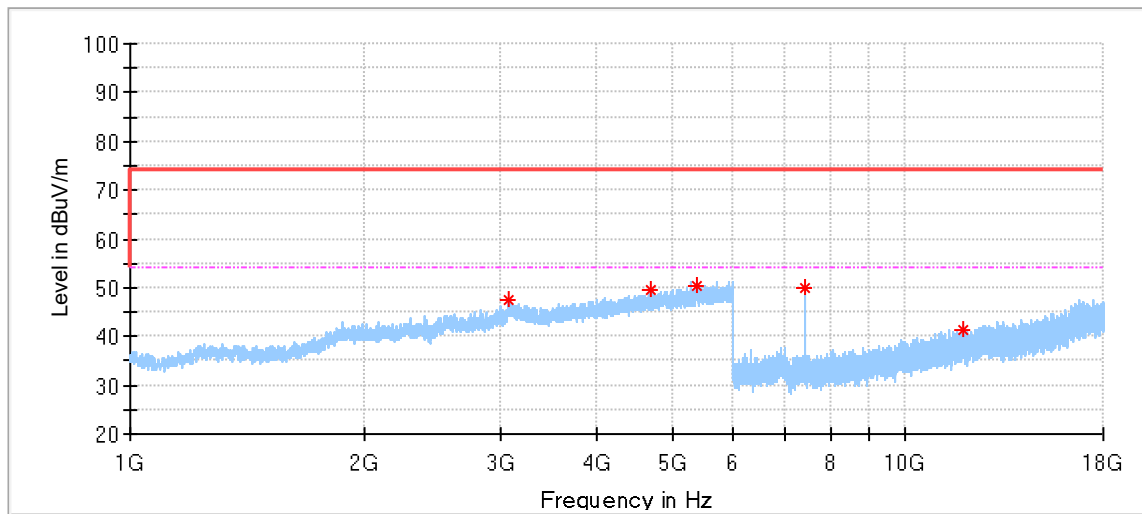


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3083.500000	47.50	74.00	26.50	150.0	V	86.0	2.34
4688.000000	49.54	74.00	24.46	150.0	V	146.0	5.34
5394.000000	50.38	74.00	23.62	150.0	V	122.0	7.19
7440.500000	49.86	74.00	24.14	150.0	V	157.0	9.58
11889.500000	41.23	74.00	32.77	150.0	V	1.0	16.52

Test data 18GHz to 40GHz:
BLE_1Mbps_Low Channel:

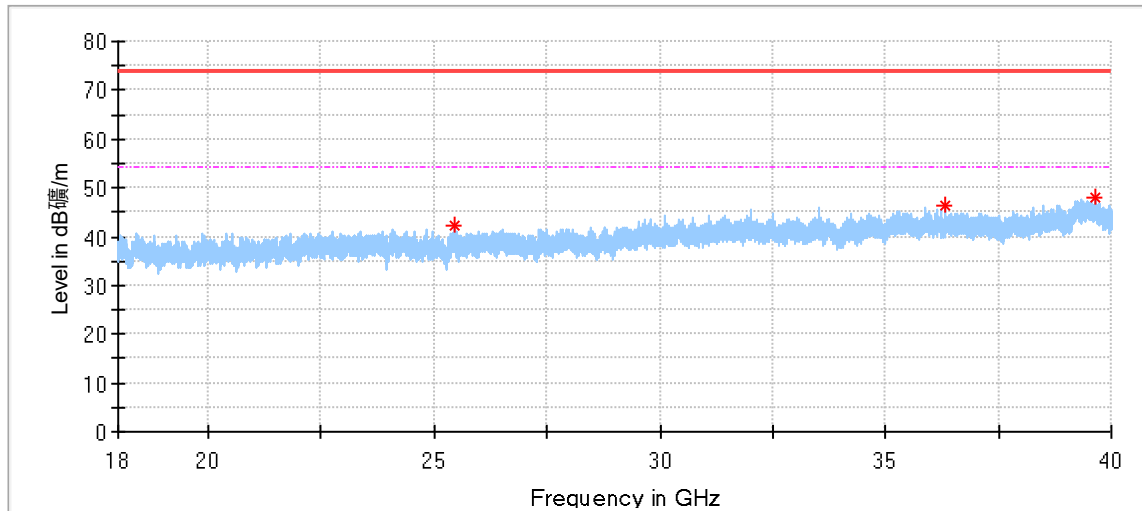


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
25464.187500	42.08	74.00	31.92	150.0	H	248.0	0.46
36298.500000	46.45	74.00	27.55	150.0	H	345.0	2.22
39654.187500	48.09	74.00	25.91	150.0	H	152.0	5.52

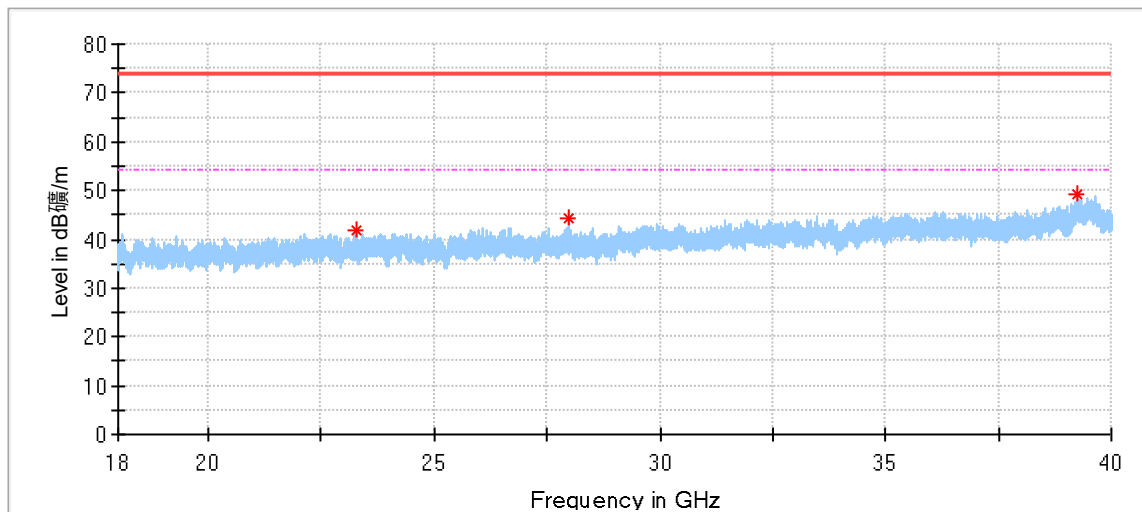


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23293.750000	41.66	74.00	32.34	150.0	V	0.0	-0.52
27989.375000	44.11	74.00	29.89	150.0	V	0.0	0.74
39234.812500	49.07	74.00	24.93	150.0	V	30.0	4.63

BLE_1Mbps_ Middle Channel:

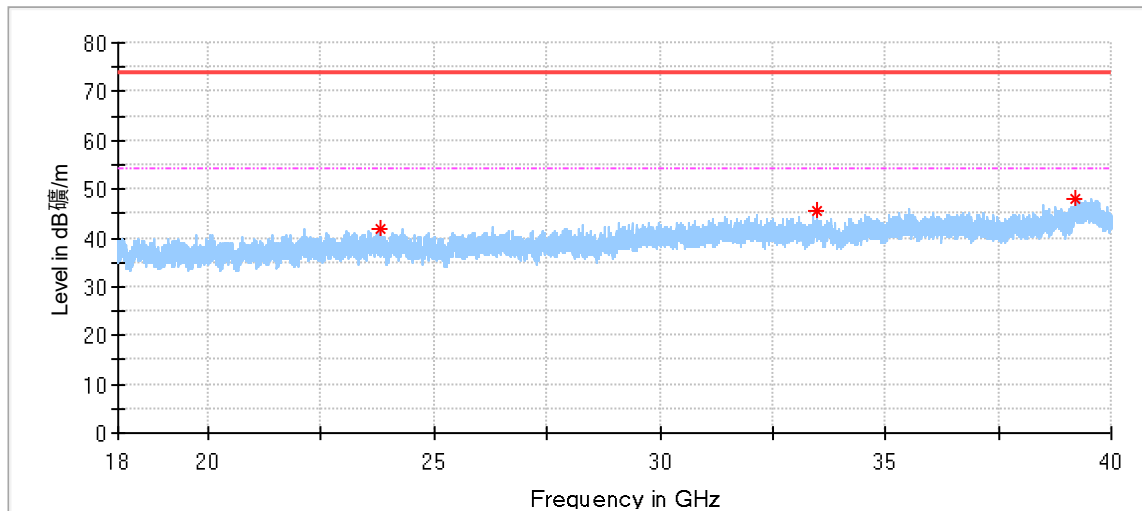


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23819.687500	41.67	74.00	32.33	150.0	H	140.0	-0.18
33481.812500	45.41	74.00	28.59	150.0	H	87.0	0.60
39211.437500	48.18	74.00	25.82	150.0	H	154.0	4.47

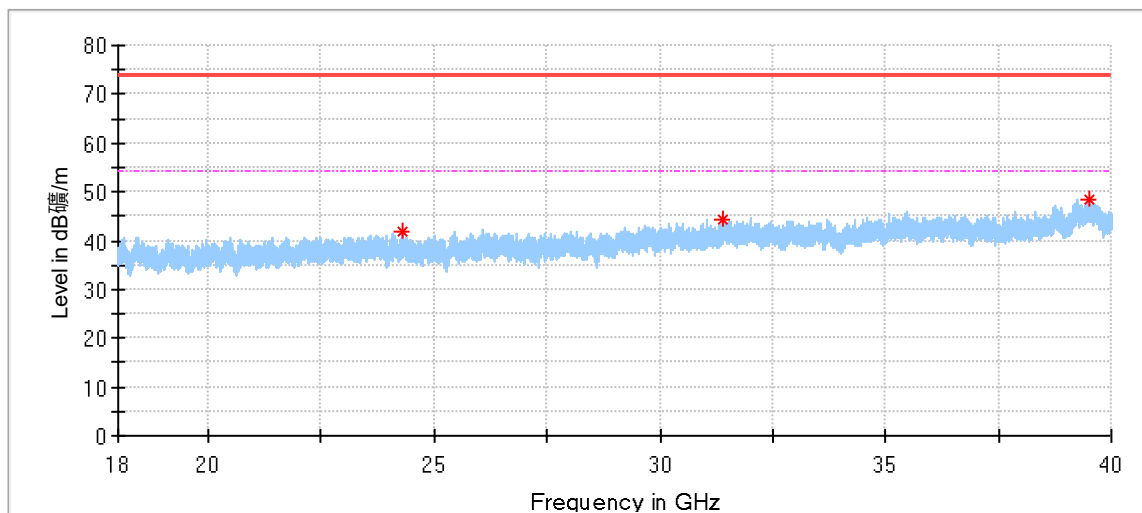


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
24303.000000	42.01	74.00	31.99	150.0	V	0.0	-0.16
31373.250000	44.48	74.00	29.52	150.0	V	152.0	1.20
39497.437500	48.40	74.00	25.60	150.0	V	298.0	6.15

BLE_1Mbps_High Channel:

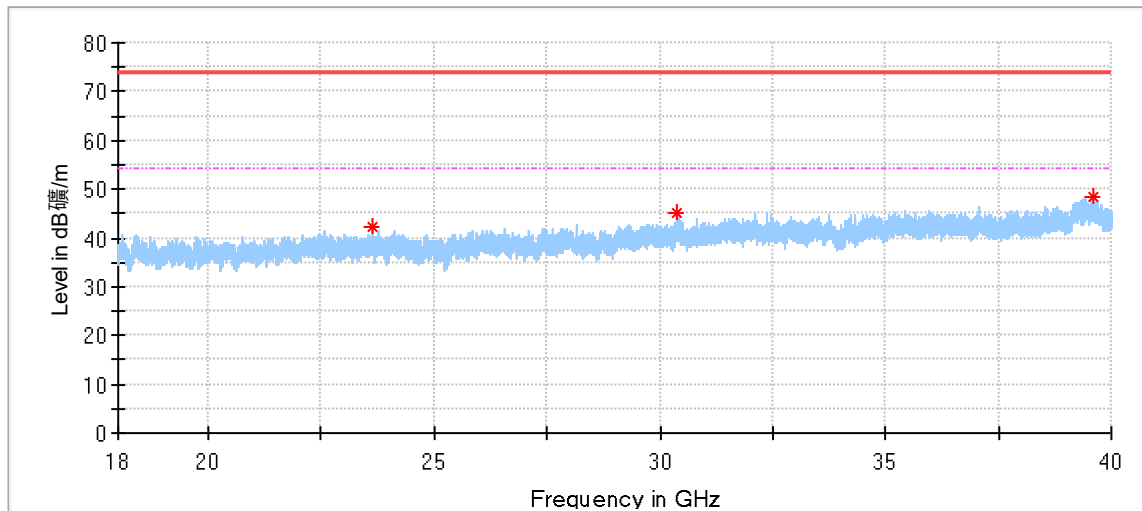


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23629.937500	42.32	74.00	31.68	150.0	H	112.0	-0.32
30385.312500	44.96	74.00	29.04	150.0	H	261.0	0.93
39585.437500	48.24	74.00	25.76	150.0	H	315.0	5.81

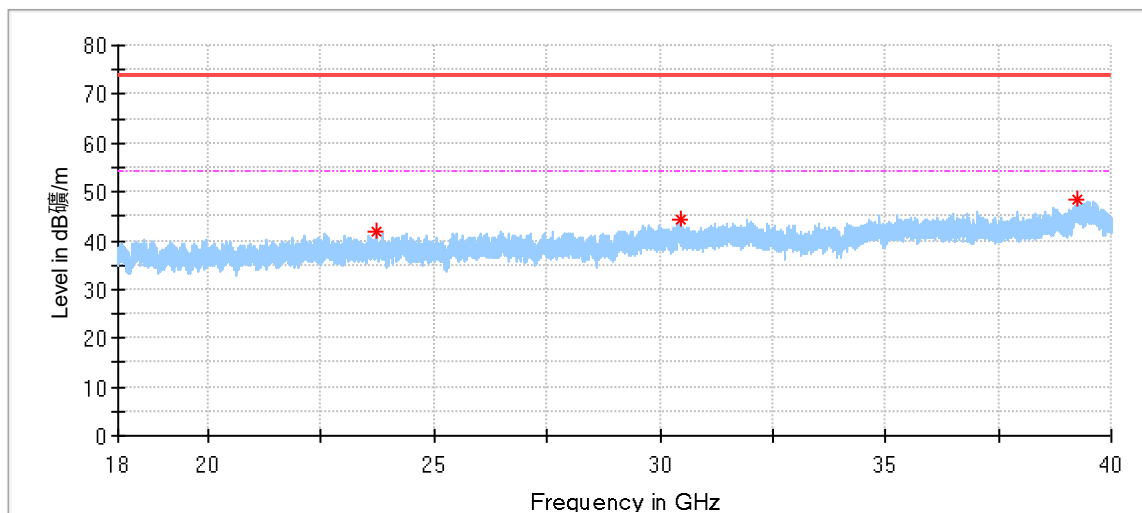


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23737.875000	41.69	74.00	32.31	150.0	V	166.0	-0.21
30443.750000	44.28	74.00	29.72	150.0	V	1.0	0.98
39260.250000	48.52	74.00	25.48	150.0	V	232.0	4.80

Restricted band band-edge of operation. test result as below:

BLE_1Mbps_Low Channel:

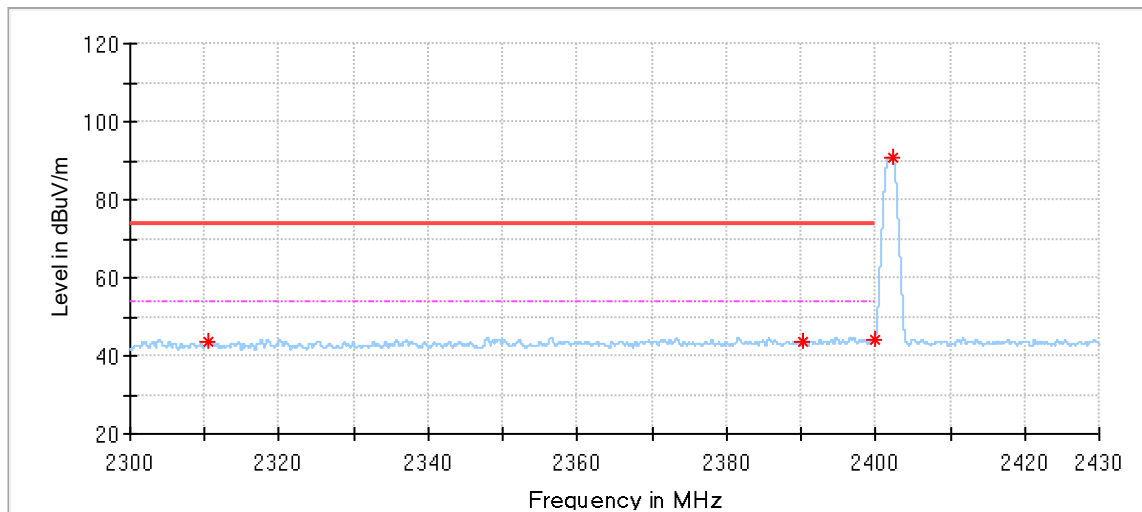


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
2310.517000	43.80	74.00	30.20	150.0	H	144.0	-2.25	---
2390.194000	43.53	74.00	30.47	150.0	H	345.0	-1.74	---
2399.931000	43.98	74.00	30.02	150.0	H	122.0	-1.56	---
2402.284000	90.52	---	---	150.0	H	122.0	-1.53	---

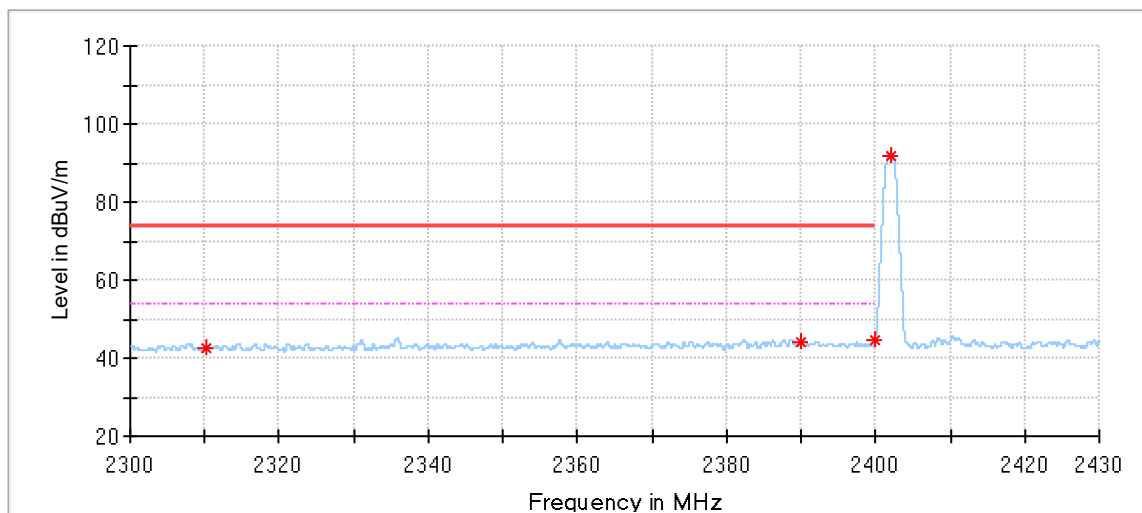


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
2310.231000	42.71	74.00	31.29	150.0	V	120.0	-2.25	---
2389.999000	44.32	74.00	29.68	150.0	V	152.0	-1.74	---
2399.983000	44.77	74.00	29.23	150.0	V	152.0	-1.56	---
2401.972000	91.93	---	---	150.0	V	152.0	-1.54	---

BLE_1Mbps_High Channel:

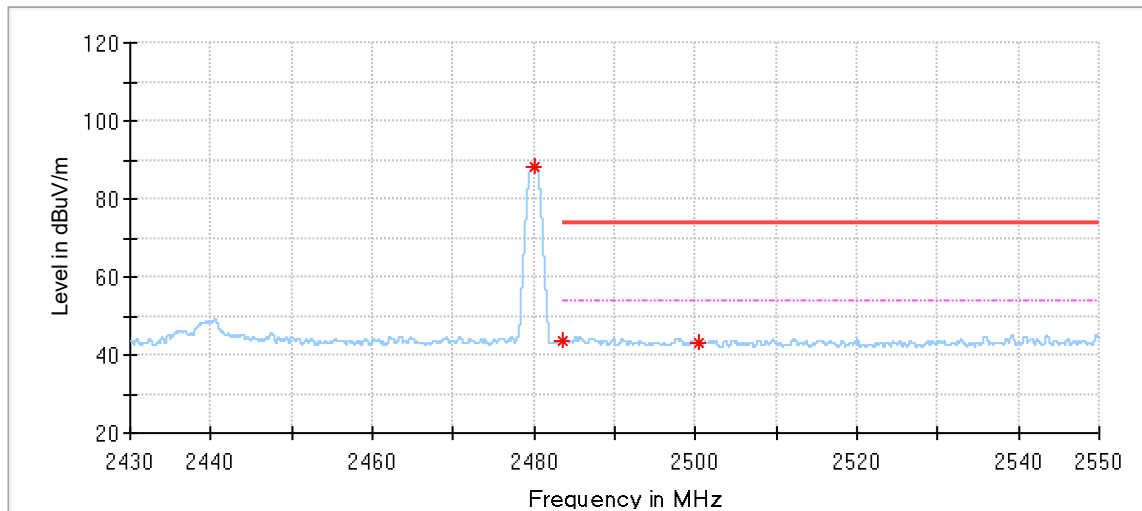

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.028000	88.24	---	---	150.0	H	136.0	-1.80
2483.532000	43.57	74.00	30.43	150.0	H	0.0	-1.85
2500.368000	42.97	74.00	31.03	150.0	H	30.0	-2.08

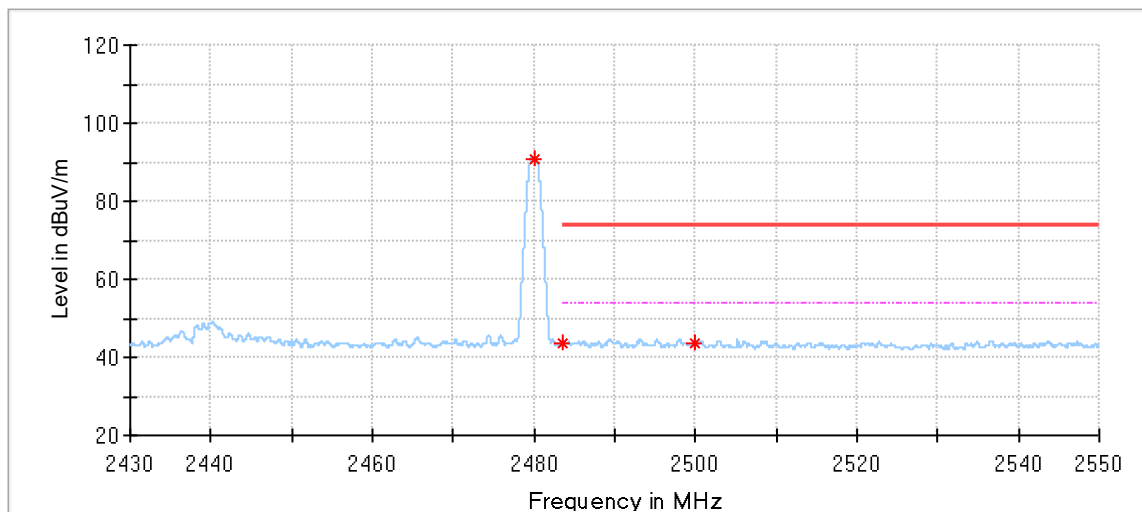

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.004000	90.82	---	---	150.0	V	150.0	-1.80
2483.520000	43.79	74.00	30.21	150.0	V	171.0	-1.85
2499.960000	43.57	74.00	30.43	150.0	V	12.0	-2.08

Remark:

- Corrected Amplitude = Read level + Corrector factor
Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)
- For 9kHz-30MHz and 30MHz-1GHz, all modes were tested, and only the modes with the worst data (BLE_2402MHz) were represented in the report.

10 Test Equipment List

List of Test Instruments

Radiated Emission Test (9kHz-30MHz) (SAC-3 #1)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2026-4-25
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2025-7-24
Cable	HUBER-SUHNER	RG214	68-4-90-14-001-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #1	68-4-90-14-001	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

Radiated Emission Test (30MHz-1GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2026-4-25
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2026-2-11
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2026-4-19
Cable	OUQIAO	18DLB5-NMNM-7000	68-4-90-19-006-A22	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Radiated Emission Test (1GHz-18GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2026-4-25
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2026-3-10
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-003	100747	1	2026-4-19
Cable	OUQIAO	18DLB5-NMNM-7000	68-4-90-19-006-A22	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Radiated Emission Test (18GHz-40GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2026-4-25
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2025-7-02
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2025-7-17
Cable	JUNFLON	MWX241	68-4-90-19-006-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

RF Test System(FCC Part15 C/RSS-247)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2026-4-18
RF Meas. and Switch Matrix Unit	TST PASS	TSCB3023R2	68-4-93-23-001	2811685c	1	2026-4-18
Cable	JUNFLON	J12J103539	68-4-90-19-003-A20	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A21	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A22	----	----	----
Test software	TST PASS	TST PASS	68-4-93-23-001-A03	Version 2.0	N/A	N/A
Test software	Tonscend	JS1120-3	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 9kHz-30MHz	4.69dB
Uncertainty for Radiated Emission in new 2# 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.79dB; Vertical: 5.86dB;
Uncertainty for Radiated Emission in new 2# 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.37dB; Vertical: 5.37dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 18GHz-40GHz	Horizontal: 5.29dB; Vertical: 5.29dB;
Uncertainty for RF Conducted Measurement power	1.12dB
Uncertainty Evaluation for PSD measurement	1.05dB

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3 and 4.3.4.

---THE END OF REPORT---