


Conducted Spurious Emission

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	1.91	1.91	---	PASS
			30~1000	1.91	-62.57	≤-28.09	PASS
			1000~26500	1.91	-36.75	≤-28.09	PASS
		2437	Reference	1.81	1.81	---	PASS
			30~1000	1.81	-67.51	≤-28.19	PASS
			1000~26500	1.81	-34.99	≤-28.19	PASS
		2462	Reference	1.96	1.96	---	PASS
			30~1000	1.96	-43.06	≤-28.04	PASS
			1000~26500	1.96	-33.85	≤-28.04	PASS
11G	Ant1	2412	Reference	2.03	2.03	---	PASS
			30~1000	2.03	-68.46	≤-27.97	PASS
			1000~26500	2.03	-38.77	≤-27.97	PASS
		2437	Reference	2.46	2.46	---	PASS
			30~1000	2.46	-67.76	≤-27.54	PASS
			1000~26500	2.46	-41.47	≤-27.54	PASS
		2462	Reference	2.45	2.45	---	PASS
			30~1000	2.45	-67.47	≤-27.55	PASS
			1000~26500	2.45	-37.19	≤-27.55	PASS
11N20SISO	Ant1	2412	Reference	0.62	0.62	---	PASS
			30~1000	0.62	-68.96	≤-29.38	PASS
			1000~26500	0.62	-42.44	≤-29.38	PASS
		2437	Reference	0.89	0.89	---	PASS
			30~1000	0.89	-68.17	≤-29.11	PASS
			1000~26500	0.89	-43.5	≤-29.11	PASS
		2462	Reference	1.07	1.07	---	PASS
			30~1000	1.07	-68.17	≤-28.93	PASS
			1000~26500	1.07	-42.56	≤-28.93	PASS


11B_Ant1_2412_0-Reference



11B_Ant1_2412_30-1000

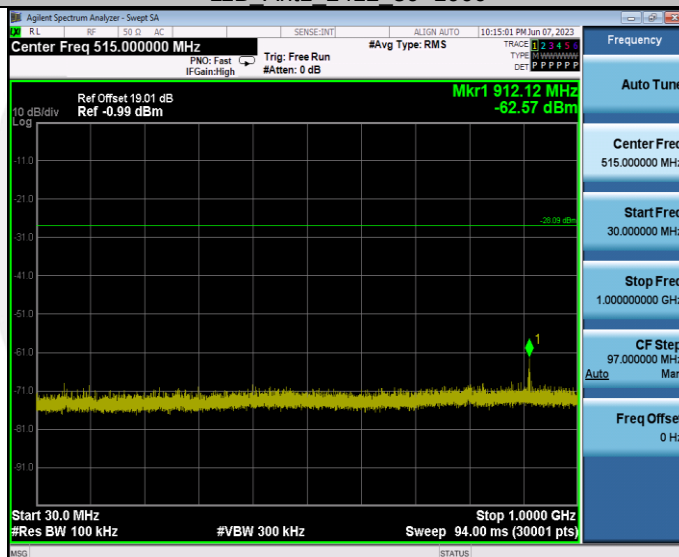


11B_Ant1_2412_1000-26500

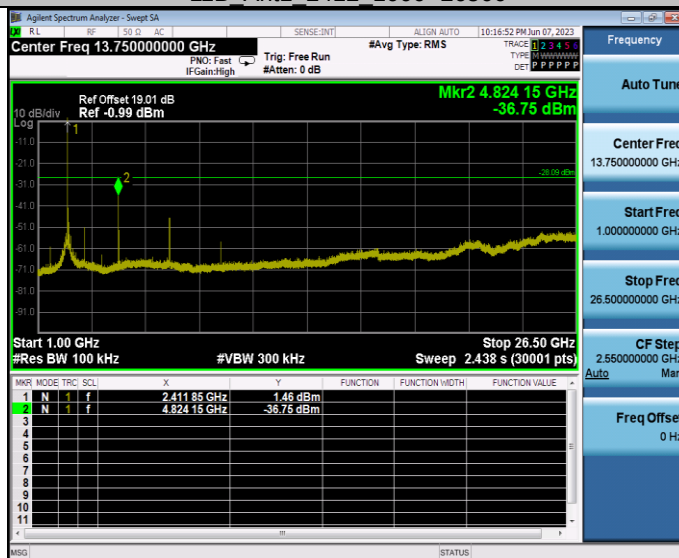


11B_Ant1_2437_0-Reference



11B_Ant1_2437_30-1000

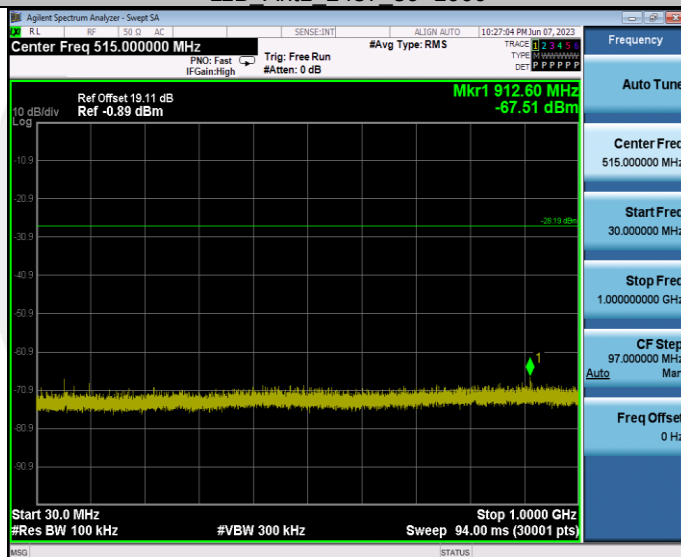


11B_Ant1_2437_1000-26500

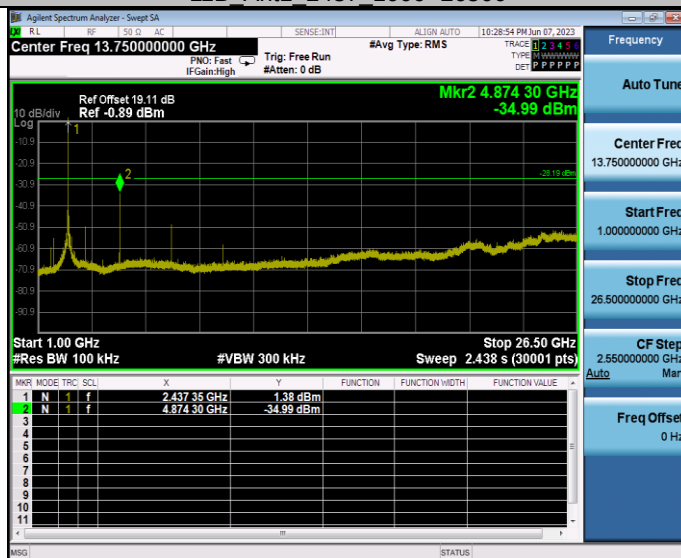


11B_Ant1_2462_0-Reference



11B_Ant1_2462_30-1000

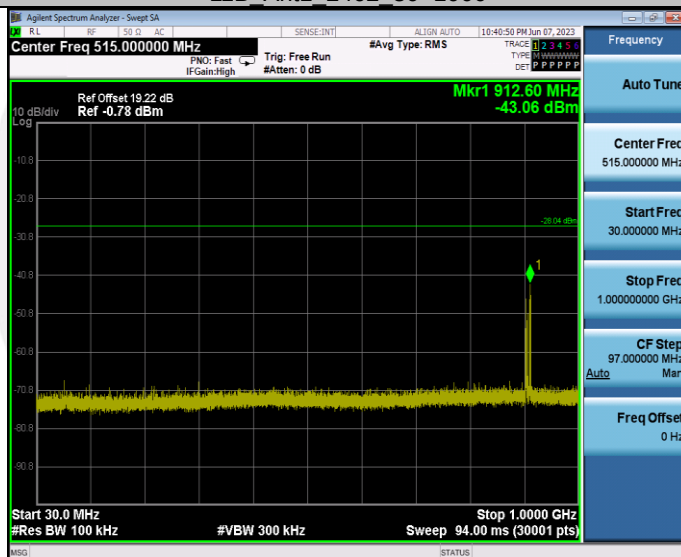


11B_Ant1_2462_1000-26500

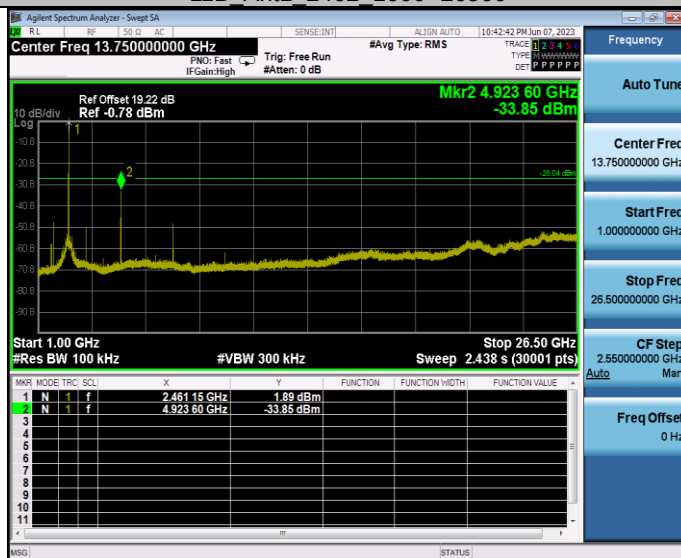


11G_Ant1_2412_0-Reference




11G_Ant1_2412_30~1000

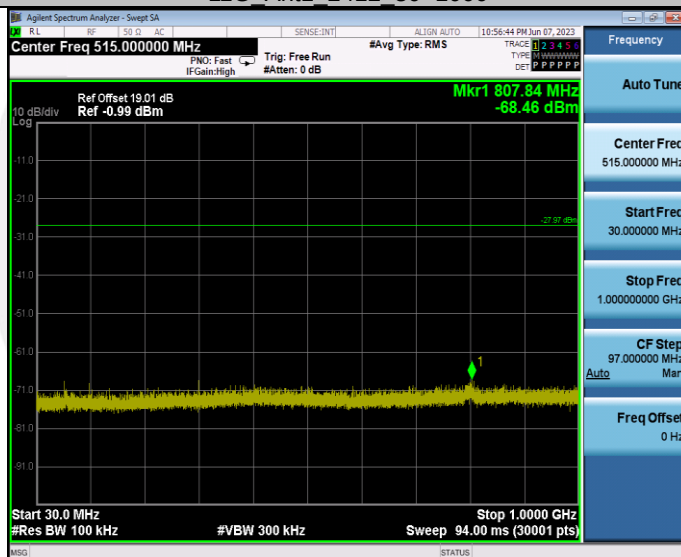

11G_Ant1_2412_1000~26500

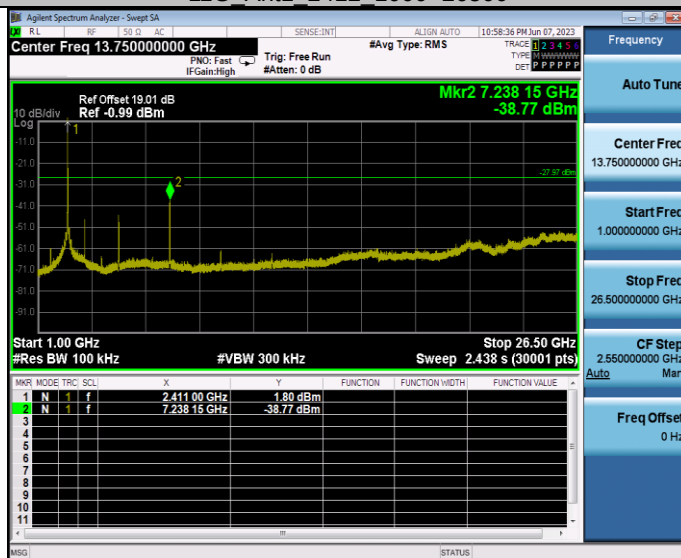


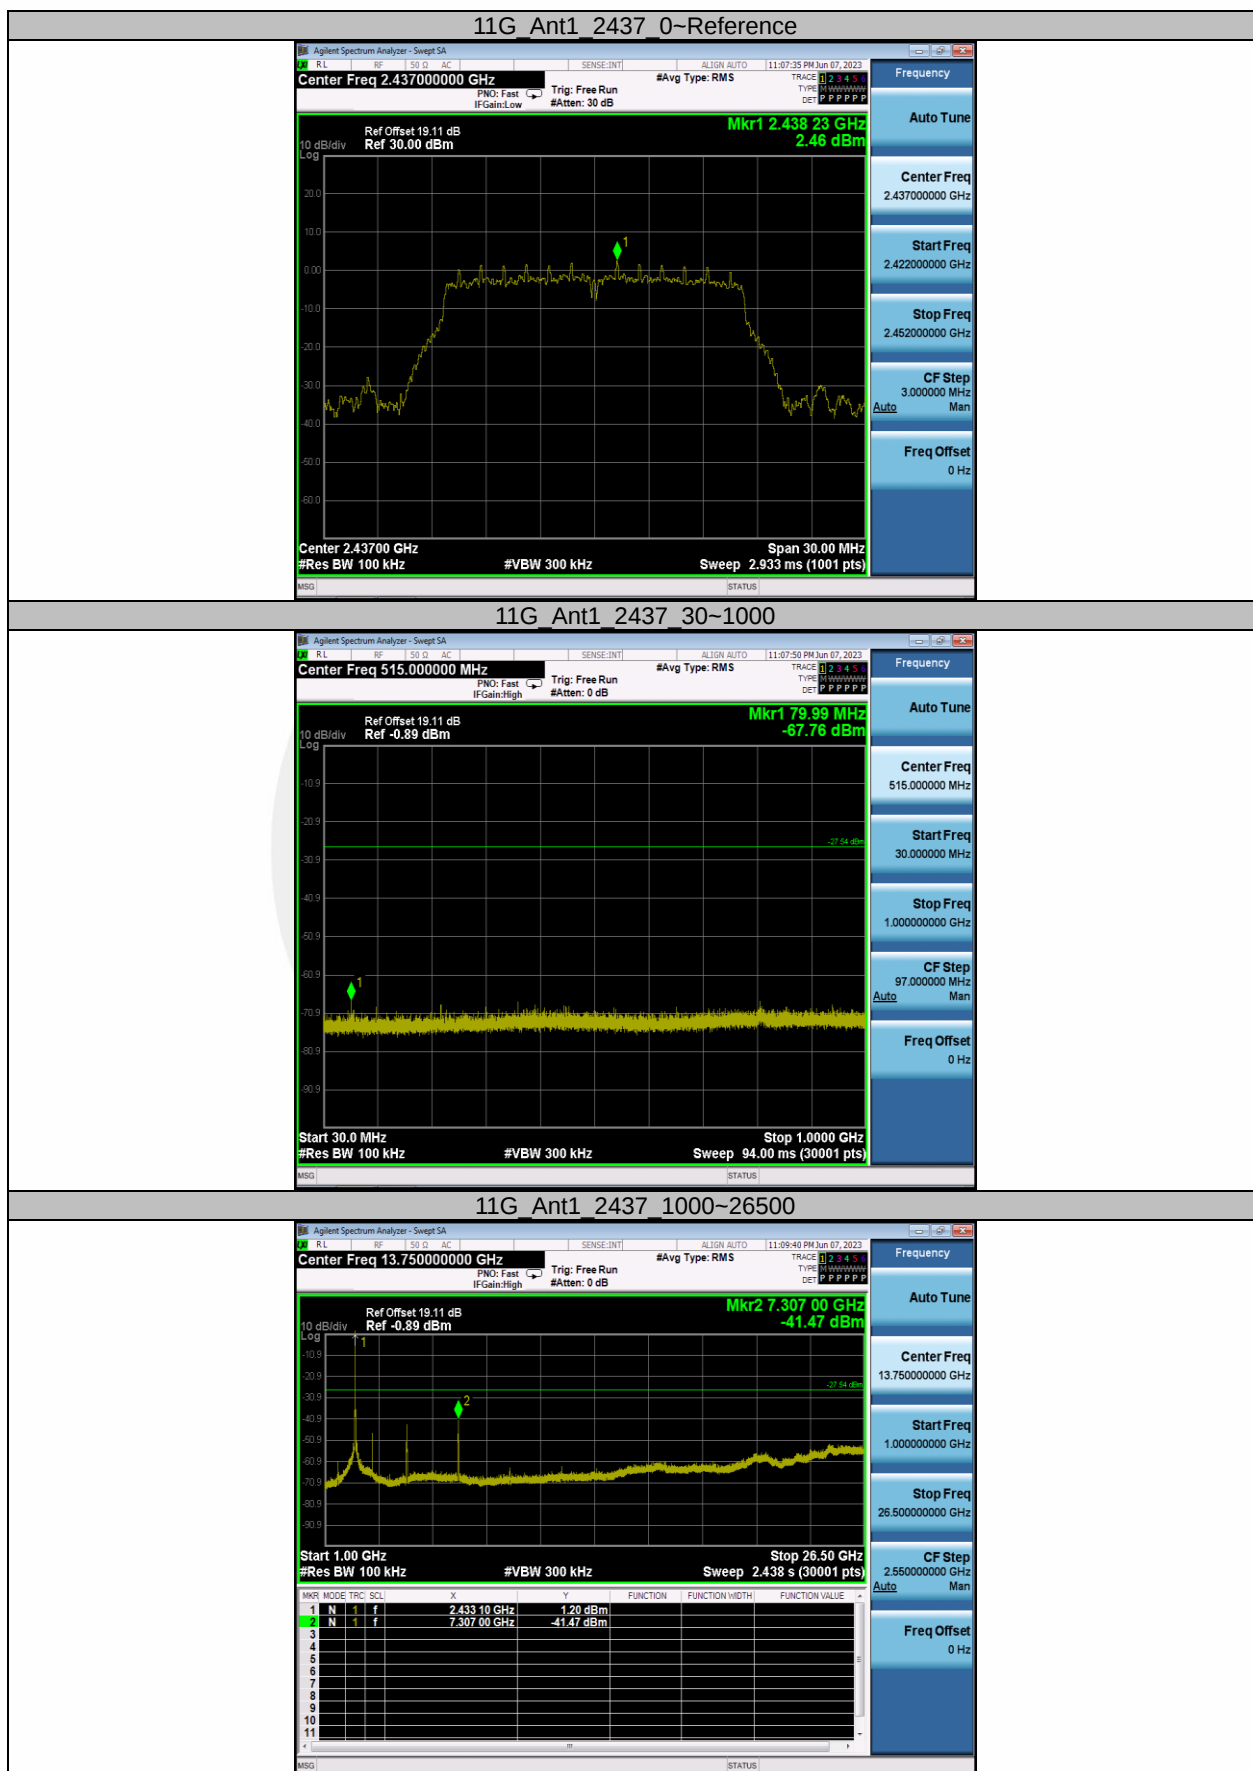


11G_Ant1_2462_0-Reference



11G_Ant1_2462_30-1000

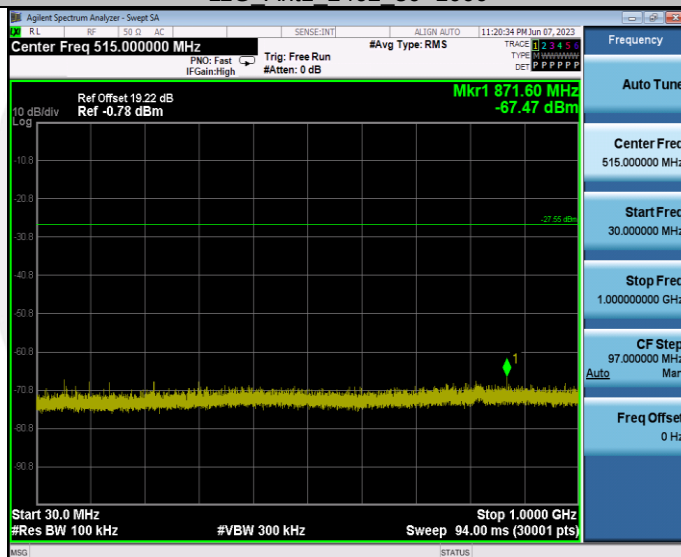


11G_Ant1_2462_1000-26500

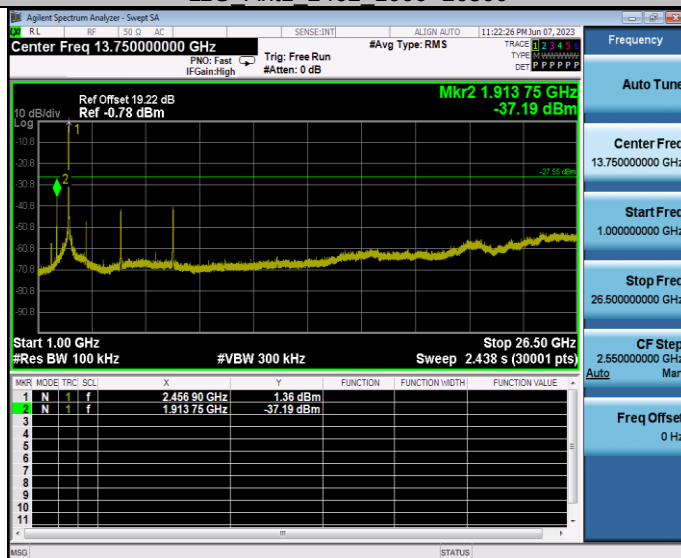


11N20SISO Ant1 2412 0~Reference



11N20SISO Ant1 2412 30~1000

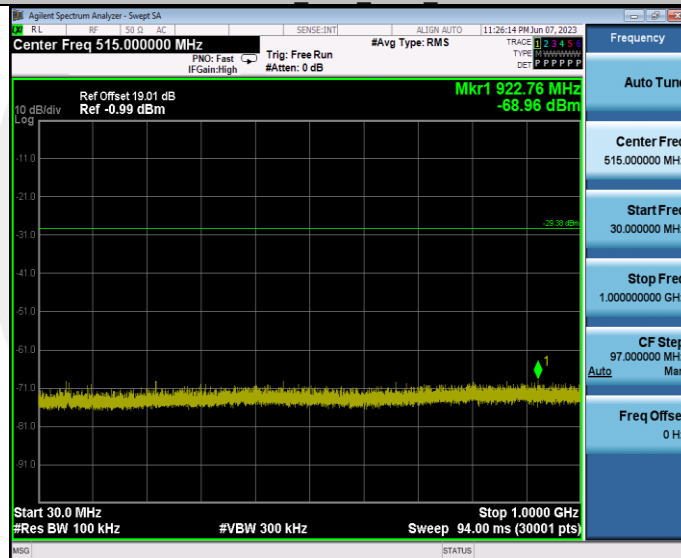


11N20SISO Ant1 2412 1000~26500

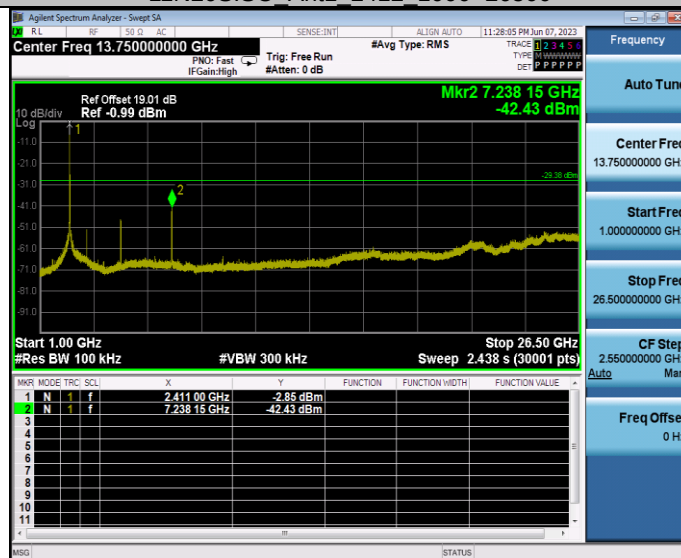


11N20SISO Ant1 2437 0~Reference



11N20SISO Ant1 2437 30~1000

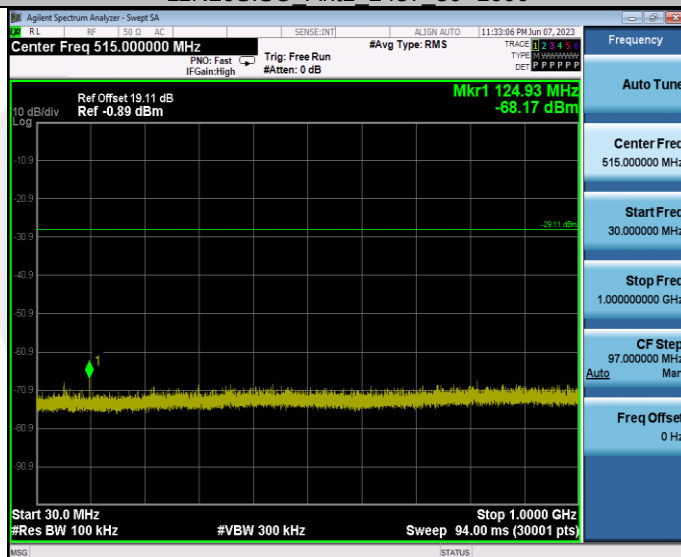


11N20SISO Ant1 2437 1000~26500

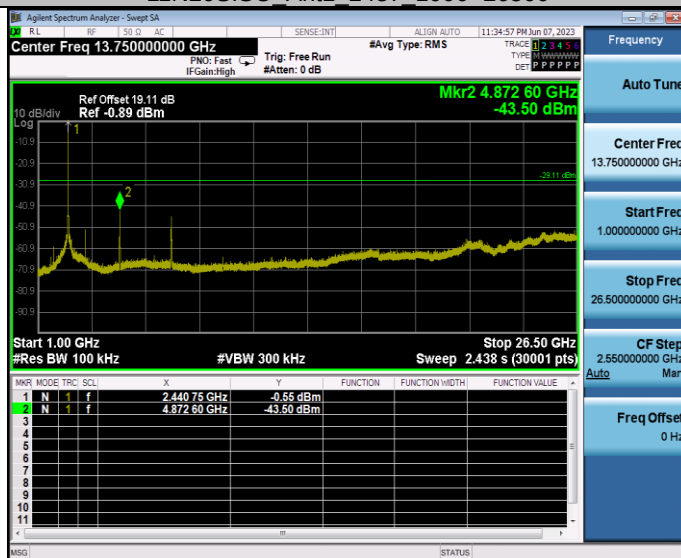


11N20SISO Ant1 2462 0~Reference



11N20SISO Ant1 2462 30~1000

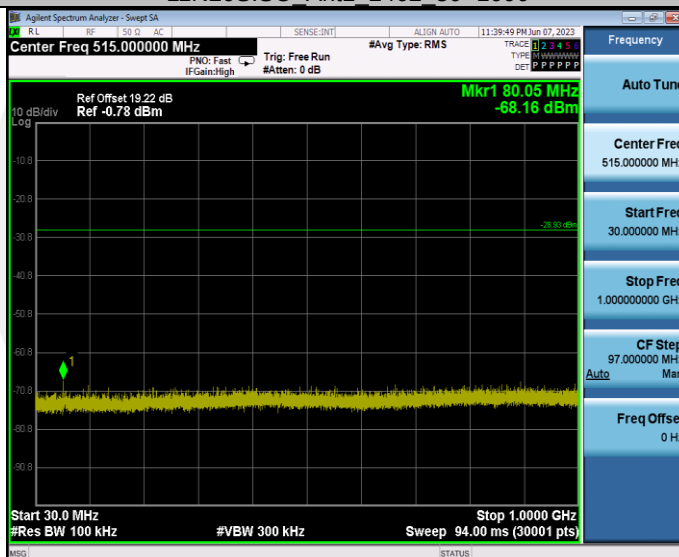

11N20SISO Ant1 2462 1000~26500

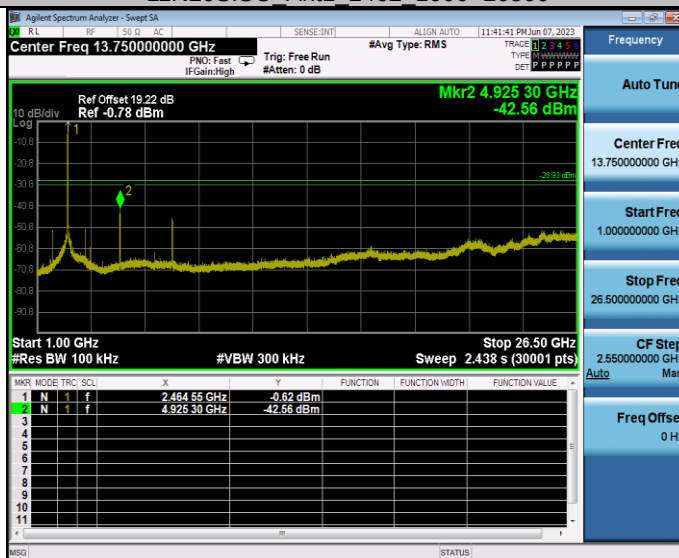

8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz(1GHz to 25GHz), 100 kHz for $f < 1$ GHz(30MHz to 1GHz), 200Hz for $f < 150$ KHz(9KHz to 150KHz), 9KHz for $f < 30$ MHz(150KHz to 30KHz)

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

- Spurious Emission Above 1GHz(1GHz to 25GHz)
- All modes 2.4G 802.11b/g/n have been tested, and the worst result of 802.11b recorded was report as below:

Test mode: 802.11b Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)		results
		PK	AV	PK	AV	PK	AV	
4822.87	V	59.07	50.34	74.00	54.00	14.93	3.66	PASS
4822.87	H	58.17	49.81	74.00	54.00	15.83	4.19	PASS

Test mode: 802.11b Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)		results
		PK	AV	PK	AV	PK	AV	
4873.87	V	59.46	49.82	74.00	54.00	14.54	4.18	PASS
4873.87	H	59.47	50.17	74.00	54.00	14.53	3.83	PASS

Test mode: 802.11b Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)		results
		PK	AV	PK	AV	PK	AV	
4924.87	V	44.77	33.87	74.00	54.00	29.23	20.13	PASS
4924.87	H	43.43	32.77	74.00	54.00	30.57	21.23	PASS

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4)The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz
All modes 2.4G 802.11b/g/n have been tested, and the worst result of 802.11b recorded was report as below:

Test mode: 802.11b Frequency: Channel 1: 2412MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2334.68	H	48.34	74	42.64	54
2328.83	V	46.97	74	42.55	54


Test mode: 802.11b Frequency: Channel 11: 2462MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2483.69	H	46.43	74	42.54	54
2486.32	V	45.93	74	42.86	54

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Spurious Emission in Restricted Band 2310-2390MHz

Test Model	☒ 802.11b	☐ 802.11g	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ Channel 1: 2412MHz	☐ Channel 3: 2422MHz	Polarity: H	
	VBW=3MHz			

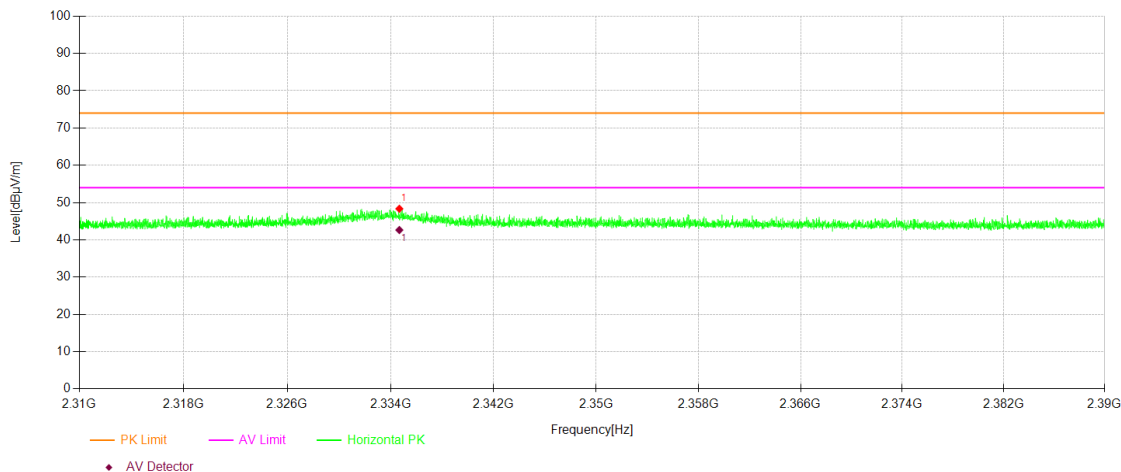

Spurious Emission in Restricted Band 2310-2390MHz

Test Model	☒ 802.11b	☐ 802.11g	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ Channel 1: 2412MHz	☐ Channel 3: 2422MHz	Polarity: V	
	VBW=3MHz			

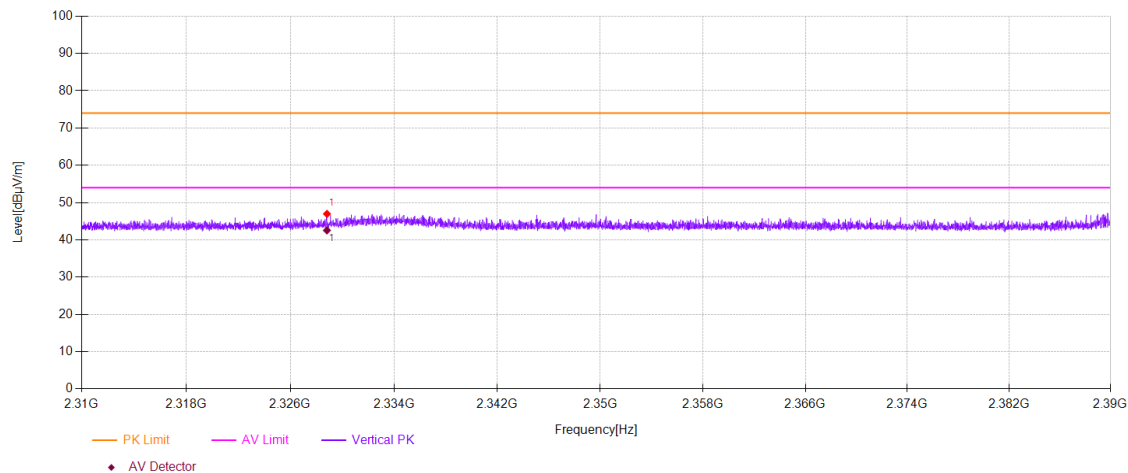


Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model ☒ 802.11b ☐ 802.11g ☐ 802.11n(HT20) ☐ 802.11n(HT40)

☒ Channel 11: 2462MHz ☐ Channel 9: 2452MHz Polarity: H

VBW=3MHz

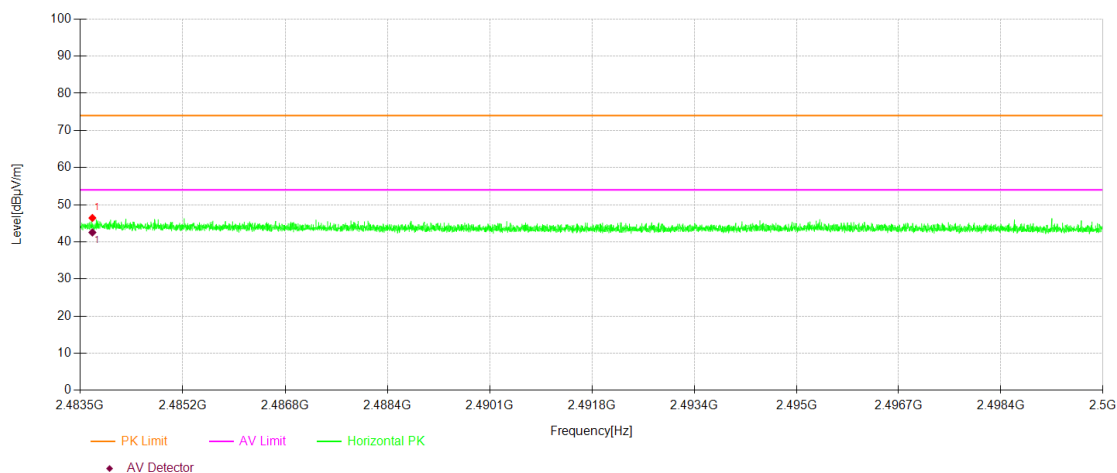


Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model ☒ 802.11b ☐ 802.11g ☐ 802.11n(HT20) ☐ 802.11n(HT40)


☒ Channel 11: 2462MHz ☐ Channel 9: 2452MHz Polarity: V

VBW=3MHz

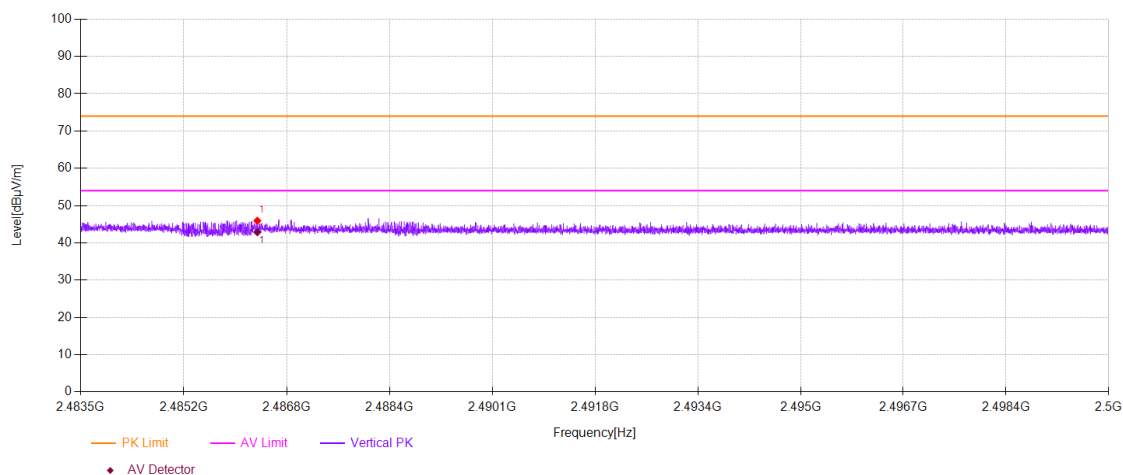


- Spurious Emission below 1GHz (30MHz to 1GHz)
- All modes 2.4G 802.11b/g/n have been tested, and the worst result of 802.11b recorded was report as below:

Test mode: GFSK Frequency: Channel 0: 2412MHz

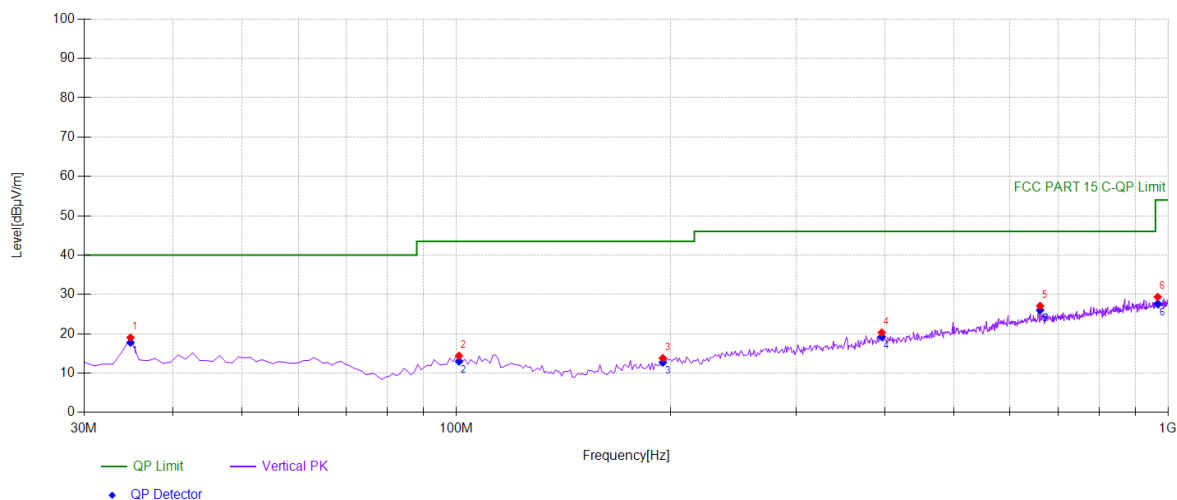


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	34.8549	37.28	-18.23	19.05	PK	40.00	20.95	Vertical
2	100.880	31.25	-16.84	14.41	PK	43.50	29.09	Vertical
3	195.065	31.23	-17.43	13.80	PK	43.50	29.70	Vertical
4	396.056	32.12	-11.81	20.31	PK	46.00	25.69	Vertical
5	661.131	33.22	-6.14	27.08	PK	46.00	18.92	Vertical
6	966.987	31.46	-2.11	29.35	PK	54.00	24.65	Vertical

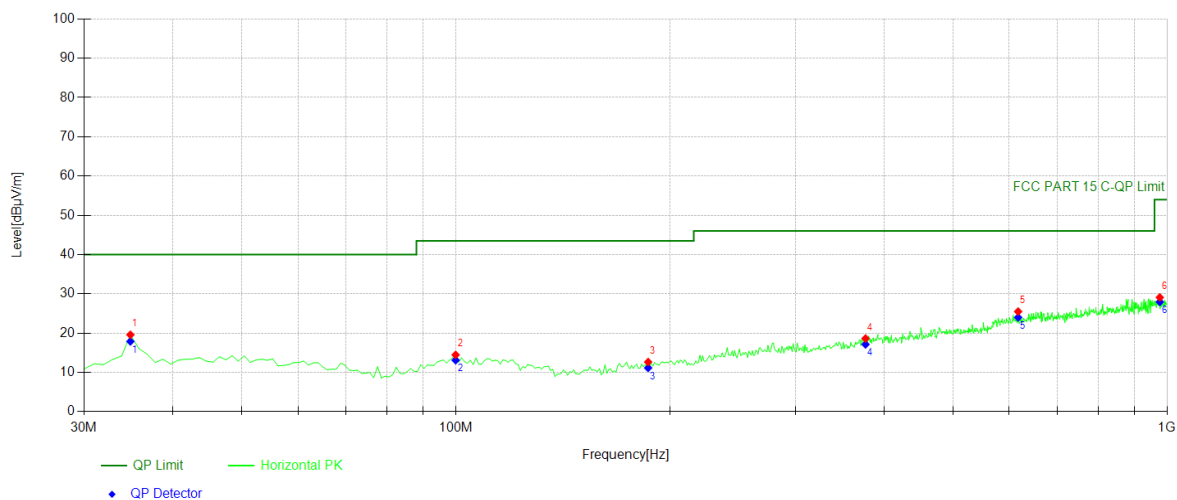


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	34.8549	37.81	-18.23	19.58	PK	40.00	20.42	Horizontal
2	99.9099	31.28	-16.82	14.46	PK	43.50	29.04	Horizontal
3	186.326	30.63	-17.98	12.65	PK	43.50	30.85	Horizontal
4	376.636	30.73	-12.10	18.63	PK	46.00	27.37	Horizontal
5	617.437	32.61	-7.11	25.50	PK	46.00	20.50	Horizontal
6	976.696	30.96	-1.87	29.09	PK	54.00	24.91	Horizontal

Test mode: GFSK Frequency: Channel 0: 2437MHz

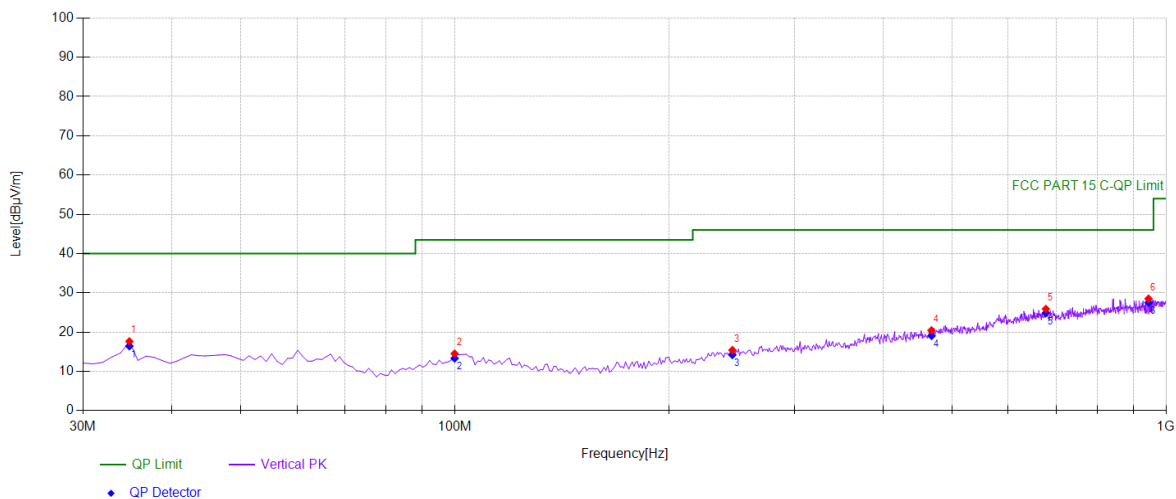


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	34.8549	35.87	-18.23	17.64	PK	40.00	22.36	Vertical
2	99.9099	31.35	-16.82	14.53	PK	43.50	28.97	Vertical
3	245.555	30.59	-15.18	15.41	PK	46.00	30.59	Vertical
4	467.907	30.98	-10.55	20.43	PK	46.00	25.57	Vertical
5	677.637	32.00	-6.11	25.89	PK	46.00	20.11	Vertical
6	944.654	30.90	-2.39	28.51	PK	46.00	17.49	Vertical

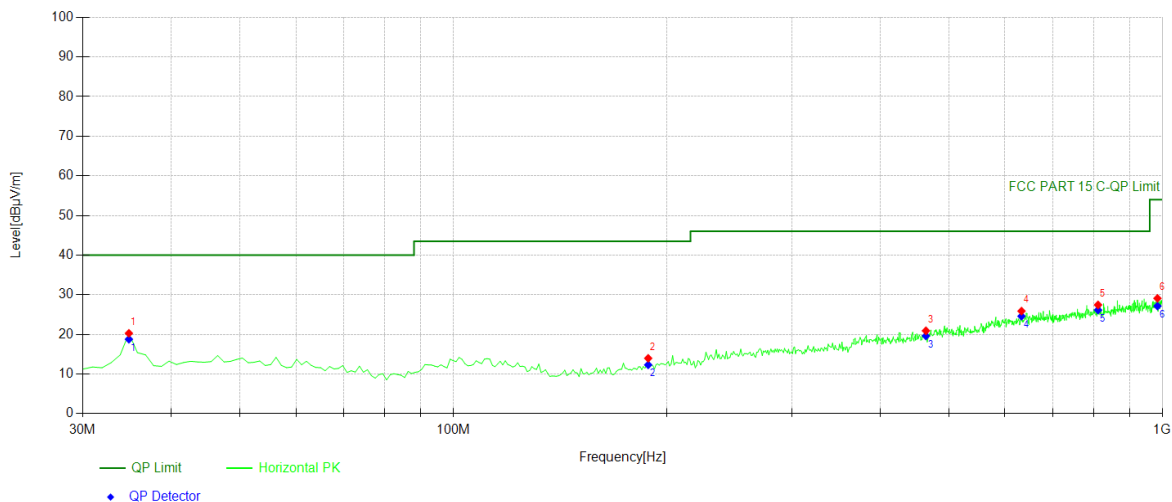


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	34.8549	38.51	-18.23	20.28	PK	40.00	19.72	Horizontal
2	188.268	31.85	-17.87	13.98	PK	43.50	29.52	Horizontal
3	464.024	31.71	-10.79	20.92	PK	46.00	25.08	Horizontal
4	632.973	32.48	-6.59	25.89	PK	46.00	20.11	Horizontal
5	811.631	31.78	-4.33	27.45	PK	46.00	18.55	Horizontal
6	984.464	30.85	-1.75	29.10	PK	54.00	24.90	Horizontal

Test mode: GFSK Frequency: Channel 0: 2462MHz

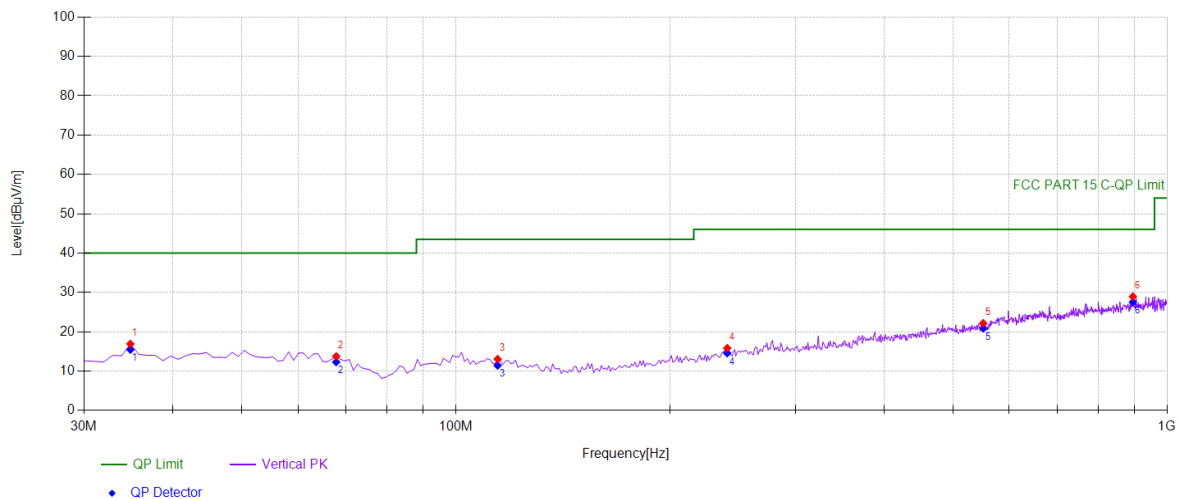

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	34.8549	35.15	-18.23	16.92	PK	40.00	23.08	Vertical
2	67.8679	33.42	-19.66	13.76	PK	40.00	26.24	Vertical
3	114.474	30.65	-17.59	13.06	PK	43.50	30.44	Vertical
4	240.700	31.03	-15.19	15.84	PK	46.00	30.16	Vertical
5	551.411	31.34	-9.18	22.16	PK	46.00	23.84	Vertical
6	895.135	31.80	-2.84	28.96	PK	46.00	17.04	Vertical

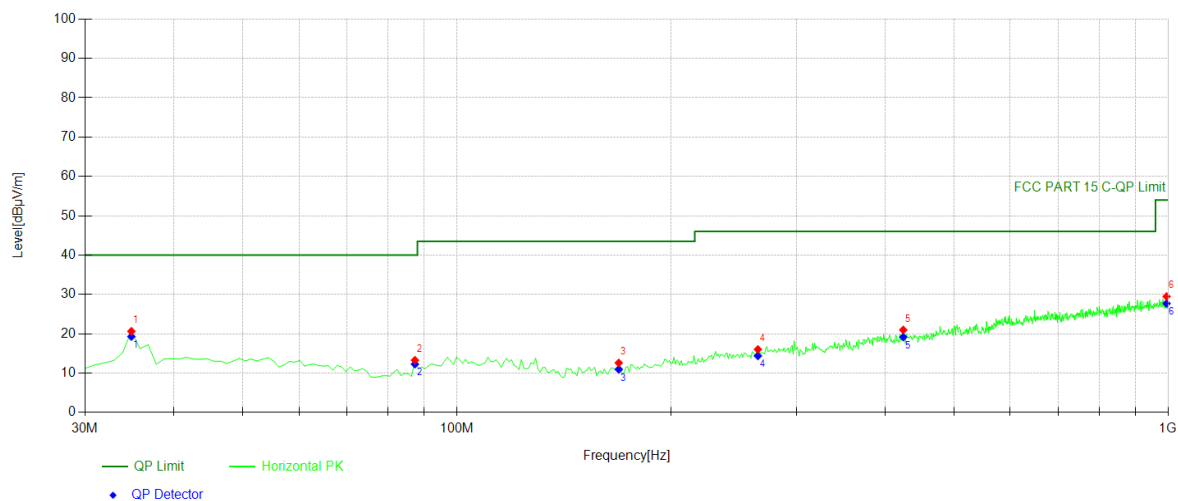

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	34.8549	38.87	-18.23	20.64	PK	40.00	19.36	Horizontal
2	87.2873	33.08	-19.80	13.28	PK	40.00	26.72	Horizontal
3	168.848	31.64	-19.03	12.61	PK	43.50	30.89	Horizontal
4	264.975	30.99	-14.96	16.03	PK	46.00	29.97	Horizontal
5	424.214	32.59	-11.61	20.98	PK	46.00	25.02	Horizontal
6	995.145	31.20	-1.71	29.49	PK	54.00	24.51	Horizontal

8.6 CONDUCTED EMISSIONS TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 7.3conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

N/A

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS.

- The EUT has a Internal Antenna for WIFI 2.4G, the antenna gain is 1.09 dBi.

Note: ☒ Antenna uses a permanently attached antenna which is not replaceable.
☐ Not using a standard antenna jack or electrical connector for antenna replacement
☐ The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

*** End of Report ***