

TEST REPORT

Report No..... : KS2307S3802E

FCC ID..... : 2BB7R-SL-1000A

Applicant..... : Slenergy Technology (A.H.) Co., Ltd.

Address..... : NO. 120 Yongyang Road, Chuzhou City, Anhui Province, China

Manufacturer..... : Slenergy Technology (A.H.) Co., Ltd.

Address..... : NO. 120 Yongyang Road, Chuzhou City, Anhui Province, China

Product Name..... : Portable Power Station

Trademark..... : 

Model/Type reference..... : SL-1000A

Standard..... : 47 CFR Part 15C

Date of Receipt..... : July 20, 2023

Date of Test Date..... : July 20, 2023 to August 7, 2023


Date of issue..... : August 8, 2023

Test result..... : Pass

Prepared by:
(Printed name + Signature) Pai Zheng



Approved by:
(Printed name + Signature) Sky Dong



Testing Laboratory Name...: KSIGN(Guangdong) Testing Co., Ltd.

Address..... : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by KSIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to KSIGN within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample. The report is invalid if it is not stamped with the "Testing Special Stamp" and the "Riding Seam Stamp".

TABLE OF CONTENTS**Page**

1. TEST SUMMARY	3
1.1. Test Standards	3
1.2. Report Version	3
1.3. Test Description	4
1.4. Test Facility	5
1.5. Measurement Uncertainty	5
2. GENERAL INFORMATION	6
2.1. General Description Of EUT	6
2.2. Accessory Equipment Information	6
2.3. Description of Test Modes	6
2.4. Measurement Instruments List	7
3. Evaluation Results (Evaluation)	8
3.1. Antenna requirement	8
4. Radio Spectrum Matter Test Results (RF)	9
4.1. Conducted Emission at AC power line	9
4.2. Emissions in restricted frequency bands (below 30MHz)	12
4.3. Emissions in restricted frequency bands (30MHz - 1GHz)	17
5. EUT TEST PHOTOS	20
6. PHOTOGRAPHS OF EUT CONSTRUCTIONAL	22

1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules and Regulations Part 15 Subpart C (Section 15.207): Conducted limits.

FCC Rules and Regulations Part 15 Subpart C (Section 15.209): Radiated emission limits; general requirements.

ANSI C63.10: 2013: American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Date of issue	Description
01	August 8, 2023	Original

1.3. Test Description

Test Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15C	Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15C	47 CFR 15.207(a)	Pass
Emissions in restricted frequency bands (below 30MHz)	47 CFR Part 15C	47 CFR 15.209	Pass
Emissions in restricted frequency bands (30MHz - 1GHz)	47 CFR Part 15C	47 CFR 15.209	Pass

1.4. Test Facility

KSIGN(Guangdong) Testing Co., Ltd.

West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L13261

KSIGN(Guangdong) Testing Co., Ltd. has been assessed and proved to be in Compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5457.01

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing

ISED#: 25693 CAB identifier.: CN0096

KSIGN(Guangdong) Testing Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

FCC-Registration No.: 294912 Designation Number: CN1328

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

1.5. Measurement Uncertainty

Test Items	Measurement Uncertainty
Conducted Emission (9-150kHz)	$\pm 3.74\text{dB}$
Conducted Emission (150k-30MHz)	$\pm 3.34\text{dB}$
RE (9kHz-30MHz)	$\pm 2.20\text{dB}$
RSE (30-1000MHz)	$\pm 5.7\text{dB}$

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

2. GENERAL INFORMATION

2.1. General Description Of EUT

Test Sample Number:	1-1(Normal Sample), 1-2(Engineering Sample)
Product Name:	Portable Power Station
Trademark:	
Model / Type reference:	SL-1000A
Model Difference:	N/A
Power Supply:	Input: AC 100-120V~, 60Hz Battery: DC 37V Wireless Charging Output: 15W Max
Operation Frequency:	115KHz-205KHz
Modulation Type:	ASK
Antenna Type:	Loop coil antenna
Antenna Gain:	0dBi
Note: For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.	

2.2. Accessory Equipment Information

Title	Manufacturer	Model No.	Technical Parameters	Provided by
Wireless charging load	N/A	N/A	5W, 15W	manufacturer

2.3. Description of Test Modes

No.	Title	Description of Mode
Test Mode1	Charging+Wireless charging mode(15W)	N/A
Test Mode2	Charging+Wireless charging mode(5W)	N/A
Test Mode3	Standby mode	N/A
Note: All test modes were pre-tested, The Mode 1 was the worst case and only the data of the worst case record in this report.		

2.4. Measurement Instruments List

Emissions in restricted frequency bands (below 30MHz)				
Emissions in restricted frequency bands (30MHz - 1GHz)				
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
Color Signal Generator	Philips	PM5418	672926	2024-02-17
Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	1230	2025-02-18
Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	2024-02-17
Broadcast Television Signal Generator	R&S	SFE100	141038	2024-02-17
Analog Signal Generator	Agilent	8648A	3847M00445	2024-02-17
EMI Test Receiver	R&S	ESR	102525	2024-02-17
Loop Antenna	Beijin ZHINAN	ZN30900C	18050	2024-02-19
Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	2026-02-19
Pre-Amplifier	EMCI	EMC051835SE	980662	2024-02-17
Spectrum Analyzer	Keysight	N9020A	MY46471971	2024-02-17

Conducted Emission at AC power line				
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
LISN	R&S	ENV432	1326.6105.02	2024-02-17
EMI Test Receiver	R&S	ESR	102524	2024-02-17
Manual RF Switch	JS TOYO	/	MSW-01/002	2024-02-17
ISN CAT6	Schwarzbeck	CAT5 8158	227	2024-02-17
Color Signal Generator	Philips	PM5418	672926	2024-02-17
Power Absorbing Clamp	R&S	MDS-21	100925	2024-02-19


3. Evaluation Results (Evaluation)

3.1. Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Antenna Information:	The antenna used in this product is a Coil Antenna.

4.1.3. Test Data:

Test Mode1 / Line: Line

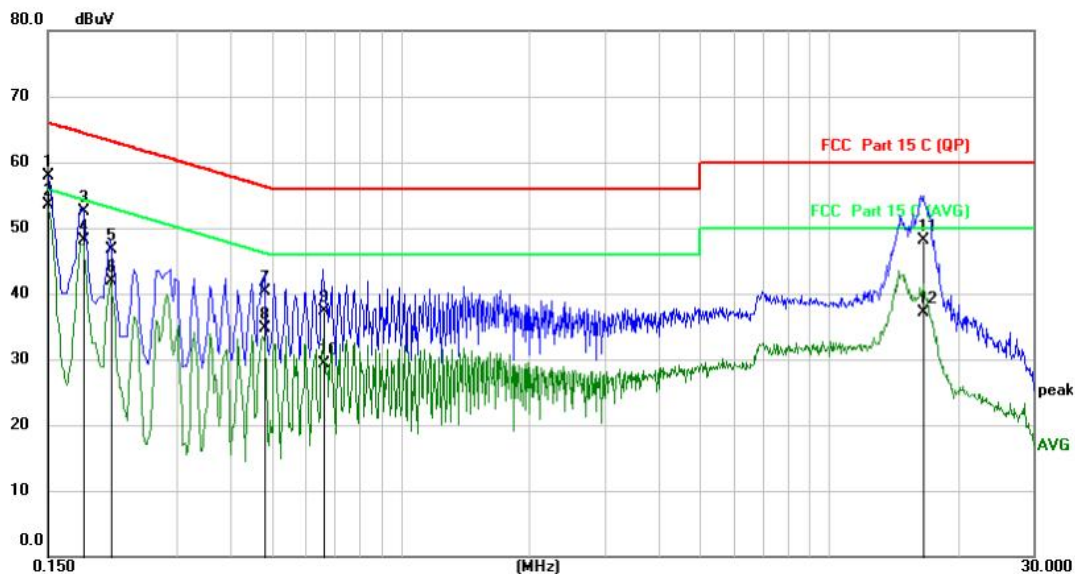


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1500	46.72	11.16	57.88	66.00	-8.12	QP	
2 *	0.1500	42.36	11.16	52.92	56.00	-3.08	AVG	
3	0.1806	41.49	11.07	52.56	64.46	-11.90	QP	
4	0.1806	36.99	11.07	48.06	54.46	-6.40	AVG	
5	0.2100	35.61	11.03	46.64	63.21	-16.57	QP	
6	0.2100	30.83	11.03	41.86	53.21	-11.35	AVG	
7	0.4820	29.33	11.01	40.34	56.30	-15.96	QP	
8	0.4820	23.64	11.01	34.65	46.30	-11.65	AVG	
9	0.6580	26.22	11.03	37.25	56.00	-18.75	QP	
10	0.6580	18.26	11.03	29.29	46.00	-16.71	AVG	
11	16.6500	33.27	14.80	48.07	60.00	-11.93	QP	
12	16.6500	22.29	14.80	37.09	50.00	-12.91	AVG	

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com

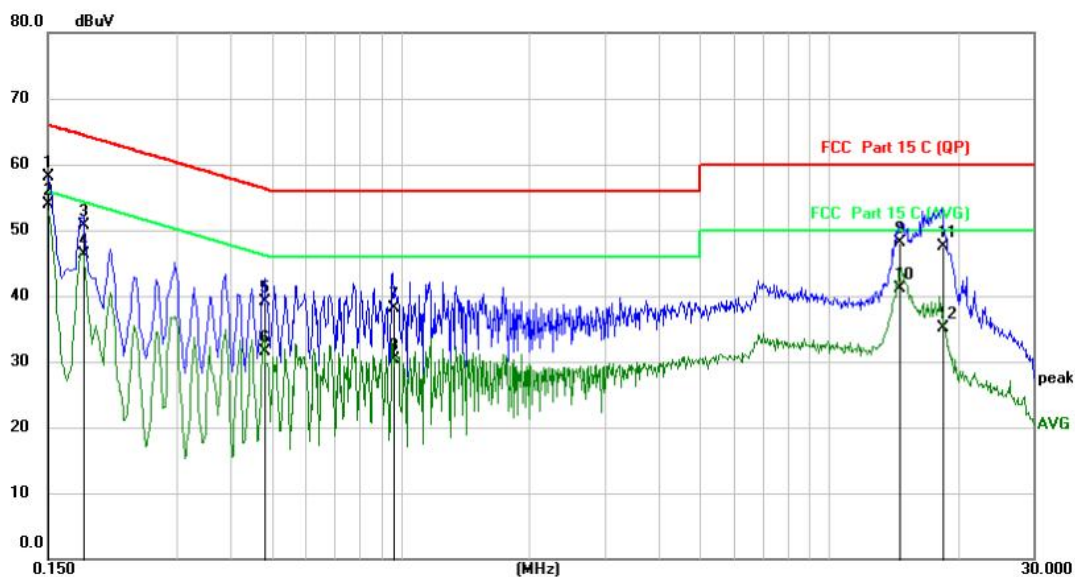Test Mode1 / Line: Neutral


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	47.05	11.14	58.19	66.00	-7.81	QP	
2	*	0.1500	42.79	11.14	52.93	56.00	-3.07	AVG	
3		0.1819	39.65	11.07	50.72	64.40	-13.68	QP	
4		0.1819	35.31	11.07	46.38	54.40	-8.02	AVG	
5		0.4820	28.17	11.00	39.17	56.30	-17.13	QP	
6		0.4820	20.59	11.00	31.59	46.30	-14.71	AVG	
7		0.9620	27.10	11.06	38.16	56.00	-17.84	QP	
8		0.9620	19.26	11.06	30.32	46.00	-15.68	AVG	
9		14.6420	34.08	13.95	48.03	60.00	-11.97	QP	
10		14.6420	27.22	13.95	41.17	50.00	-8.83	AVG	
11		18.3900	32.54	15.00	47.54	60.00	-12.46	QP	
12		18.3900	20.09	15.00	35.09	50.00	-14.91	AVG	

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com


4.2. Emissions in restricted frequency bands (below 30MHz)

Test Requirement:	47 CFR 15.209		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.			
Test Method:	Radiated emissions tests		
Procedure:	ANSI C63.10-2013 section 6.6.4		

4.2.1. E.U.T. Operation:

Operating Environment:	
Temperature:	23.8 °C
Humidity:	51.2 %
Atmospheric Pressure:	102 kPa
Final test mode:	Test Mode1, Test Mode2, Test Mode3

4.2.2. Test Setup Diagram:

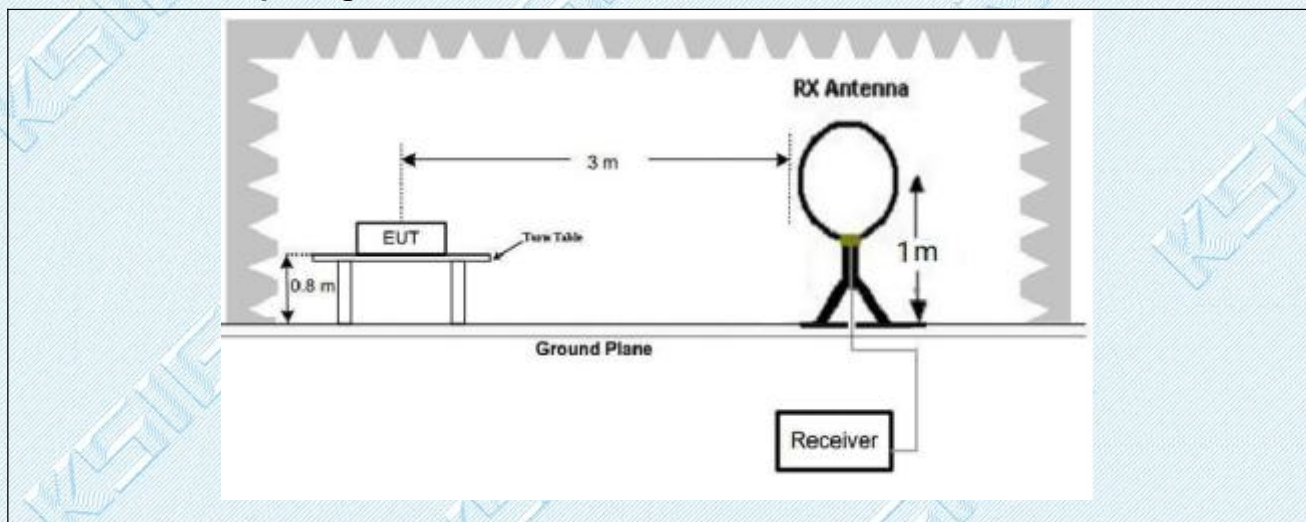

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

Note:

Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor

4.2.3. Test Data:

Test Mode1 / Face / 9KHz-150KHz




No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		0.0383	45.07	-8.92	36.15	115.94	-79.79	peak
2		0.0570	40.02	-9.01	31.01	112.49	-81.48	peak
3		0.0734	47.43	-9.31	38.12	110.29	-72.17	peak
4		0.0868	42.41	-8.98	33.43	108.83	-75.40	peak
5		0.1174	35.84	-9.21	26.63	106.21	-79.58	peak
6	*	0.1276	79.08	-9.61	69.47	105.49	-36.02	peak

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

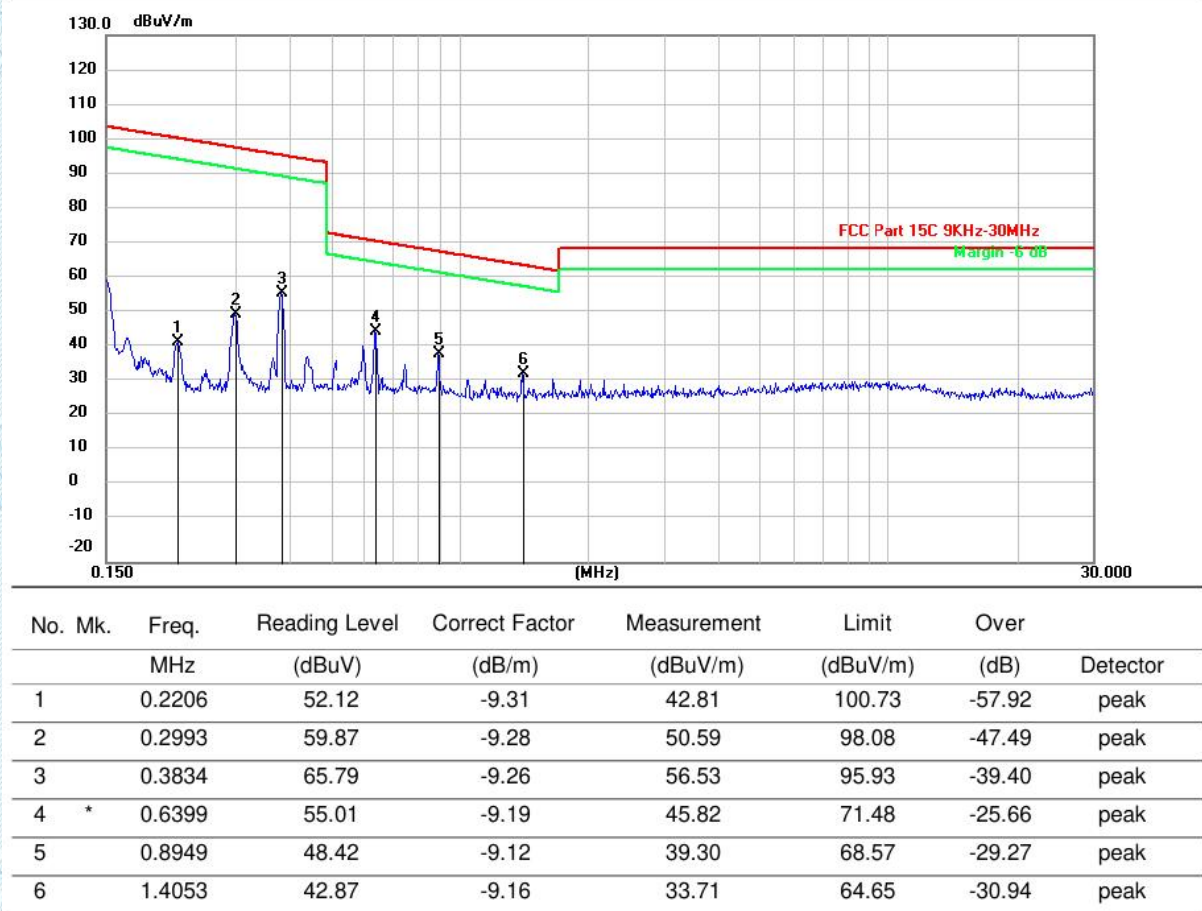Test Mode1 / Face / 150KHz-30MHz


TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com

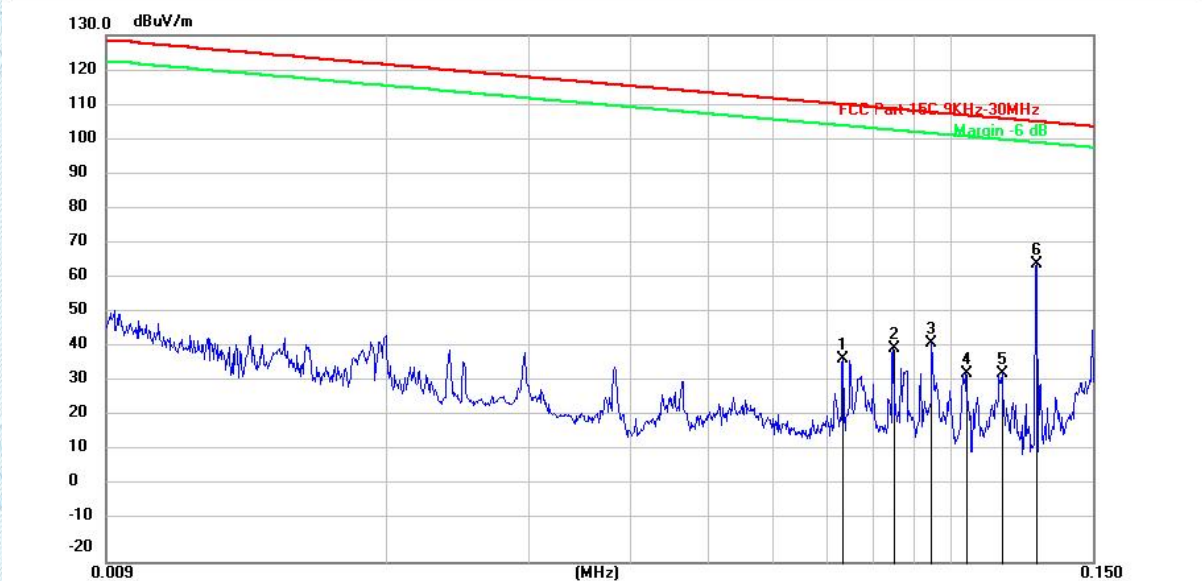
Test Mode1 / Side / 9KHz-150KHz


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		0.0734	47.37	-9.31	38.06	110.29	-72.23	peak
2		0.0850	50.02	-9.02	41.00	109.02	-68.02	peak
3		0.0947	51.28	-8.90	42.38	108.08	-65.70	peak
4		0.1044	42.86	-8.90	33.96	107.23	-73.27	peak
5		0.1159	43.15	-9.15	34.00	106.32	-72.32	peak
6	*	0.1276	74.52	-9.61	64.91	105.49	-40.58	peak

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com

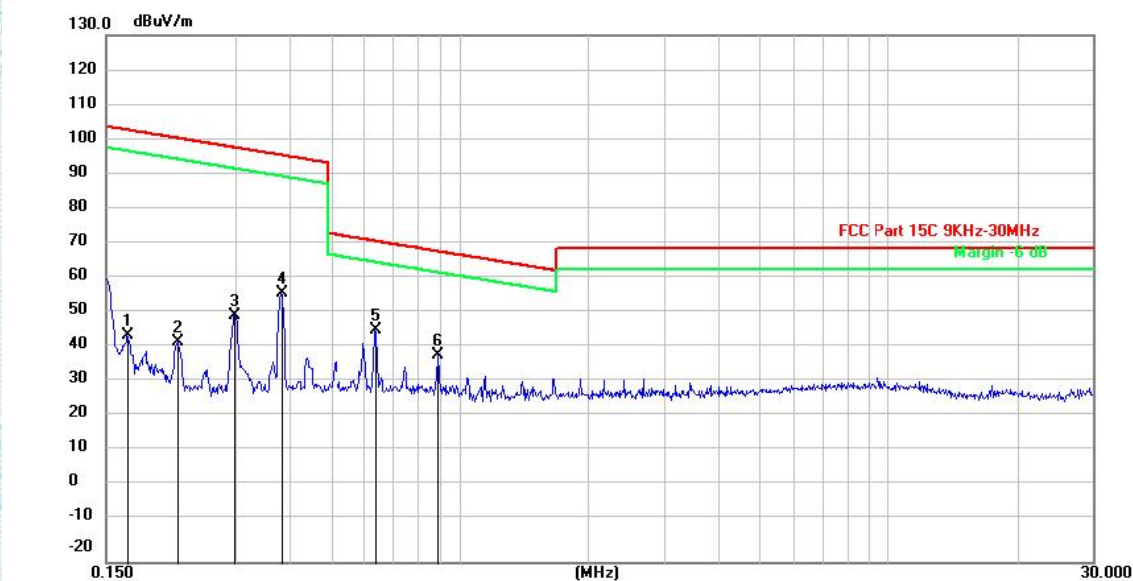Test Mode1 / Side / 150KHz-30MHz


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		0.1680	53.89	-9.32	44.57	103.10	-58.53	peak
2		0.2201	51.96	-9.31	42.65	100.75	-58.10	peak
3		0.2983	59.70	-9.28	50.42	98.11	-47.69	peak
4		0.3833	65.93	-9.26	56.67	95.93	-39.26	peak
5	*	0.6394	55.36	-9.19	46.17	71.49	-25.32	peak
6		0.8944	48.21	-9.12	39.09	68.57	-29.48	peak

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com


4.3. Emissions in restricted frequency bands (30MHz - 1GHz)

Test Requirement:	47 CFR 15.209		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.			
Test Method:	Radiated emissions tests		
Procedure:	ANSI C63.10-2013 section 6.6.4		

4.3.1. E.U.T. Operation:

Operating Environment:	
Temperature:	23.8 °C
Humidity:	51.2 %
Atmospheric Pressure:	102 kPa
Final test mode:	Test Mode1, Test Mode2, Test Mode3

4.3.2. Test Setup Diagram:

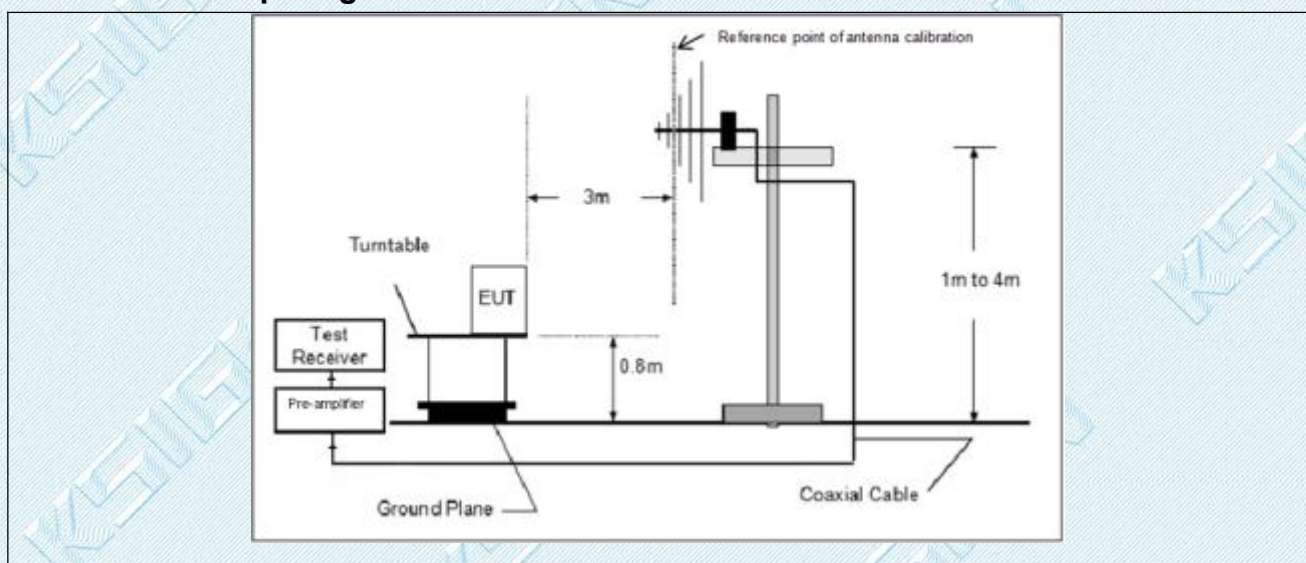

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

Note:

- 1). Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)
- 2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)
- 3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

4.3.3. Test Data:

Test Mode1 / Polarization: Horizontal



No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		122.3611	50.22	-19.70	30.52	43.50	-12.98	QP
2		168.0009	53.72	-20.71	33.01	43.50	-10.49	QP
3		251.9744	54.12	-15.69	38.43	46.00	-7.57	QP
4		279.0436	54.37	-15.16	39.21	46.00	-6.79	QP
5	*	299.8410	55.52	-14.66	40.86	46.00	-5.14	QP
6		390.0381	48.22	-11.23	36.99	46.00	-9.01	QP

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com

Test Mode1 / Polarization: Vertical


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	*	37.0899	52.29	-18.07	34.22	40.00	-5.78	QP
2		97.2853	47.93	-18.07	29.86	43.50	-13.64	QP
3		121.7619	55.35	-19.61	35.74	43.50	-7.76	QP
4		308.8042	46.48	-14.29	32.19	46.00	-13.81	QP
5		375.0169	45.93	-11.72	34.21	46.00	-11.79	QP
6		457.9888	42.33	-10.25	32.08	46.00	-13.92	QP

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com

5. EUT TEST PHOTOS

Conducted Emission at AC power line



Emissions in restricted frequency bands (below 30MHz)

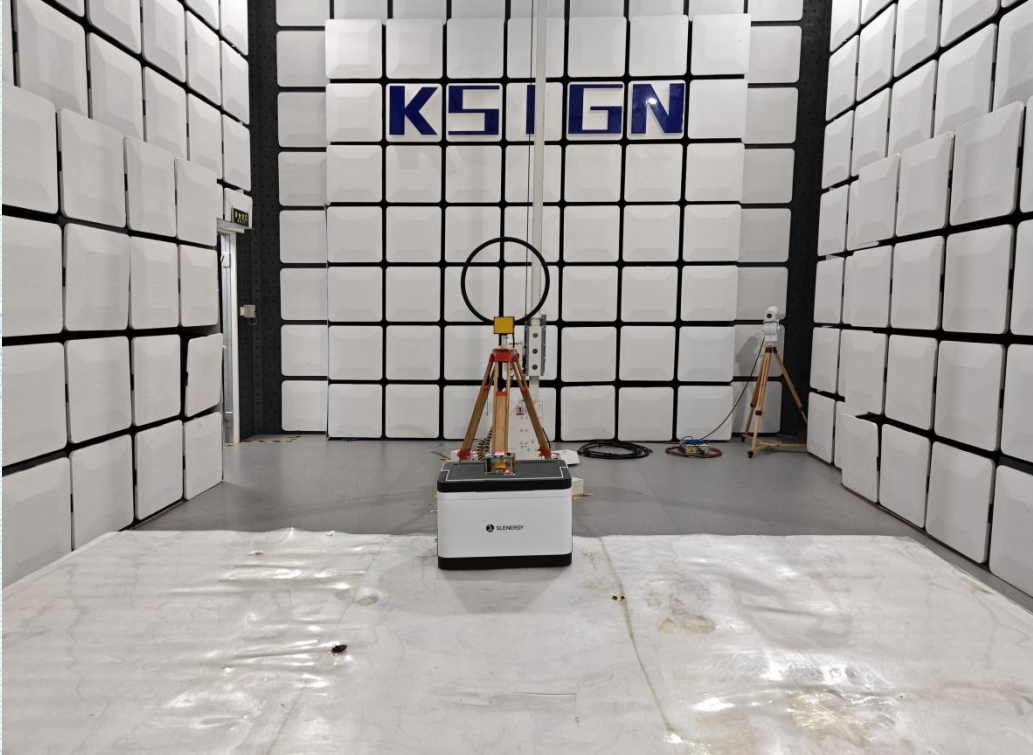

Emissions in restricted frequency bands (30MHz - 1GHz)

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

6. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

External



TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com



TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com

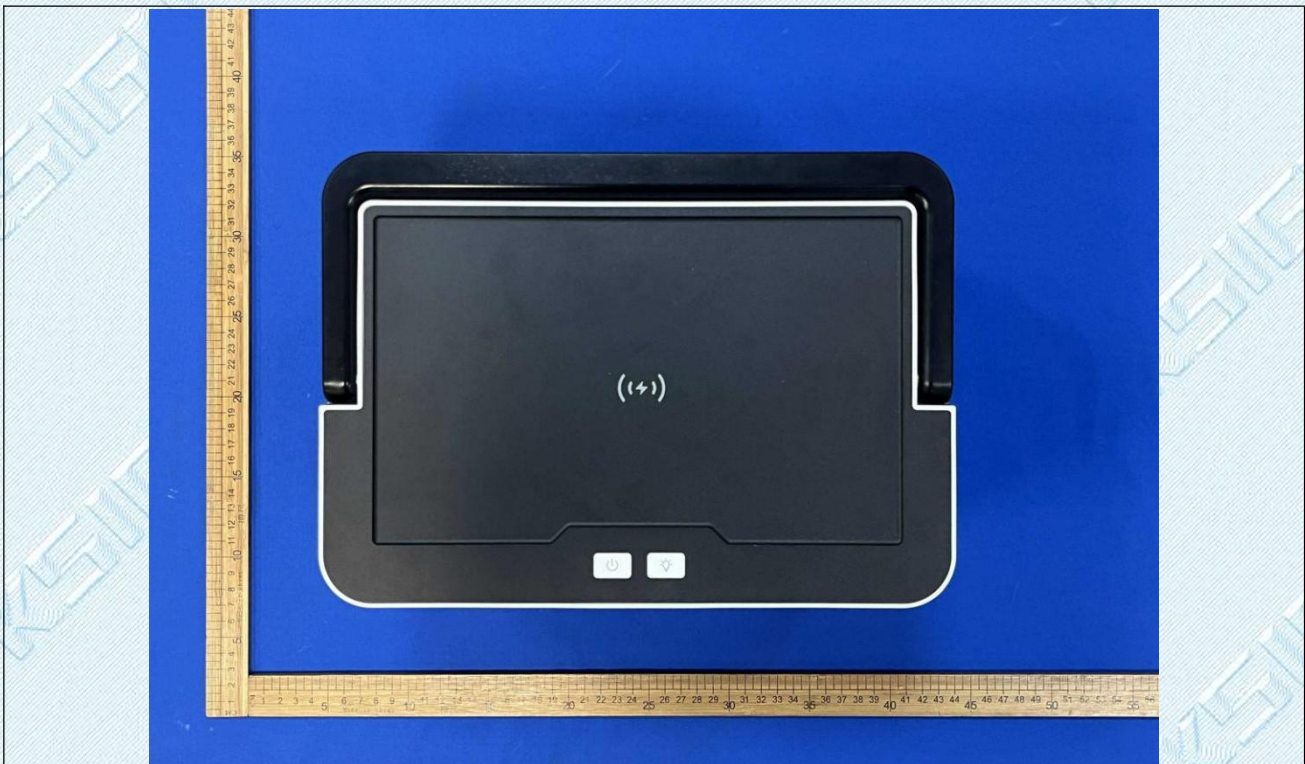

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com


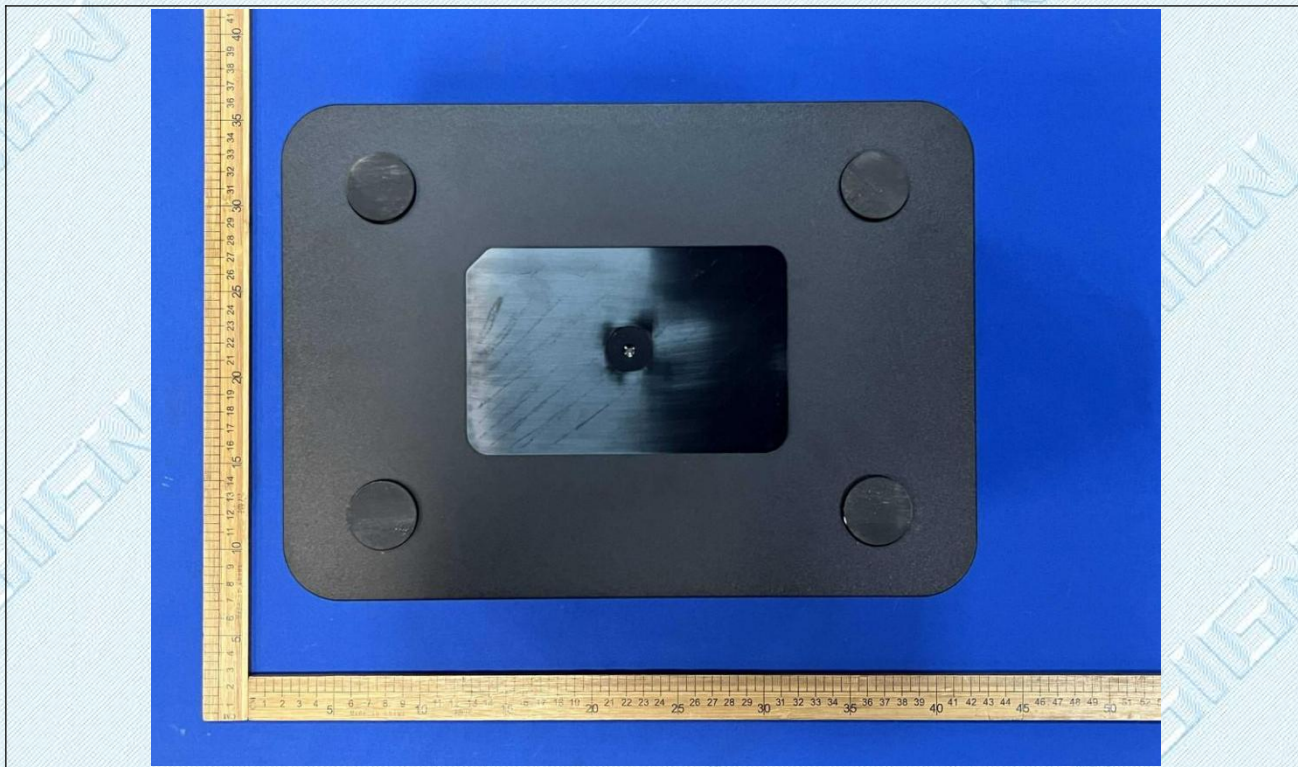


TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com



Internal

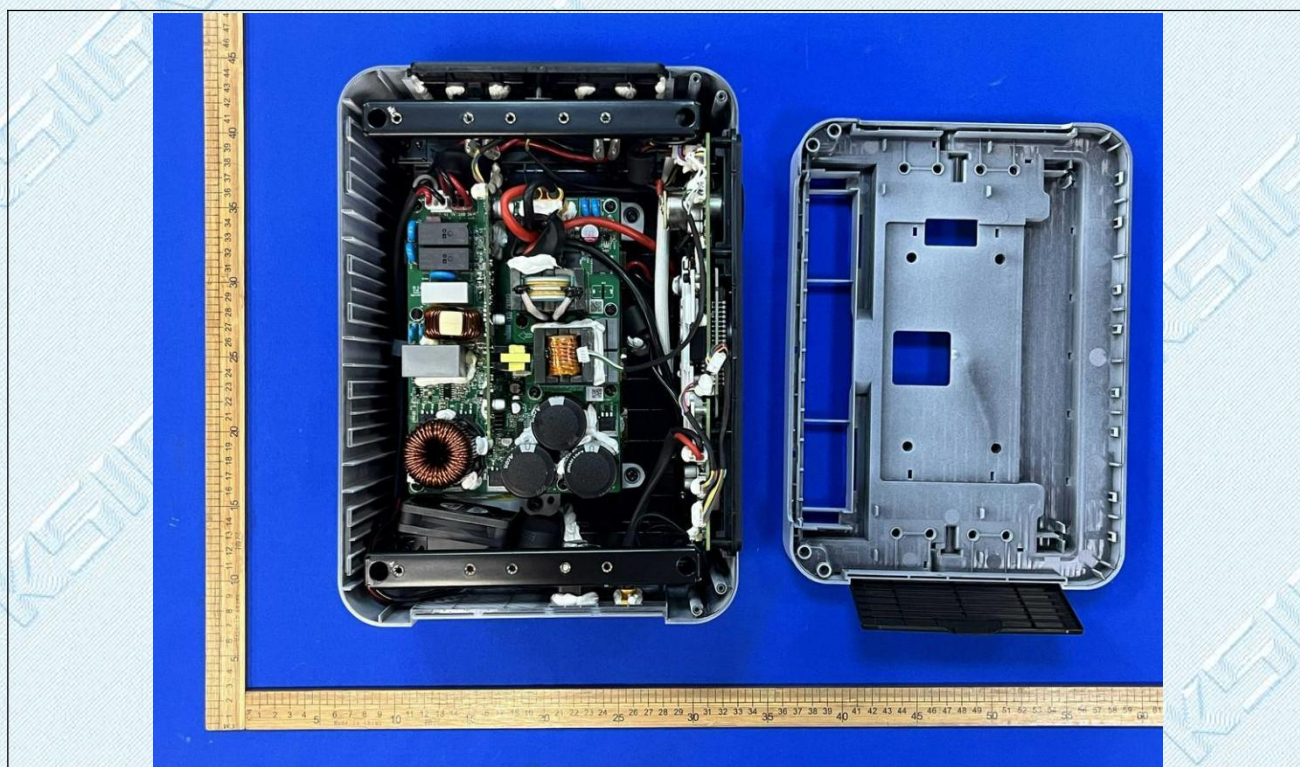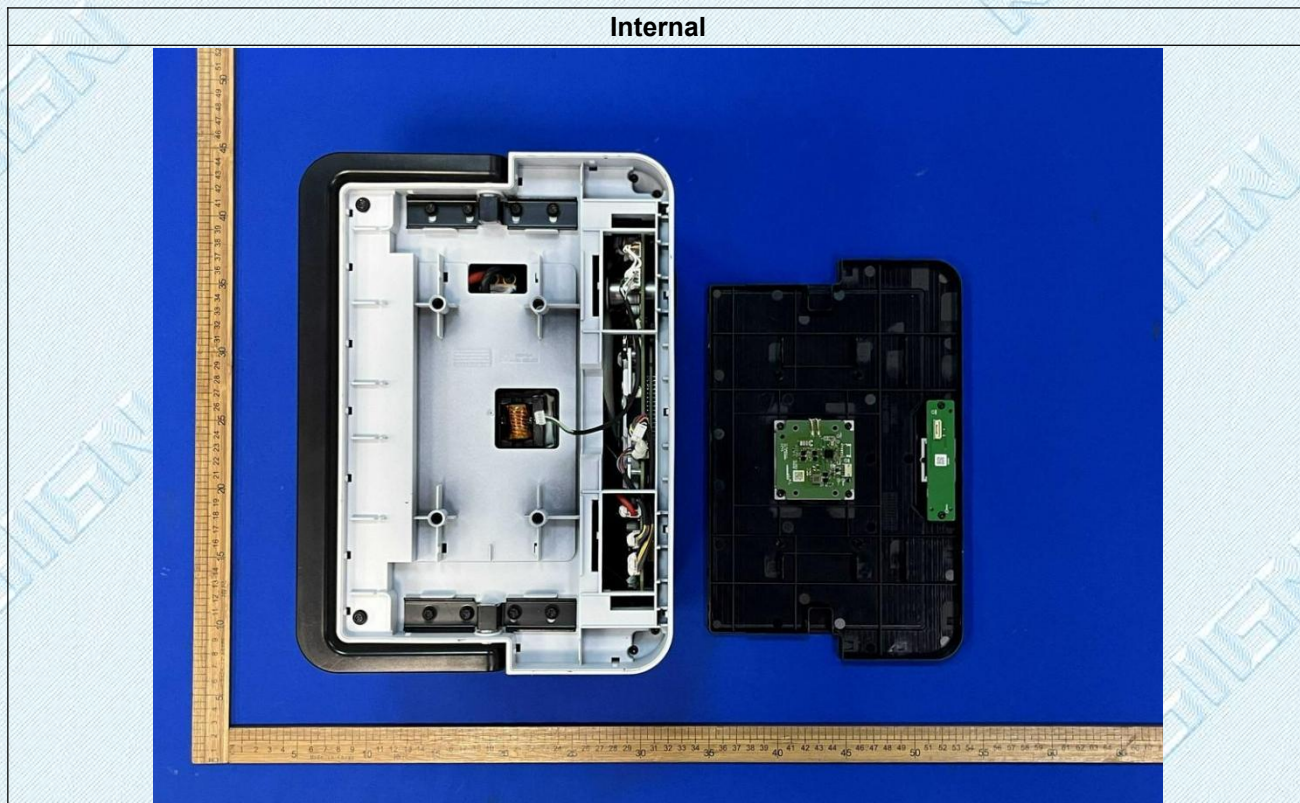

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China



Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

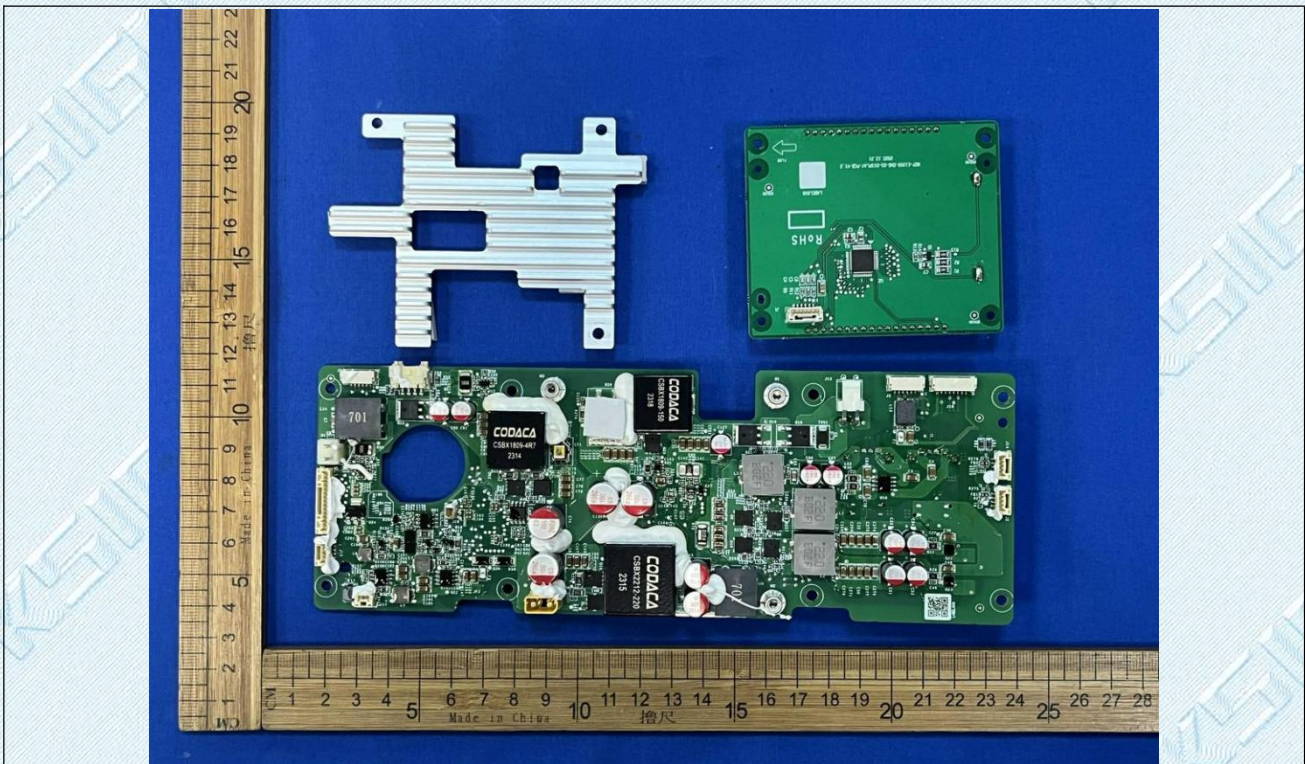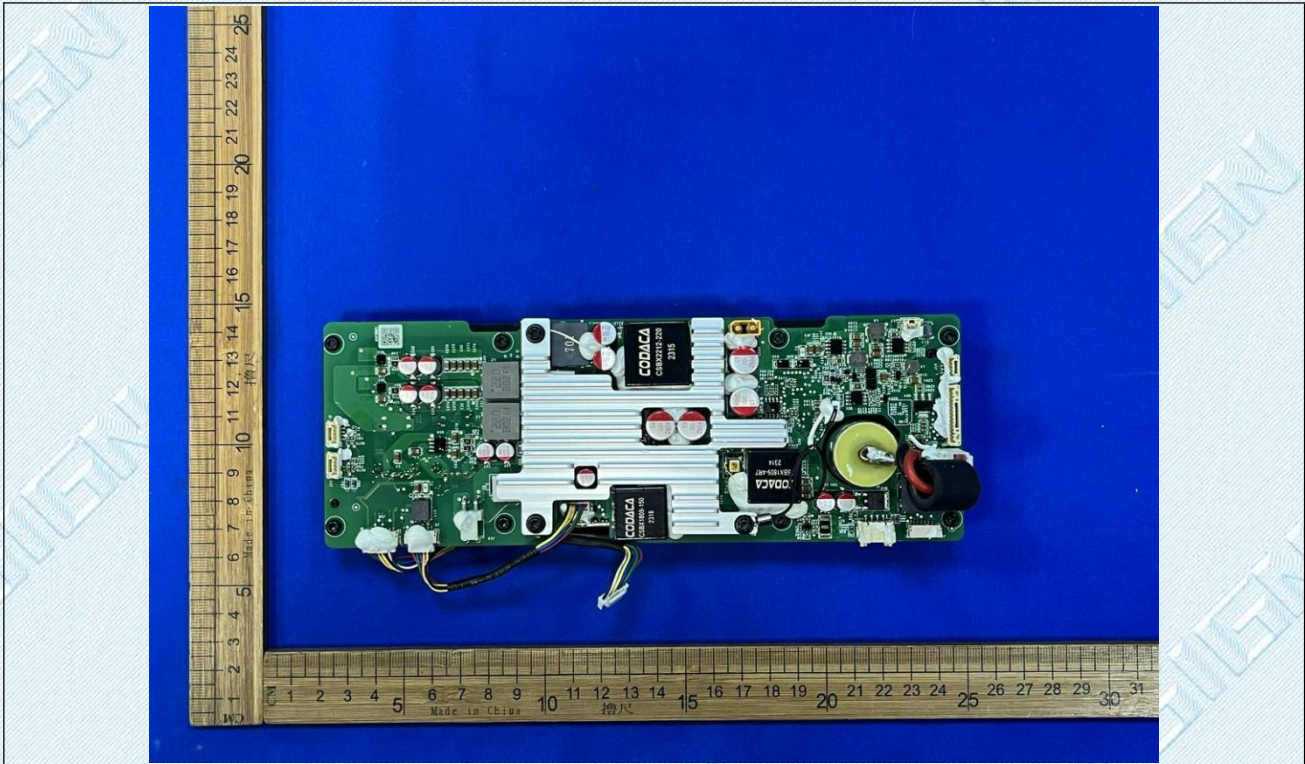

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China



Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

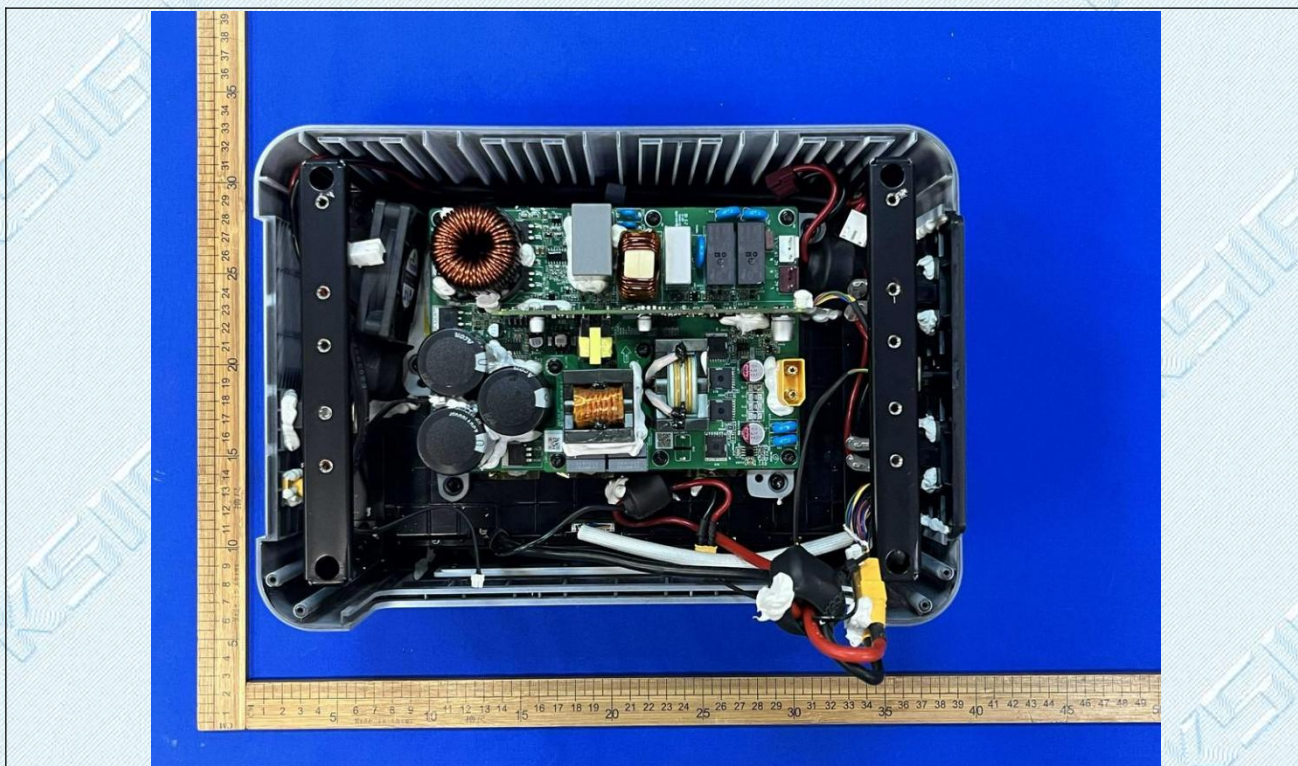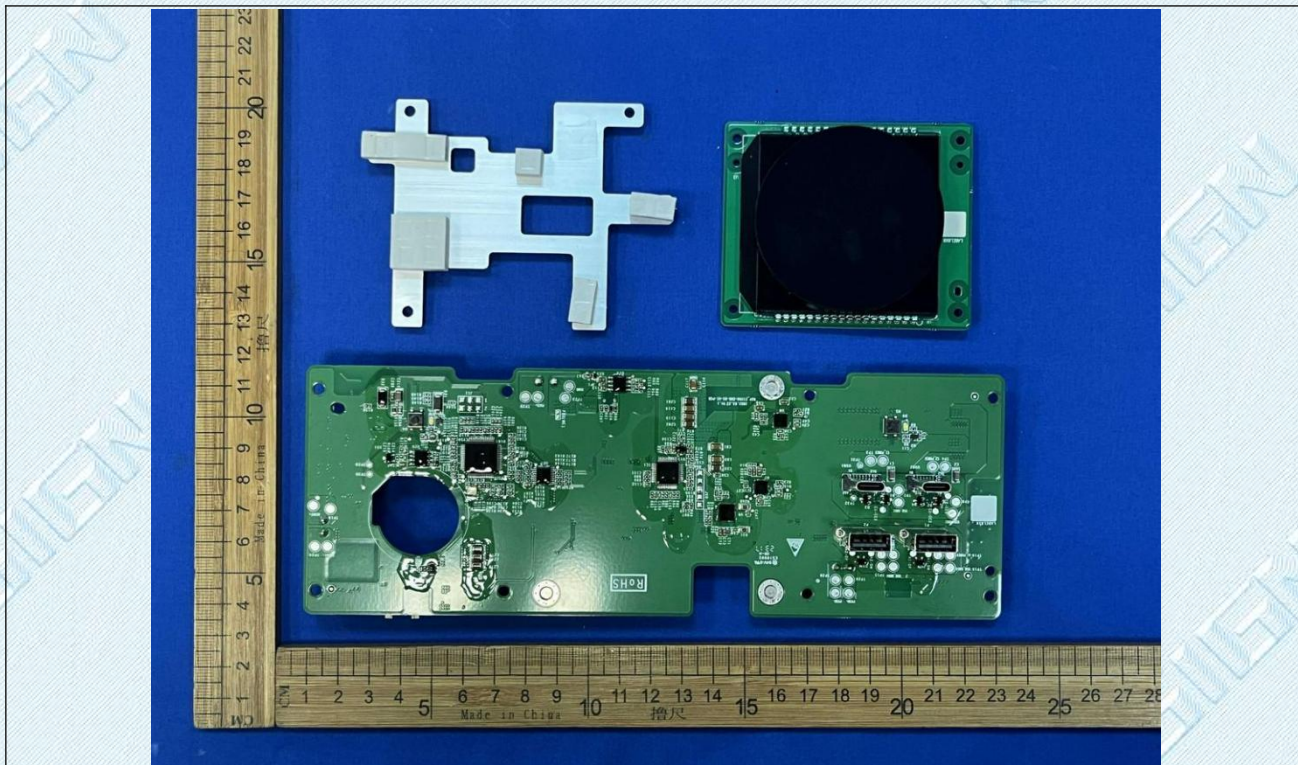

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

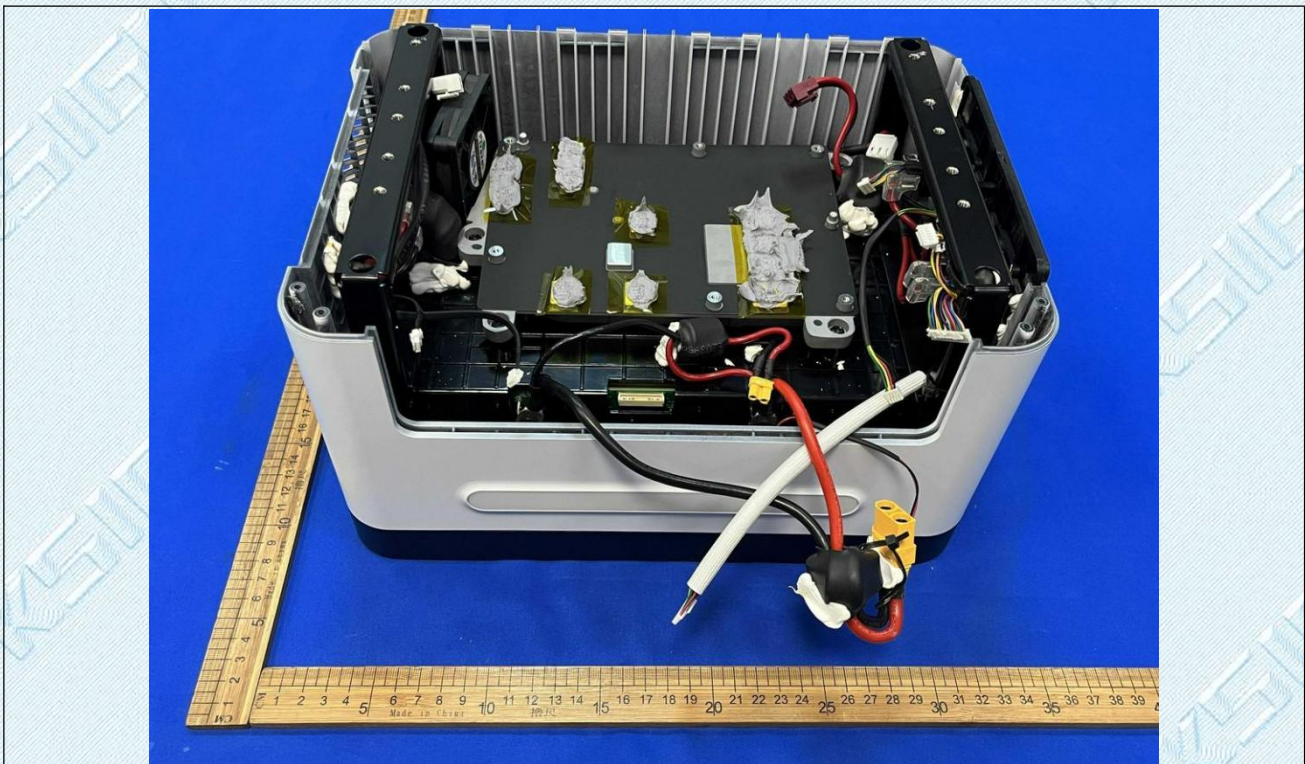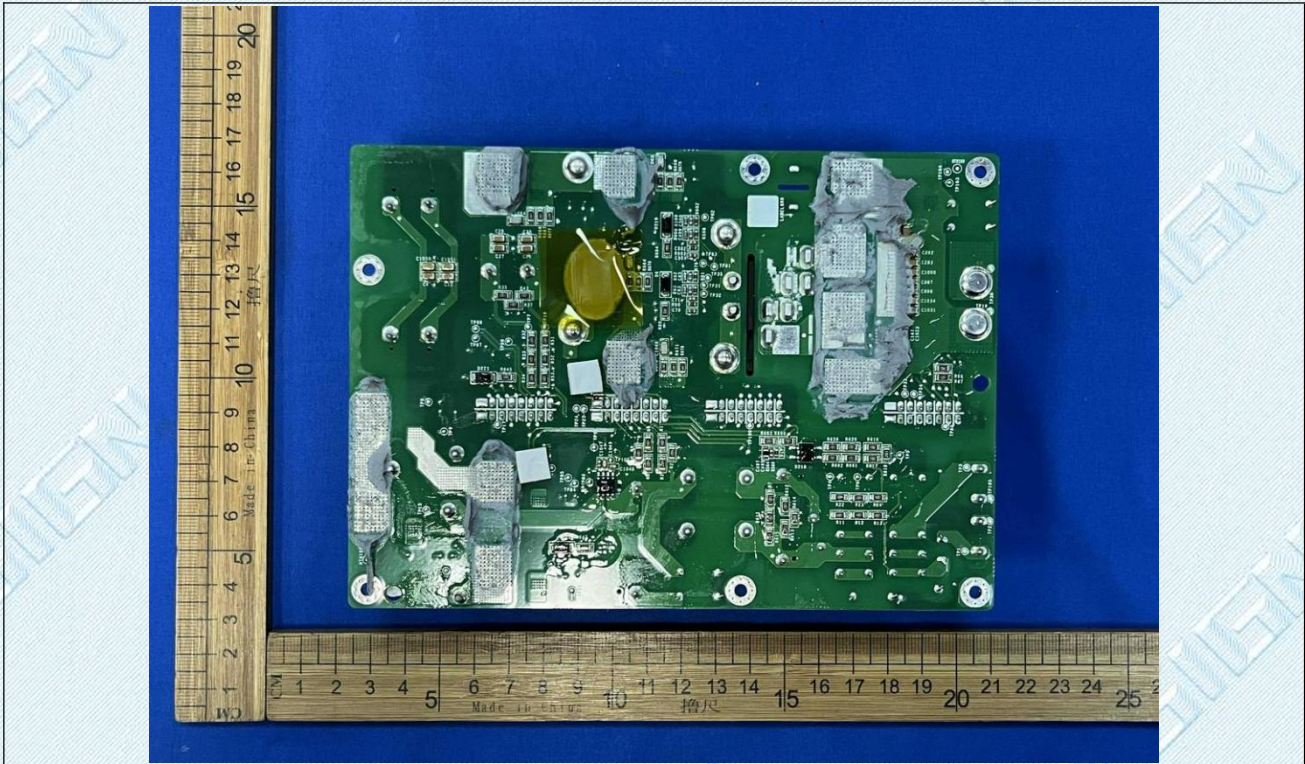

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China



Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

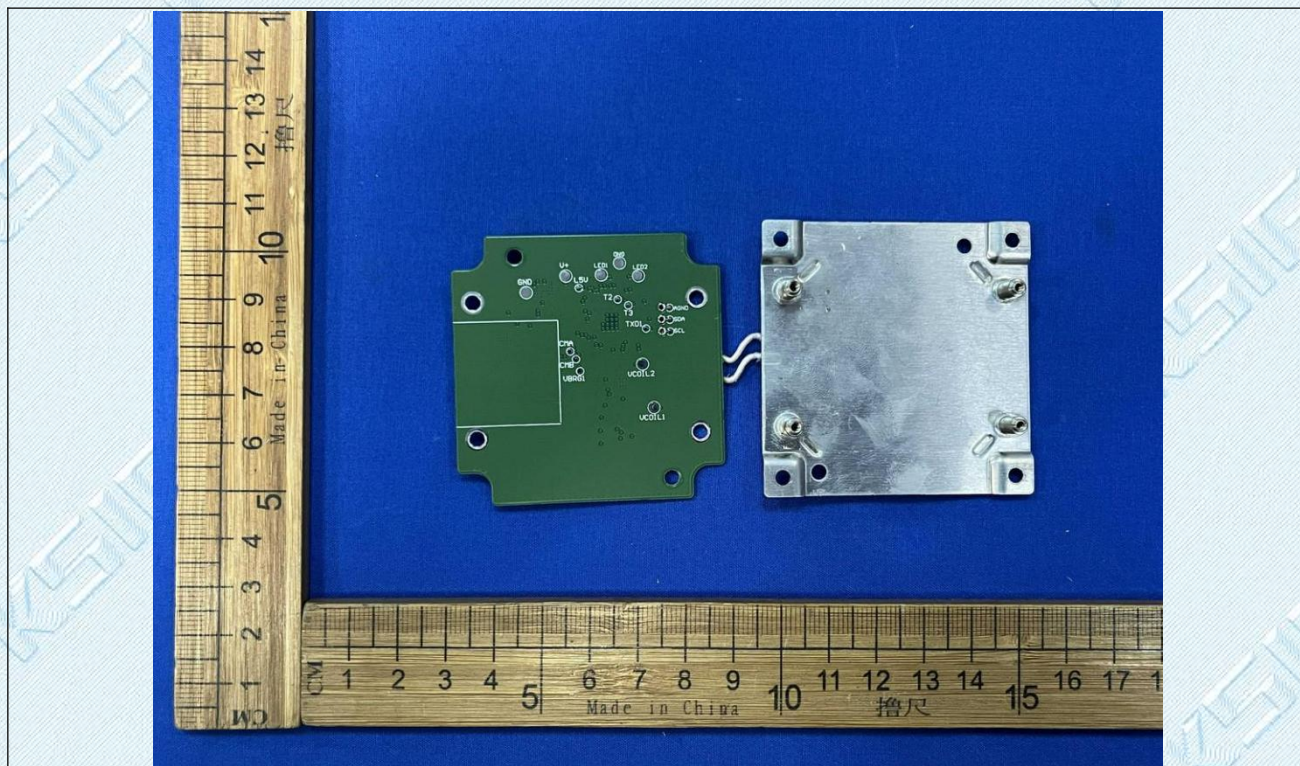

TRF RF_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

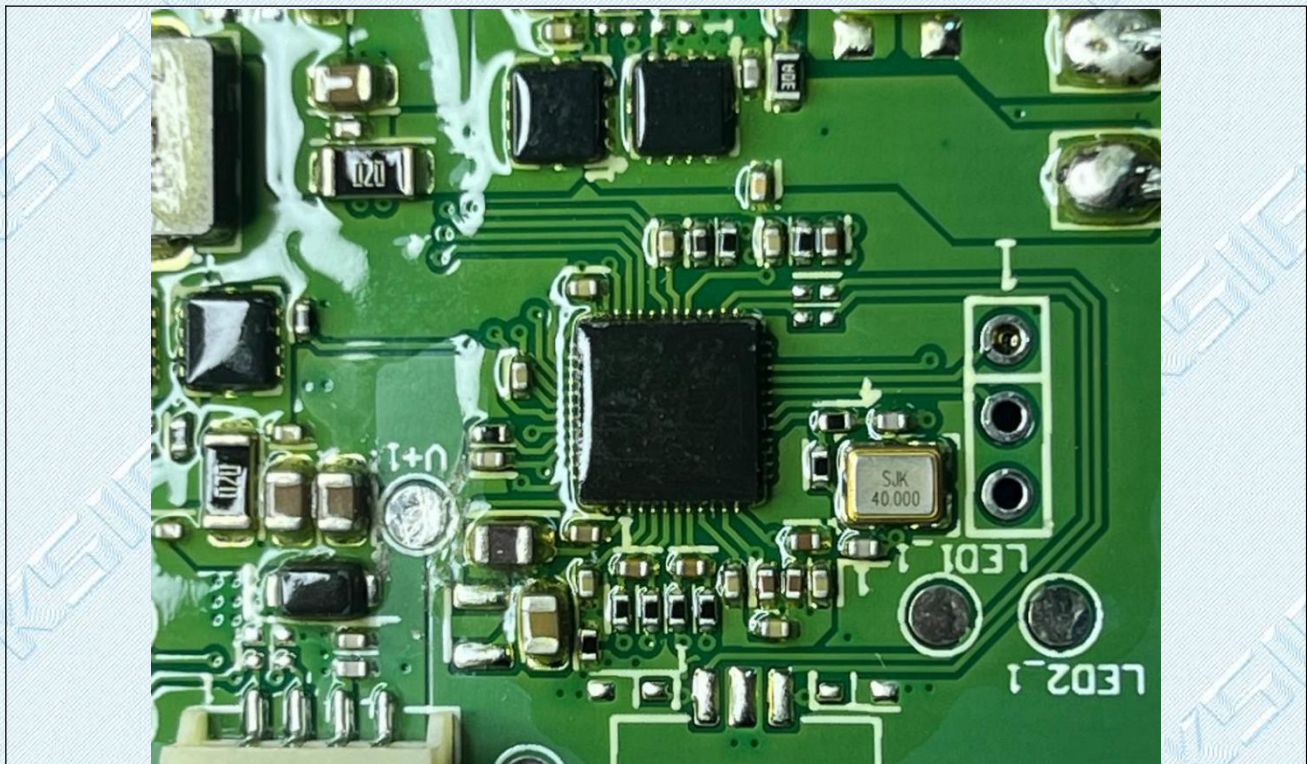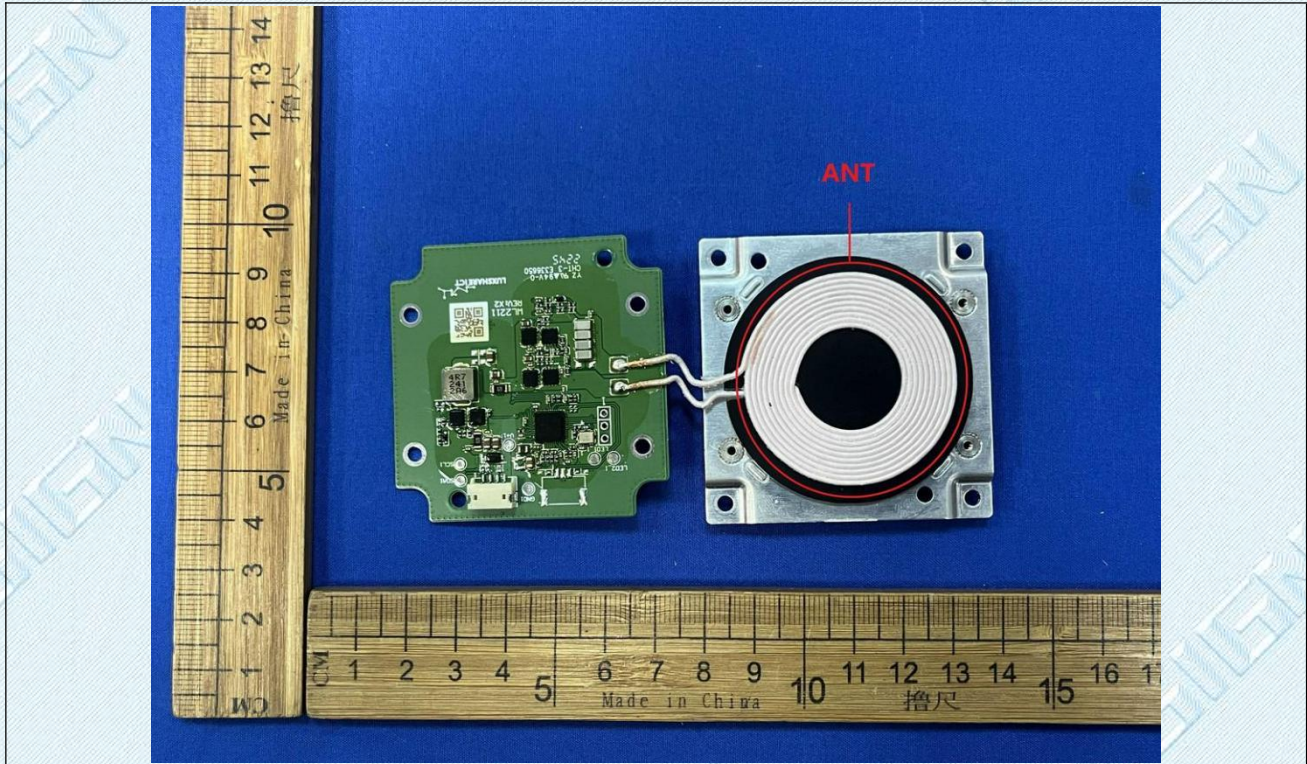

--THE END--