



Mode:	11A 5180
-------	----------

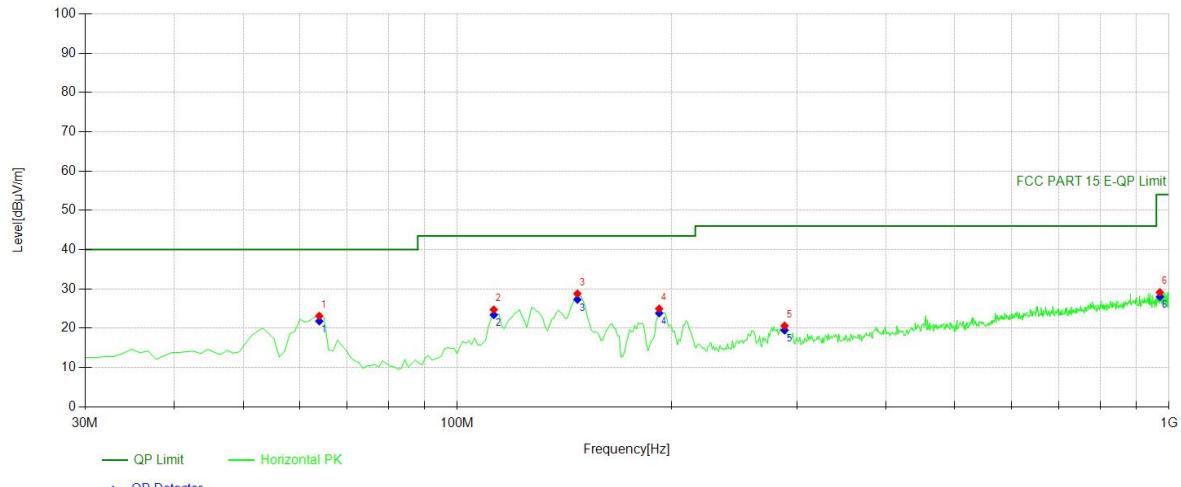


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	63.984	42.21	-19.11	23.10	PK	40.00	16.90	Horizontal
2	112.532	42.18	-17.47	24.71	PK	43.50	18.79	Horizontal
3	147.487	48.60	-19.83	28.77	PK	43.50	14.73	Horizontal
4	192.152	42.55	-17.61	24.94	PK	43.50	18.56	Horizontal
5	288.278	34.76	-14.16	20.60	PK	46.00	25.40	Horizontal
6	970.870	31.12	-2.01	29.11	PK	54.00	24.89	Horizontal

Mode:	11A 5200
-------	----------

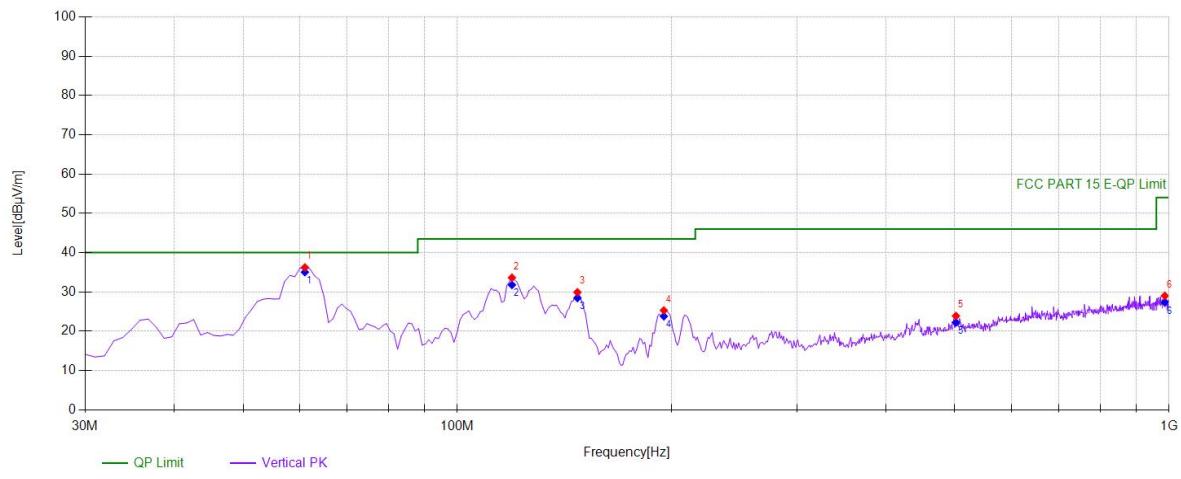


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	61.0711	54.92	-18.70	36.22	PK	40.00	3.78	Vertical
2	119.329	51.49	-17.88	33.61	PK	43.50	9.89	Vertical
3	147.487	49.74	-19.83	29.91	PK	43.50	13.59	Vertical
4	195.065	42.70	-17.43	25.27	PK	43.50	18.23	Vertical
5	501.891	33.62	-9.76	23.86	PK	46.00	22.14	Vertical
6	986.406	30.72	-1.73	28.99	PK	54.00	25.01	Vertical

Mode:	11A 5200
-------	----------

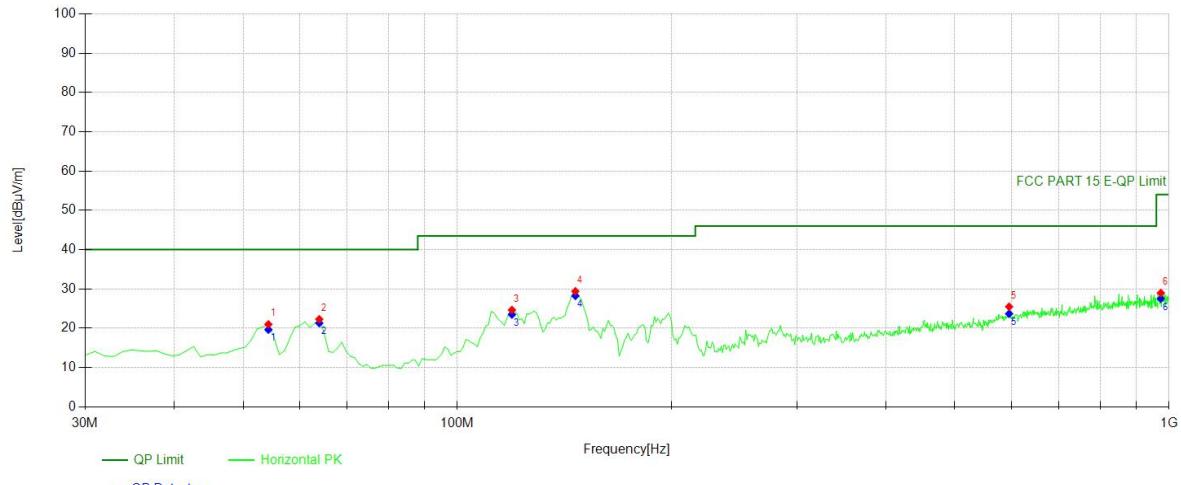


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	54.2743	38.74	-17.78	20.96	PK	40.00	19.04	Horizontal
2	63.984	41.38	-19.11	22.27	PK	40.00	17.73	Horizontal
3	119.329	42.50	-17.88	24.62	PK	43.50	18.88	Horizontal
4	146.516	49.22	-19.84	29.38	PK	43.50	14.12	Horizontal
5	596.076	32.60	-7.14	25.46	PK	46.00	20.54	Horizontal
6	973.783	30.88	-1.94	28.94	PK	54.00	25.06	Horizontal

Mode:	11A 5240
-------	----------

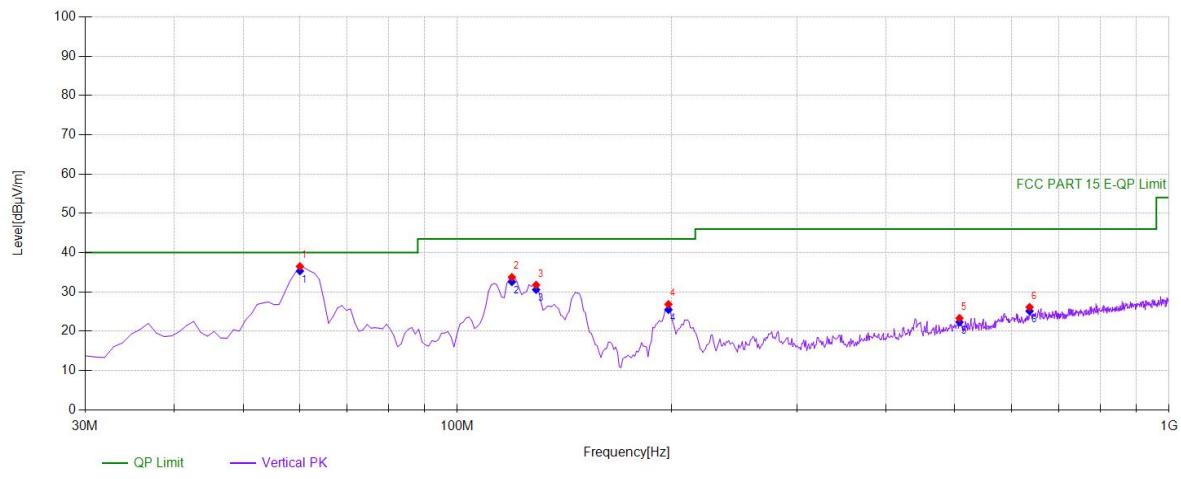

Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V]	Factor [dB/m]	Level [dB μ V/m]	Detector	Limit [dB μ V/m]	Margin [dB]	Polarity
1	60.1001	55.04	-18.56	36.48	PK	40.00	3.52	Vertical
2	119.329	51.61	-17.88	33.73	PK	43.50	9.77	Vertical
3	129.039	50.65	-18.90	31.75	PK	43.50	11.75	Vertical
4	197.978	44.08	-17.25	26.83	PK	43.50	16.67	Vertical
5	507.717	33.08	-9.78	23.30	PK	46.00	22.70	Vertical
6	636.856	32.52	-6.41	26.11	PK	46.00	19.89	Vertical

Mode:	11A 5240
-------	----------

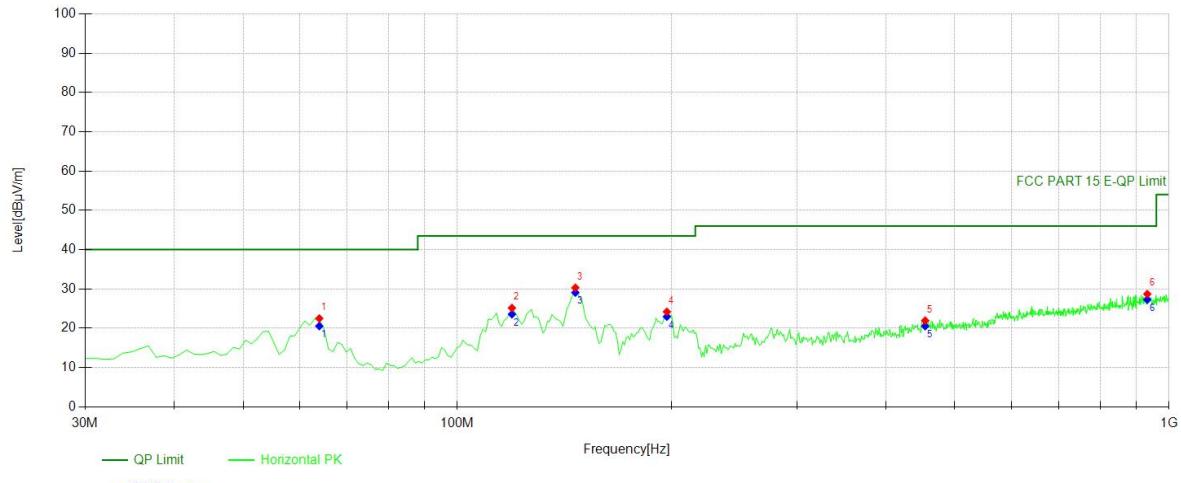

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	63.984	41.58	-19.11	22.47	PK	40.00	17.53	Horizontal
2	119.329	43.01	-17.88	25.13	PK	43.50	18.37	Horizontal
3	146.516	50.14	-19.84	30.30	PK	43.50	13.20	Horizontal
4	197.007	41.48	-17.31	24.17	PK	43.50	19.33	Horizontal
5	454.314	33.01	-11.09	21.92	PK	46.00	24.08	Horizontal
6	932.032	31.26	-2.58	28.68	PK	46.00	17.32	Horizontal

8.5 POWER LINE CONDUCTED EMISSIONS

8.5.1 Applicable Standard

According to FCC Part 15.207(a)

8.5.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.5.3 Test Configuration

Test according to clause 6.3 conducted emission test setup

8.5.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.


Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.5.5 Test Results

Pass

The 120V &240V voltagehave been tested, and the worst result recorded was report as below:

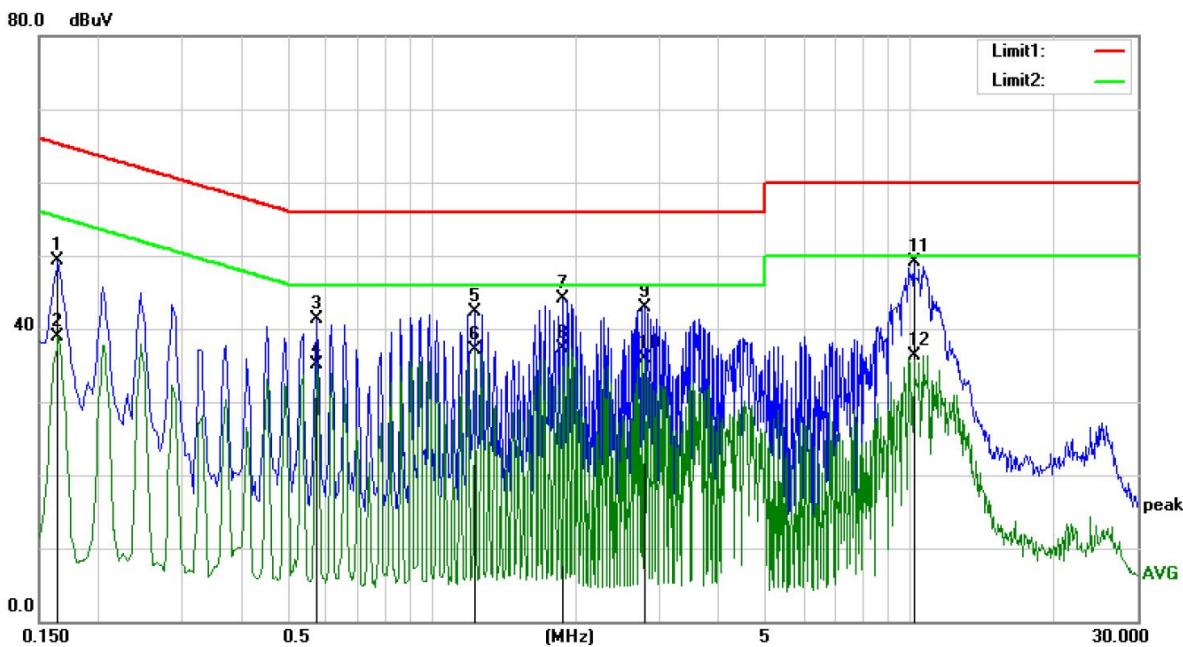

Site Conduction #1

 Phase: **L1**

Temperature: 21.9

Limit: (CE)FCC PART 15 class B_QP


Power: AC 120V/60Hz

Humidity: 58 %

Mode: wifi 5G

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
							MHz	dBuV	dB
1		0.1650	39.80	9.53	49.33	65.21	-15.88	QP	
2		0.1650	29.39	9.53	38.92	55.21	-16.29	AVG	
3		0.5750	31.77	9.53	41.30	56.00	-14.70	QP	
4		0.5750	25.67	9.53	35.20	46.00	-10.80	AVG	
5		1.2300	32.76	9.55	42.31	56.00	-13.69	QP	
6		1.2300	27.51	9.55	37.06	46.00	-8.94	AVG	
7		1.8850	34.47	9.55	44.02	56.00	-11.98	QP	
8	*	1.8850	27.83	9.55	37.38	46.00	-8.62	AVG	
9		2.7850	33.44	9.56	43.00	56.00	-13.00	QP	
10		2.7850	26.40	9.56	35.96	46.00	-10.04	AVG	
11		10.1800	39.41	9.70	49.11	60.00	-10.89	QP	
12		10.1800	26.62	9.70	36.32	50.00	-13.68	AVG	

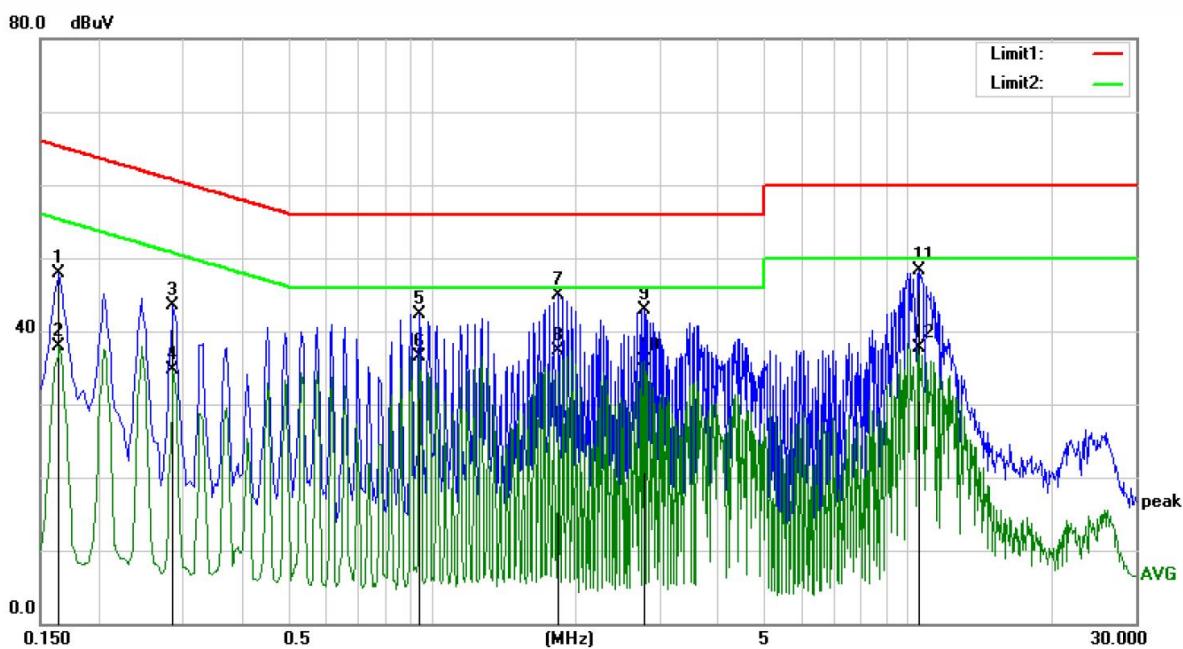

Site Conduction #1

 Phase: **N**

Temperature: 21.9

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 58 %

Mode: wifi 5G

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1650	38.45	9.53	47.98	65.21	-17.23	QP	
2		0.1650	28.44	9.53	37.97	55.21	-17.24	AVG	
3		0.2850	34.06	9.53	43.59	60.67	-17.08	QP	
4		0.2850	25.19	9.53	34.72	50.67	-15.95	AVG	
5		0.9400	32.75	9.55	42.30	56.00	-13.70	QP	
6		0.9400	27.05	9.55	36.60	46.00	-9.40	AVG	
7		1.8400	35.38	9.55	44.93	56.00	-11.07	QP	
8 *		1.8400	27.73	9.55	37.28	46.00	-8.72	AVG	
9		2.7800	33.28	9.56	42.84	56.00	-13.16	QP	
10		2.7800	26.32	9.56	35.88	46.00	-10.12	AVG	
11		10.5300	38.53	9.72	48.25	60.00	-11.75	QP	
12		10.5300	27.94	9.72	37.66	50.00	-12.34	AVG	

8.6 ANTENNA APPLICATION

8.6.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list. If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.
RSS-247 Section 5.4	

Result

PASS.

Note:

- Antenna use a permanently attached antenna which is not replaceable.
- Not using a standard antenna jack or electrical connector for antenna replacement
- The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document\Internal Photos to show the antenna connector.

*** End of Report ***