



# Acknowledgment Letter

## SPECIFICATION FOR APPROVAL

Customer Name	Deep Technology		
Customer Project Name	D10S	Project Name	D10S
Customer P/N		SDC P/N	WF3163B-0812M-80
Band	WIFI2.4G/BT		
Version	A0		
Designer Information			
RF Engineer	Fu Xuerong	R&D Director	Xia Chenglei
ME Engineer	Huang Zongbao		

Approval				Customer Approval	
	Prepared By	Checked By	Approval By	Checked By	Approval By
Signature	Huang Zongbao	Fu Xuerong	Xia Chenglei		
Date	2023.5.10	2023.5.10	2023.5.10		

Change Log				
Version	Change Description	Person in Charge	Approval By	Date




# Catalogue

No.	Item	Page No.
1	Drawing or Product Image	3
2	Dimensions Test Report	4
3	RF Performance Test Report	5-7
4	Reliability Test Report1	8
5	Package Document	9
6	RoHS Control list for Sample	10
7	Install Wizard or Other	10



## Drawing or Product Image

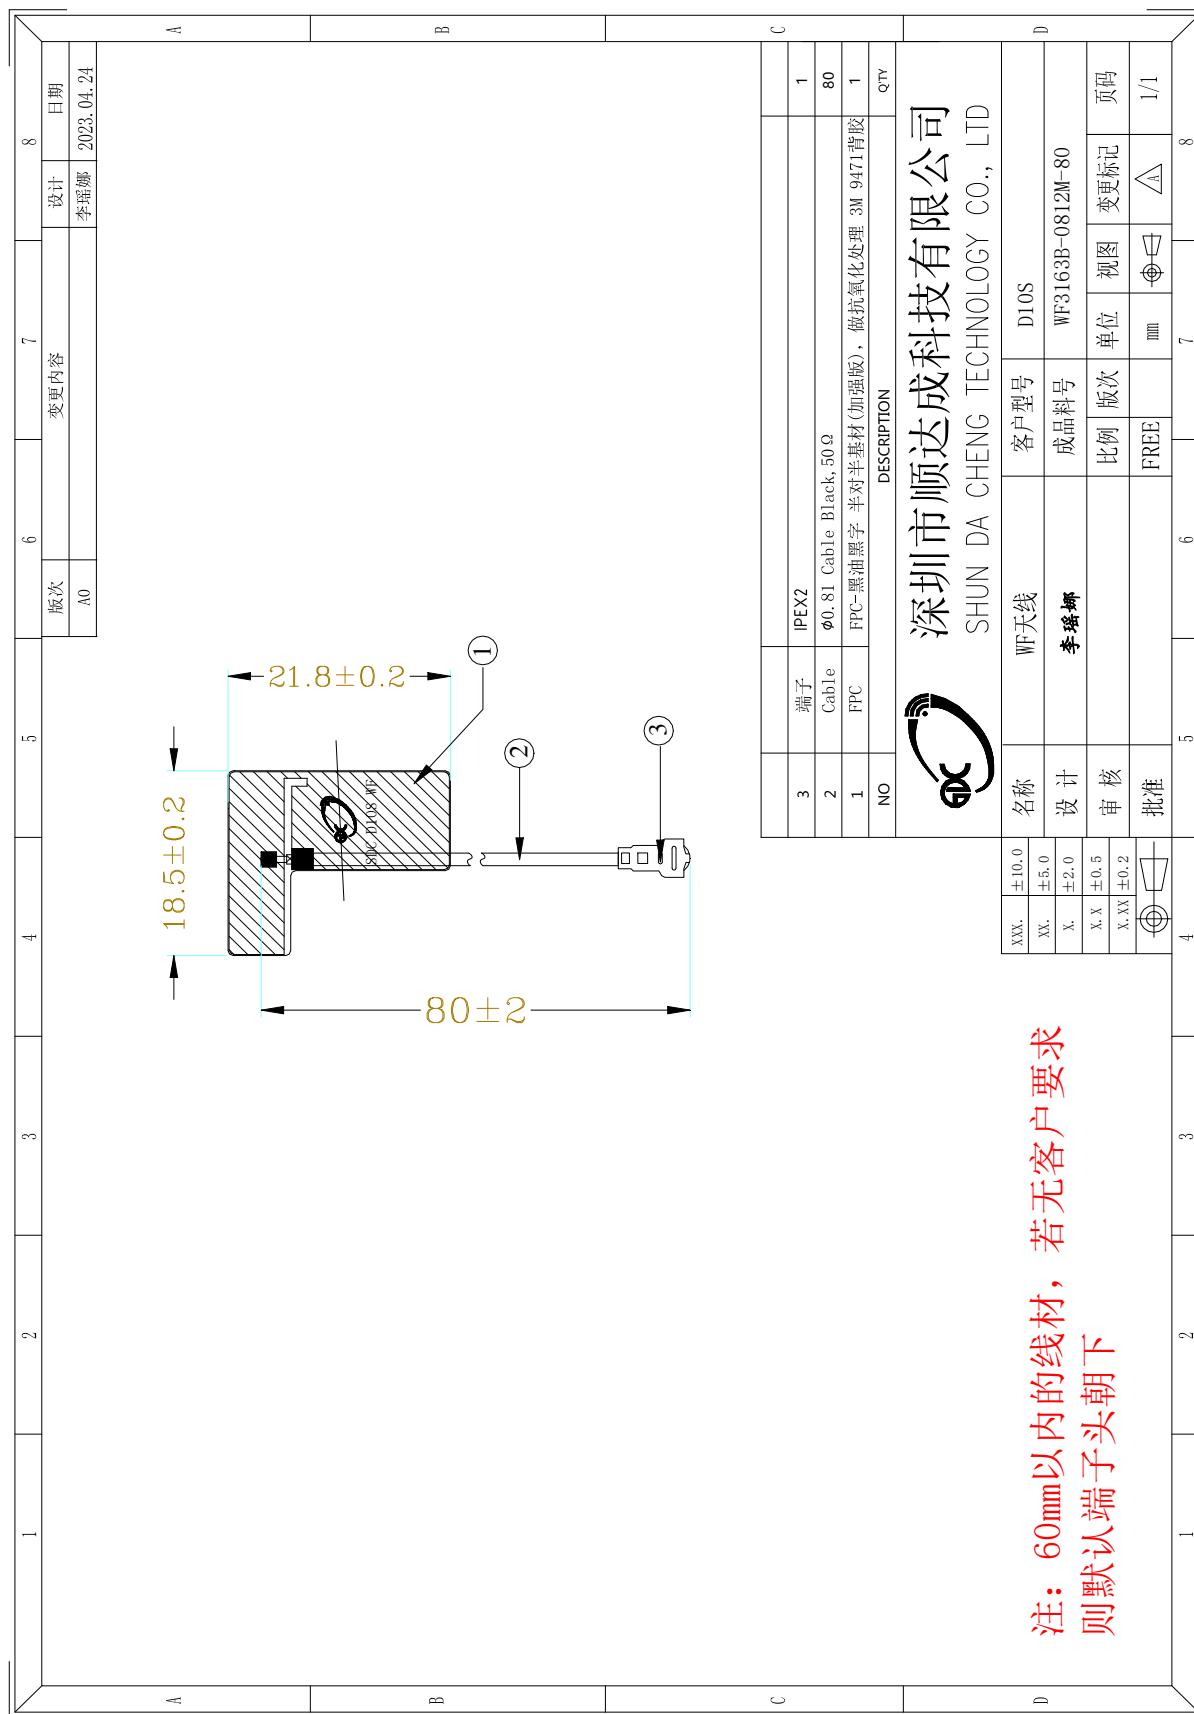



## Sample Dimensions Test Report

Test Date	2023. 5. 10	Sample Qty.	3	Inspector	Xu Yanfang
Dimension No.	Standard	Sample 1	Sample 2	Sample 3	Pass/NG
①length	18±0. 2mm	18	18	18	Pass
②width	22±0. 2mm	22	22	22	Pass
③thickness	0. 1±0. 03mm	0. 1	0. 1	0. 1	Pass
④Line length	100±2mm	100	101	100	Pass
⑤					
⑥					
⑦					
Conclusion					PASS
Inspector & Date	Xu Yanfang 2023. 5. 10	Approval & Date			

## RF Performance Test Report

### Antenna Test Equipment Introduction

Test of antenna input characteristics using **Agilent E5071C** and **Agilent 5062A** vector network analyzer; The radiation pattern of the antenna are tested using the guangping 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:

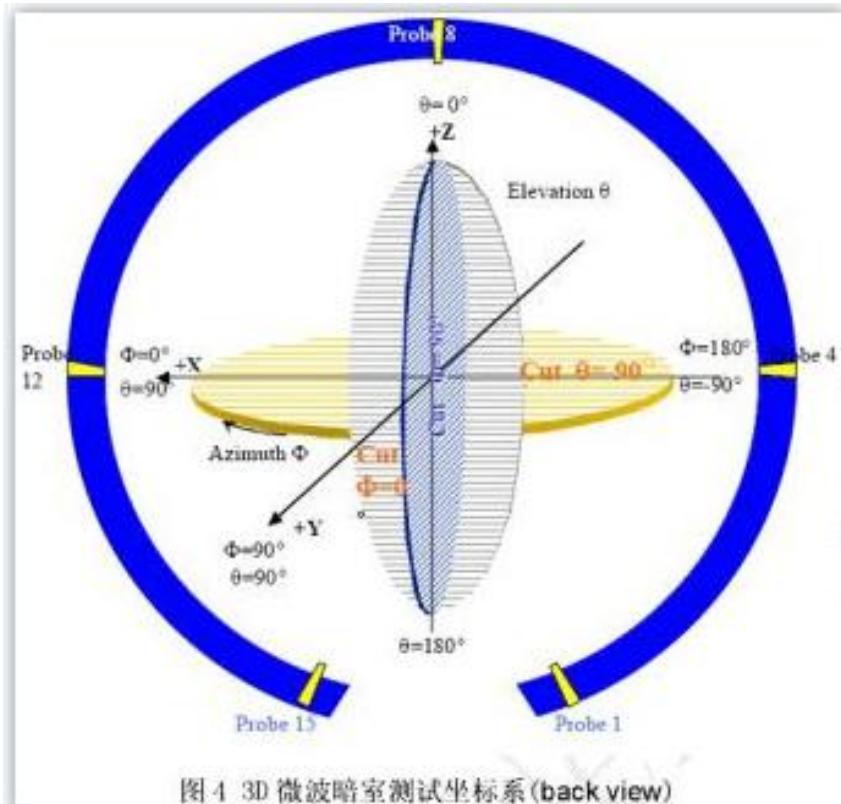


图 4 3D 微波暗室测试坐标系 (back view)

### 1. S11 Parameter-VSWR

Measuring Method is a  $50 \Omega$  coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.




### S11 Parameter-VSWR

frequency (MHZ)	2400	2450	2500
standing-wave ratio	2	1.3	1.4



### 2. Antenna Matching Network


#### Antenna

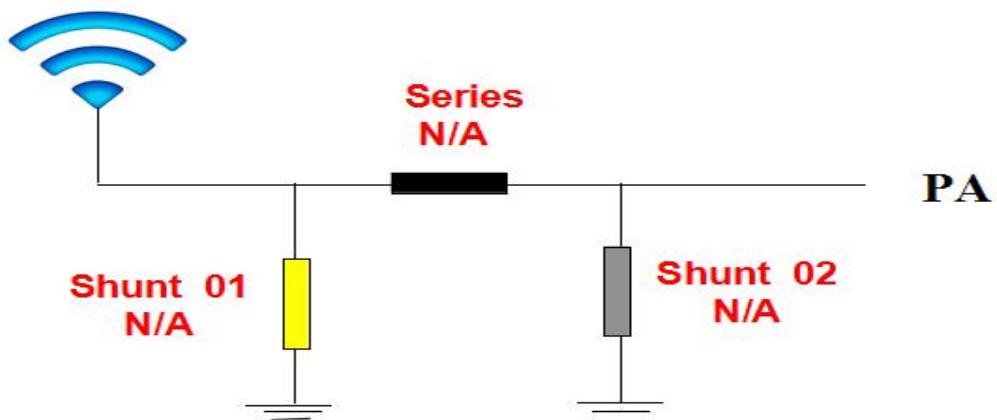



### 3. Gain & Efficiency

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	30. 26	0. 58
2450	31. 95	0. 65
2500	31. 18	-0. 13

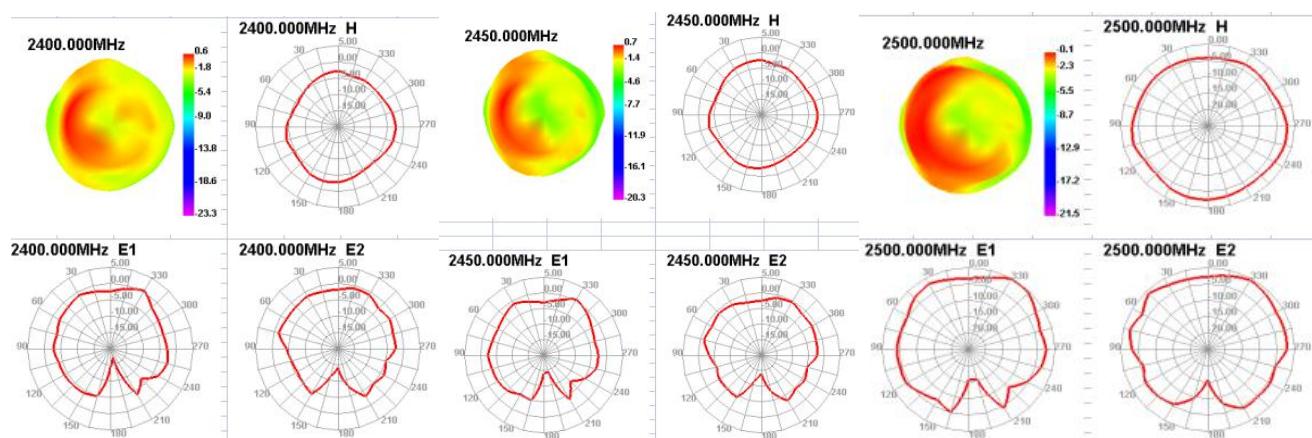



## Reliability Test Report

Test Date	2023.5.10	Sample Qty.	3	Inspector	Xu Yanfang	
Test Item	Requirement	testing equipment	Sample 1	Sample 2	Sample 3	PASS/NG
high temperature storage	Expose to +85 °C for 24 hours, recover for 2 hours, and conduct testing	Constant temperature and humidity box	OK	OK	OK	Pass
low temperature storage	Expose to -40 °C for 24 hours, recover for 2 hours, and perform testing	Constant temperature and humidity box	OK	OK	OK	Pass
High temperature operation	Powered on for 24 hours at +60 °C	Constant temperature and humidity box	OK	OK	OK	Pass
Low temperature operation	Powered on for 24 hours at -20 °C	Constant temperature and humidity box	OK	OK	OK	Pass
Salt spray test	(5 ± 0.5)% sodium chloride, pH value is 6.5~7.2, Temperature of experimental chamber (35±2) °C <input type="checkbox"/> 24H <input checked="" type="checkbox"/> 48H	Salt spray testing machine	OK	OK	OK	Pass
Connector riveting and pulling force	1.13Wire diameter ≥ 10N 0.81Wire diameter ≥ 8N RG174 ≥ 60N RG178 ≥ 50N	Push-pull force gauge	≥10N	≥10N	≥10N	Pass
Conclusion						Pass
Inspector & Date	Xu Yanfang 2023.5.10		Approval & Date			



## Product ROHS Composition Declaration Form

product name	Unifor m material	Harmful substance content( PPM )					HS test report number	Date of HS test report
		Pb	Cd	Hg	Cr	Br		
WIFI&BT antenna	FPC	ND	ND	ND	ND	ND	UNIB21042707HR-01	2023. 5. 10
		ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND		
	wire rod	ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND		
	termin	ND	ND	ND	ND	ND		

Install Wizard or Other

setup script:

Take 1 PCS of product, tear off the release paper on the back of the FPC by hand, and then align the FPC positioning hole position with the shell positioning hole position (positioning rib position or positioning line), and attach it flat to the shell, as shown in the following figure:

Installation process precautions:

- Ensure that the FPC is fully attached to the housing after pasting the antenna;
- Align the positioning hole with the position of the casing positioning column;
- Align FPC edge with shell edge;
- When attaching the terminal to the PCBA end of the motherboard, please first align the terminals and then snap them vertically;
- When disassembling antenna terminals, it is necessary to use a tool (such as a special pry bar) to vertically lift the terminals and not directly pull the wires for disassembly



# Certificate



Certificate Number: UNIB22051904HC-01

Product: Fpc antenna  
Applicant: ShenZhen ShunDaCheng Technology Co., Ltd.  
4th Floor, Building B5, Xinfu Industrial Zone, Fuyong Chongqing Road,  
Bao'an District, Shenzhen  
Manufacturer: ShenZhen ShunDaCheng Technology Co., Ltd.  
Model No.: N/A  
Trade Name: N/A  
Test Methods: IEC 62321-2:2021, IEC 62321-3-1:2013, IEC 62321-4:2013 +A1:2017,  
IEC 62321-5:2013, IEC 62321-6:2015, IEC 62321-7-1:2015  
IEC 62321-7-2:2017, IEC 62321-8:2017

The laboratory tested the product provided by the applicant according to the above test methods. According to the test results, the product conforms to RoHS Directive [(2011/65/EU and Amendment (EU) 2015/863)] issued by the European Commission. It is possible to use CE marking to demonstrate the compliance with RoHS Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test report number: UNIB22051904HR-01.

**Note:** According to the requirements of the applicant for testing, details are shown in the test report.

# RoHS

May 27, 2022  
Issue Date



# CE



Shenzhen United Testing Technology Co., Ltd.

Shenzhen: 2/F, Annex Building, Jiahuangyuan Tech Park, No.365, Baotian 1st Road, Bao'an District, Xinfu Street, Bao'an District, Shenzhen, Guangdong, China/518050

Guangzhou: No.47-3, Industrial Road, Zhushan, Dalong Street, Panyu District, Guangzhou, Guangdong, China/511450

Tel: +86-755-86180996/+86-020-39277769 Fax: +86-0755-86180156

Web Site: [www.uni-lab.hk/](http://www.uni-lab.hk/) E-mail: [hofferlau@uni-lab.hk](mailto:hofferlau@uni-lab.hk)

# Certificate of Compliance