



Total Quality. Assured.

Intertek

731 Enterprise Drive

Lexington, KY 40510

Tel 859 226 1000

Fax 859 226 1040

www.intertek.com

SPR Therapeutics, Inc.

SAR EXEMPTION

REPORT

SCOPE OF WORK

SAR EXEMPTION CALCULATION

ON THE SPRINT PNS (PATIENT REMOTE REF: 9620)

REPORT NUMBER

105410623LEX-009.2

ISSUE DATE

5/25/2023

REVISED DATE

6/22/2023

PAGES

11

DOCUMENT CONTROL NUMBER

Non-Specific EMC Report Shell Rev. December 2017

© 2017 INTERTEK



SAR EXEMPTION TEST REPORT

Report Number: 105410623LEX-009.2

Project Number: G105410623

Report Issue Date: 5/25/2023

Report Revised Date: 6/22/2023

Product Name: SPRINT PNS (Patient Remote Ref: 9620)
Model 9620

Standards: FCC Part 2.1093
RSS-102 Issue 5

Tested by:

Intertek Testing Services NA, Inc.
731 Enterprise Drive
Lexington, KY 40510
USA

Client:

SPR Therapeutics, Inc.
22901 Millcreek Blvd Ste 500
Cleveland, OH 44122-5724
USA

Report prepared by



David Perry, EMC Engineer

Report reviewed by



Brian Lackey, Team Leader

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.





Table of Contents

1	<i>Introduction and Conclusion</i>	4
2	<i>Test Summary</i>	4
3	<i>Client Information</i>	5
4	<i>Description of Equipment under Test and Variant Models</i>	6
4.1	<i>Variant Models:</i>	6
4.2	<i>Antenna Separation</i>	7
4.3	<i>Maximum Output Power</i>	8
5	<i>FCC SAR Exemption Criteria</i>	9
6	<i>ISED SAR Exemption Criteria</i>	10
7	<i>Revision History</i>	11



1 Introduction and Conclusion

SAR exemption calculations were performed on the product constructed as described in section 4. Information provided by the client including maximum output power, antenna gain(s), and minimum separation distance(s) was used to determine if the product under evaluation was exempt from SAR. Any change in these stated values may invalidate these results. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product under evaluation is **exempt** from SAR requirements for each of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) evaluated. Intertek does not make any claims of compliance for samples or variants which were not evaluated.

2 Test Summary

Section	Requirement	Result
5	FCC SAR Exemption Criteria (FCC Title 47 CFR Part 1.1307, 2.1093)	Exempt from SAR
6	ISED SAR Exemption Criteria (RSS-102 Issue 5)	Exempt from SAR



3 Client Information

This product was tested at the request of the following:

Client Information	
Client Name:	SPR Therapeutics, Inc.
Address:	22901 Millcreek Blvd Ste 500 Cleveland, OH 44122-5724 USA
Contact:	Jeff Waterman
Telephone:	(216) 455-7447
Email:	jwaterman@sprtherapeutics.com
Manufacturer Information	
Manufacturer Name:	SPR Therapeutics, Inc.
Manufacturer Address:	22901 Millcreek Blvd Ste 500 Cleveland, OH 44122-5724 USA



4 Description of Equipment under Test and Variant Models

Equipment Under Test	
Product Name	SPRINT PNS (Patient Remote Ref: 9620)
Model Number	9620
FCC Identifier	2BBB4-9620
Type of Transmission	Bluetooth Low Energy (BLE)
Antenna(s) and Gain	AH316M245001-T, 1.6 dBm
Software Used By EUT	DEV-5043-XSF-000[08]
Frequency Range	2402MHz - 2480MHz
Type of Modulation / Data Rate	GFSK 4.1
Number of Channel(s)	40
Description of Equipment Under Test (provided by client)	
SPRINT PNS – Patient Remote. This is a Bluetooth Low Energy enabled wireless remote that communicates with the external pulse generator and serves as the User Interface for the SPRINT PNS system. It is battery operated and allows the patient to control the stimulus session. The entirety of these tests utilized a Patient Remote with increased BLE transmit power (7).	

4.1 Variant Models:

There were no variant models covered by this evaluation.




4.2 Antenna Separation

The following information was provided by SPR Therapeutics, Inc. and may affect compliance. Intertek does not make any claims of compliance for values other than those shown below.

Spec Sheet

Chip Antennas(Multilayer)

AH316M245001-T

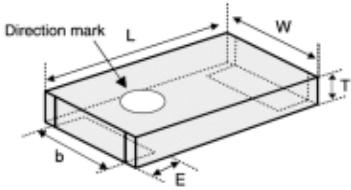

Products characteristics table

System	Bluetooth/W-LAN/ZigBee
Frequency Band Width	2400 to 2500 MHz
Center Frequency	2450 MHz
Gain1 (Peak Gain)(typ)	+1.6 dBi
Gain2 (Ave. Gain at OMNI plane)	-0.1 dBi
Efficiency (typ)	-1.4 dB (72 %)
VSWR (typ)	3
Type	MonoPole
Operating Temp. Range	-40 to +85 °C
RoHS Compliance (10 subst.)	Yes
REACH Compliance (223 subst.)	Yes
Halogen Free	Yes
Soldering	Reflow

Features

- Item Summary
MonoPole, 3.2x1.6x0.5mm,
for Bluetooth/W-LAN/ZigBee
- Lifecycle Stage
New PN available
- Standard packaging quantity (minimum)
Taping Embossed 3000pcs

External Dimensions

Dimension L	3.2 ±0.15 mm
Dimension W	1.6 ±0.15 mm
Dimension T	0.5 ±0.1 mm
Dimension E	0.5 ±0.2 mm
Dimension b	Min 1.0 mm

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
TAIYO YUDEN reserves the right to make change to the data at any time without notice.
Before making final selection, please check product specification.

2022.06.09

TAIYO YUDEN

<http://www.ty-top.com>



4.3 Maximum Output Power

The maximum output power was measured and recorded in Intertek report 105410623LEX-008, reproduced below.

Frequency (MHz)	Conducted Power (dBm)	Conducted Power Limit (dBm)	Max Antenna Gain ¹ (dBi)	EIRP (dBm)	EIRP Limit (dBm)
2402	-5.03	30	1.6	-3.43	36.02
2440	-5.30	30	1.6	-3.70	36.02
2480	-5.53	30	1.6	-3.93	36.02

¹ Antenna gain not measured; values used are from § 4.2 Antenna Specifications, a client provided document



5 FCC SAR Exemption Criteria

FCC Title 47 CFR Part 1.1307(3)(i):

For single RF sources (i.e., any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

- (A) The available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption may not be used in conjunction with other exemption criteria other than those in paragraph (b)(3)(ii)(A) of this section. Medical implant devices may only use this exemption and that in paragraph (b)(3)(ii)(A);
- (B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}}(d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

RF Source	Frequency (GHz)	Separation Distance (cm)	Output Power (mW)	P_{th} (mW)	Exempt from SAR?
Low	2.402	0.5	0.314	-	Exempt
Mid	2.440	0.5	0.295	-	Exempt
High	2.480	0.5	0.280	-	Exempt

Since the output power was less than 1 mW, the device was considered categorically exempt per 1.1307(3)(i)(A).



6 ISED SAR Exemption Criteria

RSS-102 Issue 5 § 2.5.1: SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1.

Table 1: SAR evaluation — Exemption limits for routine evaluation based on frequency and separation distance^{4.5}

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power. For controlled use devices where the 8 W/kg for 1 gram of tissue applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5. If the operating frequency of the device is between two frequencies located in Table 1, linear interpolation shall be applied for the applicable separation distance. For test separation distance less than 5 mm, the exemption limits for a separation distance of 5 mm can be applied to determine if a routine evaluation is required.

Device	Frequency (MHz)	EIRP (dBm)	Separation Distance (mm)	Limit (mW)	Exempt from SAR?
Low	2402	-3.43	5	4.20	Exempt
Mid	2440	-3.70	5	4.04	Exempt
High	2480	-3.93	5	3.88	Exempt



7 Revision History

Revision Level	Date	Report Number	Prepared By	Reviewed By	Notes
0	5/25/2023	105410623LEX-009	JP	BL	Original Issue
1	6/8/2023	105410623LEX-009.1	JP	BL	Updated per TCB feedback
2	6/22/2023	105410623LEX-009.2	JP	BL	Updated per TCB feedback