



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.000	58.61	74.00	15.39	12.74	V	135.6	1
1	5,150.000	54.54	74.00	19.46	12.75	V	354.6	1
1	5,175.500	105.62			12.86	V	176.6	2

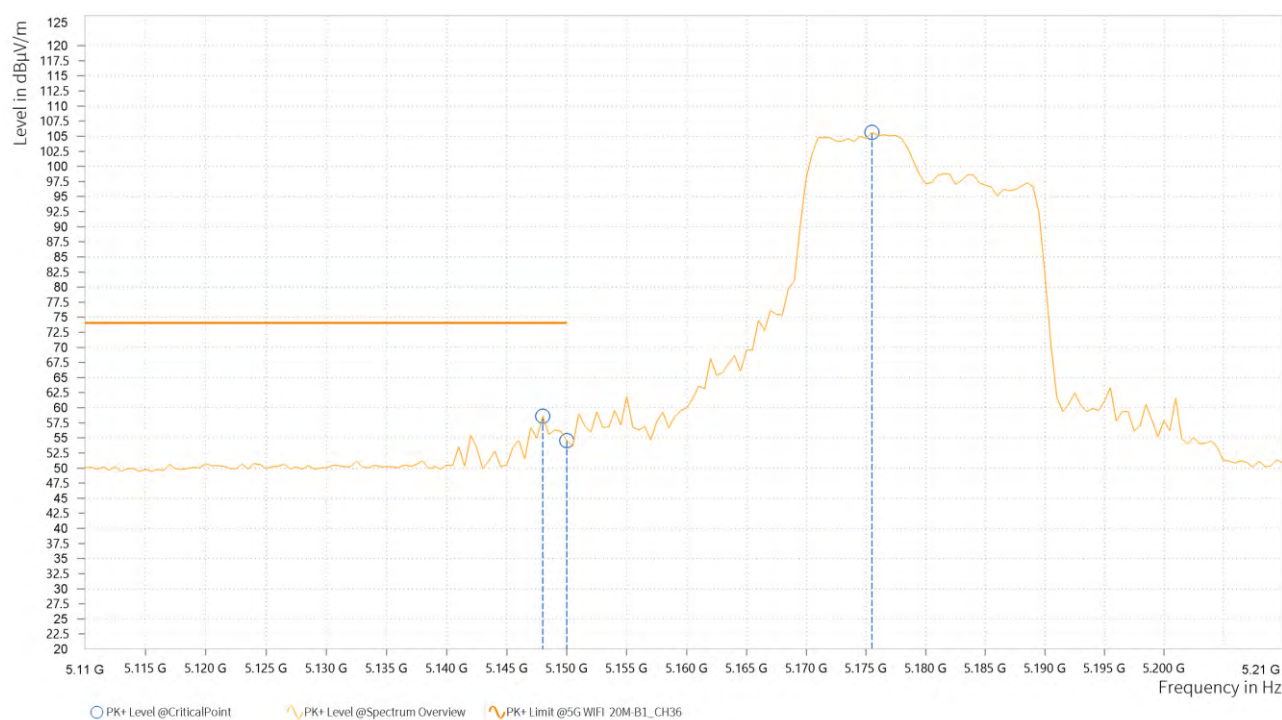

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.000	37.43	54.00	16.57	12.74	V	44.8	1
1	5,150.000	37.36	54.00	16.64	12.75	V	236	1
1	5,172.000	93.09			12.84	V	236	1

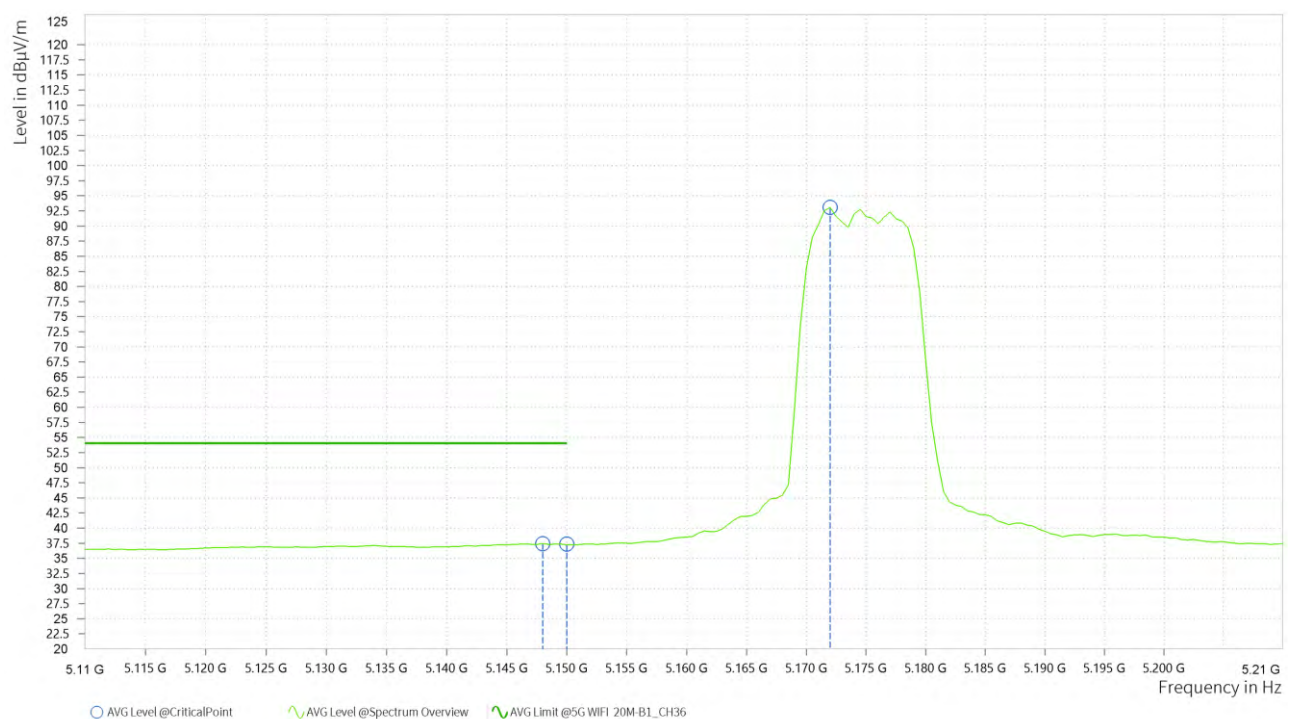

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ax (20MHz) (RU242):

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	55.91	56.98	74	-18.09	34.52	9.92	45.51	100	205	Peak
5150.000	50.04	51.11	54	-3.96	34.52	9.92	45.51	100	205	Average
5180.000	109.52	110.58	/	/	34.54	9.91	45.51	100	205	Peak
5180.000	101.19	102.25	/	/	34.54	9.91	45.51	100	205	Average
5350.000	54.68	55.66	74	-19.32	34.68	9.85	45.51	100	205	Peak
5350.000	47.11	48.09	54	-6.89	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	54.1	55.09	74	-19.9	34.6	9.92	45.51	100	0	Peak
5150.000	48.48	49.47	54	-5.52	34.6	9.92	45.51	100	0	Average
5180.000	104.23	105.23	/	/	34.6	9.91	45.51	100	0	Peak
5180.000	95.74	96.74	/	/	34.6	9.91	45.51	100	0	Average
5350.000	54.85	55.91	74	-19.15	34.6	9.85	45.51	100	0	Peak
5350.000	47.81	48.87	54	-6.19	34.6	9.85	45.51	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ax (20MHz) (RU242):

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	56.37	57.44	74	-17.63	34.52	9.92	45.51	100	205	Peak
5150.000	50.34	51.41	54	-3.66	34.52	9.92	45.51	100	205	Average
5180.000	109.81	110.86	/	/	34.56	9.9	45.51	100	205	Peak
5180.000	102.4	103.45	/	/	34.56	9.9	45.51	100	205	Average
5350.000	53.37	54.35	74	-20.63	34.68	9.85	45.51	100	205	Peak
5350.000	49.6	50.58	54	-4.4	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.22	54.21	74	-20.78	34.6	9.92	45.51	100	0	Peak
5150.000	49.4	50.39	54	-4.6	34.6	9.92	45.51	100	0	Average
5180.000	103.88	104.89	/	/	34.6	9.9	45.51	100	0	Peak
5180.000	97.32	98.33	/	/	34.6	9.9	45.51	100	0	Average
5350.000	53.54	54.6	74	-20.46	34.6	9.85	45.51	100	0	Peak
5350.000	48.55	49.61	54	-5.45	34.6	9.85	45.51	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ax (20MHz) (RU242):

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.66	54.73	74	-20.34	34.52	9.92	45.51	100	205	Peak
5150.000	49.15	50.22	54	-4.85	34.52	9.92	45.51	100	205	Average
5180.000	109.8	110.83	/	/	34.59	9.89	45.51	100	205	Peak
5180.000	102.42	103.45	/	/	34.59	9.89	45.51	100	205	Average
5350.000	53.48	54.46	74	-20.52	34.68	9.85	45.51	100	205	Peak
5350.000	48.92	49.9	54	-5.08	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.54	54.53	74	-20.46	34.6	9.92	45.51	100	300	Peak
5150.000	49.54	50.53	54	-4.46	34.6	9.92	45.51	100	300	Average
5180.000	104.52	105.54	/	/	34.6	9.89	45.51	100	300	Peak
5180.000	97.78	98.8	/	/	34.6	9.89	45.51	100	300	Average
5350.000	53.55	54.61	74	-20.45	34.6	9.85	45.51	100	300	Peak
5350.000	49.64	50.7	54	-4.36	34.6	9.85	45.51	100	300	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ax (40MHz) (RU242):


CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.500	69.04	74.00	4.96	12.74	H	222	2
1	5,150.000	66.13	74.00	7.87	12.75	H	0.9	2
1	5,188.000	109.10			12.90	H	355.7	2



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.500	46.95	54.00	7.05	12.74	H	267.1	1
1	5,150.000	47.03	54.00	6.97	12.75	H	267.1	1
1	5,181.500	98.19			12.88	H	267.1	1

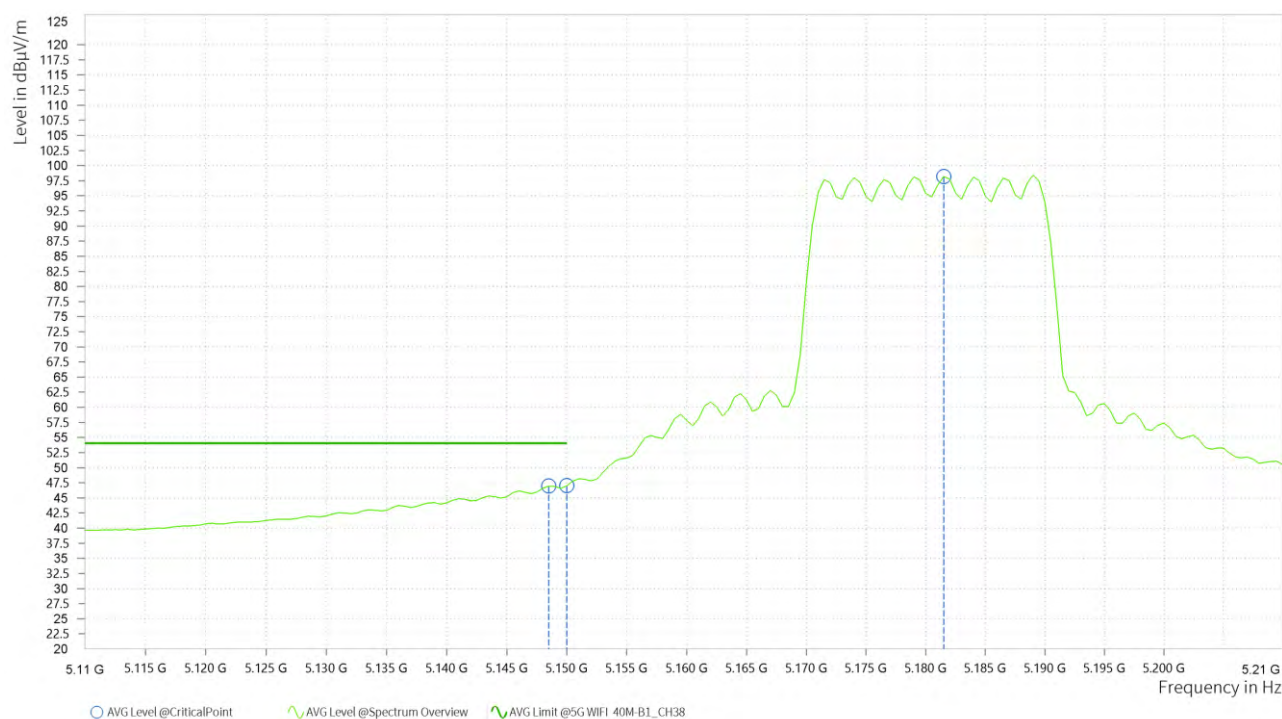

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.000	66.57	74.00	7.43	12.74	V	251.5	1
1	5,150.000	62.66	74.00	11.34	12.75	V	316.4	2
1	5,188.500	105.46			12.90	V	251.5	1



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.000	41.54	54.00	12.46	12.74	V	43.6	1
1	5,150.000	42.27	54.00	11.73	12.75	V	43.6	1
1	5,180.500	90.16			12.88	V	17	2



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5190MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.500	68.71	74.00	5.29	12.74	H	238.4	1
1	5,150.000	66.84	74.00	7.16	12.75	H	223.1	2
1	5,207.000	105.98			12.94	H	223.1	2



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.500	49.61	54.00	4.39	12.74	H	242	1
1	5,150.000	48.88	54.00	5.12	12.75	H	242	1
1	5,181.500	91.54			12.88	H	242	1




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,147.500	66.81	74.00	7.19	12.74	V	283.8	2
1	5,150.000	63.12	74.00	10.88	12.75	V	0.9	1
1	5,178.500	101.07			12.87	V	317.6	1



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.500	44.28	54.00	9.72	12.74	V	266.2	2
1	5,150.000	44.36	54.00	9.64	12.75	V	266.2	2
1	5,199.000	85.54			12.94	V	240.8	1

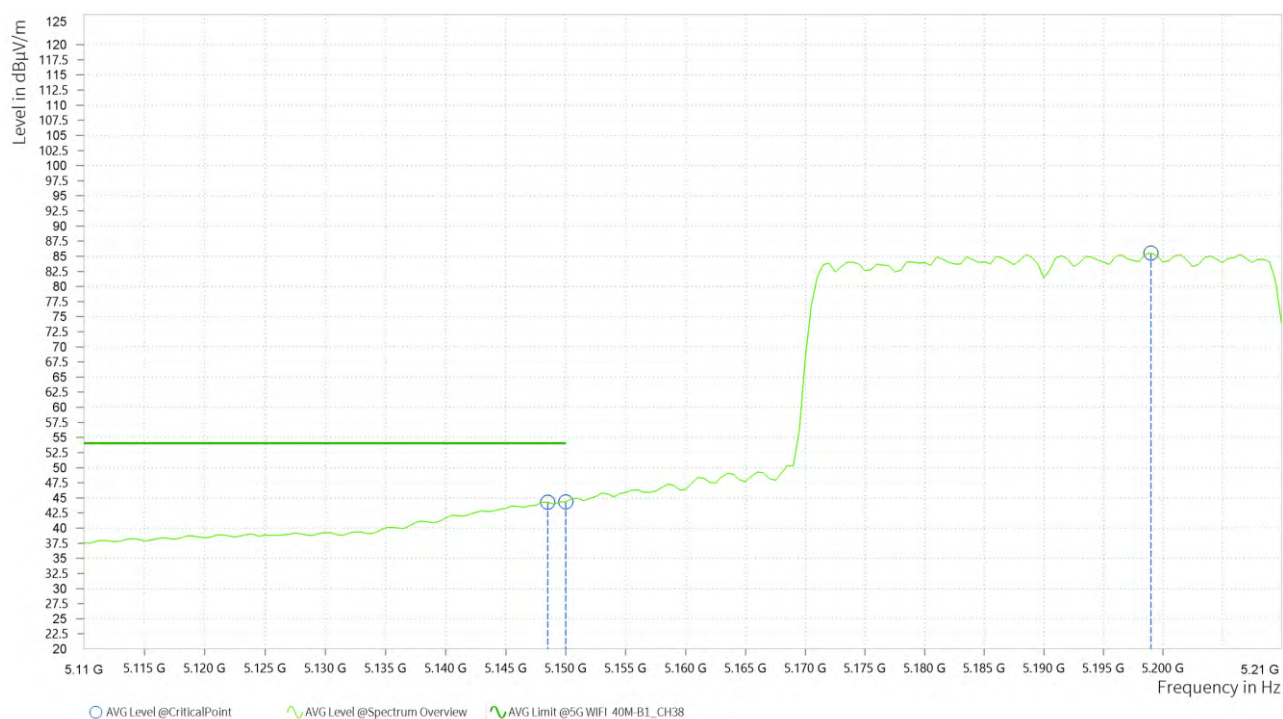

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5190MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	56.03	57.1	74	-17.97	34.52	9.92	45.51	100	205	Peak
5150.000	50.86	51.93	54	-3.14	34.52	9.92	45.51	100	205	Average
5230.000	107	108.04	/	/	34.58	9.89	45.51	100	205	Peak
5230.000	98.82	99.86	/	/	34.58	9.89	45.51	100	205	Average
5350.000	53.95	54.93	74	-20.05	34.68	9.85	45.51	100	205	Peak
5350.000	48.31	49.29	54	-5.69	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.89	54.88	74	-20.11	34.6	9.92	45.51	100	300	Peak
5150.000	47.71	48.7	54	-6.29	34.6	9.92	45.51	100	300	Average
5230.000	102.58	103.6	/	/	34.6	9.89	45.51	100	300	Peak
5230.000	93.65	94.67	/	/	34.6	9.89	45.51	100	300	Average
5350.000	52.48	53.54	74	-21.52	34.6	9.85	45.51	100	300	Peak
5350.000	46.82	47.88	54	-7.18	34.6	9.85	45.51	100	300	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5230MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11ax (80MHz) (RU484):

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,147.825	69.36	74.00	4.64	12.74	H	218.4	2
1	5,149.950	69.60	74.00	4.40	12.75	H	291.3	2
1	5,203.500	106.72			12.95	H	216.9	1

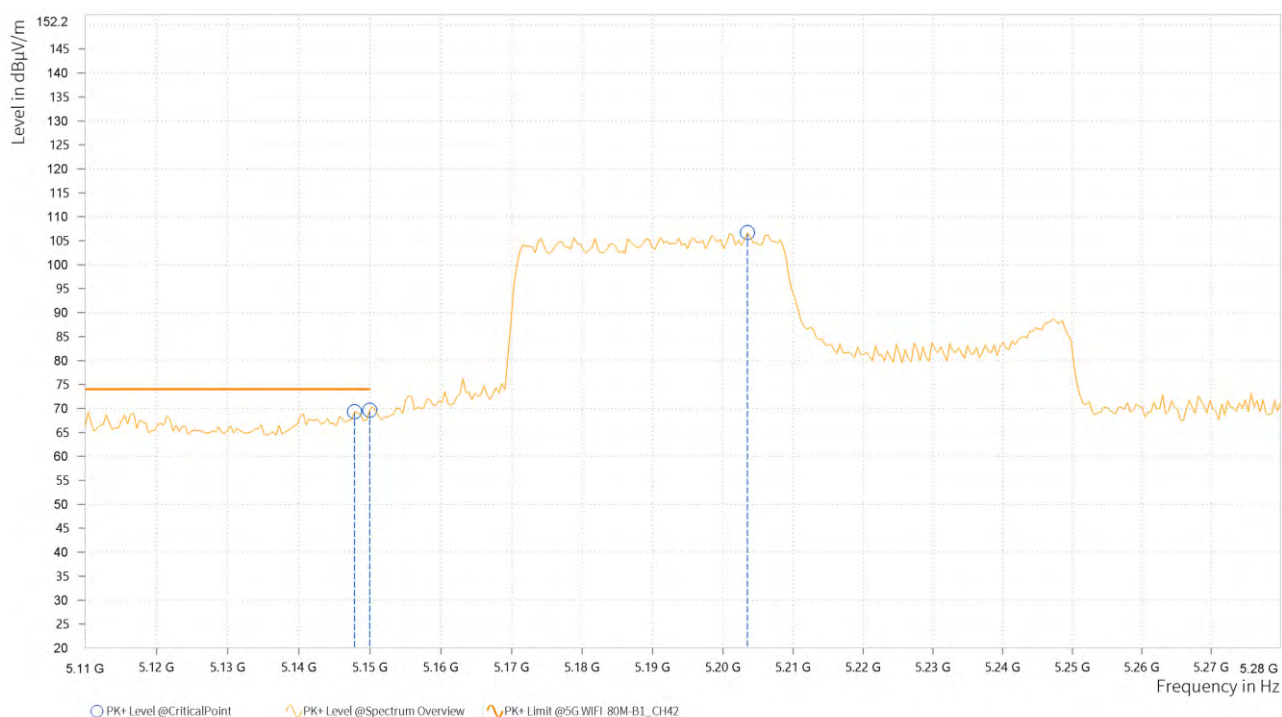


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.675	45.77	54.00	8.23	12.74	H	152.2	1
1	5,149.950	45.62	54.00	8.38	12.75	H	152.2	1
1	5,191.175	92.53			12.91	H	226.4	1



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,149.525	65.97	74.00	8.03	12.75	V	67.5	1
1	5,149.950	64.45	74.00	9.55	12.75	V	67.5	1
1	5,195.850	101.08			12.93	V	359	1

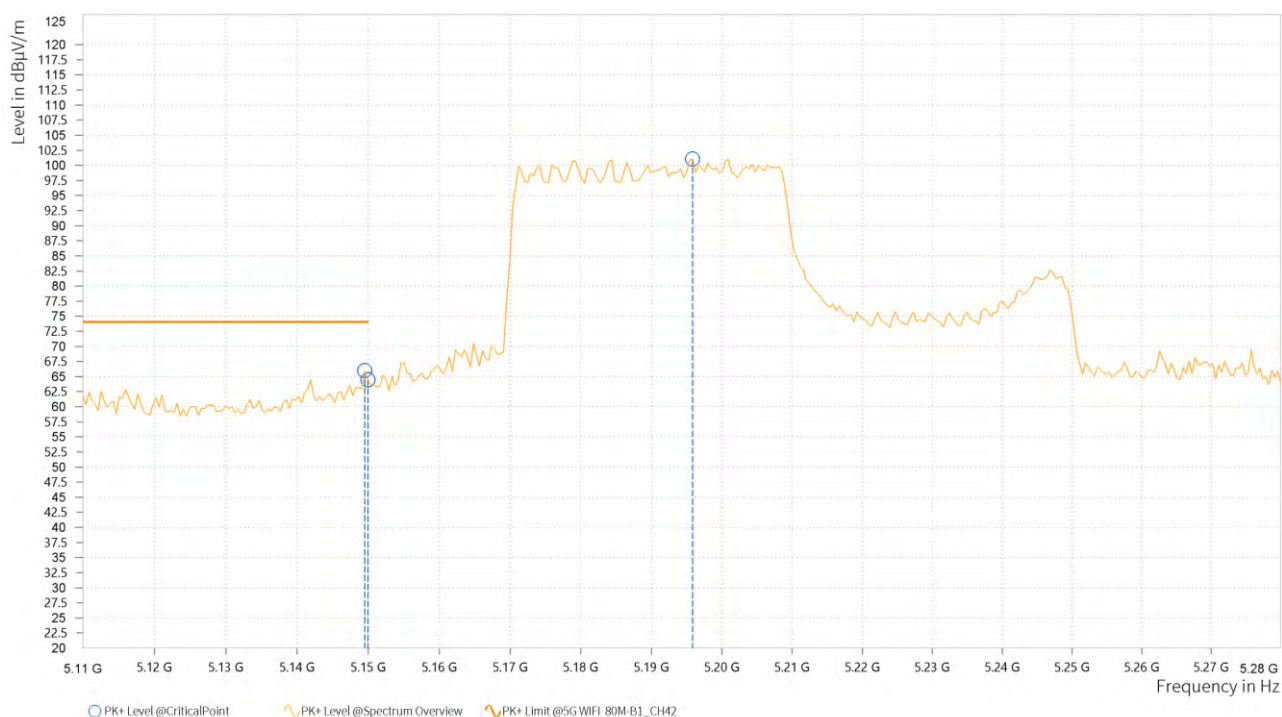

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.250	42.32	54.00	11.68	12.74	V	69.8	1
1	5,149.950	42.48	54.00	11.52	12.75	V	69.8	1
1	5,206.900	85.32			12.94	V	218	1



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5230MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ax (80MHz) (RU996):


CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,146.125	69.01	74.00	4.99	12.74	H	291.4	2
1	5,149.950	67.70	74.00	6.30	12.75	H	359.1	1
1	5,243.025	103.22			12.94	H	140.3	1




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,143.150	47.60	54.00	6.40	12.73	H	218.4	2
1	5,149.950	46.28	54.00	7.72	12.75	H	218.4	2
1	5,228.575	87.49			12.94	H	215.8	1

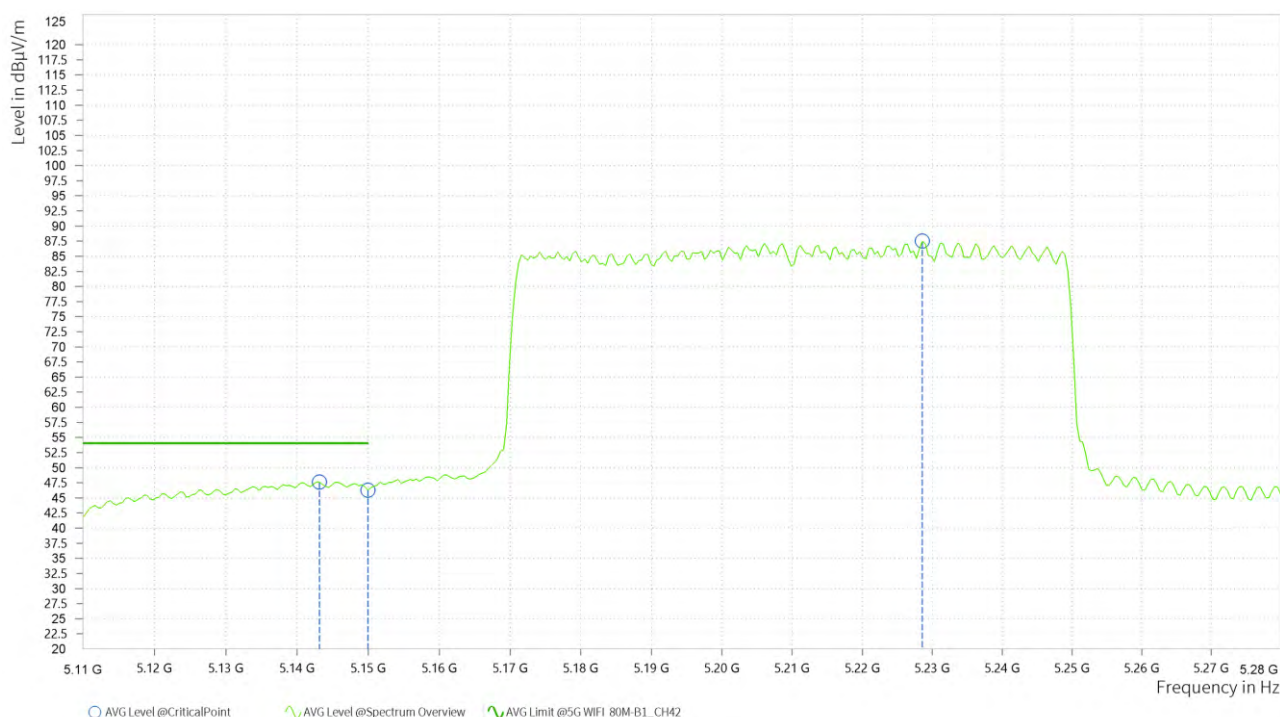

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,149.525	64.93	74.00	9.07	12.75	V	220.5	1
1	5,149.950	63.41	74.00	10.59	12.75	V	293.4	1
1	5,186.925	97.91			12.90	V	220.5	1

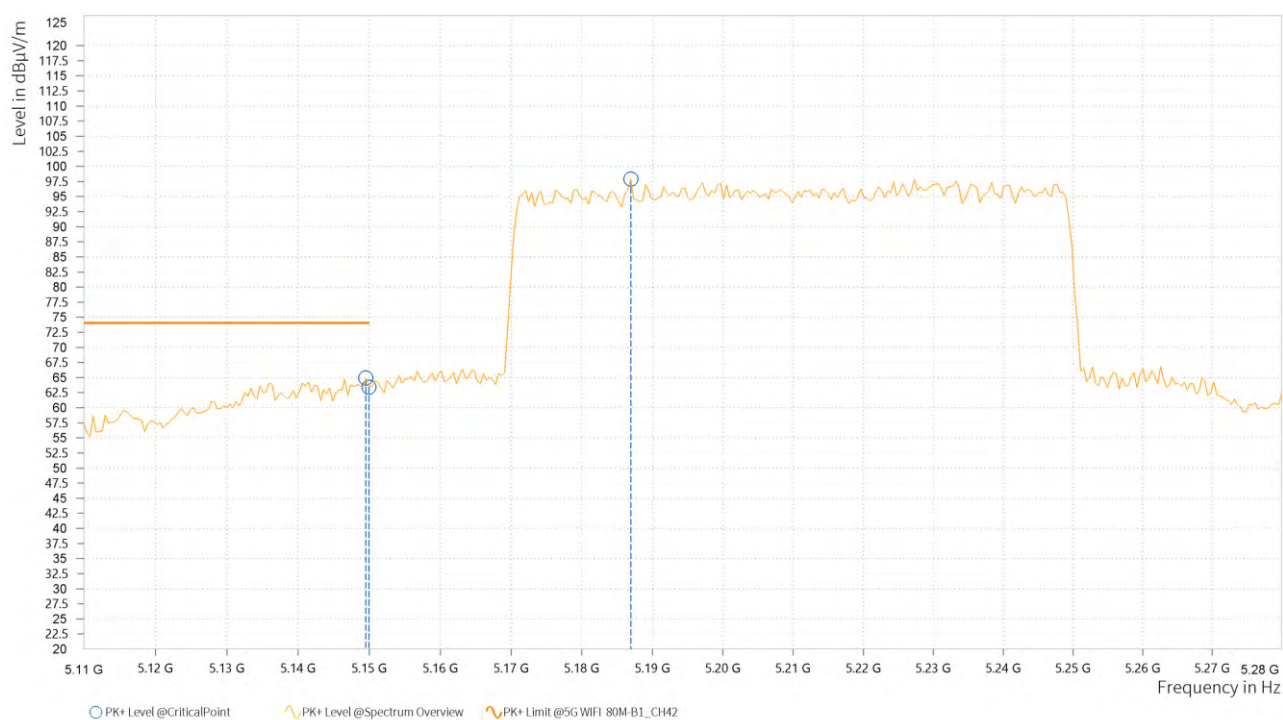

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,147.825	43.74	54.00	10.26	12.74	V	68.7	1
1	5,149.950	43.51	54.00	10.49	12.75	V	68.7	1
1	5,228.150	80.99			12.94	V	218.4	2



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5230MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

Band 2:

802.11a

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	55.53	56.6	74	-18.47	34.52	9.92	45.51	100	205	Peak
5150.000	48.12	49.19	54	-5.88	34.52	9.92	45.51	100	205	Average
5260.000	105.91	106.93	/	/	34.61	9.88	45.51	100	205	Peak
5260.000	98.7	99.72	/	/	34.61	9.88	45.51	100	205	Average
5350.000	53.43	54.41	74	-20.57	34.68	9.85	45.51	100	205	Peak
5350.000	47.91	48.89	54	-6.09	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.08	54.07	74	-20.92	34.6	9.92	45.51	100	172	Peak
5150.000	47.77	48.76	54	-6.23	34.6	9.92	45.51	100	172	Average
5260.000	99.68	100.71	/	/	34.6	9.88	45.51	100	172	Peak
5260.000	92.98	94.01	/	/	34.6	9.88	45.51	100	172	Average
5350.000	53.64	54.7	74	-20.36	34.6	9.85	45.51	100	172	Peak
5350.000	47.83	48.89	54	-6.17	34.6	9.85	45.51	100	172	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	52.68	53.75	74	-21.32	34.52	9.92	45.51	100	205	Peak
5150.000	47.72	48.79	54	-6.28	34.52	9.92	45.51	100	205	Average
5300.000	102.21	103.21	/	/	34.64	9.87	45.51	100	205	Peak
5300.000	96.36	97.36	/	/	34.64	9.87	45.51	100	205	Average
5350.000	54.25	55.23	74	-19.75	34.68	9.85	45.51	100	205	Peak
5350.000	47.76	48.74	54	-6.24	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	54.53	55.52	74	-19.47	34.6	9.92	45.51	100	172	Peak
5150.000	48.32	49.31	54	-5.68	34.6	9.92	45.51	100	172	Average
5300.000	97.18	98.22	/	/	34.6	9.87	45.51	100	172	Peak
5300.000	90.57	91.61	/	/	34.6	9.87	45.51	100	172	Average
5350.000	52.25	53.31	74	-21.75	34.6	9.85	45.51	100	172	Peak
5350.000	48.22	49.28	54	-5.78	34.6	9.85	45.51	100	172	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	54.52	55.59	74	-19.48	34.52	9.92	45.51	100	205	Peak
5150.000	49.03	50.1	54	-4.97	34.52	9.92	45.51	100	205	Average
5320.000	102.29	103.28	/	/	34.66	9.86	45.51	100	205	Peak
5320.000	95.27	96.26	/	/	34.66	9.86	45.51	100	205	Average
5350.000	54.8	55.78	74	-19.2	34.68	9.85	45.51	100	205	Peak
5350.000	48.37	49.35	54	-5.63	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	54.35	55.34	74	-19.65	34.6	9.92	45.51	100	172	Peak
5150.000	47.91	48.9	54	-6.09	34.6	9.92	45.51	100	172	Average
5320.000	96.99	98.04	/	/	34.6	9.86	45.51	100	172	Peak
5320.000	91.49	92.54	/	/	34.6	9.86	45.51	100	172	Average
5350.000	53.49	54.55	74	-20.51	34.6	9.85	45.51	100	172	Peak
5350.000	47.81	48.87	54	-6.19	34.6	9.85	45.51	100	172	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11n (20MHz)

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.62	54.69	74	-20.38	34.52	9.92	45.51	100	205	Peak
5150.000	47.56	48.63	54	-6.44	34.52	9.92	45.51	100	205	Average
5260.000	104.04	105.06	/	/	34.61	9.88	45.51	100	205	Peak
5260.000	96.43	97.45	/	/	34.61	9.88	45.51	100	205	Average
5350.000	53.91	54.89	74	-20.09	34.68	9.85	45.51	100	205	Peak
5350.000	47.53	48.51	54	-6.47	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.65	54.64	74	-20.35	34.6	9.92	45.51	100	305	Peak
5150.000	48.29	49.28	54	-5.71	34.6	9.92	45.51	100	305	Average
5260.000	99.23	100.26	/	/	34.6	9.88	45.51	100	305	Peak
5260.000	92.36	93.39	/	/	34.6	9.88	45.51	100	305	Average
5350.000	52.97	54.03	74	-21.03	34.6	9.85	45.51	100	305	Peak
5350.000	48.13	49.19	54	-5.87	34.6	9.85	45.51	100	305	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.94	55.01	74	-20.06	34.52	9.92	45.51	100	205	Peak
5150.000	47.98	49.05	54	-6.02	34.52	9.92	45.51	100	205	Average
5300.000	103.79	104.79	/	/	34.64	9.87	45.51	100	205	Peak
5300.000	97.38	98.38	/	/	34.64	9.87	45.51	100	205	Average
5350.000	53.32	54.3	74	-20.68	34.68	9.85	45.51	100	205	Peak
5350.000	49.06	50.04	54	-4.94	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	52.99	53.98	74	-21.01	34.6	9.92	45.51	100	305	Peak
5150.000	48.34	49.33	54	-5.66	34.6	9.92	45.51	100	305	Average
5300.000	99.77	100.81	/	/	34.6	9.87	45.51	100	305	Peak
5300.000	92.91	93.95	/	/	34.6	9.87	45.51	100	305	Average
5350.000	54.27	55.33	74	-19.73	34.6	9.85	45.51	100	305	Peak
5350.000	47.21	48.27	54	-6.79	34.6	9.85	45.51	100	305	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	54.24	55.31	74	-19.76	34.52	9.92	45.51	100	205	Peak
5150.000	48.37	49.44	54	-5.63	34.52	9.92	45.51	100	205	Average
5320.000	104.99	105.98	/	/	34.66	9.86	45.51	100	205	Peak
5320.000	97.63	98.62	/	/	34.66	9.86	45.51	100	205	Average
5350.000	53.32	54.3	74	-20.68	34.68	9.85	45.51	100	205	Peak
5350.000	48.11	49.09	54	-5.89	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.08	54.07	74	-20.92	34.6	9.92	45.51	100	305	Peak
5150.000	48.11	49.1	54	-5.89	34.6	9.92	45.51	100	305	Average
5320.000	99.69	100.74	/	/	34.6	9.86	45.51	100	305	Peak
5320.000	93.24	94.29	/	/	34.6	9.86	45.51	100	305	Average
5350.000	53.94	55	74	-20.06	34.6	9.85	45.51	100	305	Peak
5350.000	47.19	48.25	54	-6.81	34.6	9.85	45.51	100	305	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11n (40MHz)


CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,273.500	108.13			12.99	H	287.4	1
3	5,350.000	58.49	74.00	15.51	13.20	H	287.4	1
3	5,351.500	56.54	74.00	17.46	13.20	H	287.4	1

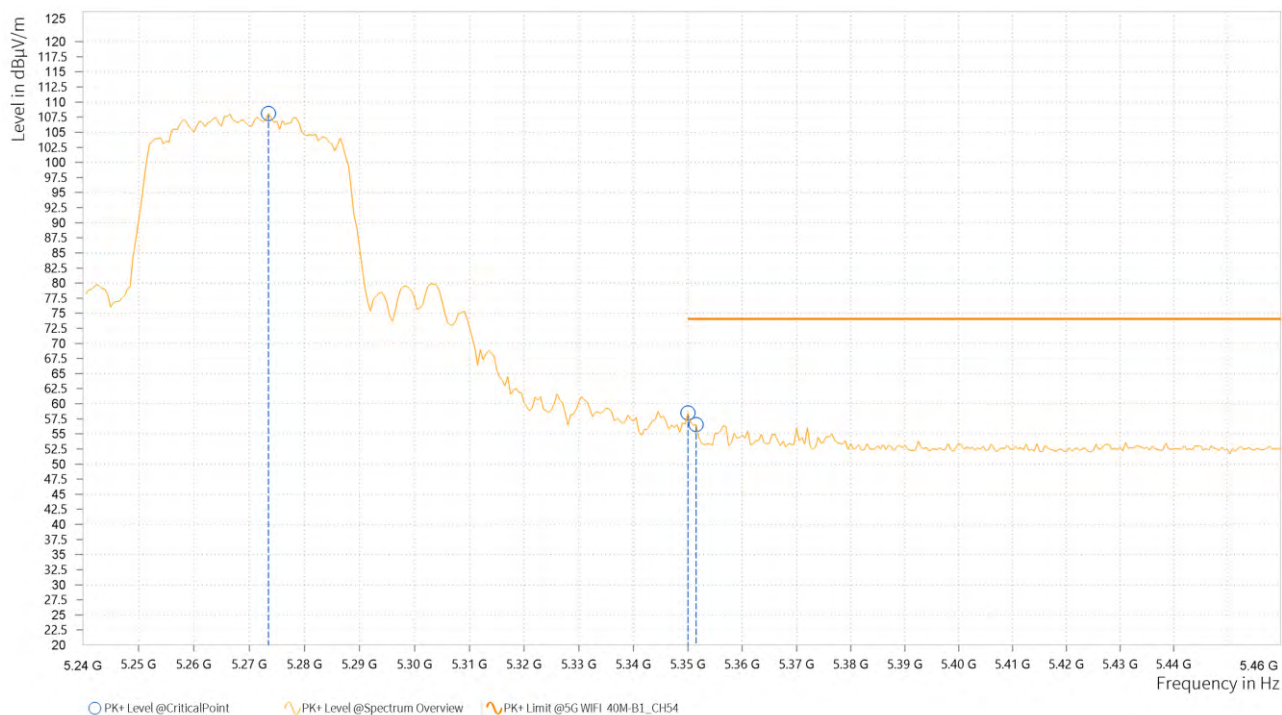


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,271.500	95.67			12.99	H	289.8	1
3	5,350.000	39.66	54.00	14.34	13.20	H	289.8	1
3	5,352.000	39.61	54.00	14.39	13.20	H	289.8	1

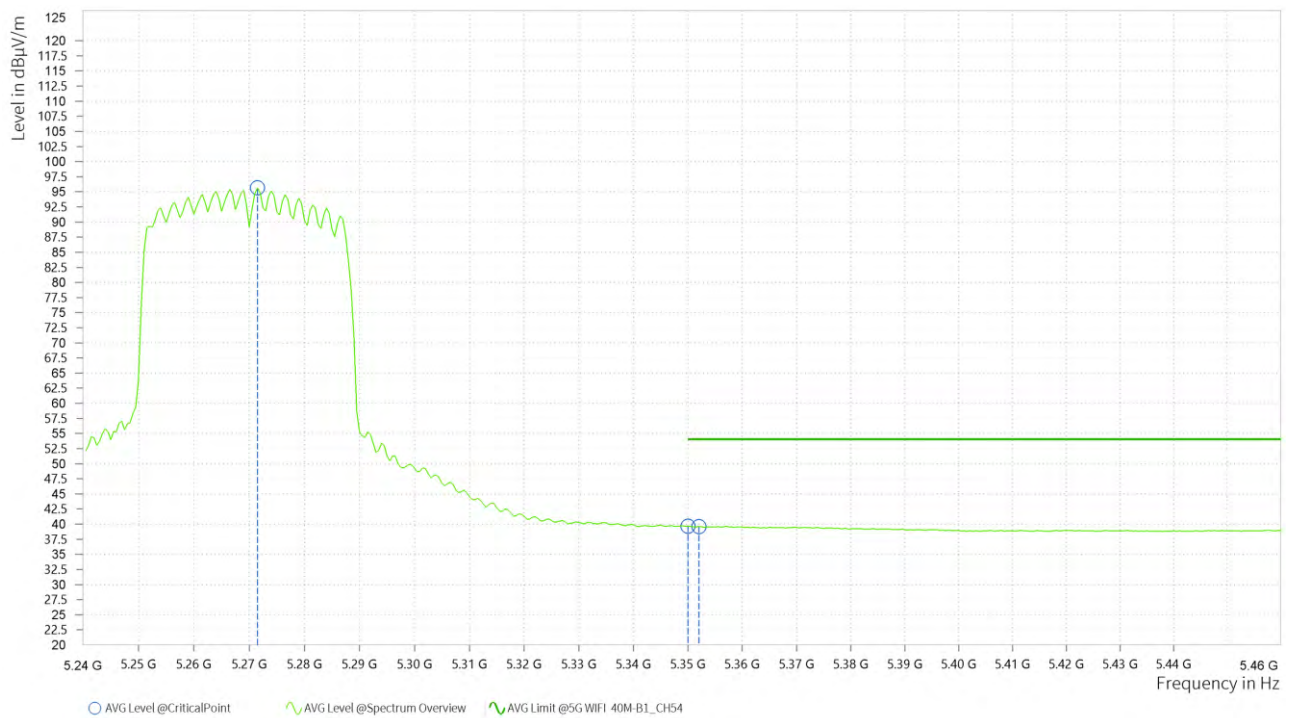


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,267.500	103.41			12.97	V	171.8	2
3	5,350.000	53.52	74.00	20.48	13.20	V	202.6	1
3	5,350.500	54.30	74.00	19.70	13.20	V	356.2	2

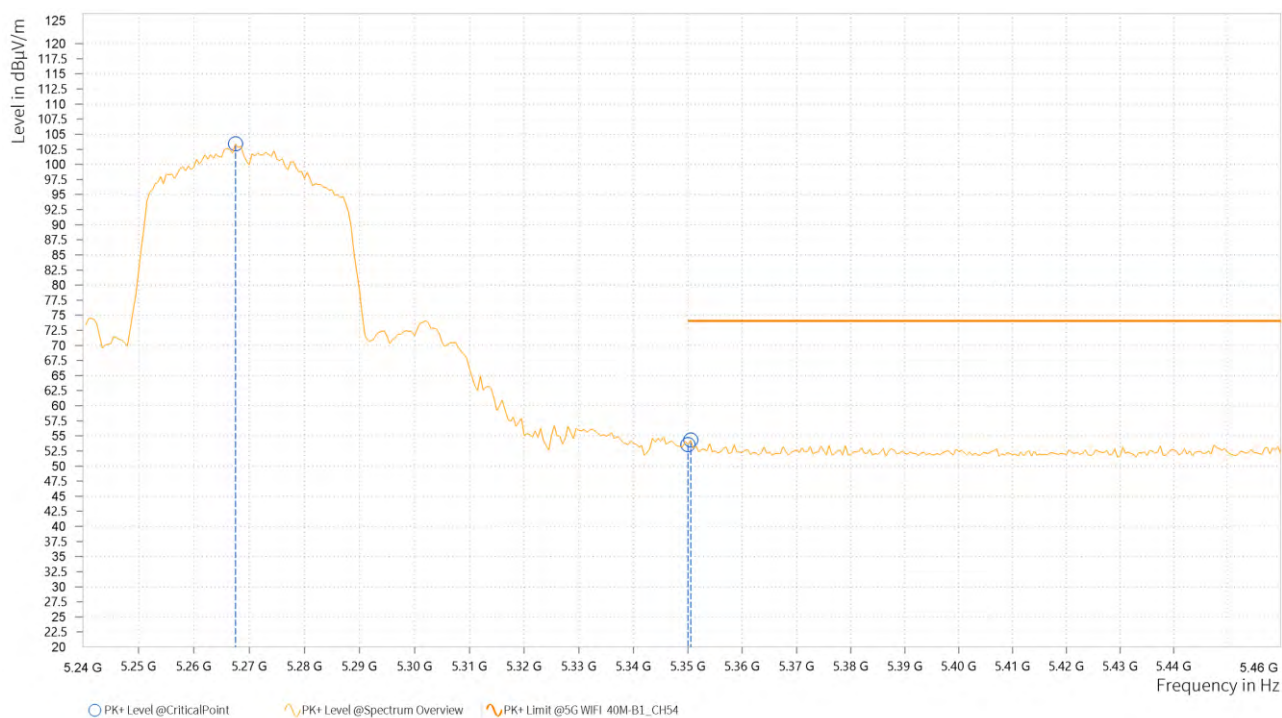

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,268.000	89.73			12.98	V	168.2	2
3	5,350.500	38.44	54.00	15.56	13.20	V	190.6	1
3	5,354.000	38.58	54.00	15.42	13.20	V	190.6	1

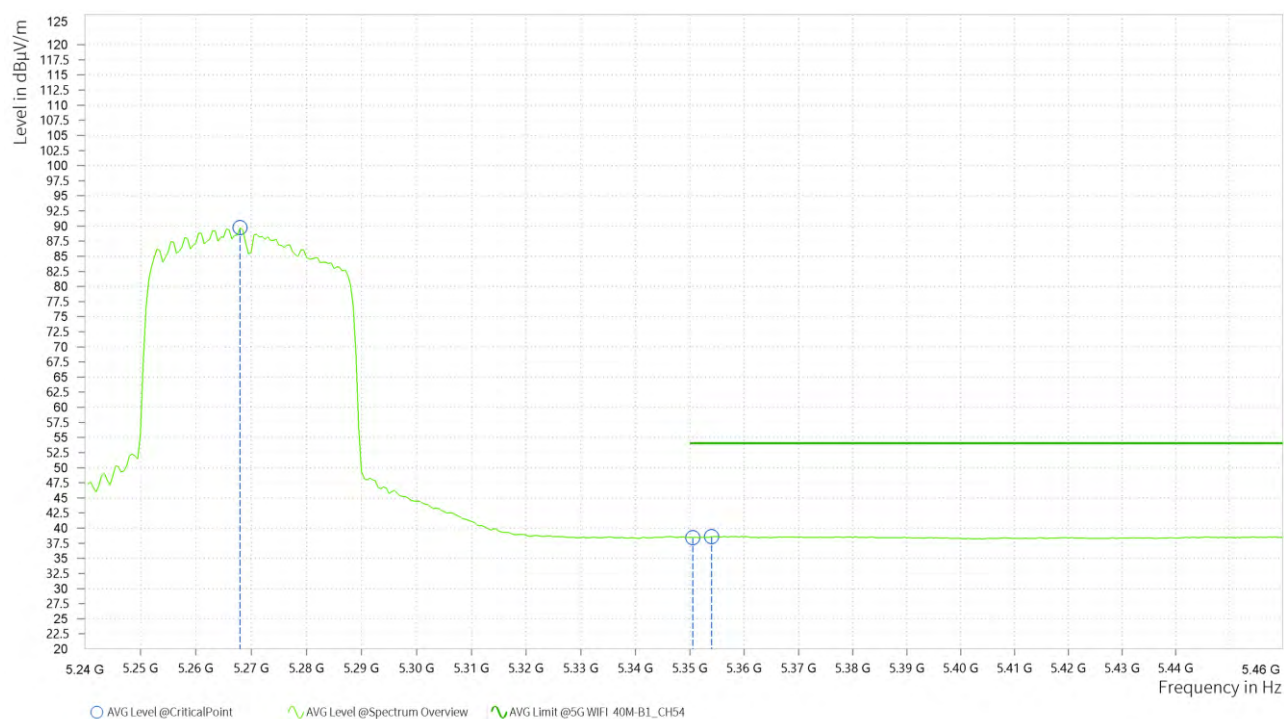

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5270MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,307.000	105.09			13.10	H	288.6	2
4	5,350.000	69.85	74.00	4.15	13.20	H	288.6	2
4	5,350.500	68.67	74.00	5.33	13.20	H	288.6	2



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,312.000	94.33			13.11	H	300.5	1
4	5,350.000	43.76	54.00	10.24	13.20	H	355.7	2
4	5,350.500	44.14	54.00	9.86	13.20	H	267.4	2



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,312.000	100.34			13.11	V	266.3	2
4	5,350.000	67.59	74.00	6.41	13.20	V	189.4	1
4	5,352.000	64.70	74.00	9.30	13.20	V	168.2	2



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,312.000	87.92			13.11	V	267.5	2
4	5,350.000	40.76	54.00	13.24	13.20	V	194.2	1
4	5,351.000	40.53	54.00	13.47	13.20	V	169.4	2



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5310MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ac (20MHz)

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	52.77	53.84	74	-21.23	34.52	9.92	45.51	100	205	Peak
5150.000	48.2	49.27	54	-5.8	34.52	9.92	45.51	100	205	Average
5260.000	103.81	104.83	/	/	34.61	9.88	45.51	100	205	Peak
5260.000	96.26	97.28	/	/	34.61	9.88	45.51	100	205	Average
5350.000	54.12	55.1	74	-19.88	34.68	9.85	45.51	100	205	Peak
5350.000	47.94	48.92	54	-6.06	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	54.55	55.54	74	-19.45	34.6	9.92	45.51	100	172	Peak
5150.000	48	48.99	54	-6	34.6	9.92	45.51	100	172	Average
5260.000	98.94	99.97	/	/	34.6	9.88	45.51	100	172	Peak
5260.000	90.88	91.91	/	/	34.6	9.88	45.51	100	172	Average
5350.000	53.83	54.89	74	-20.17	34.6	9.85	45.51	100	172	Peak
5350.000	47.49	48.55	54	-6.51	34.6	9.85	45.51	100	172	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.08	54.15	74	-20.92	34.52	9.92	45.51	100	205	Peak
5150.000	47.66	48.73	54	-6.34	34.52	9.92	45.51	100	205	Average
5300.000	103.72	104.72	/	/	34.64	9.87	45.51	100	205	Peak
5300.000	98.66	99.66	/	/	34.64	9.87	45.51	100	205	Average
5350.000	53.96	54.94	74	-20.04	34.68	9.85	45.51	100	205	Peak
5350.000	47.35	48.33	54	-6.65	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.51	54.5	74	-20.49	34.6	9.92	45.51	100	172	Peak
5150.000	48.04	49.03	54	-5.96	34.6	9.92	45.51	100	172	Average
5300.000	98.18	99.22	/	/	34.6	9.87	45.51	100	172	Peak
5300.000	91.48	92.52	/	/	34.6	9.87	45.51	100	172	Average
5350.000	52.68	53.74	74	-21.32	34.6	9.85	45.51	100	172	Peak
5350.000	47.07	48.13	54	-6.93	34.6	9.85	45.51	100	172	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.5	54.57	74	-20.5	34.52	9.92	45.51	100	205	Peak
5150.000	48.47	49.54	54	-5.53	34.52	9.92	45.51	100	205	Average
5320.000	103.04	104.03	/	/	34.66	9.86	45.51	100	205	Peak
5320.000	96.7	97.69	/	/	34.66	9.86	45.51	100	205	Average
5350.000	54.23	55.21	74	-19.77	34.68	9.85	45.51	100	205	Peak
5350.000	48.46	49.44	54	-5.54	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	52.39	53.38	74	-21.61	34.6	9.92	45.51	100	172	Peak
5150.000	48.33	49.32	54	-5.67	34.6	9.92	45.51	100	172	Average
5320.000	98.45	99.5	/	/	34.6	9.86	45.51	100	172	Peak
5320.000	91.56	92.61	/	/	34.6	9.86	45.51	100	172	Average
5350.000	53.88	54.94	74	-20.12	34.6	9.85	45.51	100	172	Peak
5350.000	47.07	48.13	54	-6.93	34.6	9.85	45.51	100	172	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11ac (40MHz)


CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,268.000	107.79			12.98	H	293.4	1
3	5,350.000	53.06	74.00	20.94	13.20	H	194.2	1
3	5,358.000	54.37	74.00	19.63	13.20	H	293.4	1

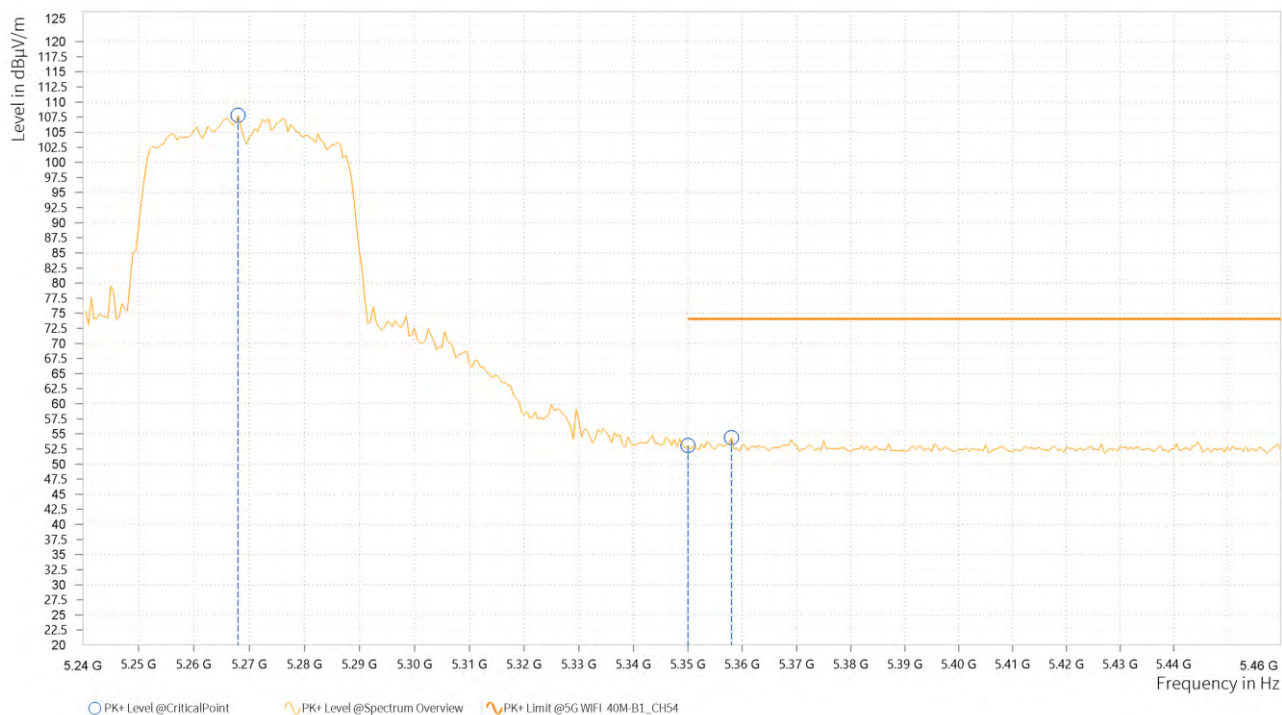

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,268.000	94.36			12.98	H	313.7	1
3	5,350.000	39.11	54.00	14.89	13.20	H	214.5	1
3	5,355.500	39.09	54.00	14.91	13.20	H	313.7	1

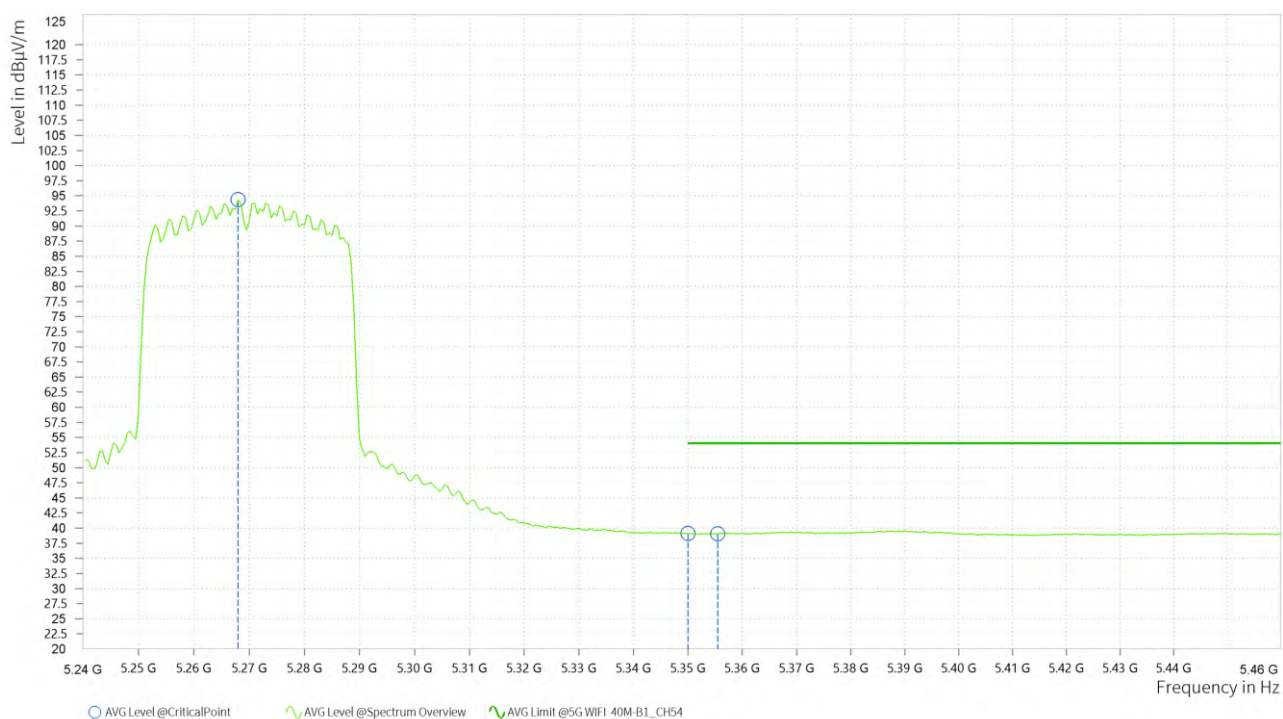

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,273.500	100.50			12.99	V	265	2
3	5,350.000	51.94	74.00	22.06	13.20	V	359	1
3	5,354.500	53.08	74.00	20.92	13.20	V	359	1



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,268.000	88.02			12.98	V	265	2
3	5,350.000	38.37	54.00	15.63	13.20	V	210.9	1
3	5,353.000	38.40	54.00	15.60	13.20	V	210.9	1



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5270MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,308.000	105.57			13.10	H	292.2	2
4	5,350.000	66.47	74.00	7.53	13.20	H	193	2
4	5,352.000	66.95	74.00	7.05	13.20	H	193	2

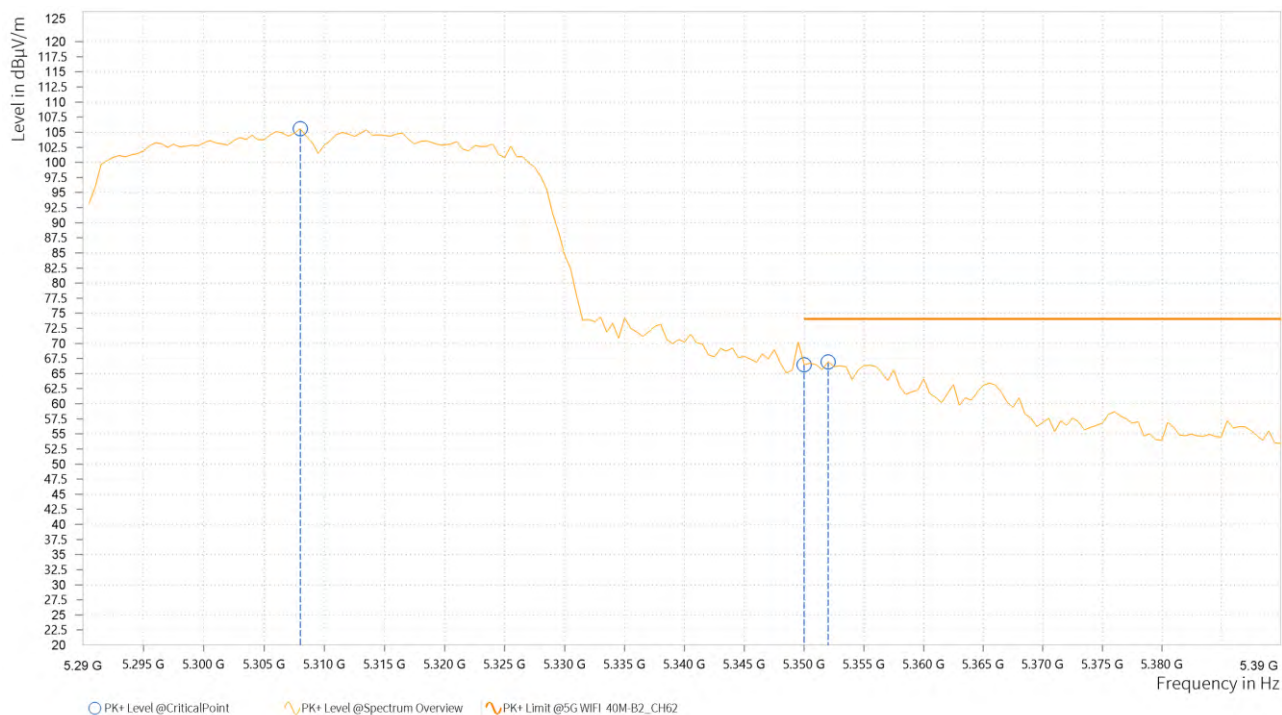


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,308.000	94.82			13.10	H	295.8	1
4	5,350.000	44.74	54.00	9.26	13.20	H	355	2
4	5,352.000	43.70	54.00	10.30	13.20	H	355	2



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,313.000	100.08			13.11	V	265	2
4	5,350.000	65.76	74.00	8.24	13.20	V	359.1	1
4	5,352.000	65.15	74.00	8.85	13.20	V	167	2

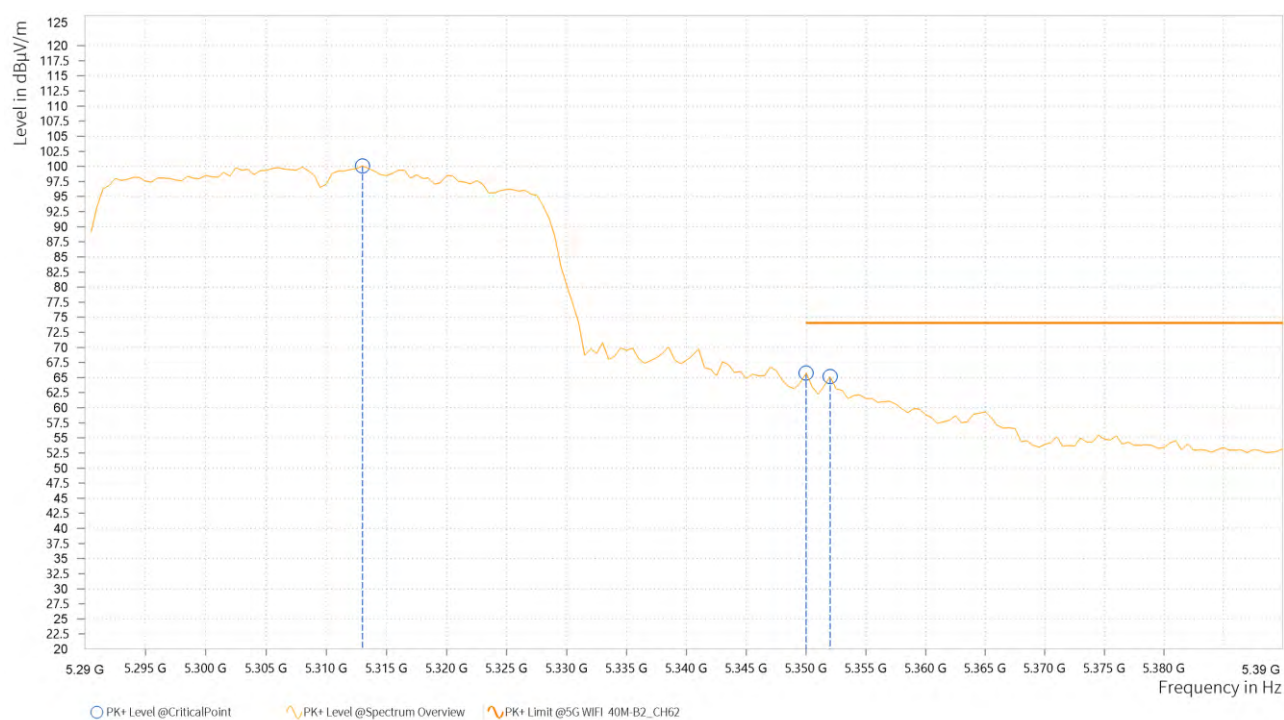

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,313.000	88.11			13.11	V	265	2
4	5,350.000	40.47	54.00	13.53	13.20	V	355	2
4	5,351.000	40.53	54.00	13.47	13.20	V	355	2



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5310MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11ac (80MHz)


CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,299.000	103.34			13.07	H	310.1	1
2	5,350.000	66.33	74.00	7.67	13.20	H	359.1	1
2	5,352.500	69.95	74.00	4.05	13.20	H	310.1	1

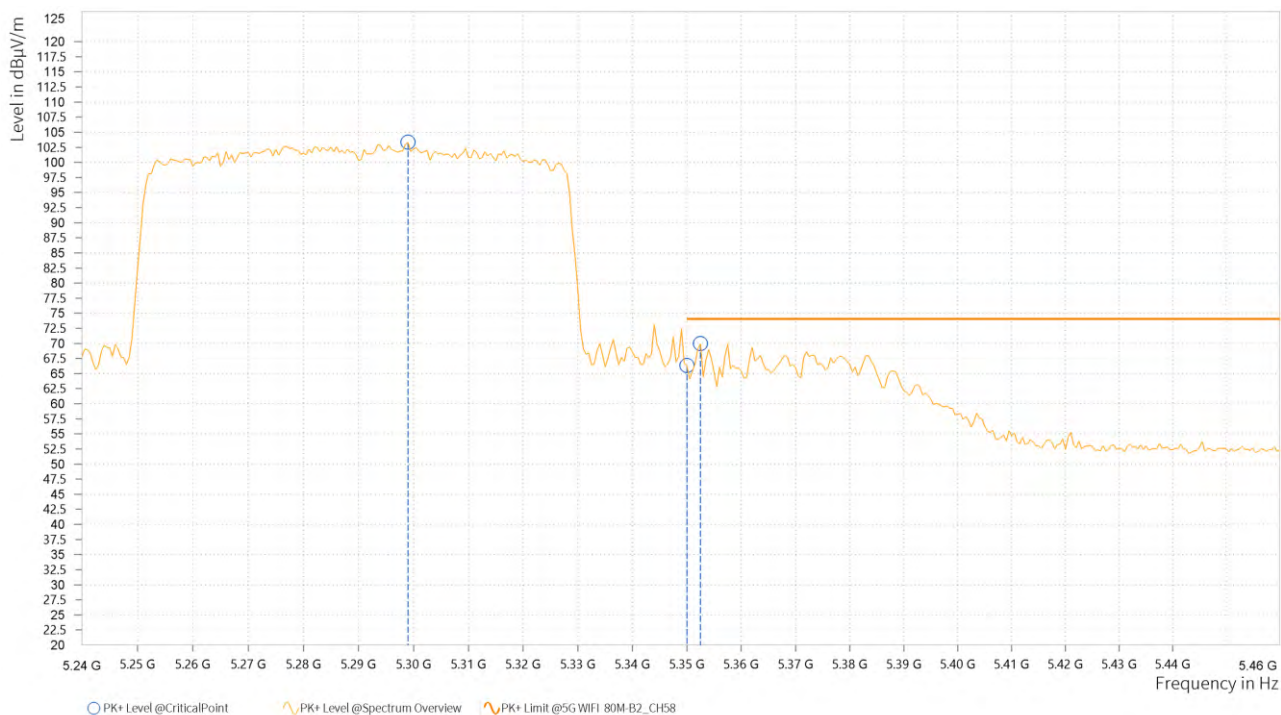

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,278.500	88.81			13.01	H	261.2	1
2	5,350.000	47.03	54.00	6.97	13.20	H	313.8	1
2	5,354.000	47.59	54.00	6.41	13.20	H	261.2	1

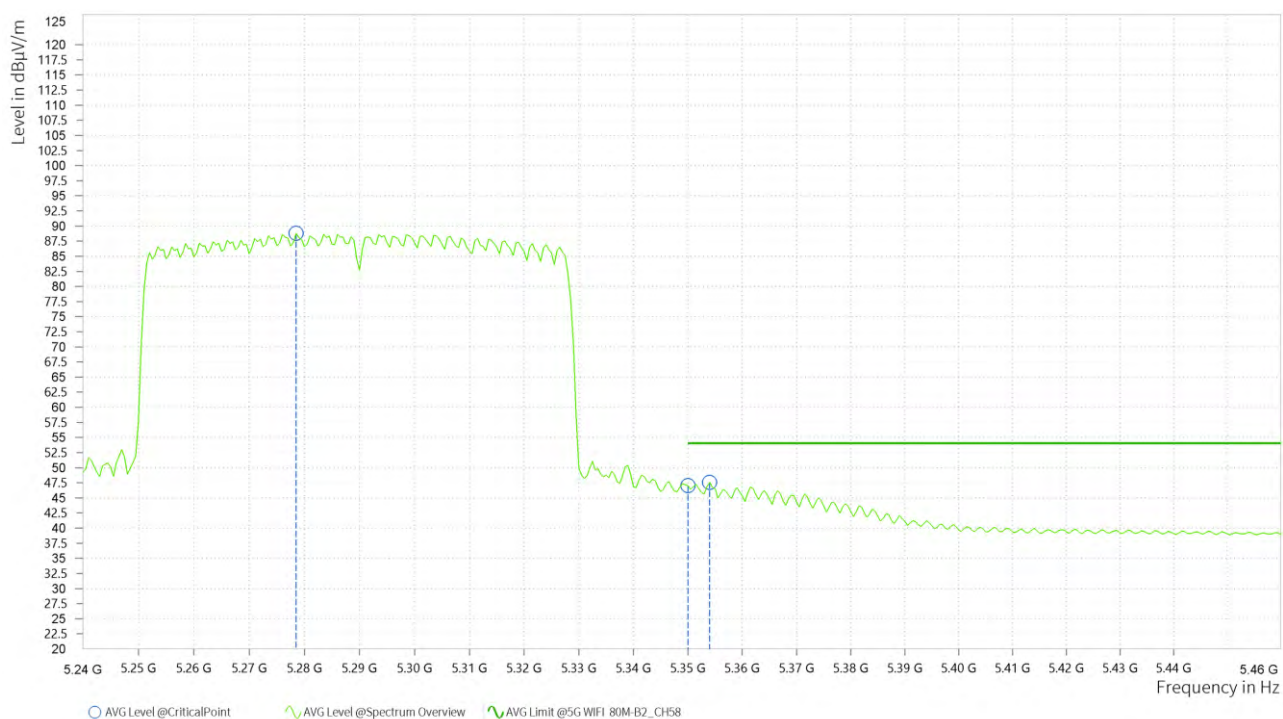

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,296.500	96.36			13.06	V	7	2
2	5,350.000	62.35	74.00	11.65	13.20	V	243.2	1
2	5,350.500	63.58	74.00	10.42	13.20	V	66.2	1



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,286.500	82.54			13.03	V	215.7	1
2	5,350.000	43.12	54.00	10.88	13.20	V	276.7	1
2	5,351.500	43.31	54.00	10.69	13.20	V	215.7	1



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5290MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13


5G WIFI-SU

802.11ax (20MHz) (SU242):


CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,262.000	110.72			12.96	H	251.5	1
4	5,350.000	52.53	74.00	21.47	13.20	H	357.4	1
4	5,370.500	52.96	74.00	21.04	13.20	H	312.8	2

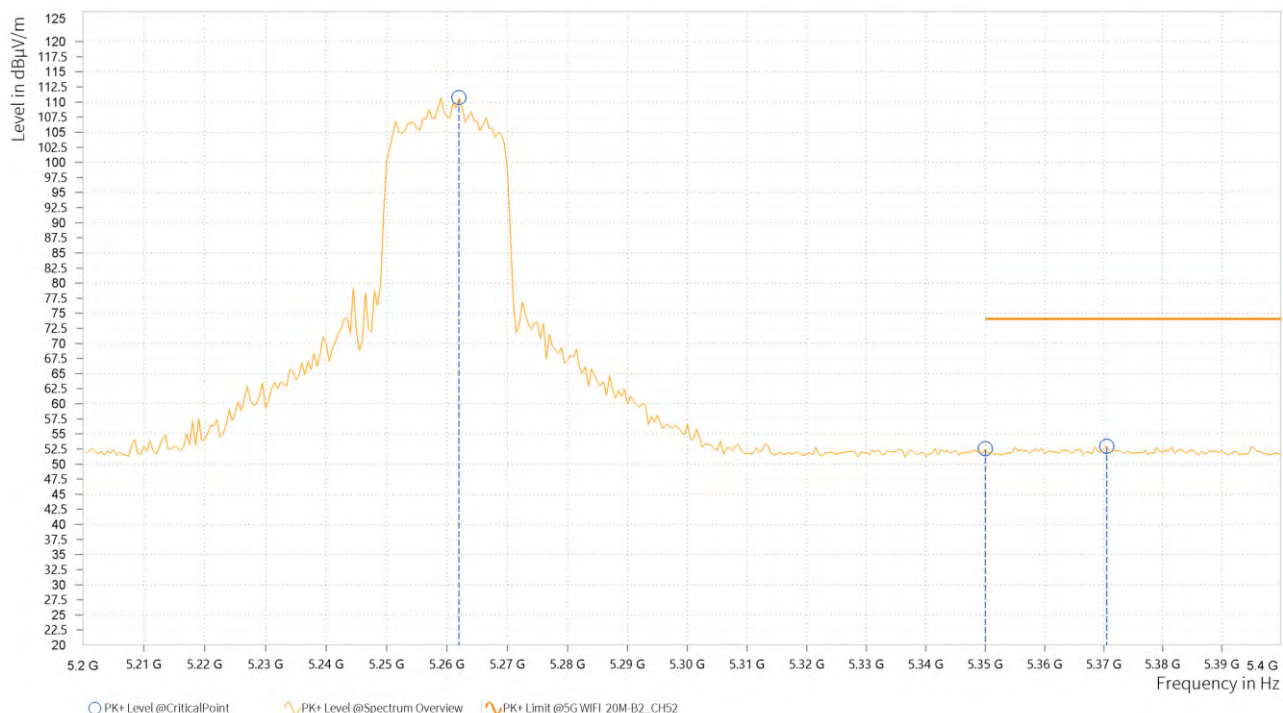


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,259.000	94.20			12.96	H	300.8	2
4	5,350.000	38.34	54.00	15.66	13.20	H	355.6	2
4	5,371.500	38.66	54.00	15.34	13.20	H	355.6	2

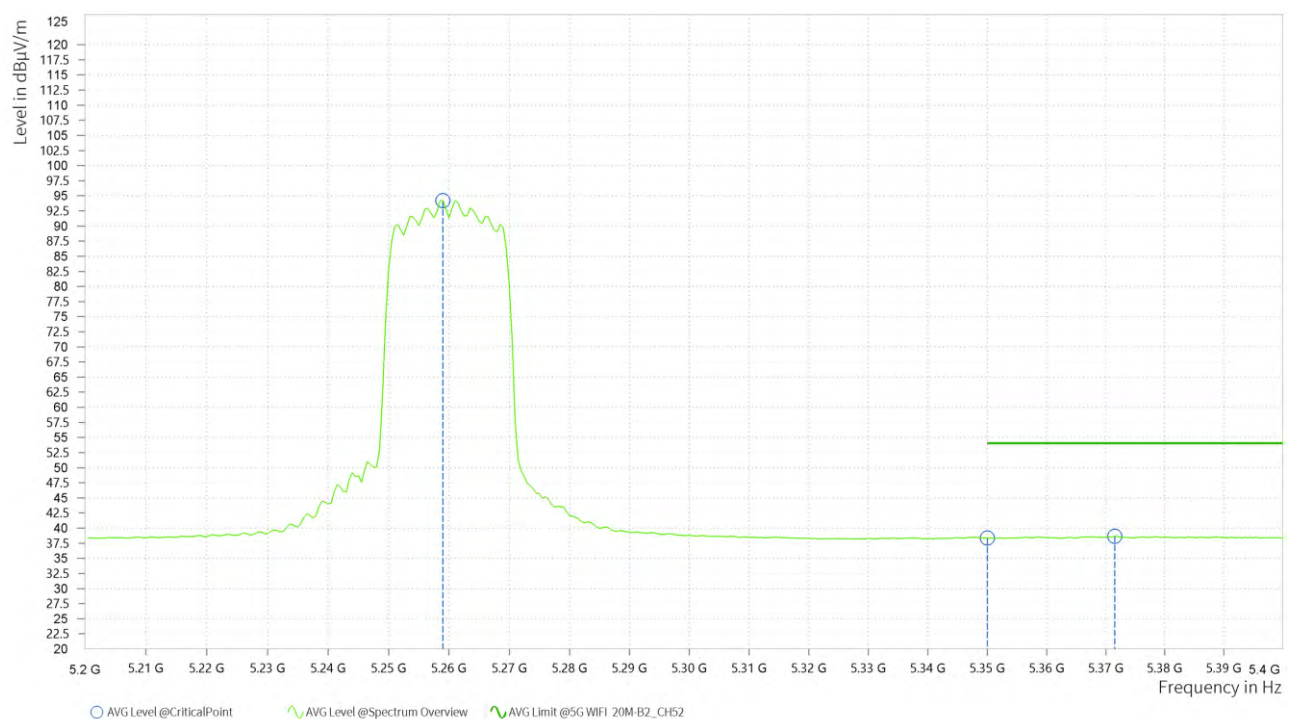


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,260.500	106.35			12.96	V	48.4	1
4	5,350.000	49.87	74.00	24.13	13.20	V	158.6	2
4	5,371.000	51.63	74.00	22.37	13.20	V	1	1

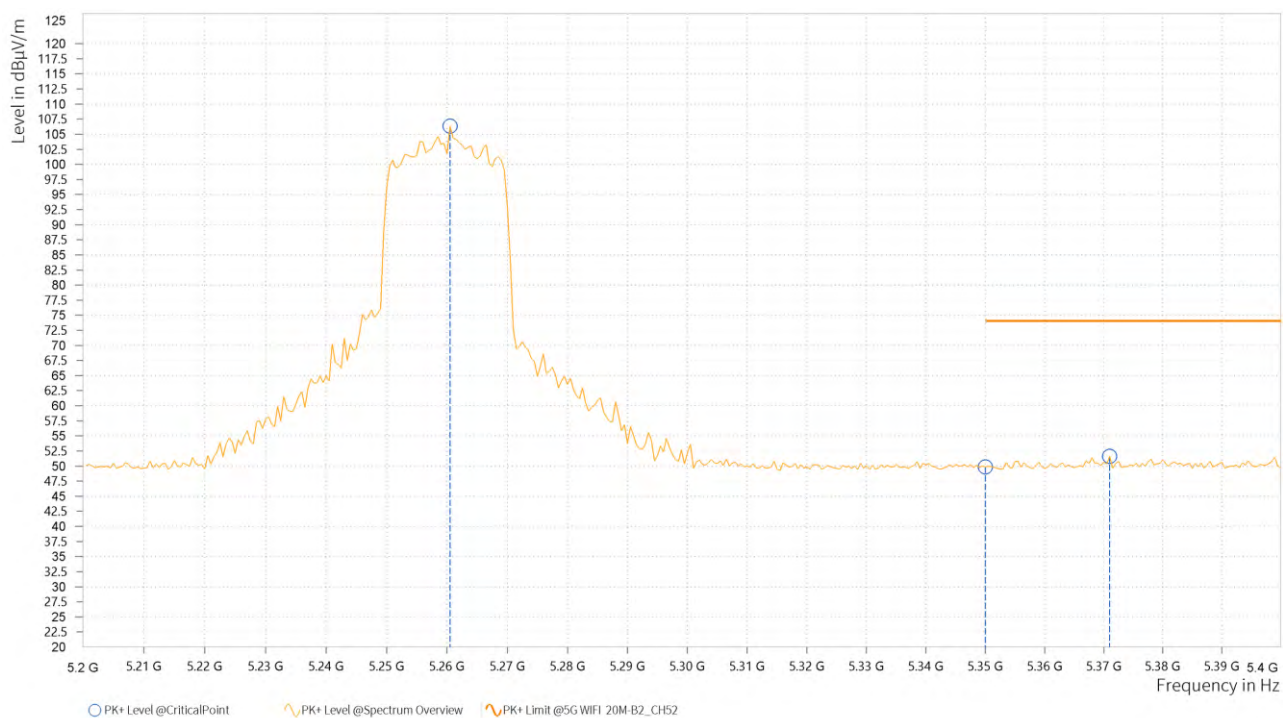

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,261.000	88.59			12.96	V	1	1
4	5,350.000	36.21	54.00	17.79	13.20	V	202.6	1
4	5,379.500	36.58	54.00	17.42	13.20	V	299.7	2

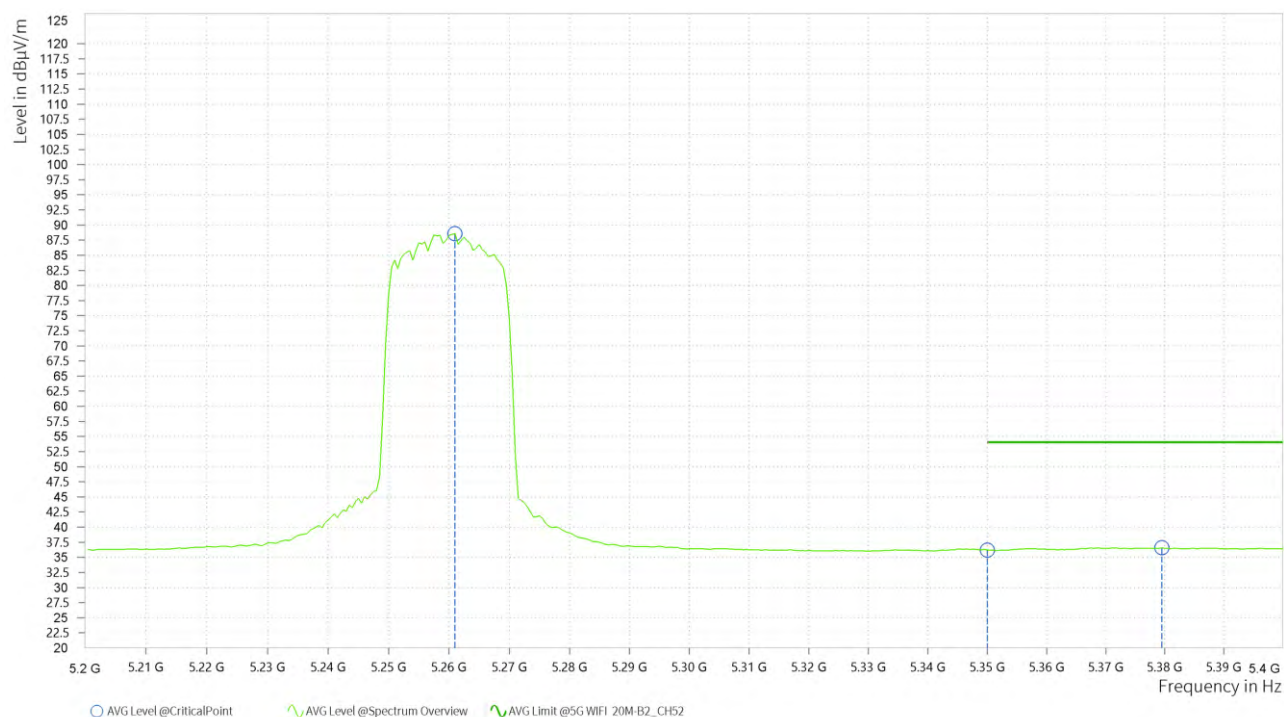

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5260MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13


CHANNEL	TX Channel 56	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
14	5,279.000	111.01			13.01	H	312.8	2
14	5,350.000	51.91	74.00	22.09	13.20	H	252.7	1
14	5,423.500	53.83	74.00	20.17	13.27	H	355	2

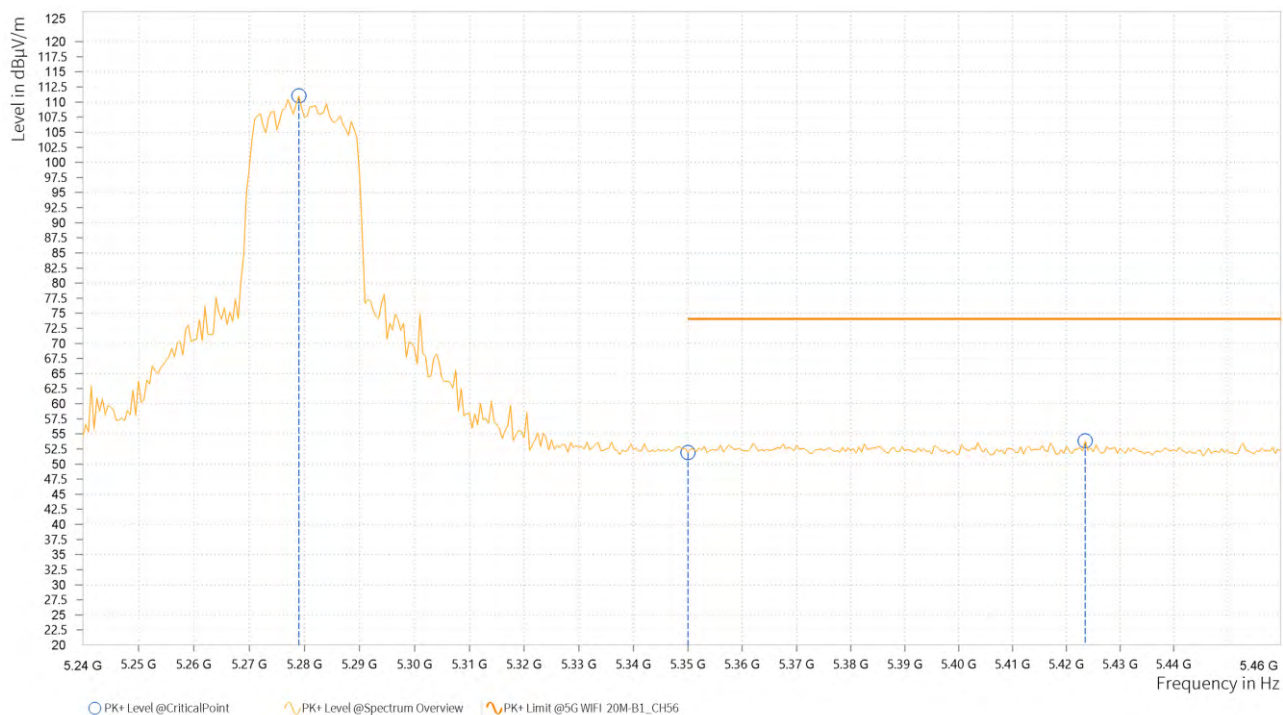


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
14	5,281.000	94.60			13.02	H	189.4	1
14	5,350.000	38.38	54.00	15.62	13.20	H	355	2
14	5,456.500	38.59	54.00	15.41	13.28	H	355	2

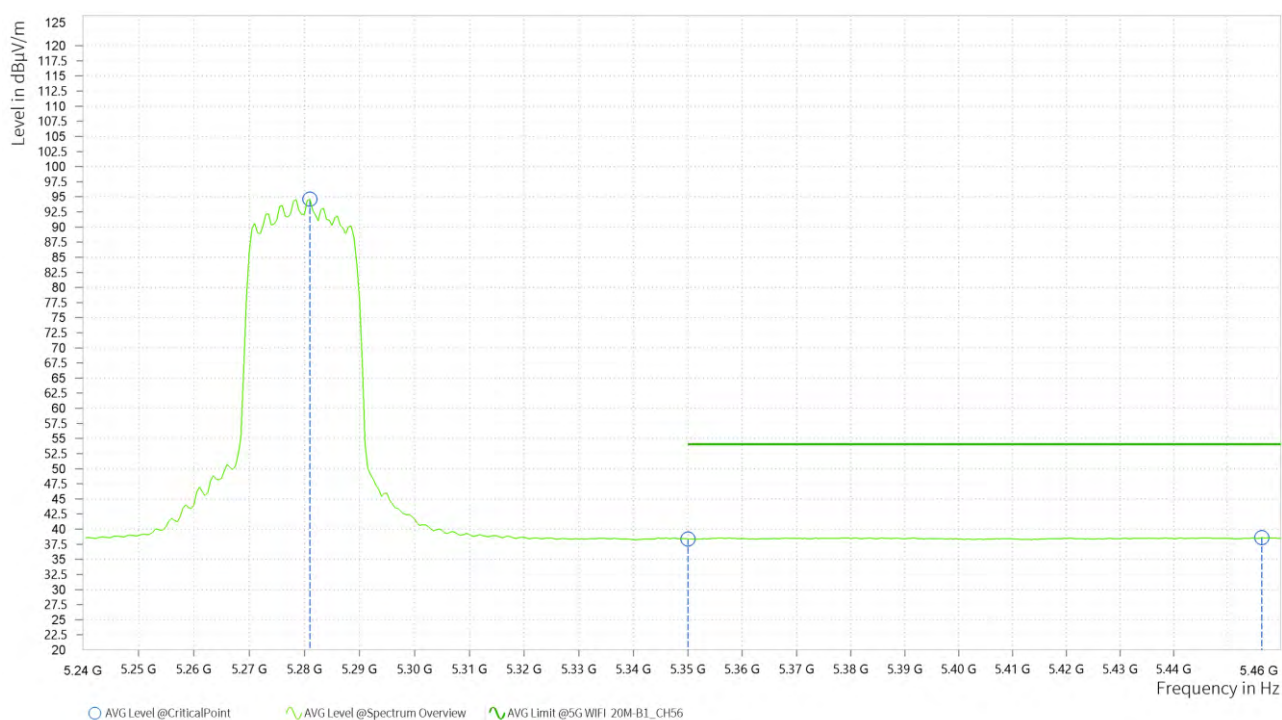

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
14	5,278.000	104.83			13.01	V	5	1
14	5,350.000	50.00	74.00	24.00	13.20	V	335.2	1
14	5,404.000	51.55	74.00	22.45	13.22	V	159.4	1

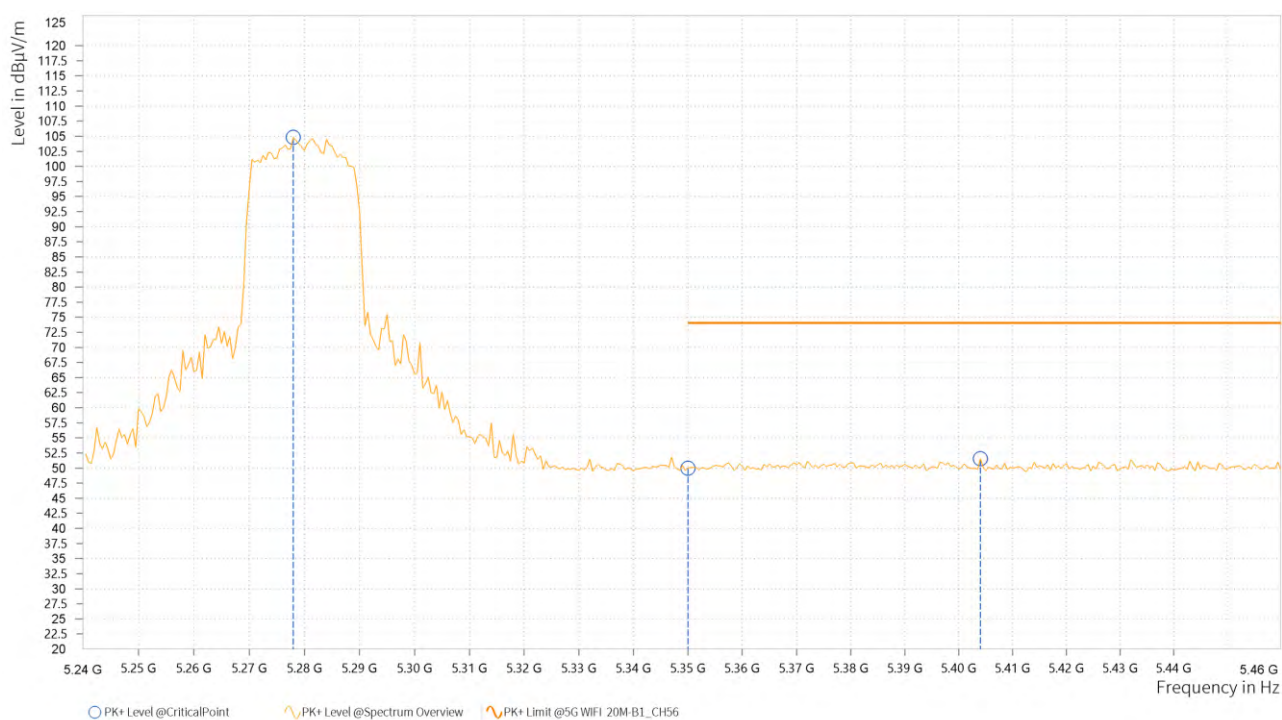

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
14	5,278.500	88.95			13.01	V	4.3	1
14	5,350.000	36.26	54.00	17.74	13.20	V	267.1	1
14	5,378.000	36.58	54.00	17.42	13.20	V	1	1



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5300MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,321.000	111.08			13.14	H	253.9	1
6	5,350.000	57.58	74.00	16.42	13.20	H	306.5	1
6	5,352.500	58.71	74.00	15.29	13.20	H	253.9	1

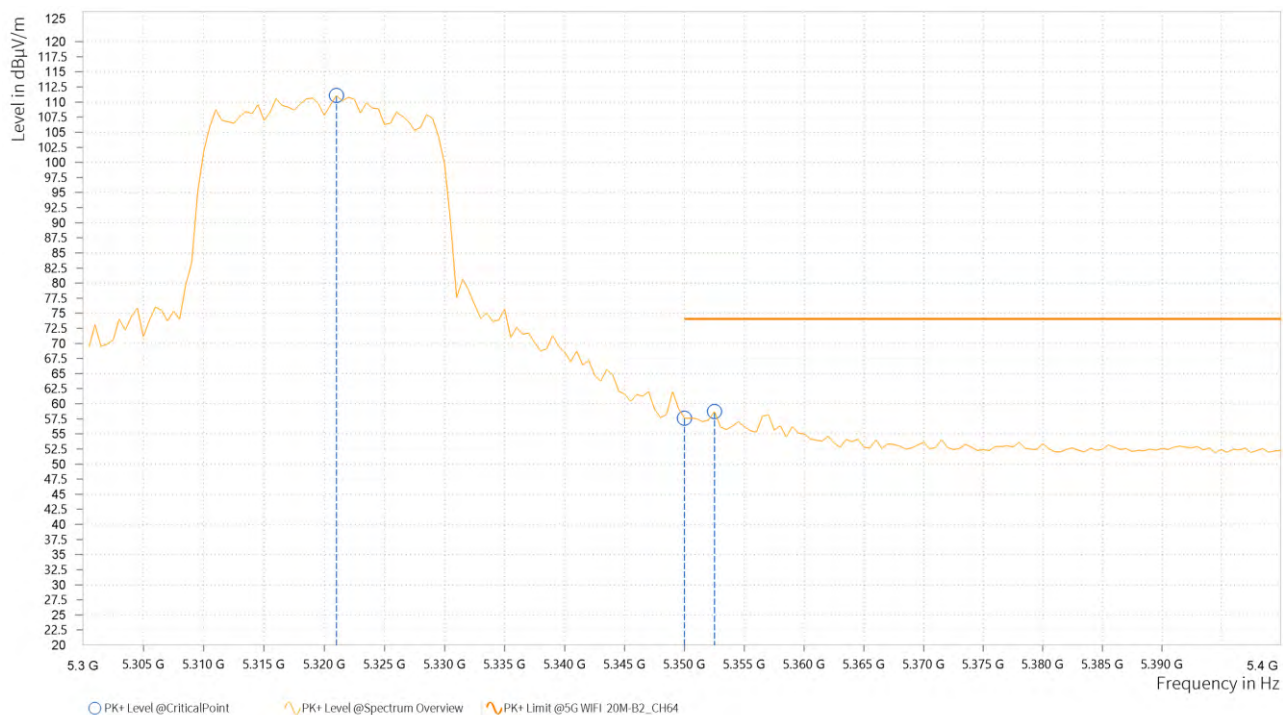

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,318.500	96.40			13.13	H	256.3	1
6	5,350.000	41.56	54.00	12.44	13.20	H	307.8	1
6	5,351.500	41.78	54.00	12.22	13.20	H	256.3	1

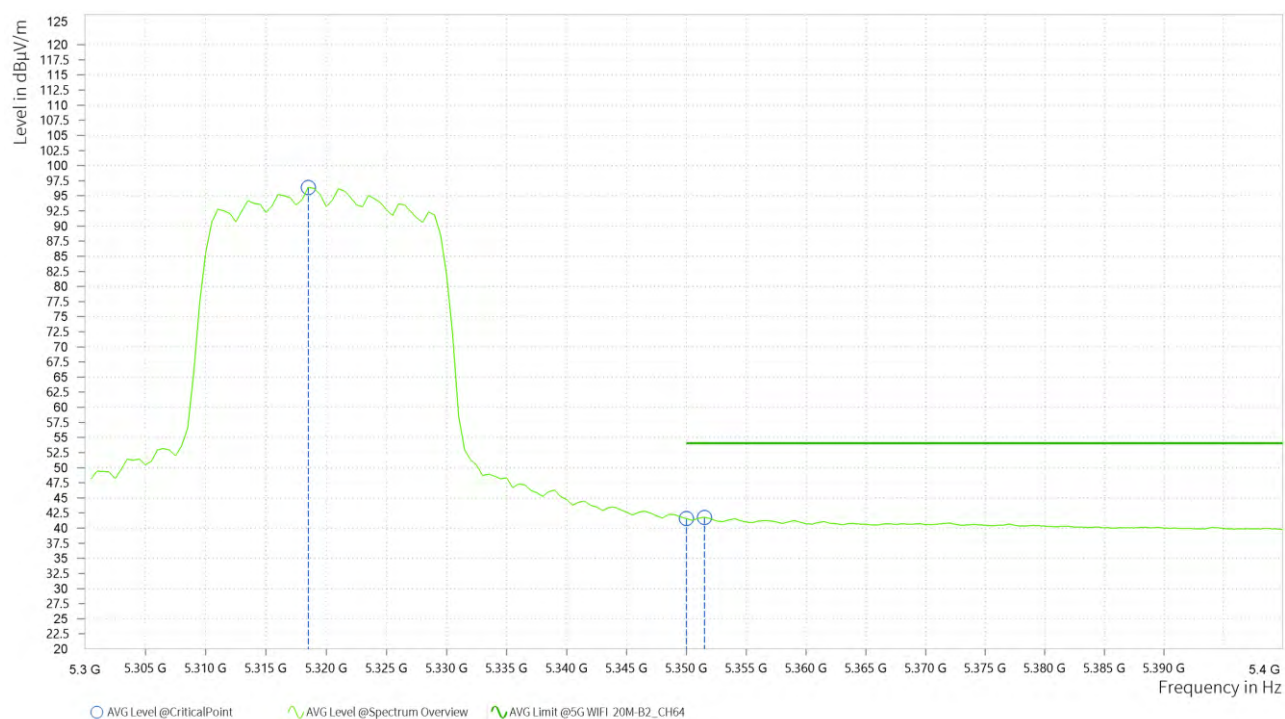

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,321.000	104.55			13.14	V	47.1	1
6	5,350.000	52.79	74.00	21.21	13.20	V	359.1	1
6	5,355.000	54.25	74.00	19.75	13.20	V	203.8	1



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,319.000	89.88			13.13	V	226.5	1
6	5,350.000	38.36	54.00	15.64	13.20	V	226.5	1
6	5,357.500	38.46	54.00	15.54	13.20	V	226.5	1



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5320MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11ax (40MHz) (SU242):

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,274.500	108.21			13.00	H	304.1	1
3	5,350.000	51.82	74.00	22.18	13.20	H	359	2
3	5,359.500	53.49	74.00	20.51	13.20	H	304.1	1

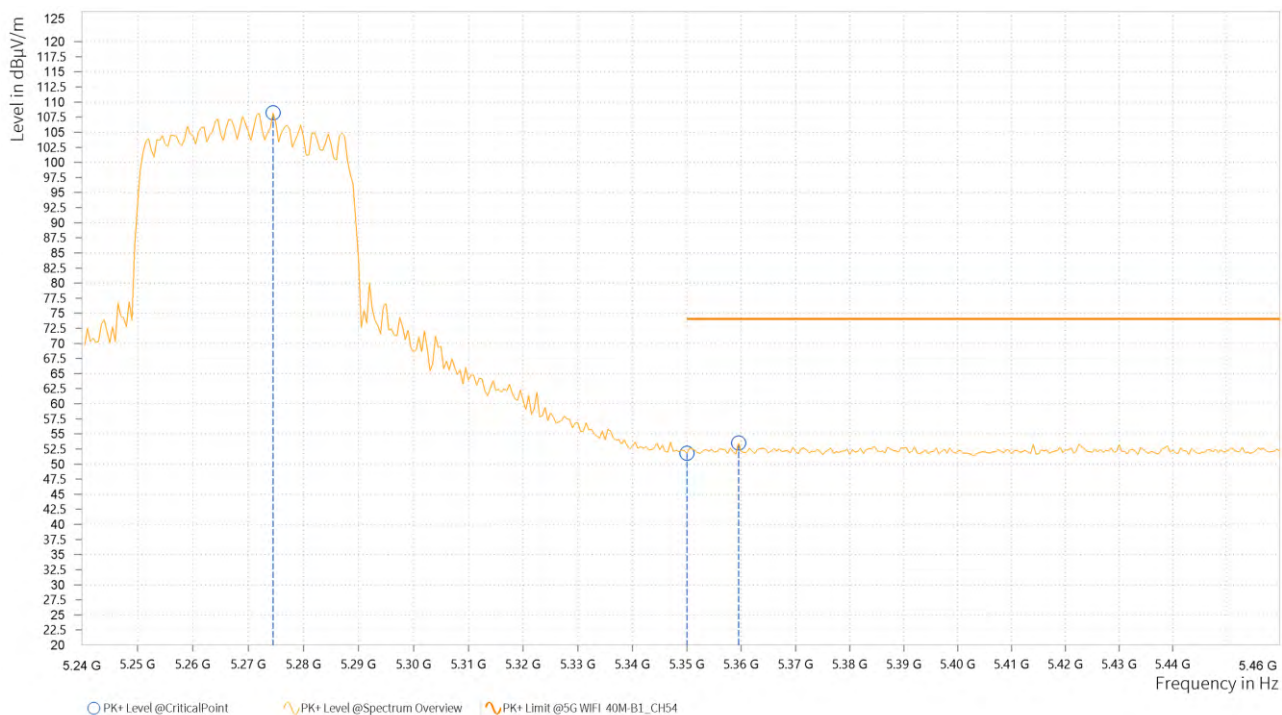

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,264.500	88.91			12.97	H	328.1	1
3	5,350.000	38.60	54.00	15.41	13.20	H	355.6	2
3	5,356.000	38.81	54.00	15.19	13.20	H	207.4	1

