



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,271.000	100.90			12.98	V	359	1
3	5,350.000	51.81	74.00	22.19	13.20	V	104.6	1
3	5,417.500	53.06	74.00	20.94	13.26	V	157.4	2

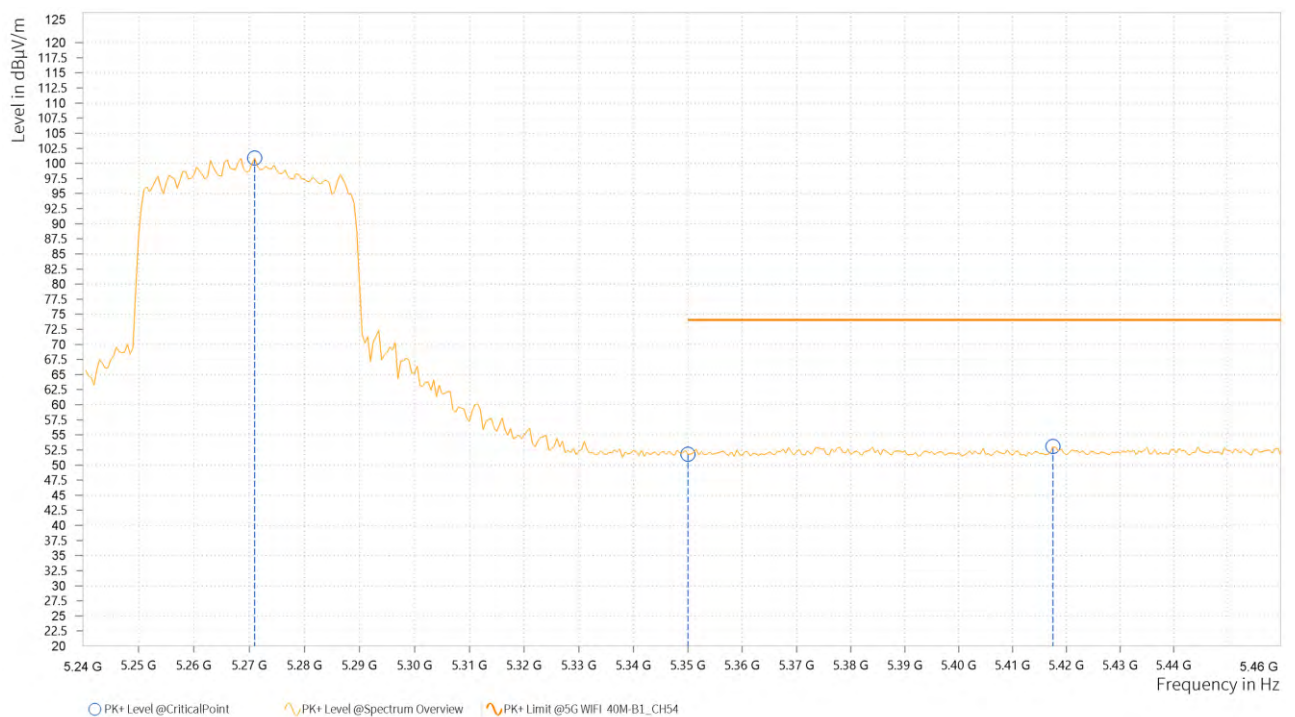

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,268.500	82.42			12.98	V	202.6	1
3	5,350.000	38.40	54.00	15.60	13.20	V	1	1
3	5,370.000	38.67	54.00	15.33	13.20	V	202.6	1

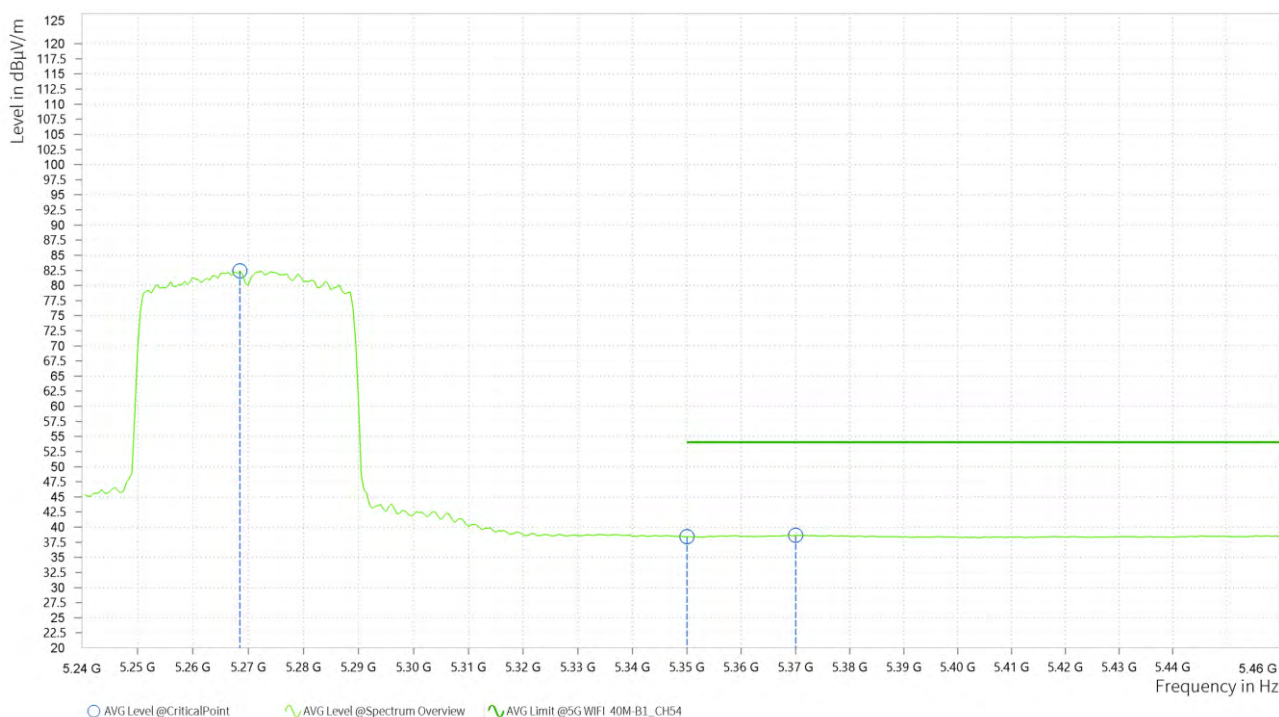

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5270MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,312.000	109.68			13.11	H	305.3	1
4	5,350.000	66.65	74.00	7.35	13.20	H	359.1	1
4	5,351.500	70.20	74.00	3.80	13.20	H	355	2

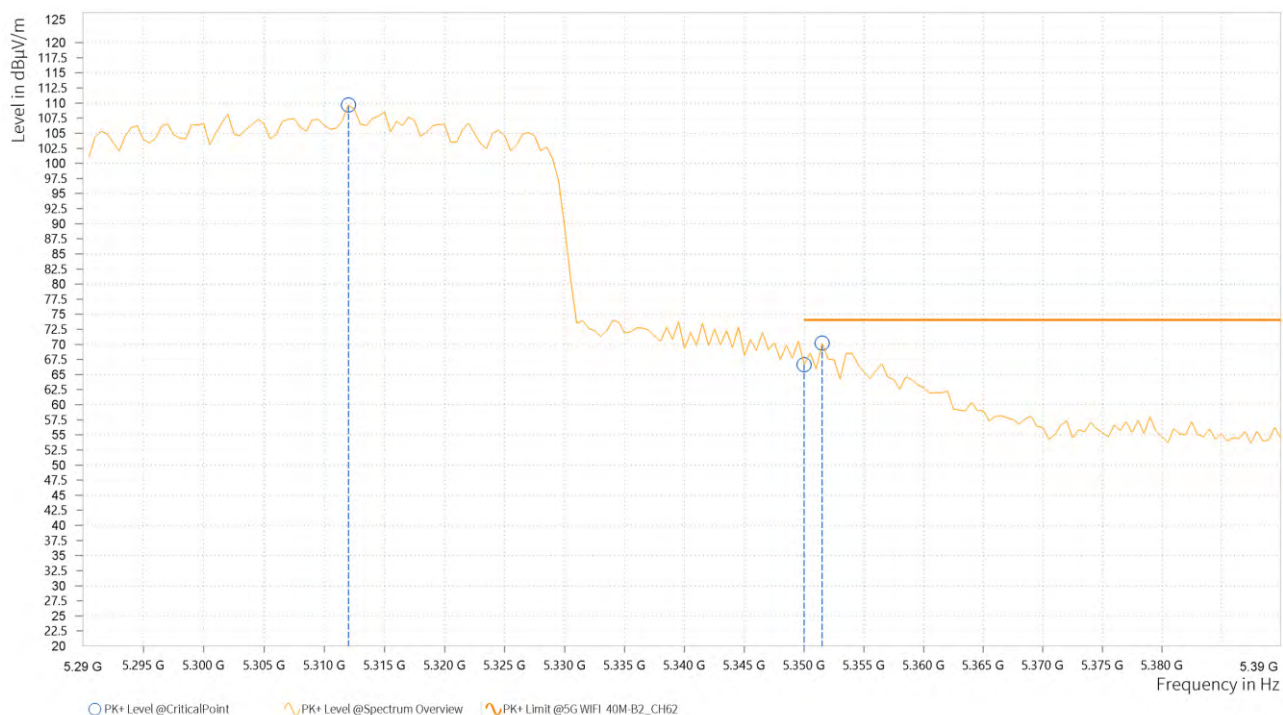


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,308.000	90.10			13.10	H	277.8	1
4	5,350.000	44.02	54.00	9.98	13.20	H	355.6	2
4	5,350.500	44.25	54.00	9.75	13.20	H	355.6	2




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,314.000	102.45			13.12	V	202.6	1
4	5,350.000	63.45	74.00	10.55	13.20	V	355.7	2
4	5,351.500	64.79	74.00	9.21	13.20	V	355.7	2

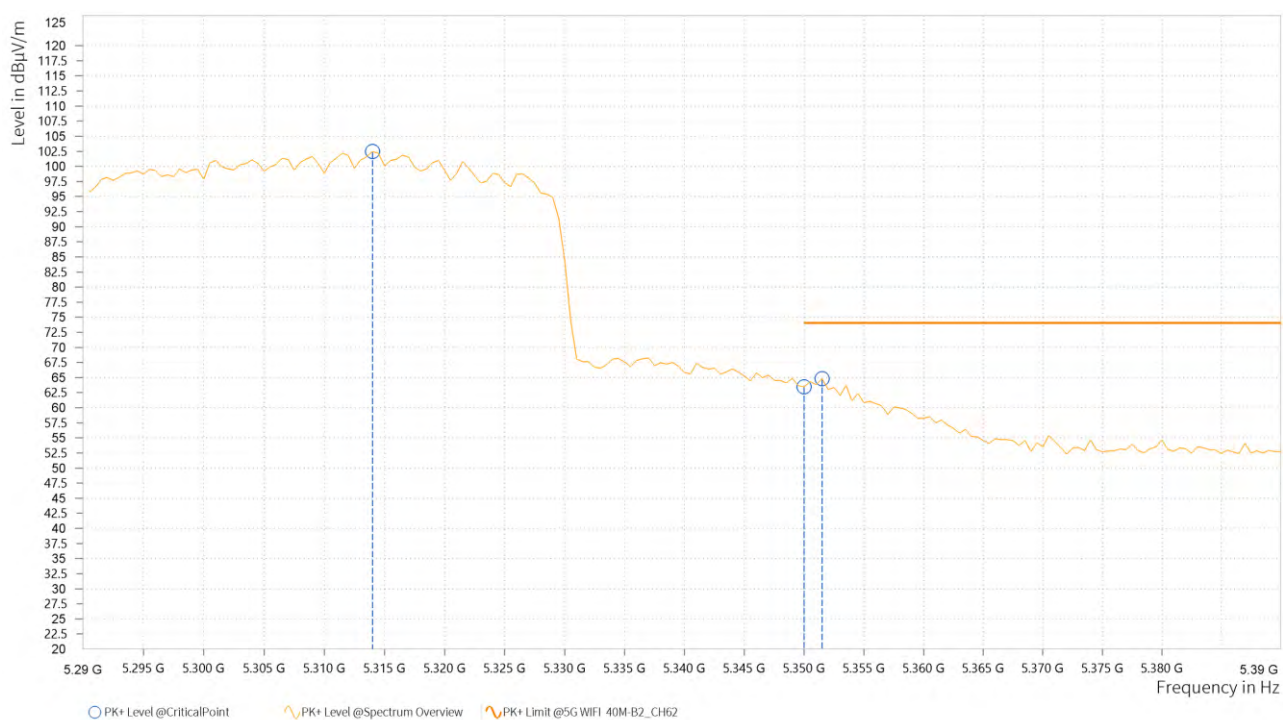

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,313.000	83.72			13.11	V	221.7	1
4	5,350.000	40.33	54.00	13.67	13.20	V	221.7	1
4	5,351.000	40.21	54.00	13.79	13.20	V	221.7	1

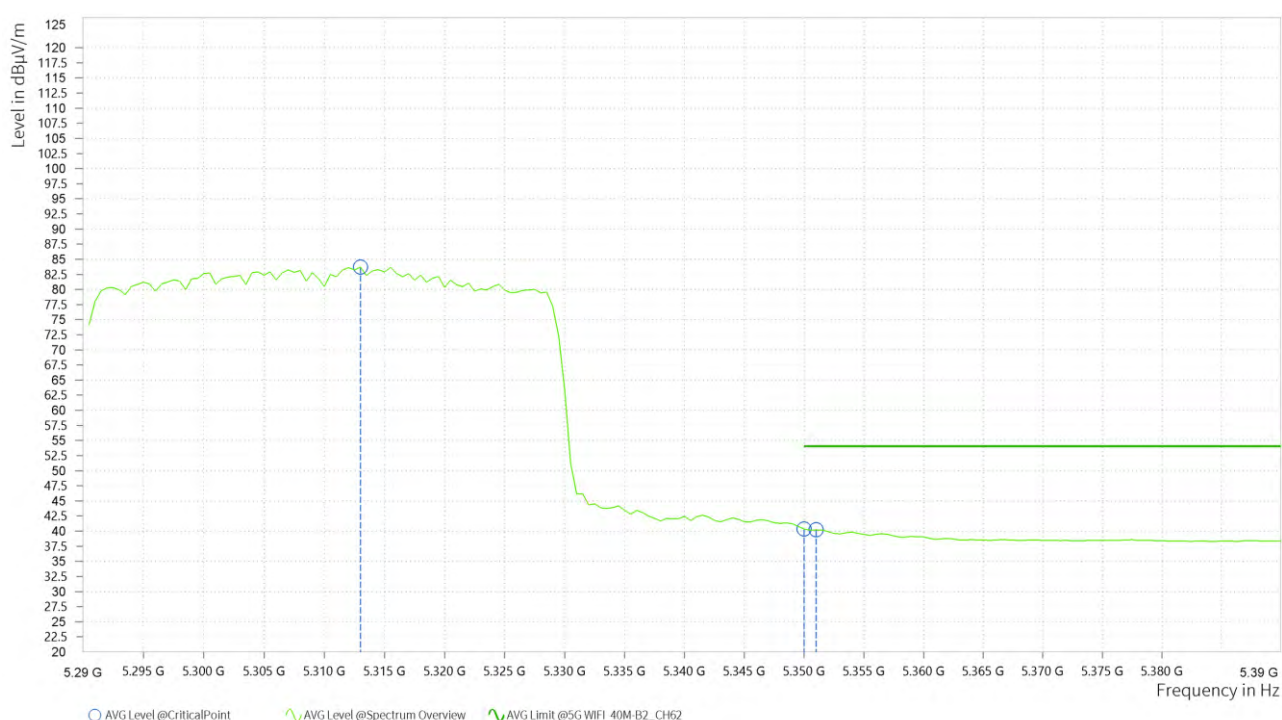

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5310MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11ax (80MHz) (SU242):


CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,280.000	105.23			13.01	H	271.9	1
2	5,350.000	67.46	74.00	6.54	13.20	H	271.9	1
2	5,355.000	68.11	74.00	5.89	13.20	H	271.9	1

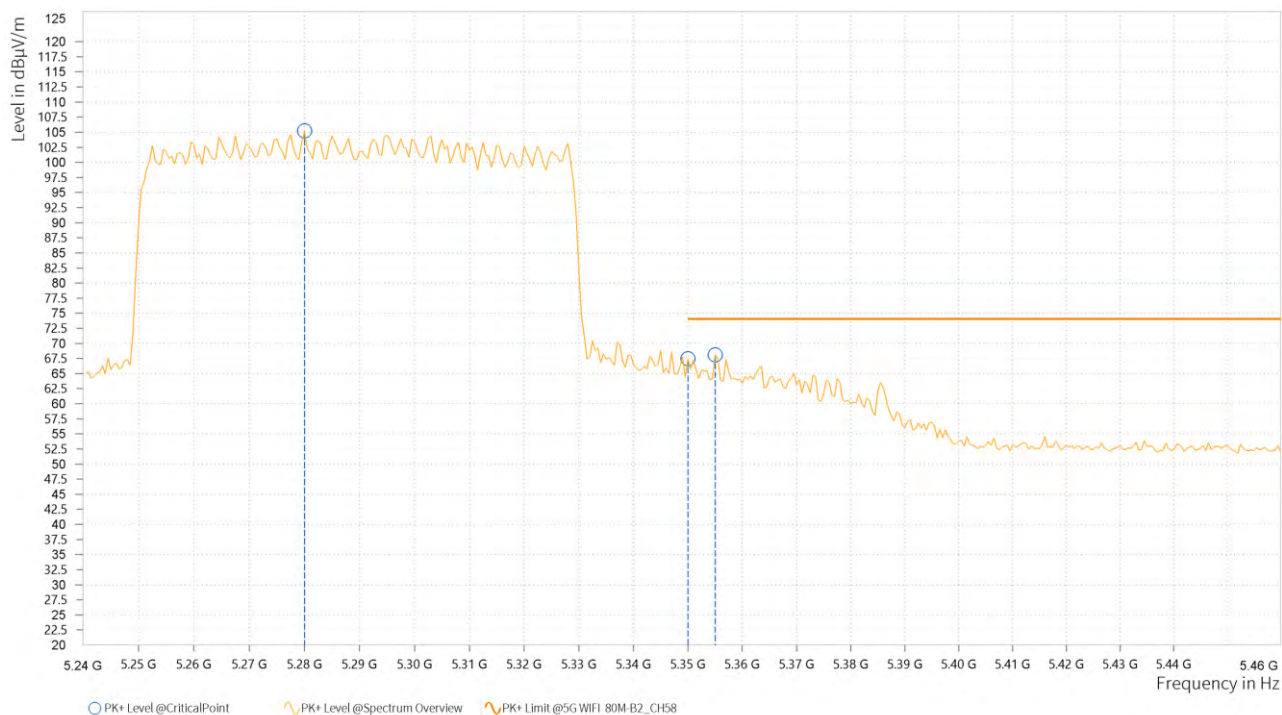


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,285.100	87.69			13.03	H	269.5	1
2	5,350.000	48.27	54.00	5.73	13.20	H	269.5	1
2	5,350.733	48.45	54.00	5.55	13.20	H	269.5	1

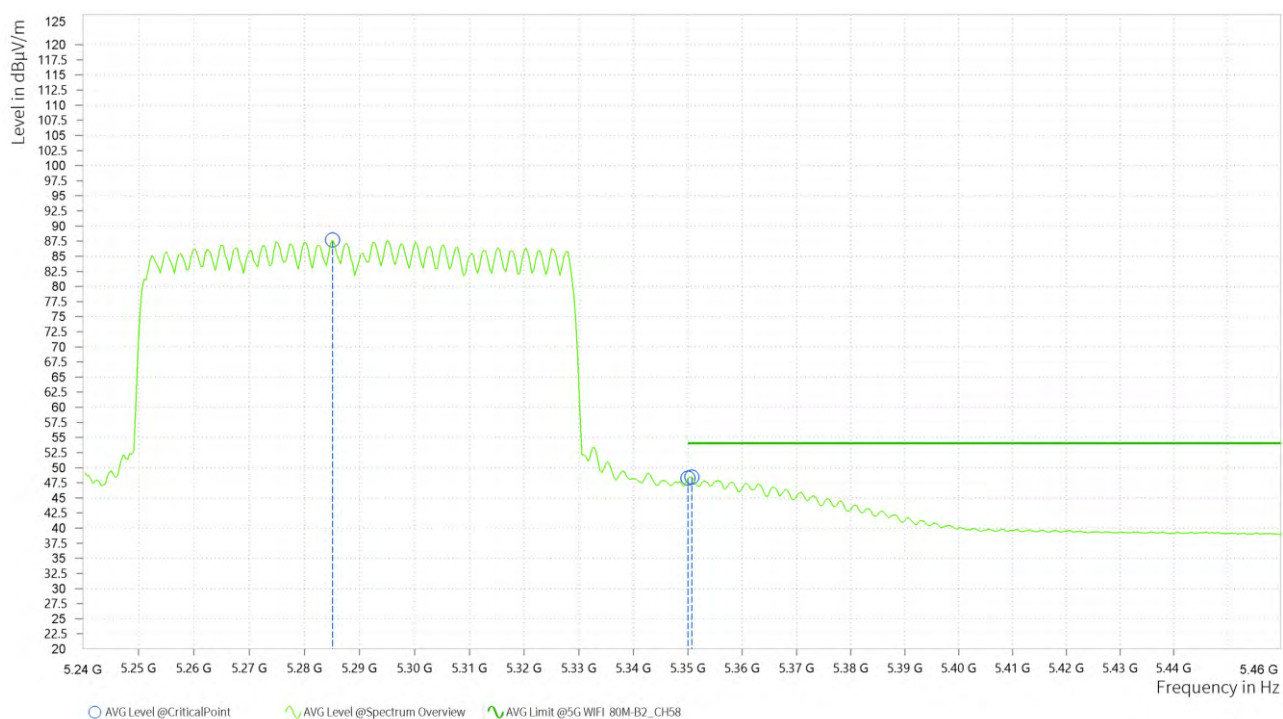

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,303.433	97.54			13.09	V	214.5	1
2	5,350.000	61.42	74.00	12.58	13.20	V	310.4	2
2	5,350.367	64.03	74.00	9.97	13.20	V	271.8	1

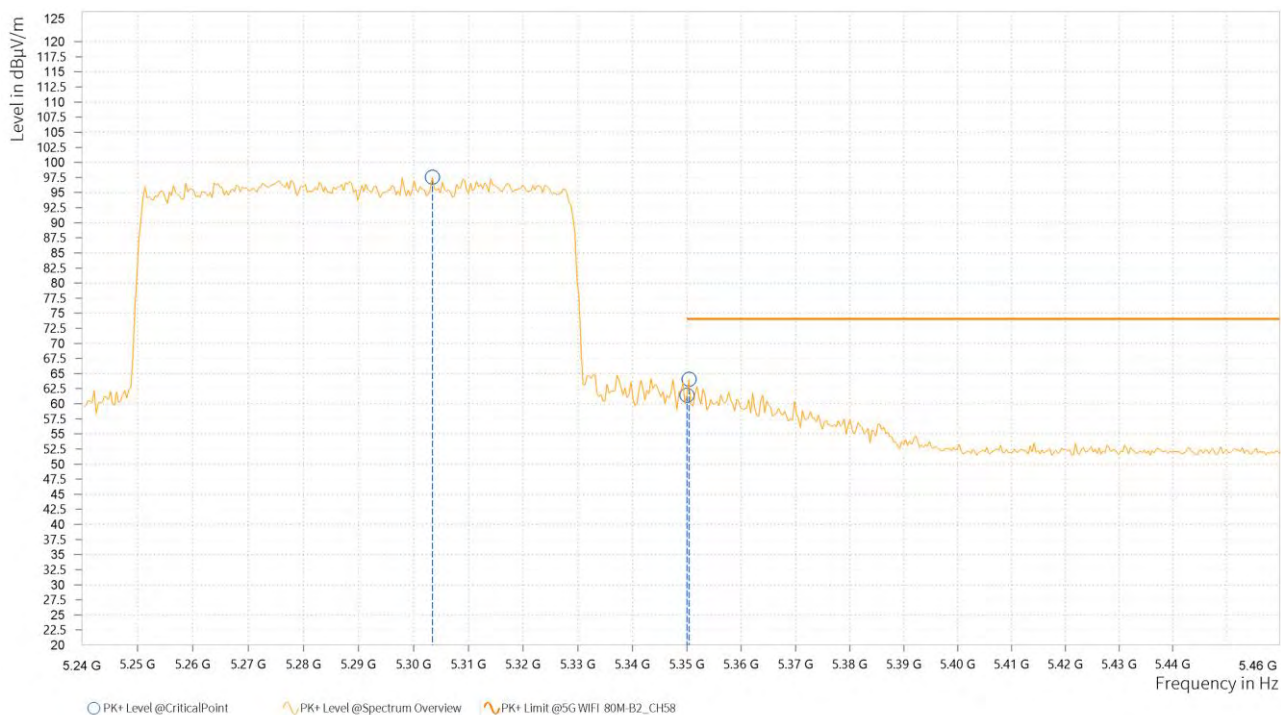

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,314.800	80.38			13.12	V	1	1
2	5,350.000	42.97	54.00	11.03	13.20	V	348.8	1
2	5,351.100	42.32	54.00	11.68	13.20	V	239.6	1



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5290MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

5G WIFI-RU

802.11ax (20MHz)(RU242):

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.02	54.09	74	-20.98	34.52	9.92	45.51	100	205	Peak
5150.000	49.6	50.67	54	-4.4	34.52	9.92	45.51	100	205	Average
5260.000	111.39	112.41	/	/	34.61	9.88	45.51	100	205	Peak
5260.000	104.11	105.13	/	/	34.61	9.88	45.51	100	205	Average
5350.000	53.29	54.27	74	-20.71	34.68	9.85	45.51	100	205	Peak
5350.000	49.44	50.42	54	-4.56	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.67	54.66	74	-20.33	34.6	9.92	45.51	100	300	Peak
5150.000	49.88	50.87	54	-4.12	34.6	9.92	45.51	100	300	Average
5260.000	106.06	107.09	/	/	34.6	9.88	45.51	100	300	Peak
5260.000	99.1	100.13	/	/	34.6	9.88	45.51	100	300	Average
5350.000	53.92	54.98	74	-20.08	34.6	9.85	45.51	100	300	Peak
5350.000	48.87	49.93	54	-5.13	34.6	9.85	45.51	100	300	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5260MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 56	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.17	54.24	74	-20.83	34.52	9.92	45.51	100	205	Peak
5150.000	49.12	50.19	54	-4.88	34.52	9.92	45.51	100	205	Average
5300.000	111.76	112.78	/	/	34.62	9.87	45.51	100	205	Peak
5300.000	104.14	105.16	/	/	34.62	9.87	45.51	100	205	Average
5350.000	53.79	54.77	74	-20.21	34.68	9.85	45.51	100	205	Peak
5350.000	49.44	50.42	54	-4.56	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	54.35	55.34	74	-19.65	34.6	9.92	45.51	100	300	Peak
5150.000	49.31	50.3	54	-4.69	34.6	9.92	45.51	100	300	Average
5300.000	105.95	106.99	/	/	34.6	9.87	45.51	100	300	Peak
5300.000	98.65	99.69	/	/	34.6	9.87	45.51	100	300	Average
5350.000	53.57	54.63	74	-20.43	34.6	9.85	45.51	100	300	Peak
5350.000	49.25	50.31	54	-4.75	34.6	9.85	45.51	100	300	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ax (20MHz) (RU26):

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.71	54.78	74	-20.29	34.52	9.92	45.51	100	205	Peak
5150.000	47.3	48.37	54	-6.7	34.52	9.92	45.51	100	205	Average
5180.000	109.22	110.21	/	/	34.66	9.86	45.51	100	205	Peak
5180.000	100.22	101.21	/	/	34.66	9.86	45.51	100	205	Average
5350.000	53.2	54.18	74	-20.8	34.68	9.85	45.51	100	205	Peak
5350.000	47.07	48.05	54	-6.93	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	55.98	56.97	74	-18.02	34.6	9.92	45.51	100	300	Peak
5150.000	47.34	48.33	54	-6.66	34.6	9.92	45.51	100	300	Average
5180.000	102.58	103.63	/	/	34.6	9.86	45.51	100	300	Peak
5180.000	94.77	95.82	/	/	34.6	9.86	45.51	100	300	Average
5350.000	53.62	54.68	74	-20.38	34.6	9.85	45.51	100	300	Peak
5350.000	47.31	48.37	54	-6.69	34.6	9.85	45.51	100	300	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ax (20MHz) (RU52):

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.12	54.19	74	-20.88	34.52	9.92	45.51	100	205	Peak
5150.000	47.06	48.13	54	-6.94	34.52	9.92	45.51	100	205	Average
5180.000	109.35	110.34	/	/	34.66	9.86	45.51	100	205	Peak
5180.000	100.14	101.13	/	/	34.66	9.86	45.51	100	205	Average
5350.000	54.12	55.1	74	-19.88	34.68	9.85	45.51	100	205	Peak
5350.000	47.68	48.66	54	-6.32	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.81	54.8	74	-20.19	34.6	9.92	45.51	100	300	Peak
5150.000	47.21	48.2	54	-6.79	34.6	9.92	45.51	100	300	Average
5180.000	103.32	104.37	/	/	34.6	9.86	45.51	100	300	Peak
5180.000	94.28	95.33	/	/	34.6	9.86	45.51	100	300	Average
5350.000	53.34	54.4	74	-20.66	34.6	9.85	45.51	100	300	Peak
5350.000	47.05	48.11	54	-6.95	34.6	9.85	45.51	100	300	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ax (20MHz) (RU106):

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	53.92	54.99	74	-20.08	34.52	9.92	45.51	100	205	Peak
5150.000	47.41	48.48	54	-6.59	34.52	9.92	45.51	100	205	Average
5180.000	108.47	109.46	/	/	34.66	9.86	45.51	100	205	Peak
5180.000	99.86	100.85	/	/	34.66	9.86	45.51	100	205	Average
5350.000	54.14	55.12	74	-19.86	34.68	9.85	45.51	100	205	Peak
5350.000	47.53	48.51	54	-6.47	34.68	9.85	45.51	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150.000	54.52	55.51	74	-19.48	34.6	9.92	45.51	100	300	Peak
5150.000	47.11	48.1	54	-6.89	34.6	9.92	45.51	100	300	Average
5180.000	103.78	104.83	/	/	34.6	9.86	45.51	100	300	Peak
5180.000	94.23	95.28	/	/	34.6	9.86	45.51	100	300	Average
5350.000	53.33	54.39	74	-20.67	34.6	9.85	45.51	100	300	Peak
5350.000	47.03	48.09	54	-6.97	34.6	9.85	45.51	100	300	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11ax (20MHz) (RU242):


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,319.000	110.72			13.13	H	314	2
6	5,350.000	67.18	74.00	6.82	13.20	H	292.2	1
6	5,352.000	69.75	74.00	4.25	13.20	H	243.3	1

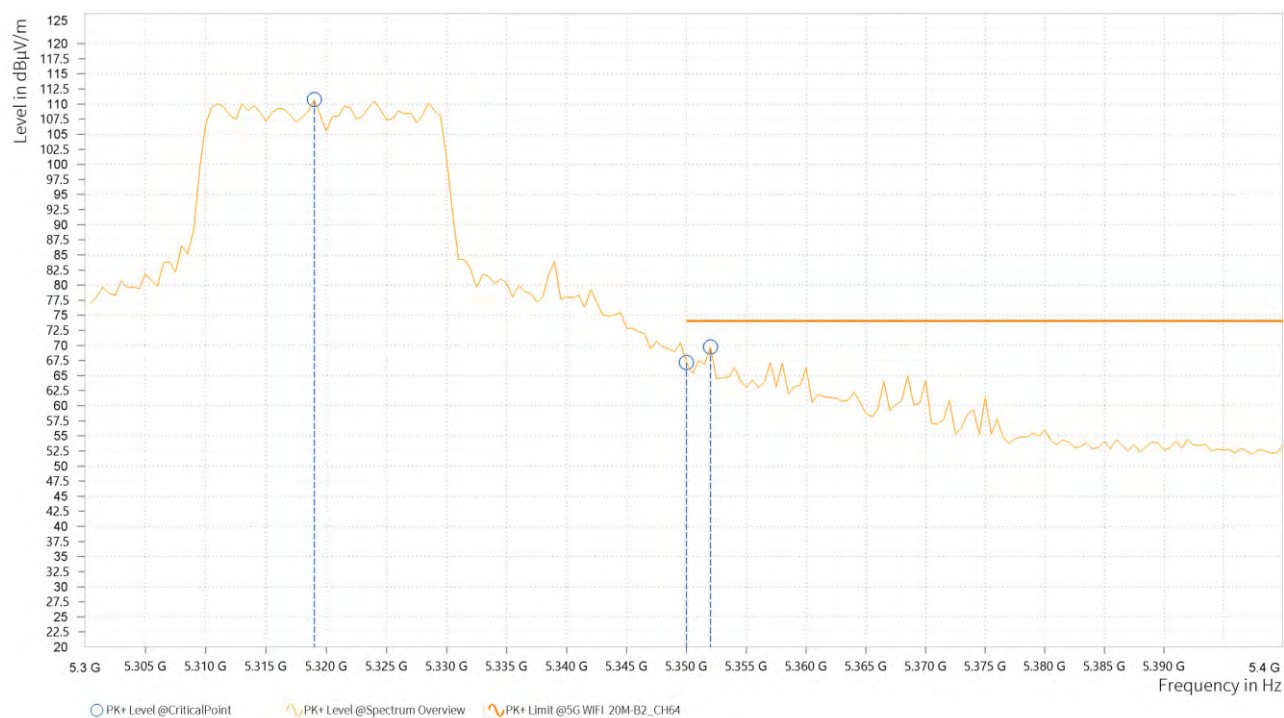


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,324.000	98.32			13.14	H	293.4	1
6	5,350.000	47.06	54.00	6.94	13.20	H	293.4	1
6	5,351.000	47.57	54.00	6.43	13.20	H	244.4	1

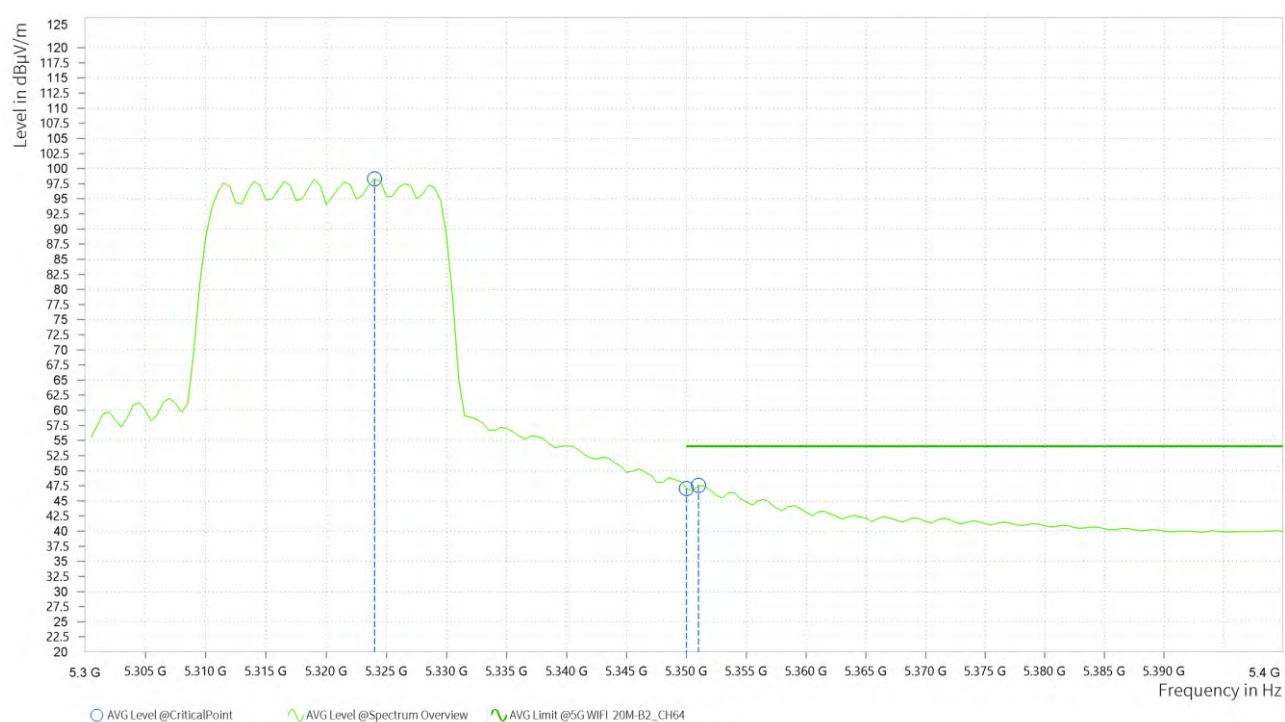

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,324.500	105.58			13.15	V	265	2
6	5,350.000	64.31	74.00	9.69	13.20	V	244.5	1
6	5,350.500	65.87	74.00	8.13	13.20	V	46	1

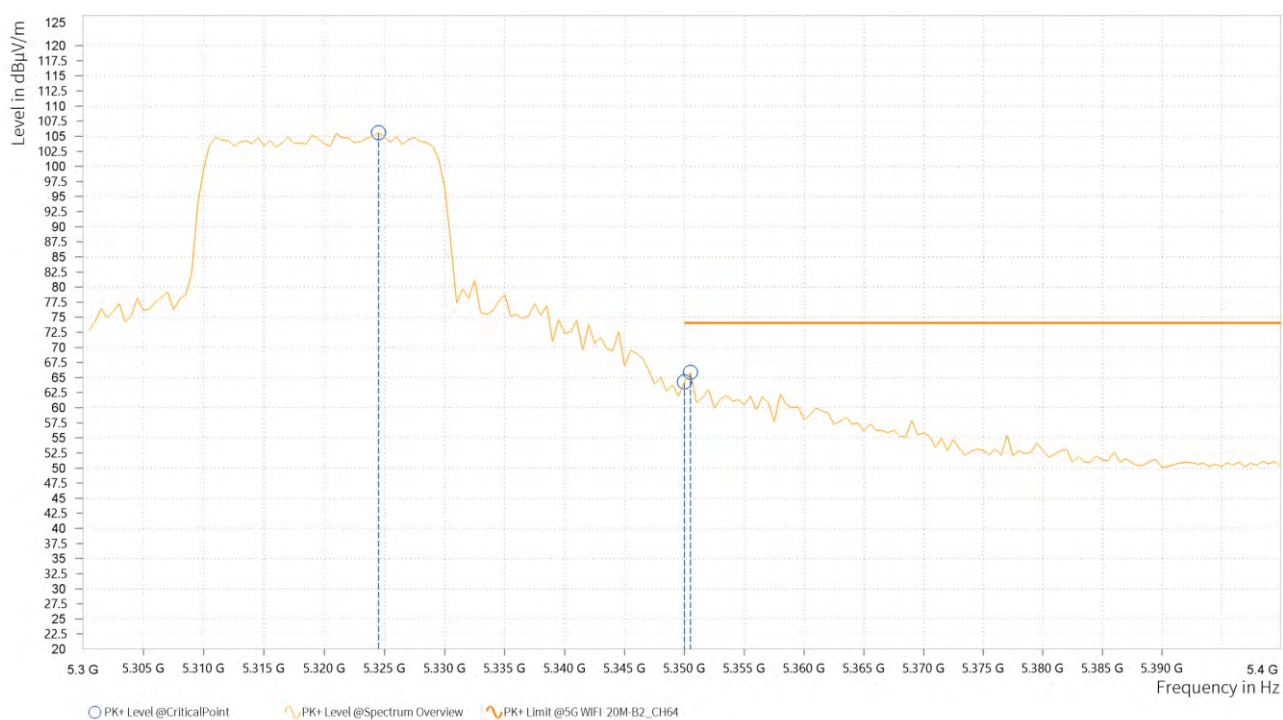

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,323.500	91.53			13.14	V	168.2	2
6	5,350.000	43.03	54.00	10.97	13.20	V	245.6	1
6	5,351.000	43.25	54.00	10.75	13.20	V	43.5	1



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11ax (40MHz) (RU242):


CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,260.500	110.34			12.96	H	195.4	1
3	5,350.000	66.07	74.00	7.93	13.20	H	245.6	1
3	5,351.000	66.87	74.00	7.13	13.20	H	147.6	1

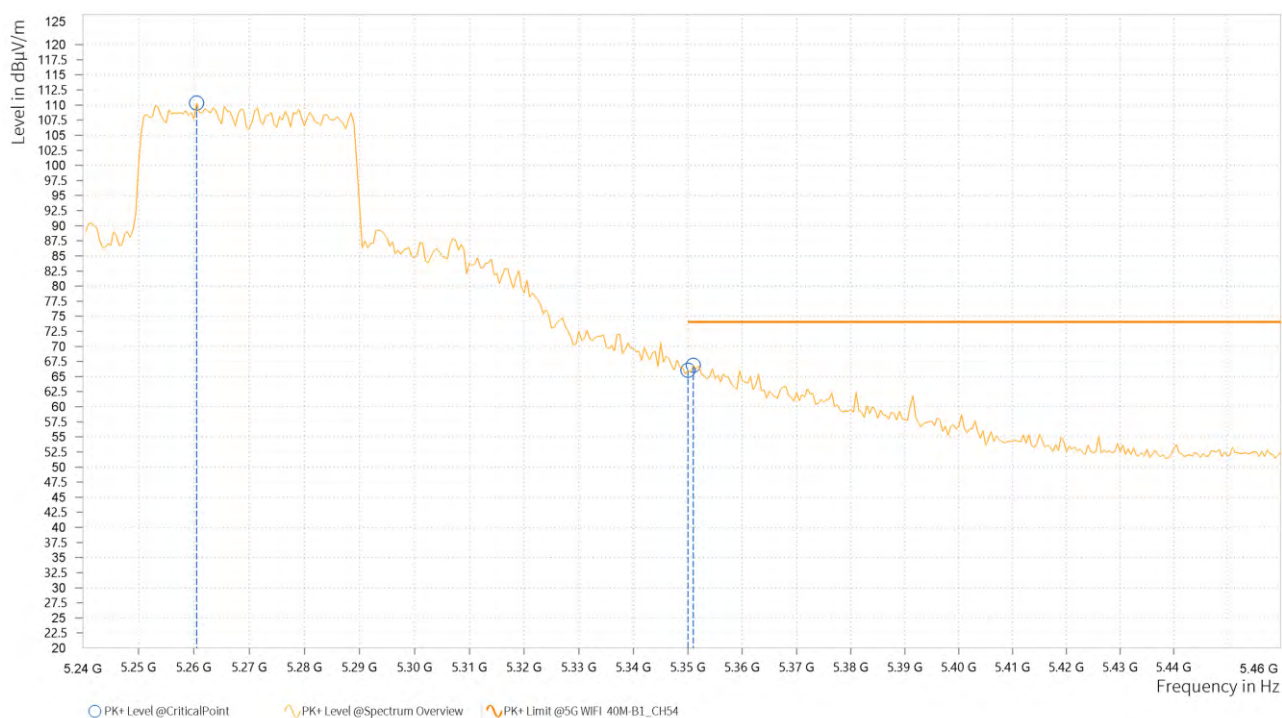


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,271.500	97.99			12.99	H	289.8	1
3	5,350.000	50.73	54.00	3.27	13.20	H	289.8	1
3	5,350.500	50.98	54.00	3.02	13.20	H	289.8	1

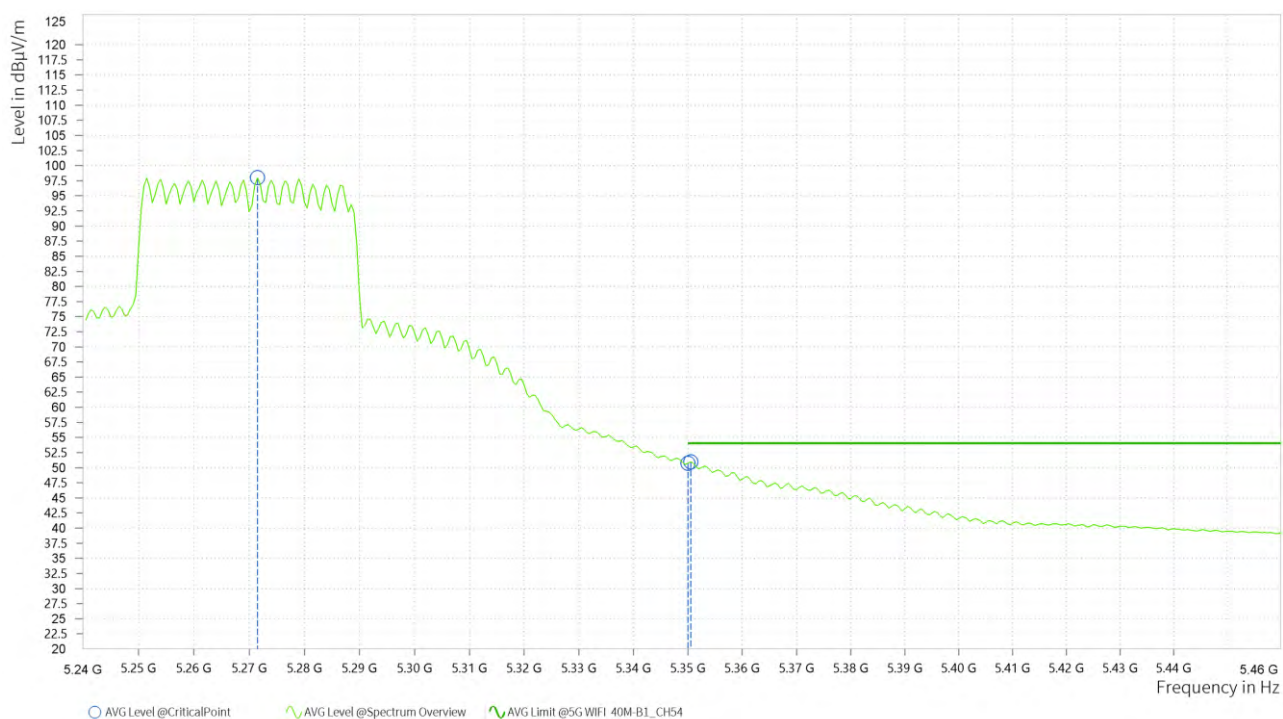


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,253.000	106.40			12.95	V	164.6	2
3	5,350.000	63.27	74.00	10.73	13.20	V	309.2	2
3	5,352.000	62.36	74.00	11.64	13.20	V	309.2	2

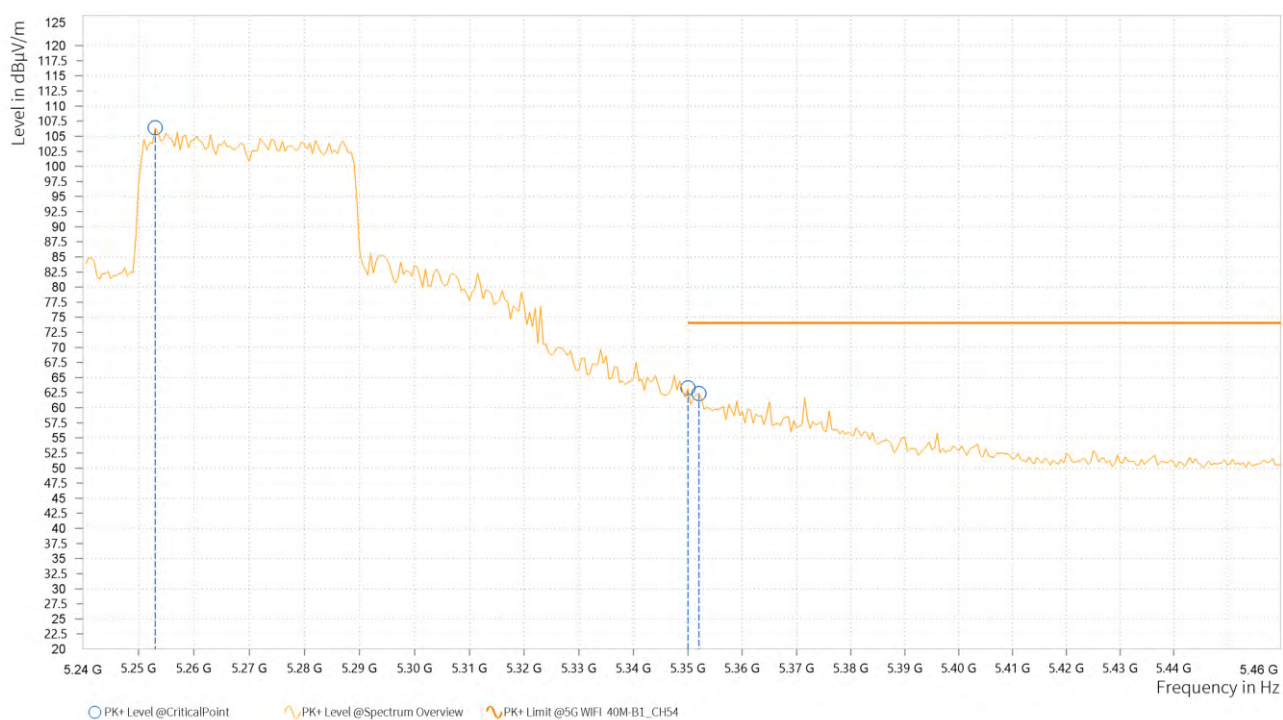

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,253.000	91.90			12.95	V	167	2
3	5,350.000	45.67	54.00	8.33	13.20	V	266.2	2
3	5,351.000	45.79	54.00	8.21	13.20	V	355	2

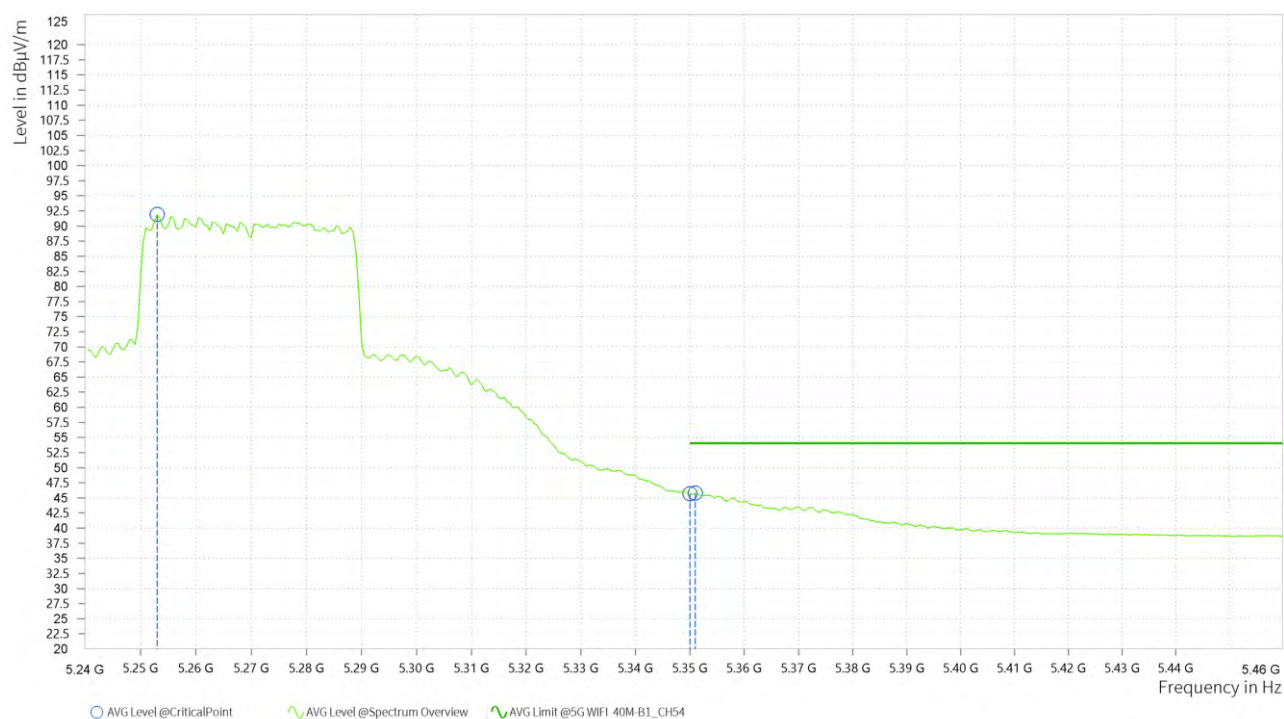

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11ax (40MHz) (RU242):


CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,321.000	112.23			13.14	H	312.7	2
3	5,350.000	65.75	74.00	8.25	13.20	H	147.6	1
3	5,351.000	68.89	74.00	5.11	13.20	H	212.4	2

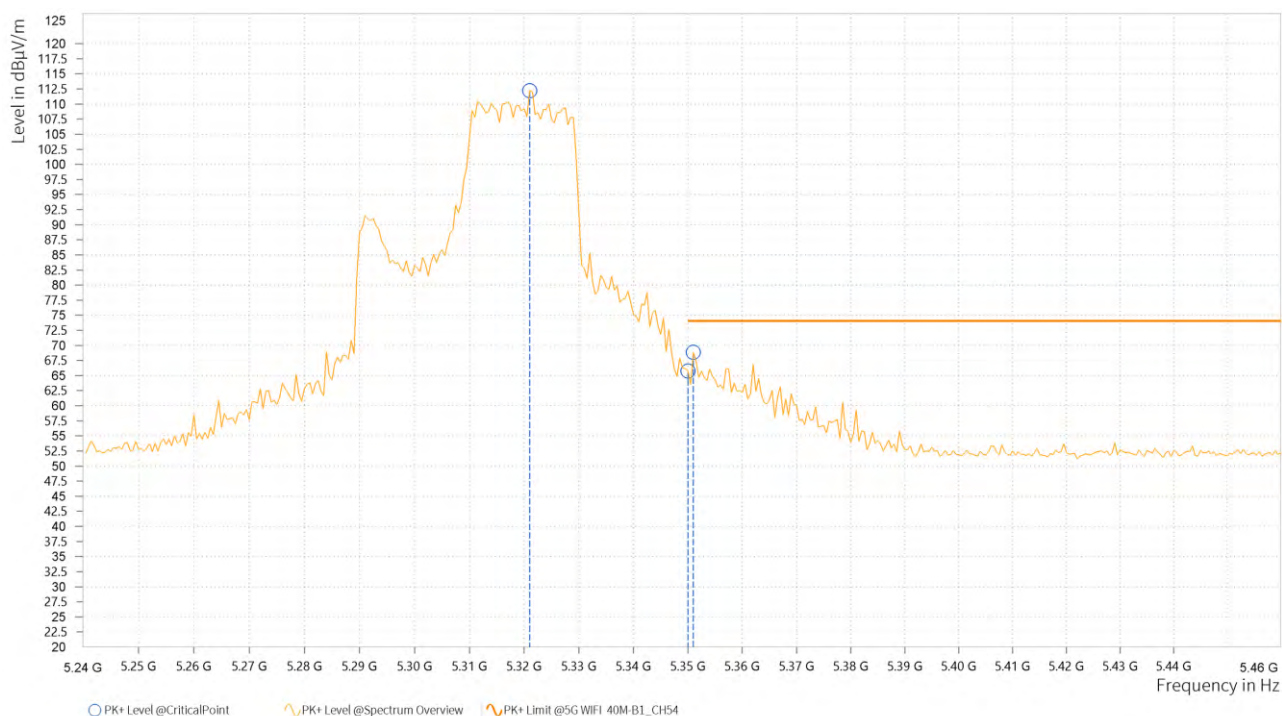


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,319.500	99.06			13.13	H	292.2	1
4	5,350.000	49.64	54.00	4.36	13.20	H	292.2	1
4	5,351.500	49.07	54.00	4.93	13.20	H	355	2

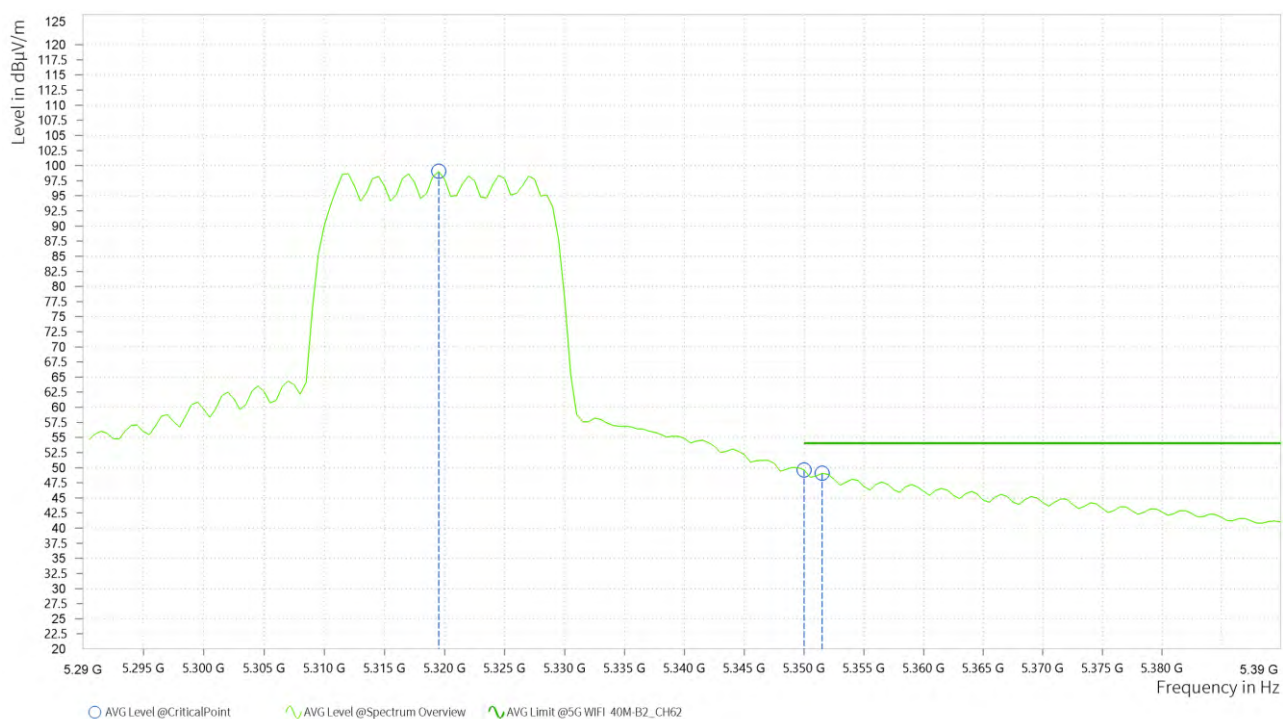

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,318.000	106.13			13.13	V	357.4	1
3	5,350.000	62.66	74.00	11.34	13.20	V	279	1
3	5,354.500	65.56	74.00	8.44	13.20	V	227.6	1

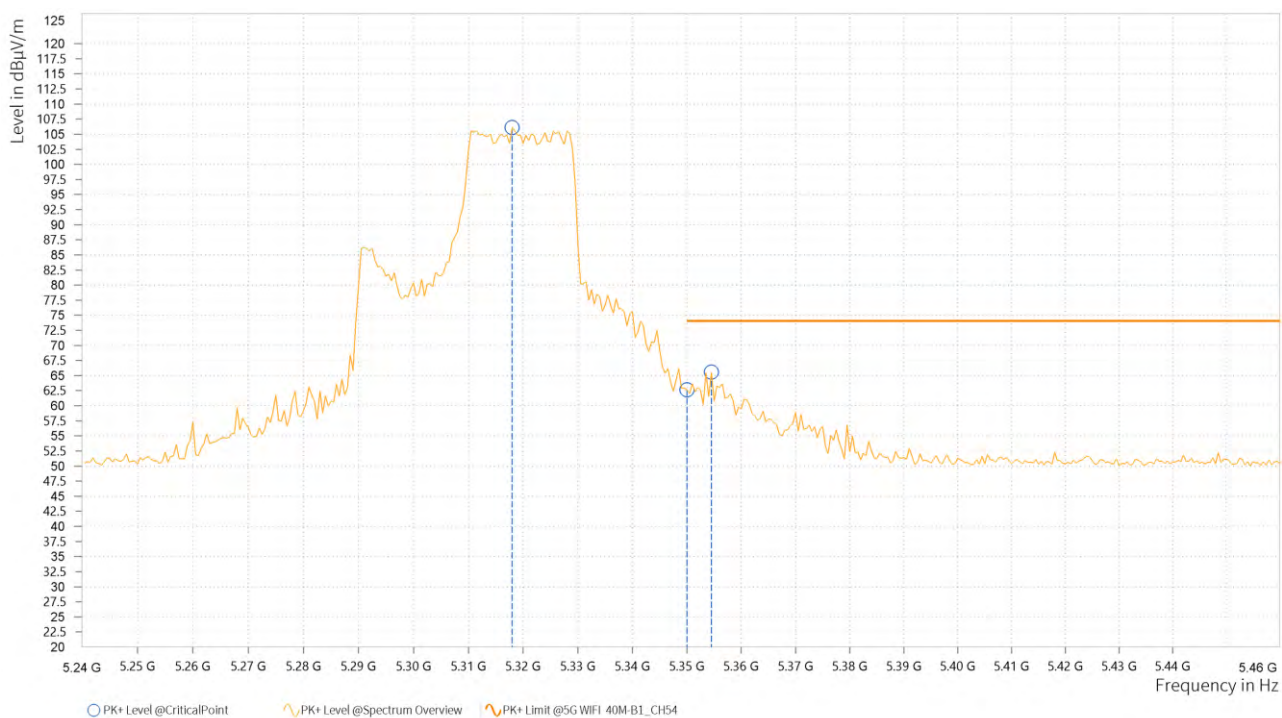

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,319.000	93.38			13.13	V	200.1	1
4	5,350.000	45.54	54.00	8.46	13.20	V	200.1	1
4	5,350.500	44.85	54.00	9.15	13.20	V	355.6	2



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,300.000	107.29			13.07	H	313.9	2
3	5,350.000	68.17	74.00	5.83	13.20	H	147.5	1
3	5,353.500	67.15	74.00	6.85	13.20	H	355.6	2




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,319.500	92.54			13.13	H	304.2	1
4	5,350.000	46.92	54.00	7.08	13.20	H	206.2	1
4	5,351.000	48.52	54.00	5.48	13.20	H	206.2	1



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,319.000	101.71			13.13	V	48.4	1
3	5,350.000	62.09	74.00	11.91	13.20	V	312.8	2
3	5,351.500	66.24	74.00	7.76	13.20	V	255.2	1

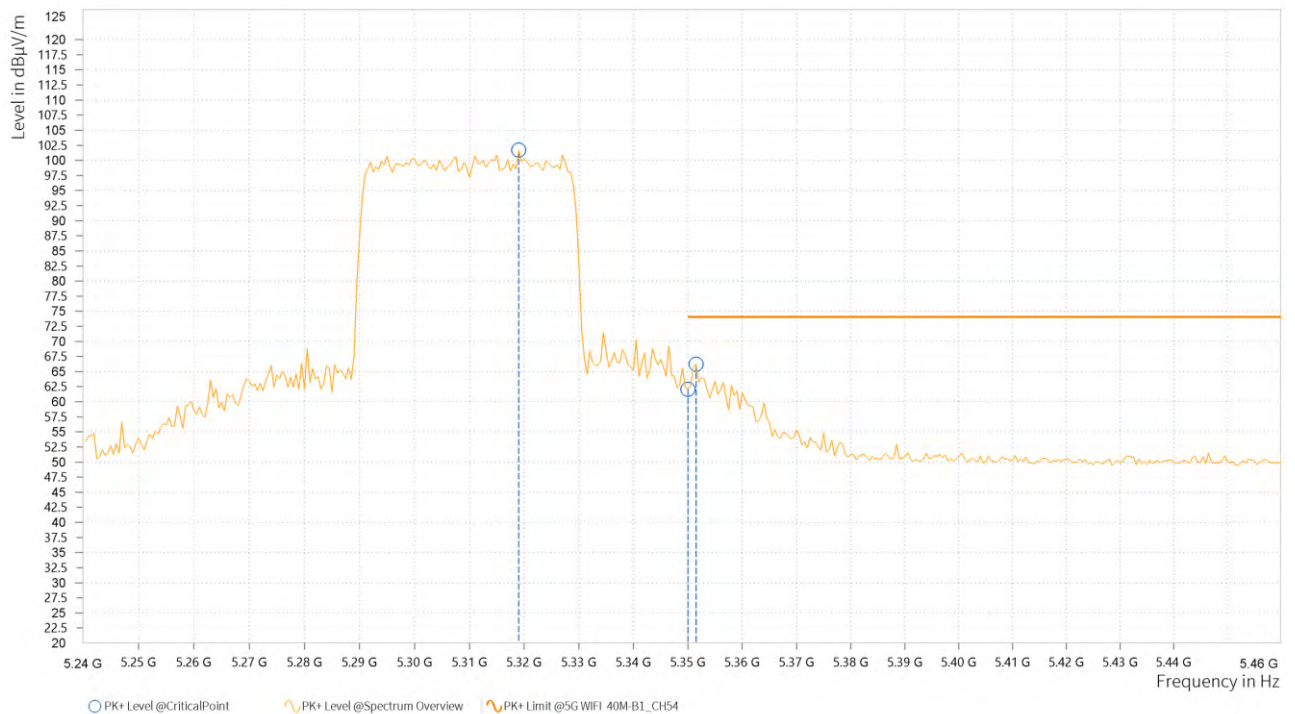

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,293.000	86.08			13.05	V	168.2	2
4	5,350.000	43.28	54.00	10.72	13.20	V	355	2
4	5,352.000	43.40	54.00	10.60	13.20	V	199	1



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11ax (80MHz) (RU484):


CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,292.500	106.01			13.05	H	311.7	2
2	5,350.000	69.57	74.00	4.43	13.20	H	311.7	2
2	5,351.500	69.52	74.00	4.48	13.20	H	155.9	1

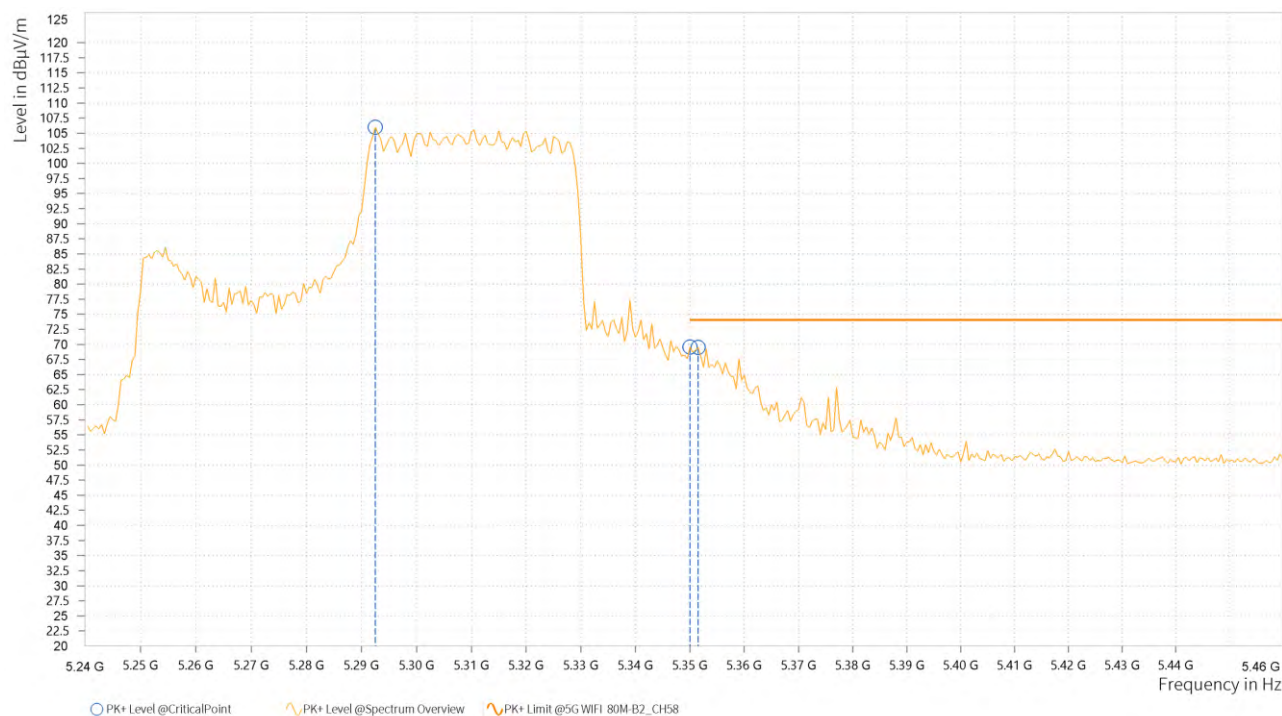


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,292.500	93.67			13.05	H	293.4	1
2	5,350.000	50.86	54.00	3.14	13.20	H	293.4	1
2	5,351.000	50.42	54.00	3.58	13.20	H	145.1	1

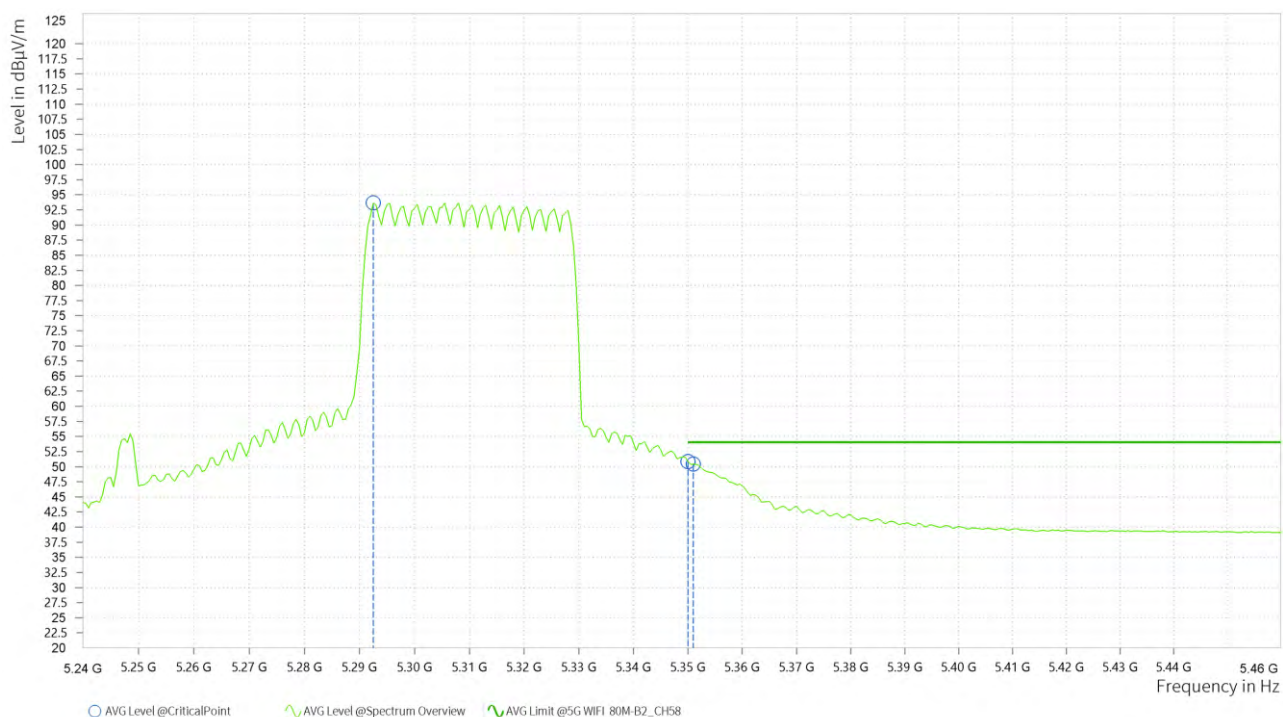

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,299.000	102.00			13.07	V	359	1
2	5,350.000	64.08	74.00	9.92	13.20	V	252.7	1
2	5,351.500	69.55	74.00	4.45	13.20	V	359	2

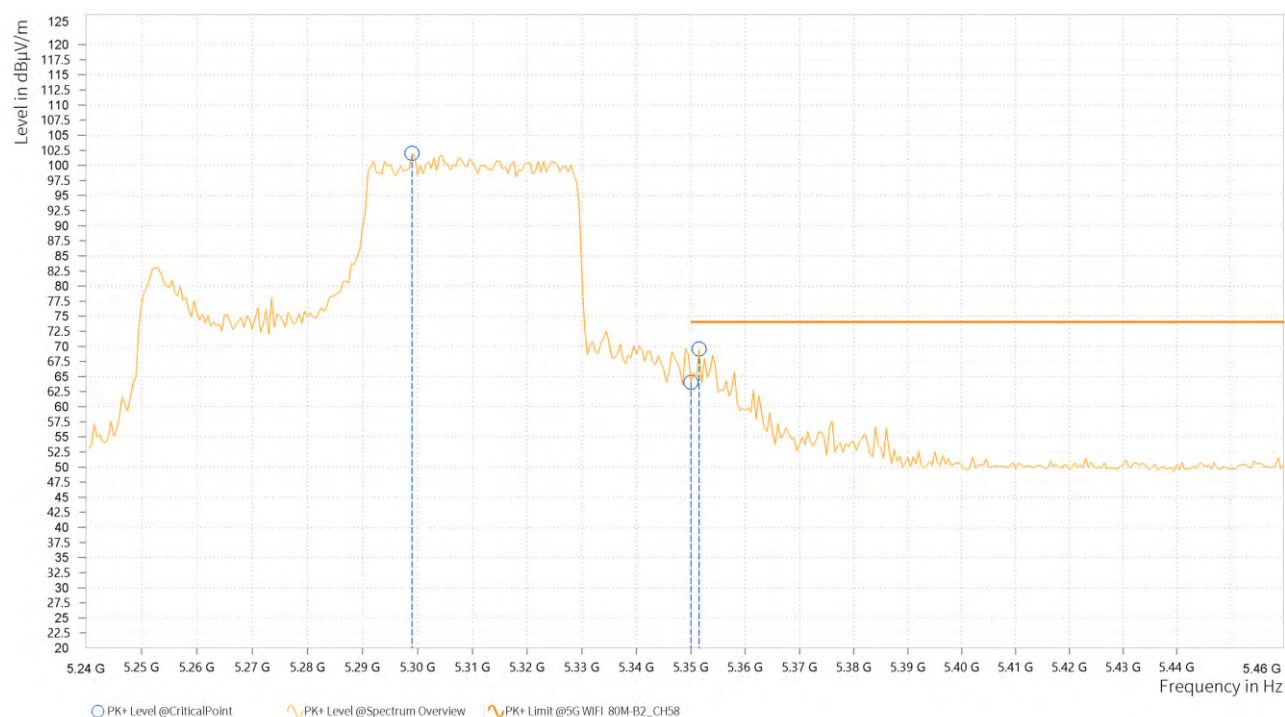

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,292.000	87.74			13.05	V	47.1	1
2	5,350.000	47.74	54.00	6.26	13.20	V	259.9	1
2	5,351.000	47.25	54.00	6.75	13.20	V	259.9	1



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11ax (80MHz) (RU996):


CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,287.500	103.90			13.04	H	314	2
2	5,350.000	67.14	74.00	6.86	13.20	H	314	2
2	5,351.500	70.41	74.00	3.59	13.20	H	176.2	1

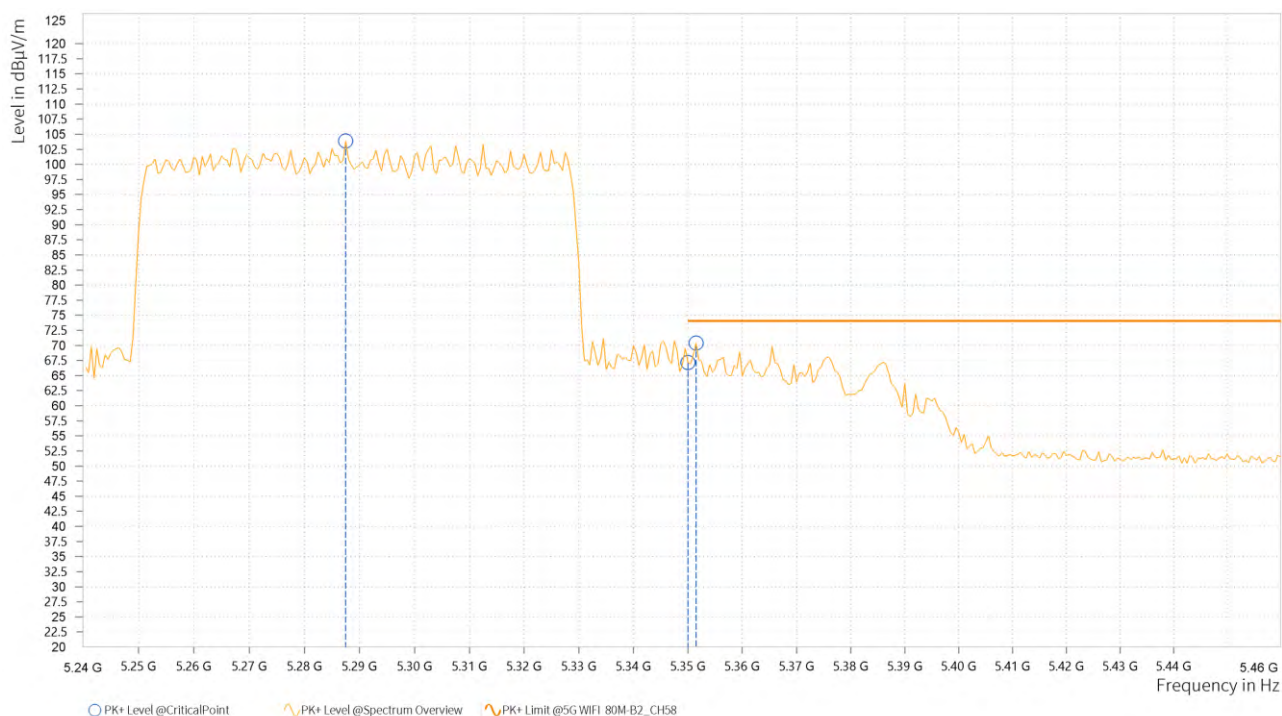


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,255.000	89.96			12.95	H	288.6	1
2	5,350.000	50.54	54.00	3.46	13.20	H	315.2	2
2	5,353.000	50.79	54.00	3.21	13.20	H	315.2	2

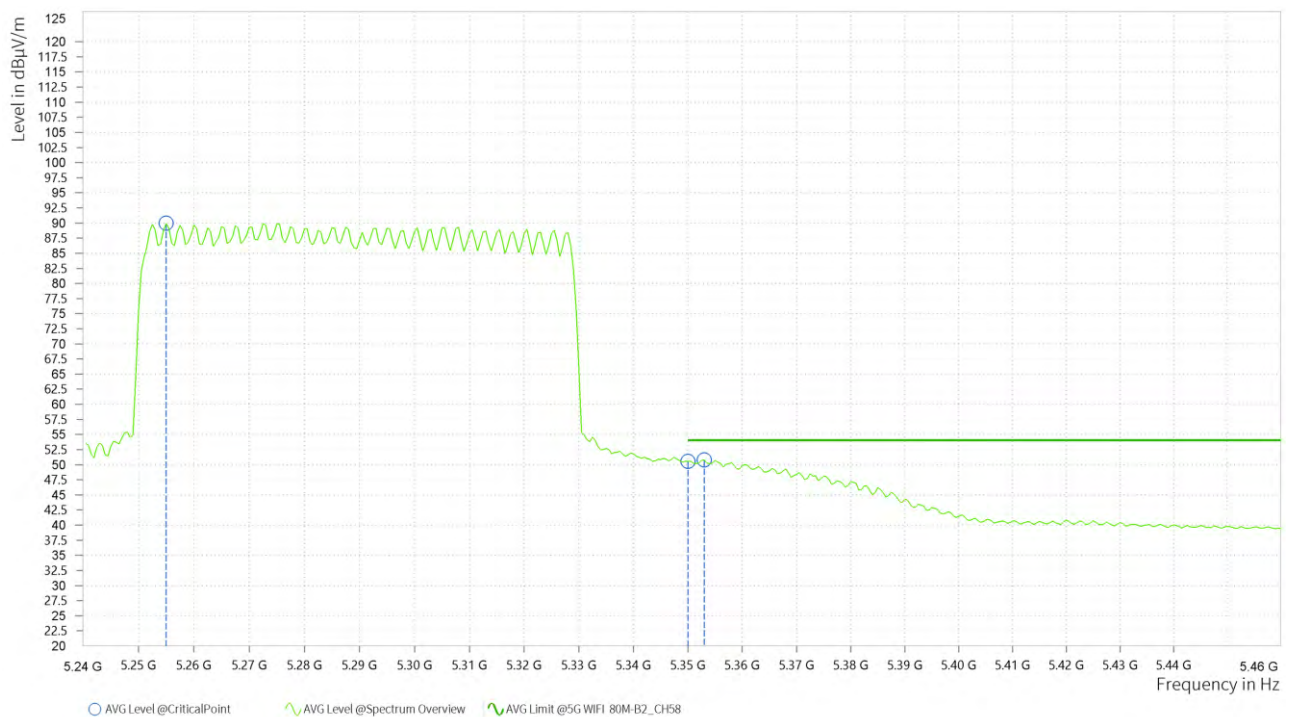

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,299.500	98.23			13.07	V	186.1	2
2	5,350.000	63.78	74.00	10.22	13.20	V	97.4	1
2	5,353.500	66.59	74.00	7.41	13.20	V	250.5	1

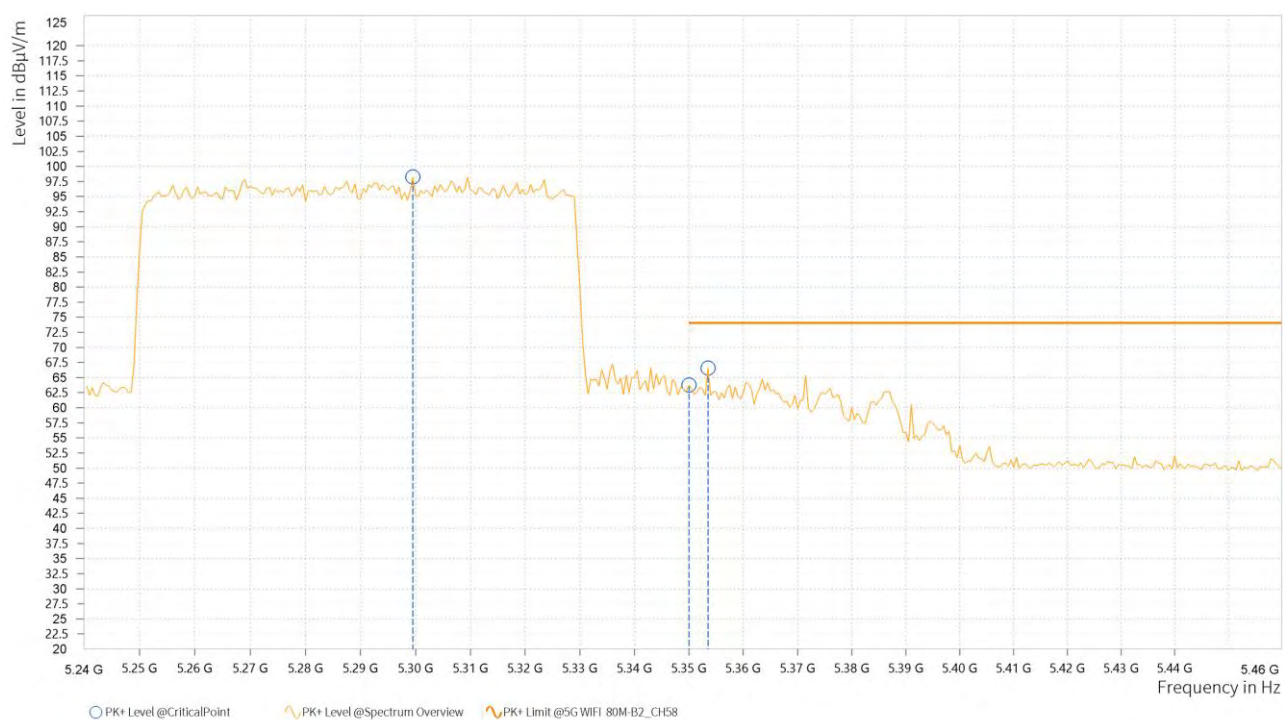

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,274.500	83.48			13.00	V	164.6	2
2	5,350.000	47.06	54.00	6.94	13.20	V	243.1	1
2	5,351.000	47.12	54.00	6.88	13.20	V	243.1	1



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13


Band 4:

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,638.750	53.00	68.20	15.20	13.67	H	359.1	1
12	5,746.560	113.05			14.03	H	258.7	1
13	5,989.125	52.72	68.20	15.48	14.62	H	0.9	2

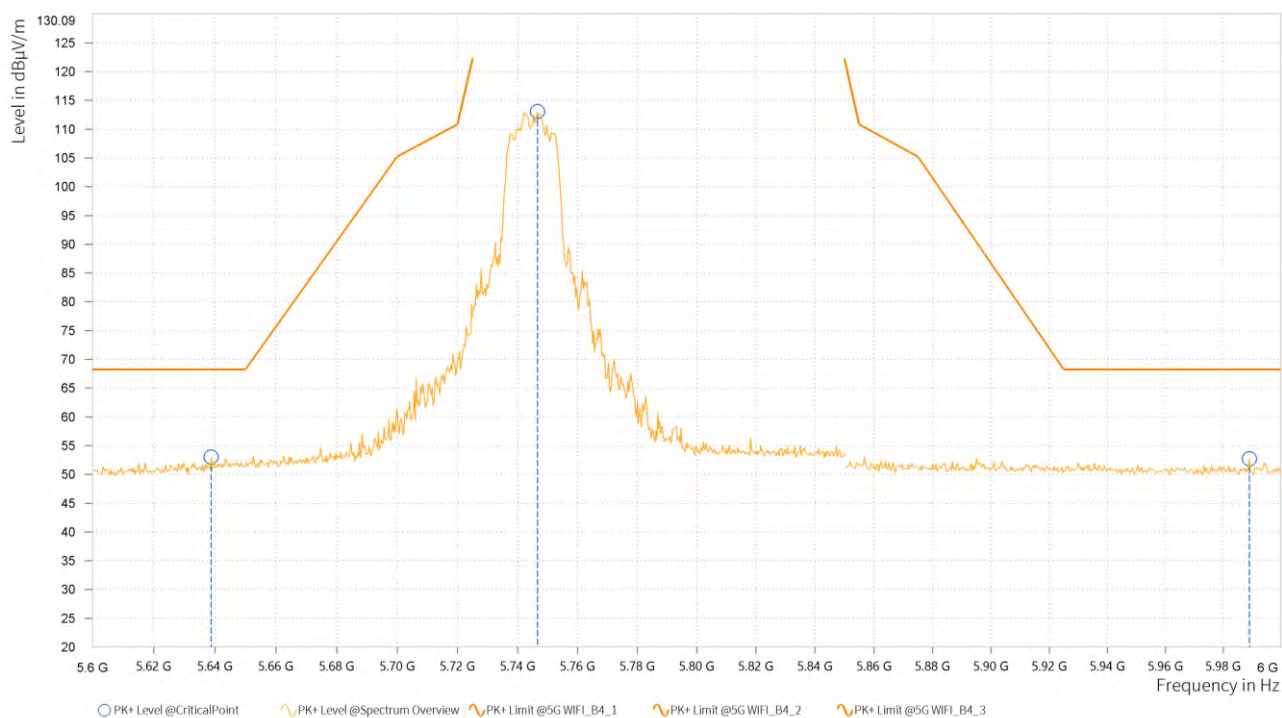

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,619.375	51.51	68.20	16.69	13.56	V	4.3	1
12	5,743.750	106.58			14.03	V	100.1	2
13	5,930.625	51.83	68.20	16.37	14.48	V	170.2	1

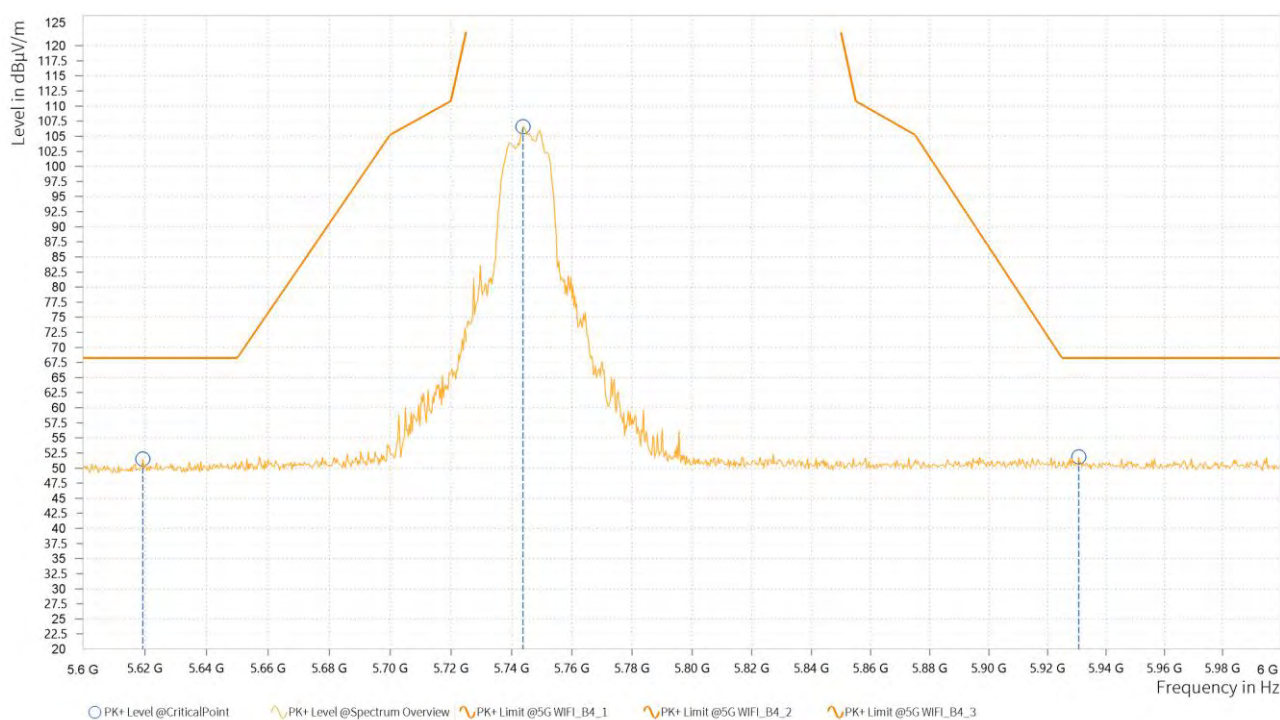

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5745MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,629.375	51.86	68.20	16.34	13.62	H	1	1
12	5,784.060	107.69			14.15	H	257.5	1
13	5,992.875	51.82	68.20	16.38	14.63	H	359	2

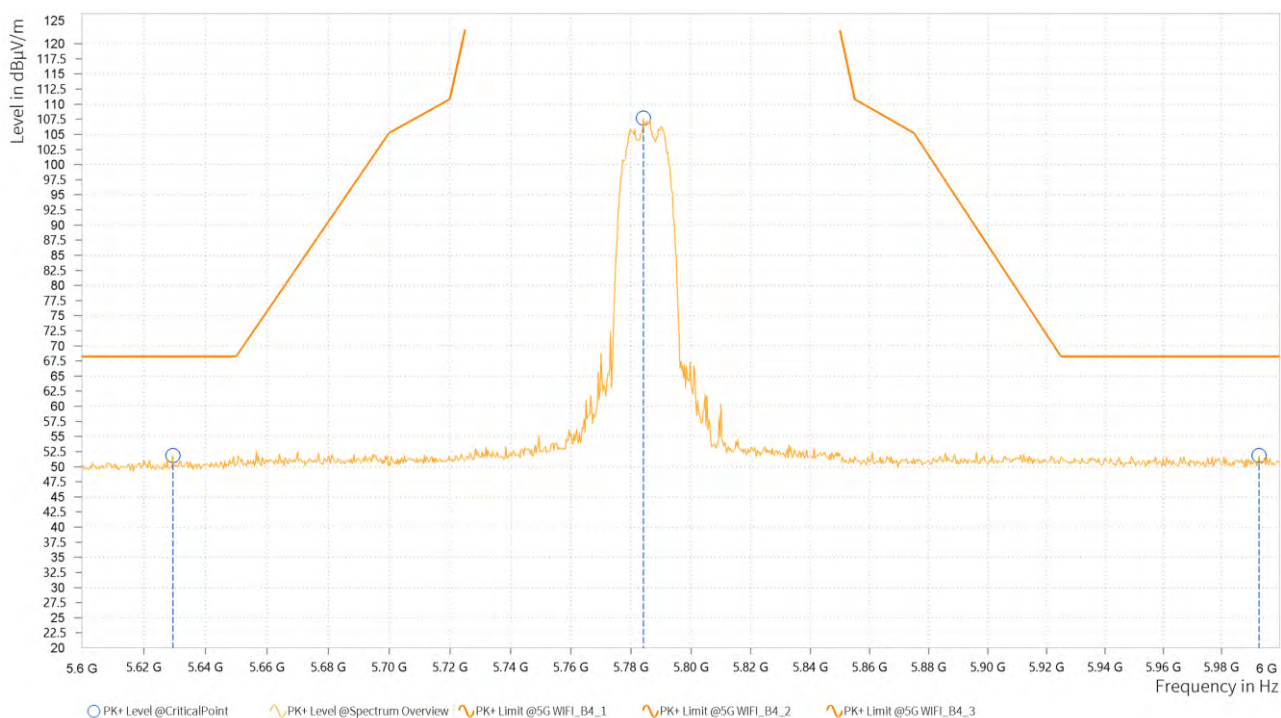

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,617.188	51.40	68.20	16.80	13.55	V	143.1	2
12	5,787.500	101.55			14.16	V	97.7	2
13	5,984.625	52.26	68.20	15.94	14.61	V	1	2

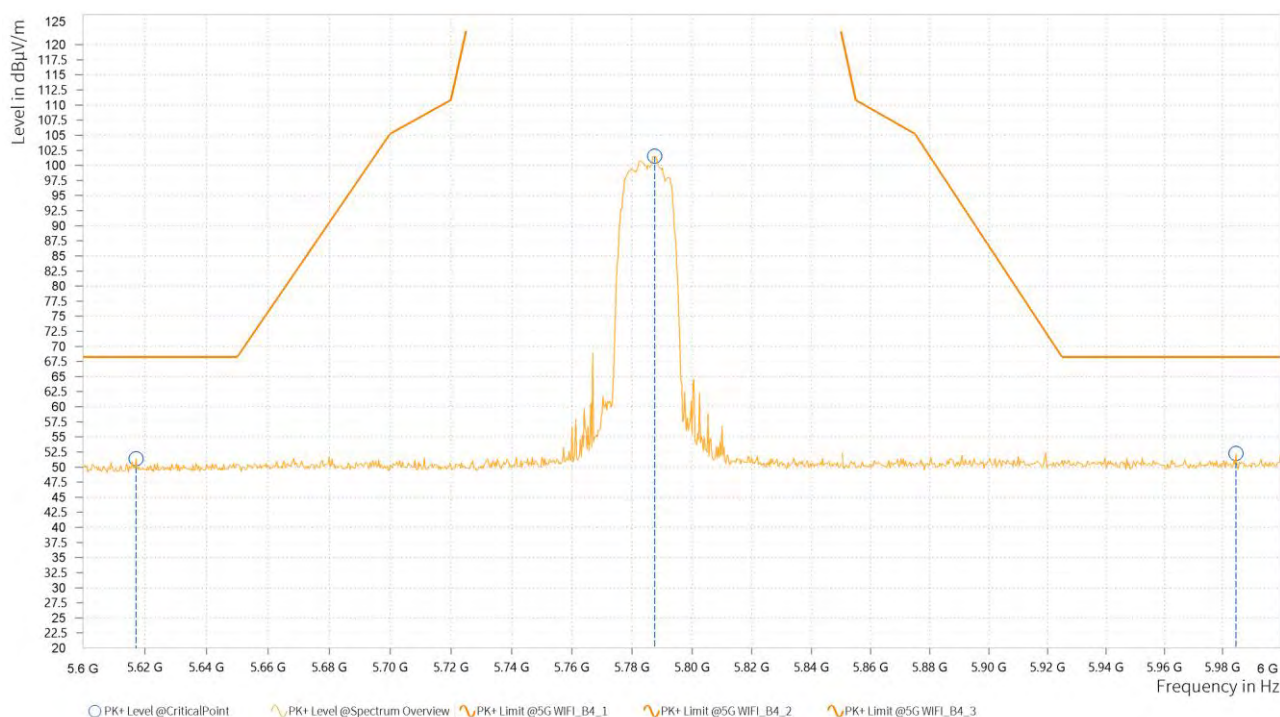

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5785MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,646.250	51.77	68.20	16.43	13.72	H	359	1
12	5,826.250	109.48			14.25	H	257.5	1
13	5,932.125	52.08	68.20	16.12	14.48	H	359	1

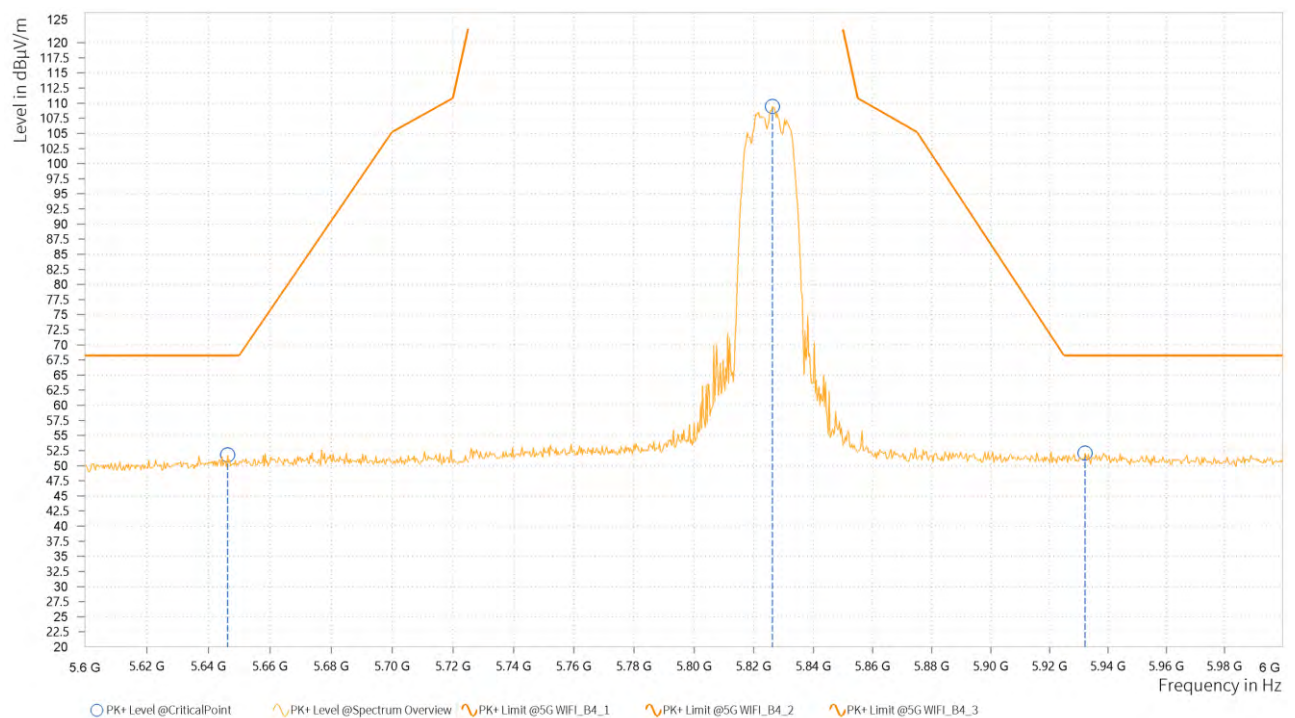

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,637.500	51.58	68.20	16.62	13.67	V	1	1
12	5,826.880	101.84			14.25	V	258.7	1
13	5,928.000	52.38	68.20	15.82	14.48	V	170.2	1

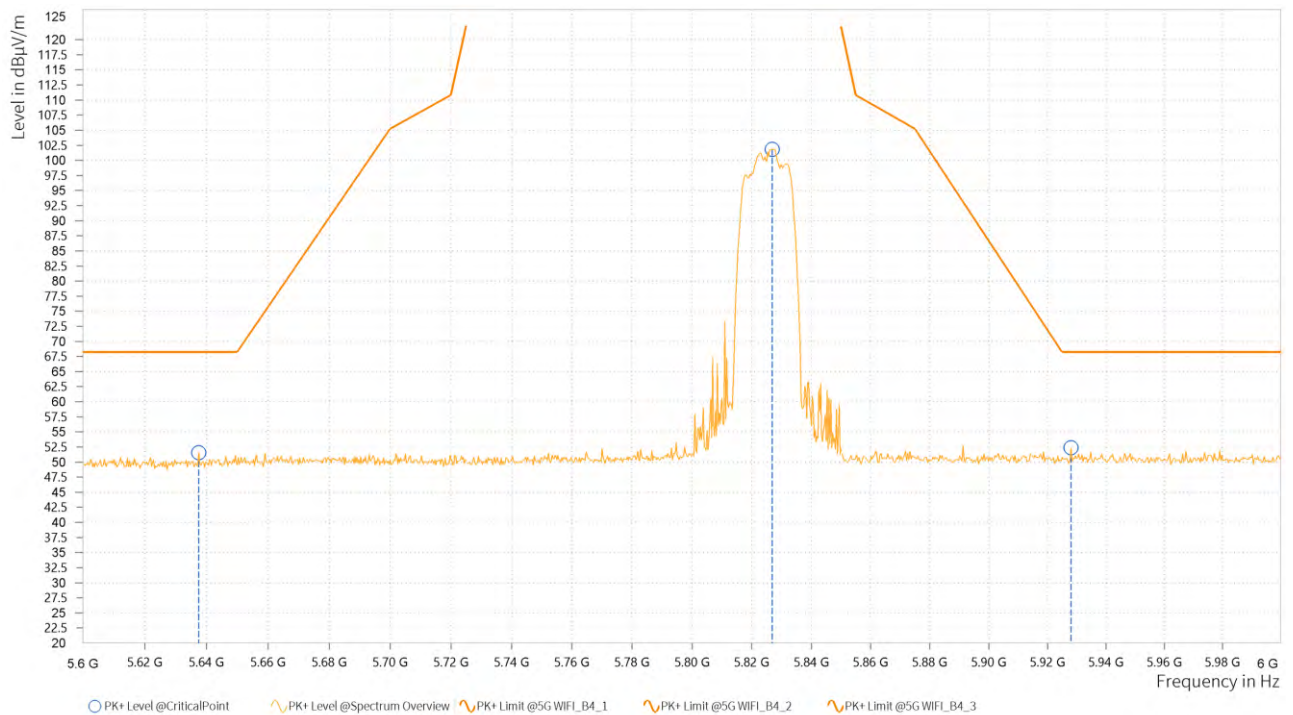

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5825MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,621.250	51.76	68.20	16.44	13.57	H	1	1
12	5,745.940	106.95			14.03	H	257.5	1
13	5,943.750	52.00	68.20	16.20	14.49	H	359	1

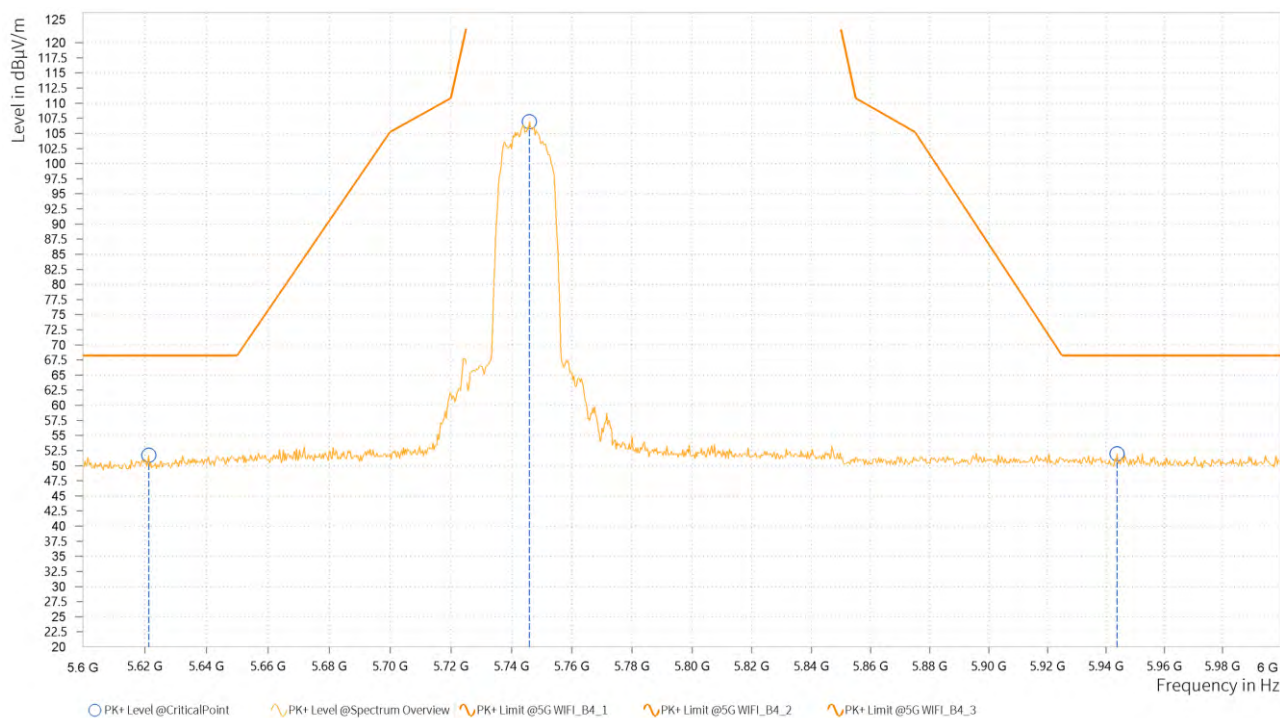

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,645.313	51.04	68.20	17.16	13.71	V	12.9	2
12	5,745.938	98.76			14.03	V	86.6	1
13	5,991.375	51.72	68.20	16.48	14.63	V	170.2	1

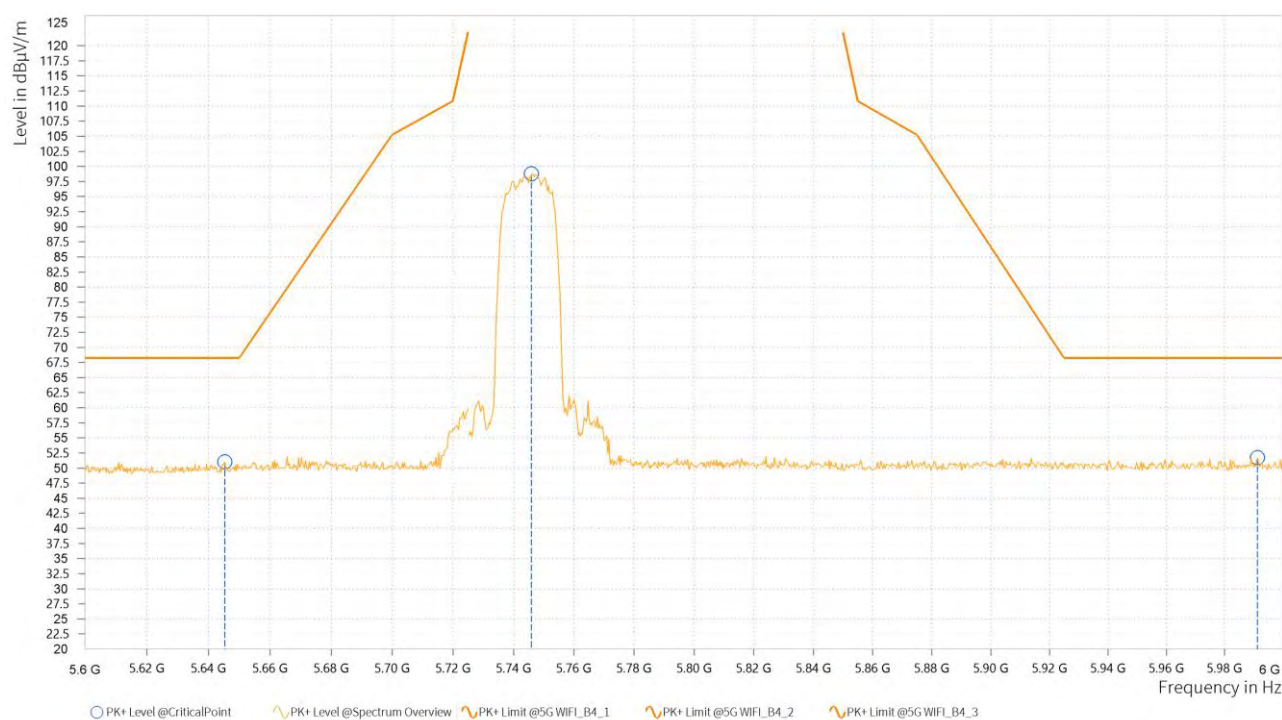

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5745MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,626.563	52.29	68.20	15.91	13.60	H	359.1	1
12	5,786.250	107.49			14.16	H	258.7	1
13	5,926.875	52.46	68.20	15.74	14.48	H	1	1

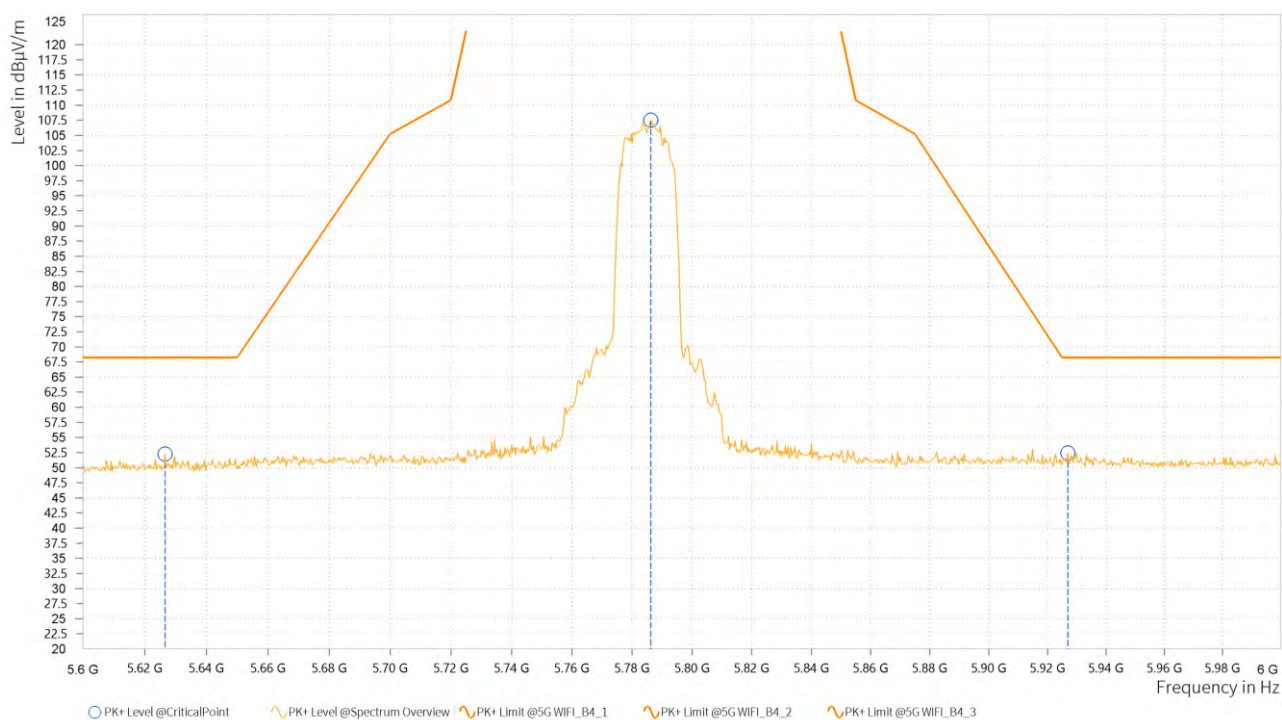

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,649.688	51.55	68.20	16.65	13.73	V	5	1
12	5,784.060	101.51			14.15	V	85.4	1
13	5,989.125	51.59	68.20	16.61	14.62	V	0.9	2

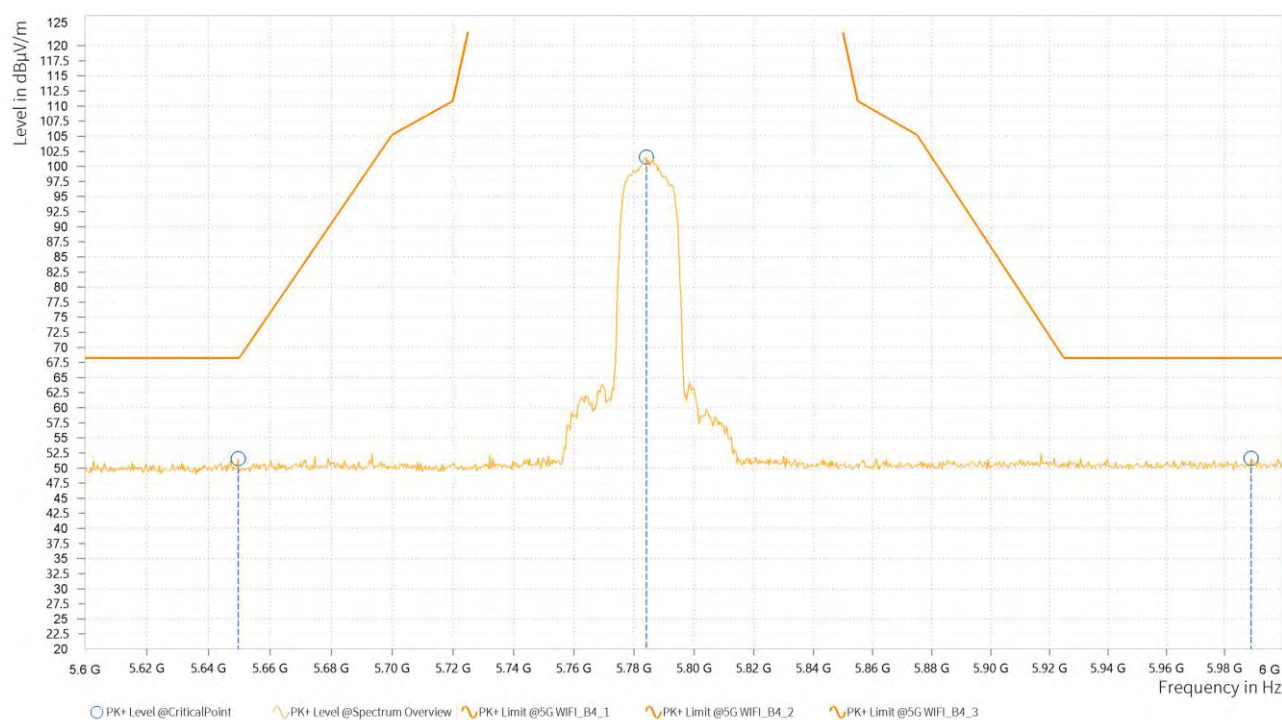

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5785MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,606.250	51.87	68.20	16.33	13.49	H	359.1	1
12	5,823.440	108.48			14.25	H	259.9	1
13	5,958.750	52.13	68.20	16.07	14.53	H	359	2

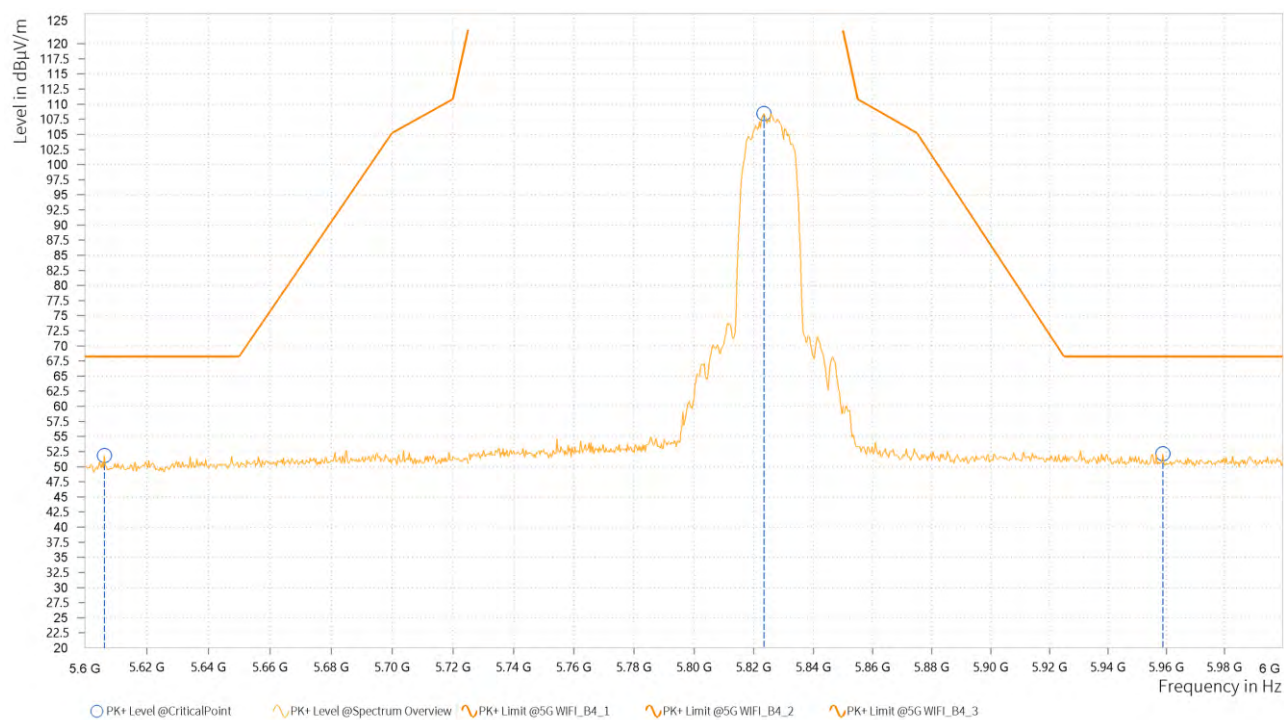

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,643.750	50.96	68.20	17.24	13.70	V	359.1	1
12	5,826.250	102.78			14.25	V	257.5	1
13	5,950.500	52.26	68.20	15.94	14.50	V	359.1	1



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5825MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,602.188	52.19	68.20	16.01	13.47	H	359.1	1
10	5,756.875	106.68			14.05	H	259.9	1
11	5,958.375	52.56	68.20	15.64	14.52	H	359.1	1

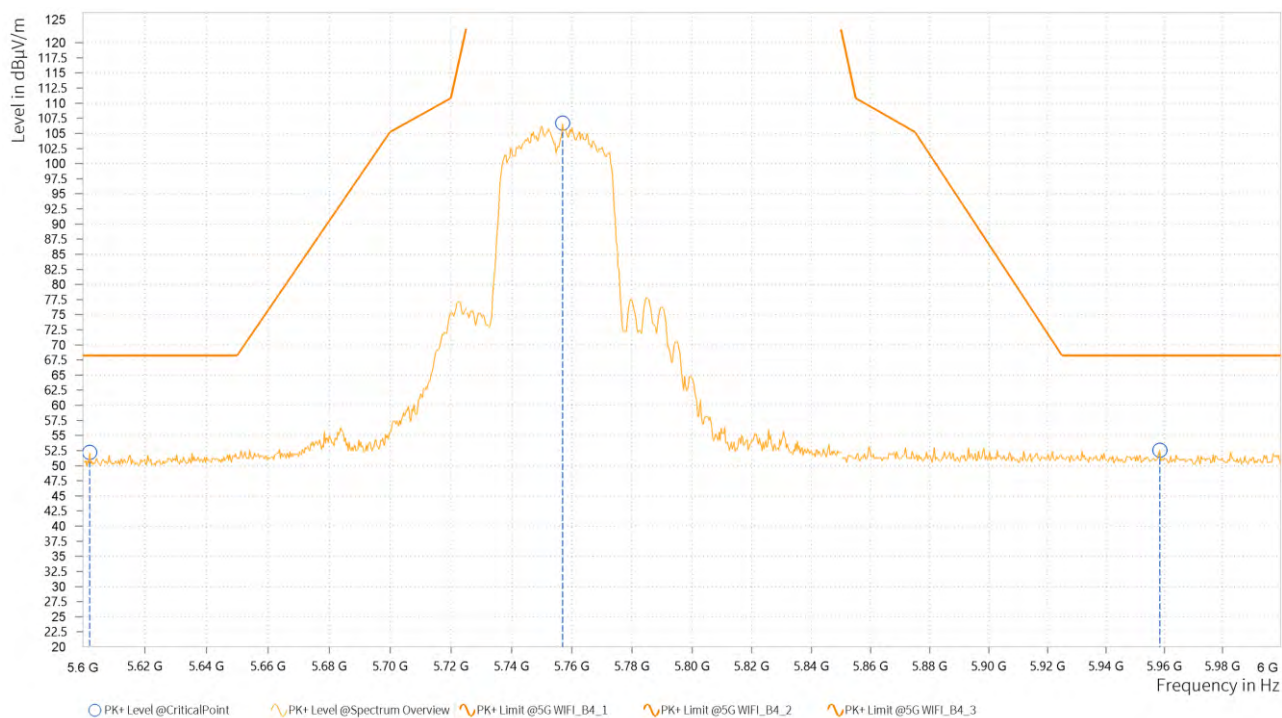

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,604.063	51.96	68.20	16.24	13.48	V	0.9	2
10	5,751.880	100.77			14.04	V	286.2	1
11	5,942.250	52.03	68.20	16.17	14.49	V	359.1	1

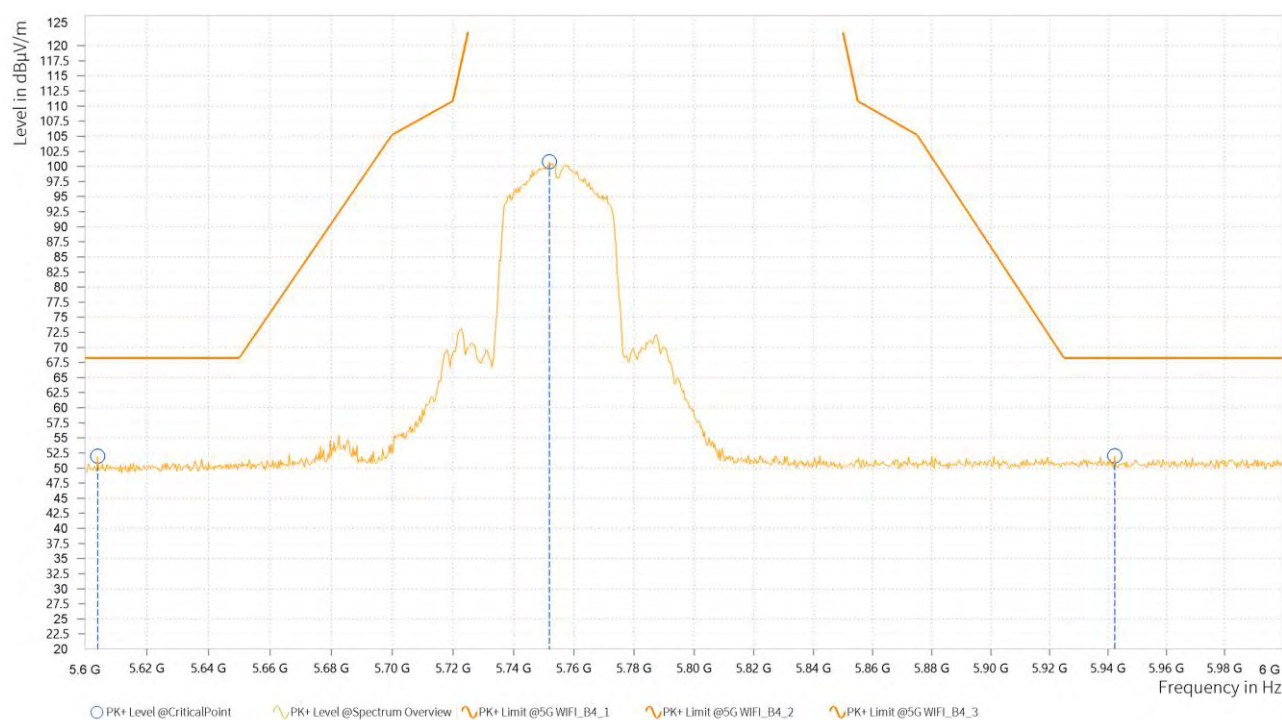

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5755MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,644.063	51.82	68.20	16.38	13.70	H	359	1
10	5,799.688	108.02			14.21	H	261.1	1
11	5,951.250	53.47	68.20	14.73	14.50	H	359	1

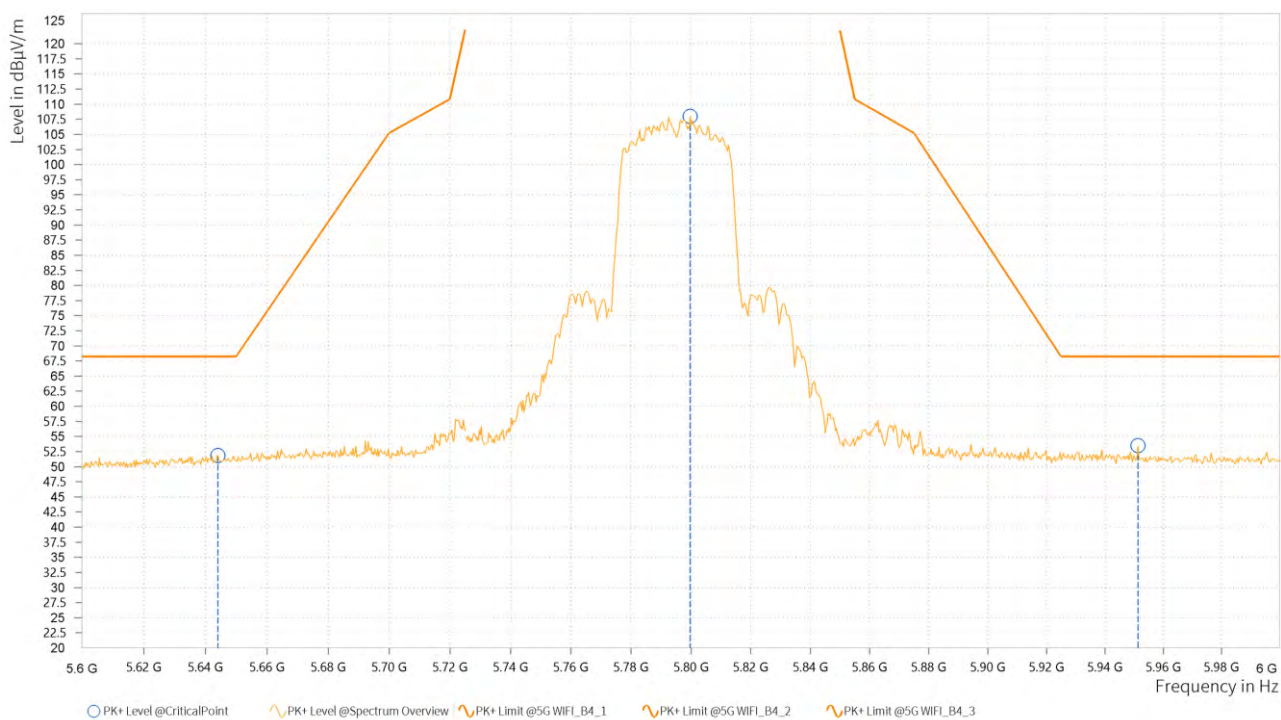

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,629.688	51.33	68.20	16.87	13.62	V	356.8	1
10	5,793.440	100.99			14.19	V	280.2	1
11	5,935.500	52.51	68.20	15.69	14.48	V	1	1



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5795MHz: Fundamental frequency.




Test Report No.: PSU-QSU2306120115RF13

802.11ac (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,645.938	52.43	68.20	15.77	13.71	H	4.9	1
12	5,743.750	106.63			14.03	H	1	1
13	5,950.125	52.04	68.20	16.16	14.50	H	359.1	1

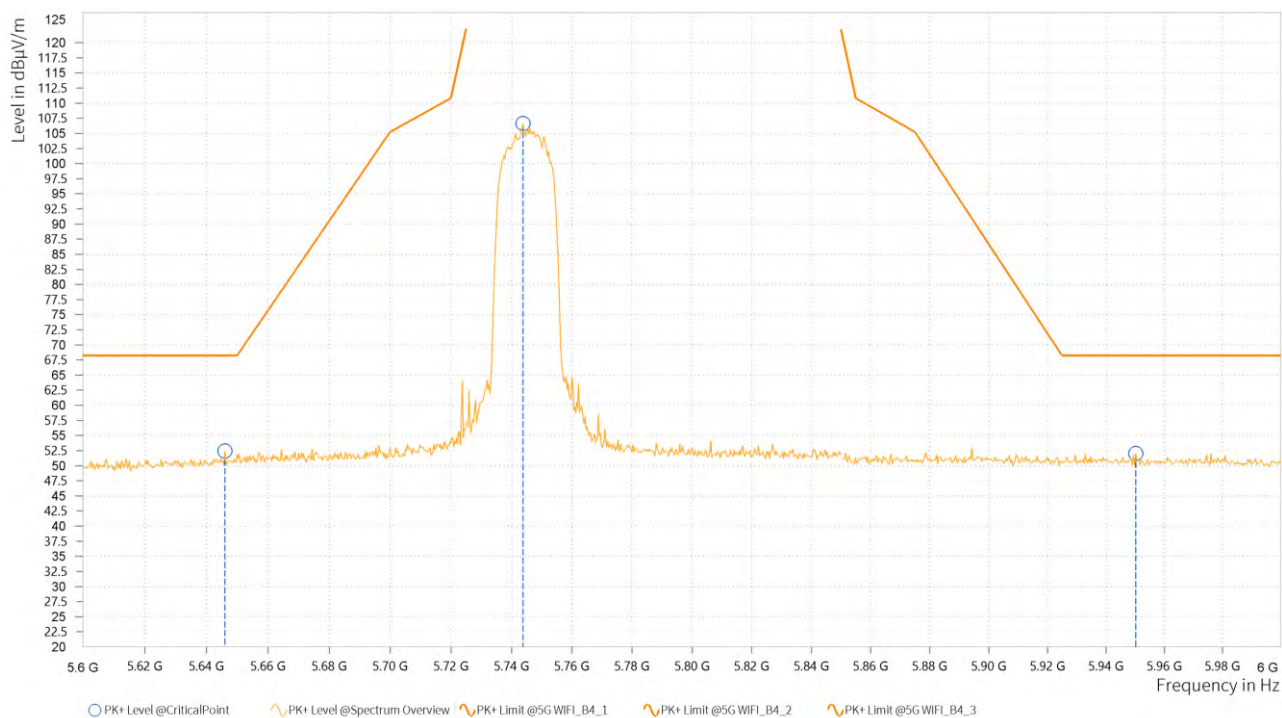

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,643.438	51.63	68.20	16.57	13.70	V	210.9	1
12	5,743.130	100.04			14.03	V	258.6	1
13	5,996.250	52.27	68.20	15.93	14.65	V	170.2	1

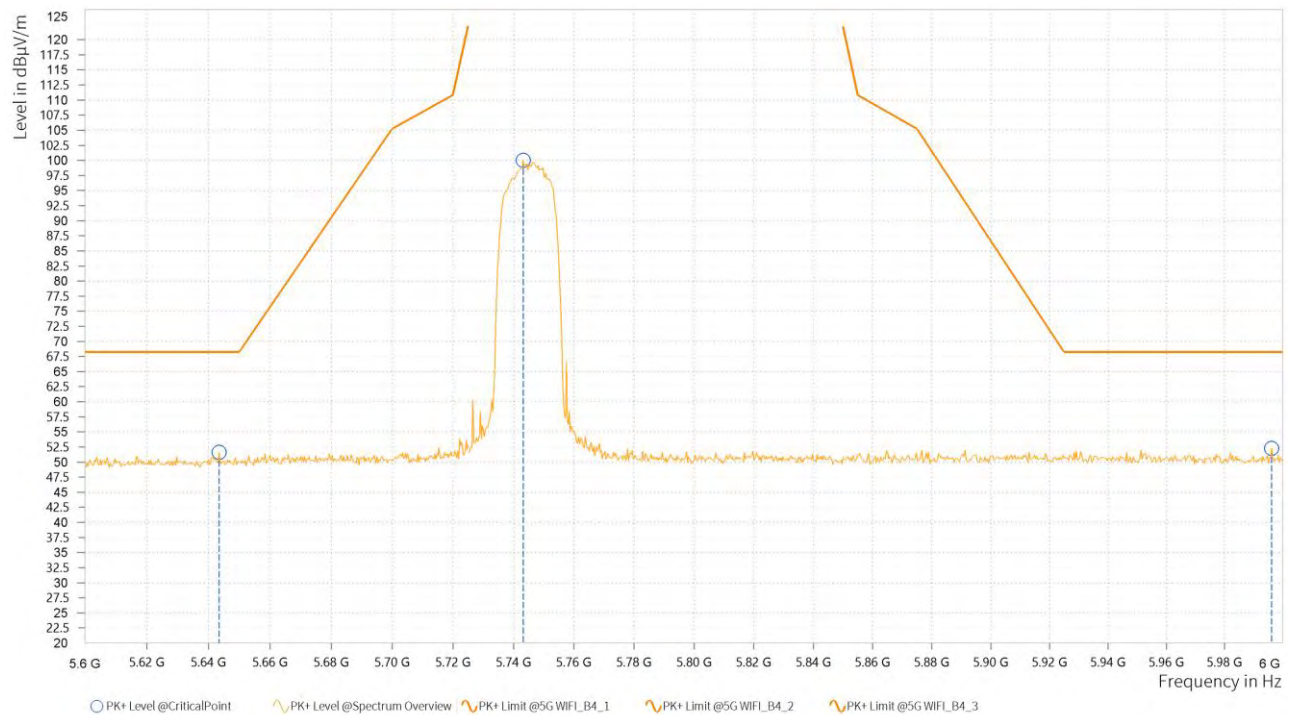

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5745MHz: Fundamental frequency.



Test Report No.: PSU-QSU2306120115RF13

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,641.875	51.88	68.20	16.32	13.69	H	359	1
12	5,785.940	106.88			14.16	H	359	1
13	5,957.250	52.35	68.20	15.85	14.52	H	1	1

