

FCC HAC (RF Emission) Test Report

Report No. : PSU-QSU2306120115SA03_
Applicant : Unplugged Technologies Ltd.
Address : 3 Hakidma St., Yokneam 2066731, Israel
Product : UP Phone 1
FCC ID : 2BBBCUP01
Brand : UP Phone
Model No. : UP01
Standards : FCC 47 CFR Part 20.19 / ANSI C63.19-2011
KDB 285076 D01 v06r04 / KDB 285076 D02 v04
Sample Received Date : Jul. 03, 2023
Date of Testing : Jul. 23, 2023 ~ Aug. 05, 2023
Summary M-Rating : M3
FCC Designation No. : CN1325 FCC Site Registration No. : 434559

CERTIFICATION: The above equipment have been tested by Huarui 7layers High Technology (Suzhou) Co., Ltd., and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's HAC characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement any government agencies.

Prepared By :

Chao Wu

Chao Wu / Engineer

Approved By :

Peibo Sun

Peibo Sun / Manager

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



BUREAU
VERITAS

FCC HAC (RF Emission) Test Report



Certificate #6613.01

Table of Contents

Release Control Record	3
1. Summary of Maximum M-Rating	4
2. Description of Equipment Under Test.....	5
3. HAC RF Emission Measurement System.....	7
3.1 SPEAG DASY System	7
3.1.1 Robot.....	8
3.1.2 Probes.....	8
3.1.3 Data Acquisition Electronics (DAE)	9
3.1.4 Phantoms	9
3.1.5 Device Holder.....	9
3.1.6 RF Emission Calibration Dipoles	9
3.2 DASY System Verification.....	10
3.3 EUT Measurements Reference and Plane.....	11
3.4 HAC RF Emission Measurement Procedure	12
3.5 Modulation Interference Factor	14
4. HAC Measurement Evaluation.....	16
4.1 M-Rating Category	16
4.2 EUT Configuration and Setting.....	16
4.3 System Verification	16
4.4 Maximum Target Conducted Power	17
4.5 Low Power Exemption Evaluation.....	19
4.6 Measured Conducted Power Results	20
4.7 HAC RF Emission Testing Results	21
5. Calibration of Test Equipment.....	22
6. Measurement Uncertainty.....	23
7. Information of the Testing Laboratories	24
Appendix A. Plots of System Verification	
Appendix B. Plots of HAC RF Emission Measurement	
Appendix C. Calibration Certificate for Probe and Dipole	
Appendix D. Photographs of EUT and Setup	



BUREAU
VERITAS

FCC HAC (RF Emission) Test Report



Certificate #6613.01

Release Control Record

Report No.	Reason for Change	Date Issued
PSU-QSU2306120115SA03	Initial release	Oct. 12, 2023



1. Summary of Maximum M-Rating

Mode	Band	Maximum Audio Interference Level (dBV/m)	M-Rating
GSM CMRS Voice	GSM850	33.57	M4
	GSM1900	27.39	M4
UMTS CMRS Voice	Band II	N/A	M4
	Band IV	N/A	M4
	Band V	N/A	M4
VoLTE	Band 7	N/A	M4
	Band 12/17	N/A	M4
	Band 13	N/A	M4
	Band 25/2	N/A	M4
	Band 26/5	N/A	M4
	Band 66/4	N/A	M4
	Band 71	N/A	M4
	Band 38	26.85	M4
	Band 41	24.51	M4
	Band 42 (Part27Q)	33.79	M3
	Band 42 (Part96)	30.96	M3
	Band 43	30.94	M3
	Band 48	33.71	M3
VoNR	n5	N/A	M4
	n7	N/A	M4
	n12	N/A	M4
	n25/2	N/A	M4
	n66	N/A	M4
	n71	N/A	M4
	n38	N/A	M4
	n41	34.00	M3
	n48	N/A	M4
	n77/78 (Part27Q)	34.58	M3
	n77/78 (Part27O)	34.75	M3
VoWiFi	2.4G	17.66	M3
	5.2G	N/A	M4
	5.3G	N/A	M4
	5.6G	N/A	M4
Summary	M3		

Note:

1. The HAC RF emission limit (**M-rating Category M3**) is specified in FCC 47 CFR part 20.19 and ANSI C63.19.
2. The device RF emission rating is determined by the minimum rating.



2. Description of Equipment Under Test

EUT Type	UP Phone 1
FCC ID	2BBBCUP01
Brand Name	UP Phone
Model Name	UP01
IMEI Code	358496270586413
HW Version	M156-MUB-V2
SW Version	NR_D011.13_N_UP01_1.000.01
Tx Frequency Bands (Unit: MHz)	GSM850 : 824.2 ~ 848.8 GSM1900 : 1850.2 ~ 1909.8 WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band IV : 1712.4 ~ 1752.6 WCDMA Band V : 826.4 ~ 846.6 LTE Band 2 : 1850.7 ~ 1909.3 LTE Band 4 : 1710.7 ~ 1754.3 LTE Band 5 : 824.7 ~ 848.3 LTE Band 7 : 2502.5 ~ 2567.5 LTE Band 12 : 699.7 ~ 715.3 LTE Band 13 : 779.5 ~ 784.5 LTE Band 17 : 706.5 ~ 713.5 LTE Band 25 : 1850.7 ~ 1914.3 LTE Band 26 : 814.7 ~ 848.3 LTE Band 38 : 2572.5 ~ 2617.5 LTE Band 41 : 2498.5 ~ 2687.5 LTE Band 42 : 3452.5 ~ 3547.5, 3552.5 ~ 3597.5 LTE Band 43 : 3602.5 ~ 3697.5 LTE Band 48 : 3552.5 ~ 3697.5 LTE Band 66 : 1710.7 ~ 1779.3 LTE Band 71 : 665.5 ~ 695.5 NR Band n2 : 1852.5 ~ 1907.5 NR Band n5 : 826.5 ~ 846.5 NR Band n7 : 2502.5 ~ 2567.5 NR Band n12 : 701.5 ~ 713.5 NR Band n25 : 1852.5 ~ 1912.5 NR Band n38 : 2582.52 ~ 2607.48 NR Band n41 : 2506.02 ~ 2679.99 NR Band n48 : 3555 ~ 3694.98 NR Band n66 : 1712.5 ~ 1777.5 NR Band n71 : 665.5 ~ 695.5 NR Band n77 : 3460.02 ~ 3540, 3710.01 ~ 3969.99 NR Band n78 : 3460.02 ~ 3540, 3710.01 ~ 3789.99 WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5745 ~ 5825 Bluetooth : 2402 ~ 2480 NFC : 13.56
Uplink Modulations	GSM & GPRS & EDGE : GMSK, 8PSK WCDMA : QPSK LTE : QPSK, 16QAM, 64QAM NR : Pi/2 BPSK (DFT-s-OFDM), QPSK (DFT-s-OFDM, CP-OFDM), 16QAM (DFT-s-OFDM, CP-OFDM), 64QAM (DFT-s-OFDM, CP-OFDM), 256QAM DFT-s-OFDM, CP-OFDM 802.11b : DSSS 802.11a/g/n/ac : OFDM 802.11ax : OFDMA Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK NFC : ASK
Subcarrier Spacing	15 kHz (FDD) / 30 kHz (TDD)
Antenna Type	WWAN: Fixed Internal Antenna WLAN: PIFA Antenna
EUT Stage	Identical Prototype

Note:

- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

Air Interface and Operational Mode:

Air Interface	Bands	Transport Type	ANSI C63.19	Simultaneous But Not Tested	Name of Voice Service	Power Reduction
GSM	850	VO	Yes	N/A	CMRS Voice ⁽¹⁾	No
	1900					No
	EGPRS	VD	Yes	N/A	N/A	No
UMTS	II	VO	No	N/A	CMRS Voice ⁽¹⁾	No
	IV					No
	V					No
	HSPA	VD	No	N/A	N/A	No
LTE (FDD)	2	VD	No	N/A	VoLTE ⁽¹⁾	No
	4					No
	5					No
	12					No
	13					No
	17					No
	25					No
	26					No
	66					No
	71					No
LTE (TDD)	38	VD	Yes	N/A	VoLTE ⁽¹⁾	No
	41					No
	42					No
	43					No
5G NR (FDD)	n2	VD	No	N/A	VoNR ⁽¹⁾	No
	n5					No
	n7					No
	n12					No
	n25					No
	n66					No
5G NR (TDD)	n71	VD	No	N/A	VoNR ⁽¹⁾	No
	n38					No
	n41					No
	n48					No
	n77					No
WLAN	n78	VD	Yes	N/A	VoWiFi ⁽¹⁾	No
	2.4G					No
	5.2G					No
	5.3G					No
Bluetooth	5.8G	VD	No	N/A	VoWiFi ⁽¹⁾	No
	2.4G					No

Transport Type:

VO = Voice Service

DT = Digital Transport Only (No Voice)

VD = IP Voice Service over Digital Transport

Note:

- The air interface is exempted from testing by low power exemption that its average antenna input power plus its MIF is 17 dBm, and is rated as M4.
- The device have similar frequency in some 5G NR FR1 bands: 5G NR n77/78 since the supported frequency spans for the smaller 5G NR FR1 bands are completely cover by the large 5G NR FR1 bands, therefore, only larger 5G NR FR1 bands were required to be tested for hearing-aid compliance.
- For 5G NR n77/n78/n41 HPUE. 5G NR n77/n41 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during testing. For 5G NR other bands test, using FTM (Factory Test Mode) with default 100% duty cycle transmission to perform evaluation.

3. HAC RF Emission Measurement System

3.1 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion form the optical into digital electric signal of the DAE and transfers data to the PC.

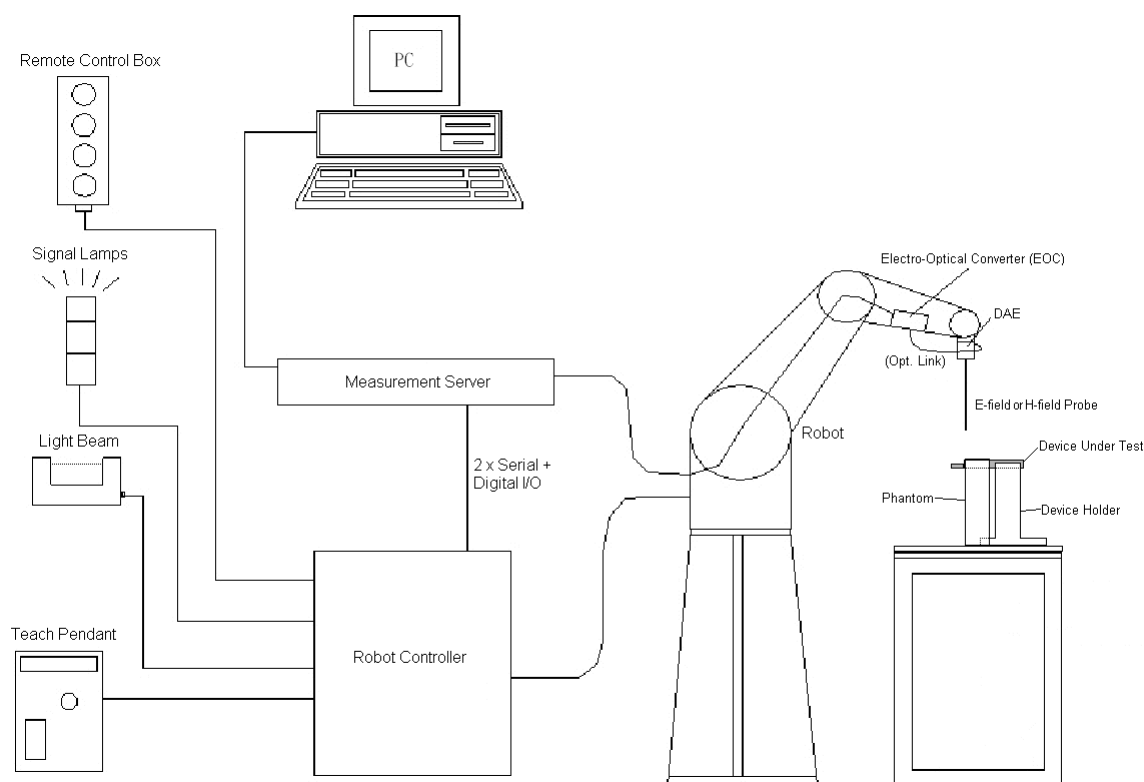


Fig-3.1 DASY System Setup

3.1.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY6: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

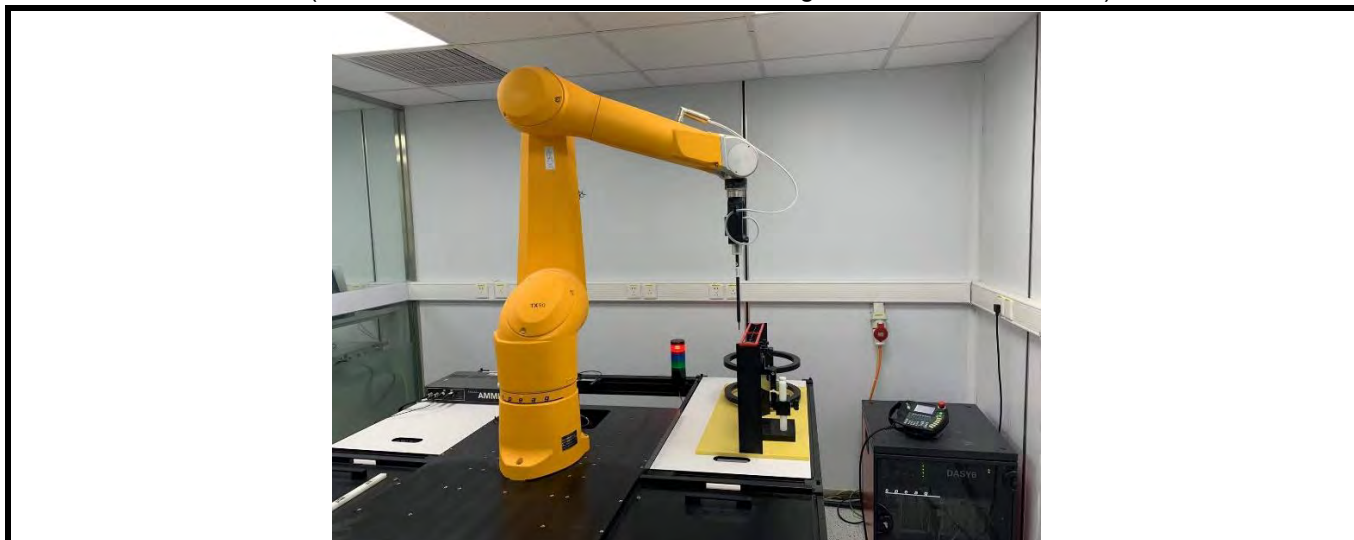


Fig-3.2 DASY6 Measurement System

3.1.2 Probes

Model	ER3DV6	
Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges	
Frequency	40 MHz to 3 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)	
Dynamic Range	2 V/m to 1000 V/m Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm	

Model	EF3DV3	
Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges	
Frequency	40 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)	
Dynamic Range	2 V/m to 1000 V/m Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.5 mm	

3.1.3 Data Acquisition Electronics (DAE)

Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5µV (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	

3.1.4 Phantoms

Model	Test Arch	
Construction	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	
Dimensions	Length : 370 mm Width : 370 mm Height : 370 mm	

3.1.5 Device Holder

Model	Mounting Device	
Construction	The Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to ANSI C63.19.	
Material	POM	

3.1.6 RF Emission Calibration Dipoles

Model	CD-Serial	
Construction	Free space antenna Hearing Aid susceptibility measurements according to ANSI C63.19. Validation of Hearing Aid RF setup for wireless device emission measurements according to ANSI C63.19	
Frequency	CD700V3 : 698 ~ 806 MHz CD835V3 : 800 ~ 960 MHz CD1880V3 : 1710 ~ 2000 MHz CD2450V3 : 2250 ~ 2650 MHz CD2600V3 : 2450 ~ 2750 MHz CD3500V3 : 3300 ~ 3950 MHz CD5500V3 : 5000 ~ 5900 MHz	
Return Loss	CD700V3 : > 15 dB (750 MHz > 20 dB) CD835V3 : > 15 dB (835 MHz > 25 dB) CD1880V3 : > 18 dB (1880 MHz > 20 dB) CD2450V3 : > 18 dB (2450 MHz > 25 dB) CD2600V3 : > 18 dB (2600 MHz > 20 dB) CD3500V3 : > 16 dB (3500 MHz > 20 dB) CD5500V3 : > 18 dB (5500 MHz > 20 dB)	
Power Capability	> 40 W continuous	

3.2 DASY System Verification

The system check verifies that the system operates within its specifications. It is performed before every E-field measurement. The system check uses normal measurements in the center section of the arch phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

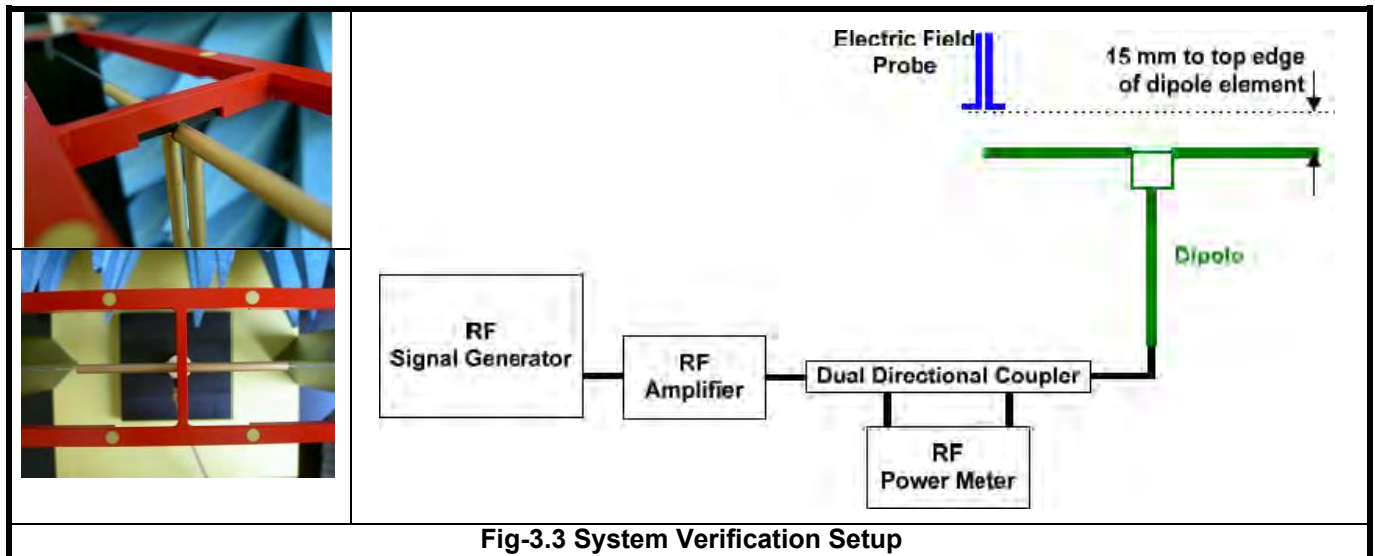


Fig-3.3 System Verification Setup

The validation dipole is placed beneath the center of arch phantom. The power meter measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power, 100 mW (20 dBm) at the dipole connector and the RF power meter is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at RF power meter.

After system check testing, the E-field result will be compared with the reference value derived from validation dipole certificate report. The deviation of system check should be within 25 %.

The result of system verification is shown in section 4.3 of this report.

3.3 EUT Measurements Reference and Plane


The EUT is mounted in the device holder. The acoustic output of the EUT will coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame. Then EUT will be moved vertically upwards until it touches the frame.

Fig-3.4 and Fig-3.5 illustrate the references and reference plane that is used in the RF emissions measurement.

- The grid is 50 mm by 50 mm area that is divided into nine evenly sized blocks or sub-grids.
- The grid is centered on the audio frequency output transducer of the EUT.
- The grid is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which in normal handset use rest against the ear.
- The measurement plane is parallel to and 15 mm in front of the reference plane.



Fig-3.4 EUT Reference and Plane

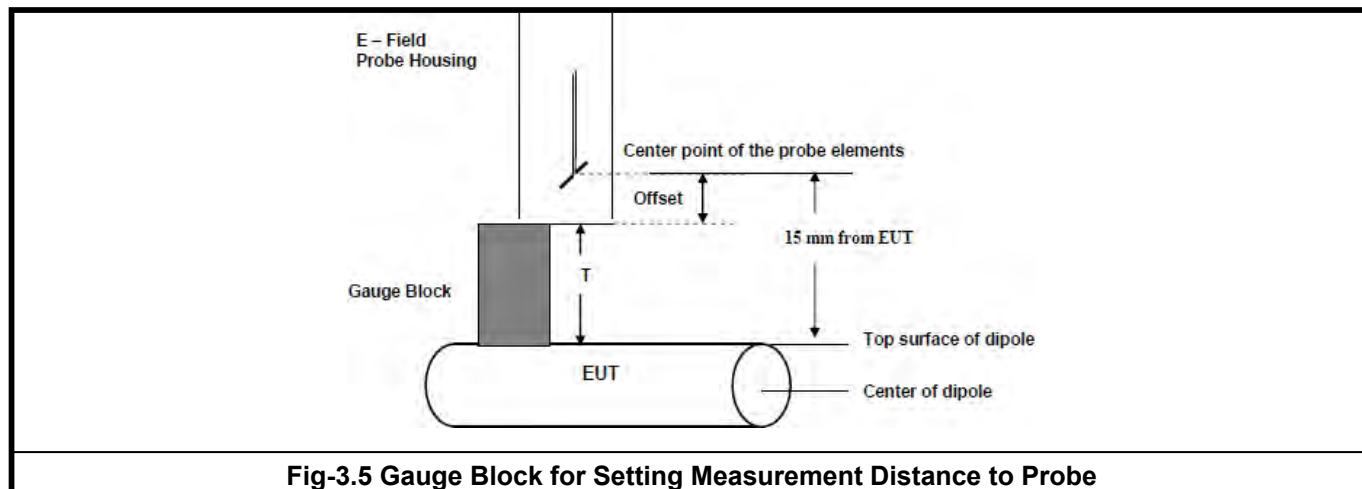

3.4 HAC RF Emission Measurement Procedure

The RF emissions test procedure for wireless communications device is as below.

1. Confirm the proper operation of the field probe, probe measurement system, and other instrumentation and the positioning system.
2. Position the WD in its intended test position.
3. Set the WD to transmit a fixed and repeatable combination of signal power and modulation characteristic that is representative of the worst case (highest interference potential) encountered in normal use. Transiently occurring start-up, changeover, or termination conditions, or other operations likely to occur less than 1% of the time during normal operation, may be excluded from consideration.
4. The center sub-grid shall be centered on the T-Coil mode perpendicular measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane, illustrated in Fig-3.4. If the field alignment method is used, align the probe for maximum field reception.
5. Record the reading at the output of the measurement system.
6. Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
7. Identify the five contiguous sub-grids around the center sub-grid whose maximum reading is the lowest of all available choices. This eliminates the three sub-grids with the maximum readings. Thus, the six areas to be used to determine the WD's highest emissions are identified.
8. Identify the maximum reading within the non-excluded sub-grids identified in step 7.
9. Indirect Measurement Method: The RF audio interference level in dB(V/m) is obtained by adding the MIF (in dB) to the maximum steady-state rms field-strength reading, in dB(V/m), from step 8. Use this result to determine the category rating.

10. Compare this RF audio interference level with the categories in section 4.1 and record the resulting WD category rating.
- 11 For the T-Coil mode M-rating assessment, determine whether the chosen perpendicular measurement point is contained in an included sub-grid of the first can. If so, then a second scan is not necessary. The first scan and resultant category rating may be used for the T-Coil mode M-rating. Otherwise, repeat step 1 through step 9, with the grid shifted so that it is centered on the perpendicular measurement point. Record the WD category rating.

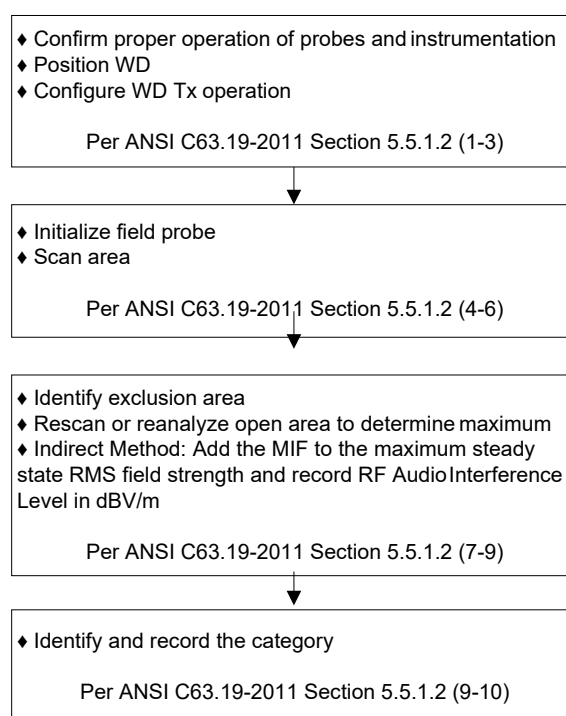


Fig-3.6 WD Near-Field Emission Test Flowchart

3.5 Modulation Interference Factor

The HAC Standard ANSI C63.19-2011 defines a new scaling using the Modulation Interference Factor (MIF) which replaces the need for the Articulation Weighting Factor (AWF) during the evaluation and is applicable to any modulation scheme.

The Modulation Interference Factor (MIF, in dB) is added to the measured average E-field (in dBV/m) and converts it to the RF audio interference potential (in dBV/m). This level considers the audible amplitude modulation components in the RF E-field. CW fields without amplitude modulation are assumed to not interfere with the hearing aid electronics. Modulations without time slots and low fluctuations at low frequencies have low MIF values, TDMA modulations with narrow transmission slots and repetition rates of few 100 Hz have high MIF values and give similar classification as ANSI C63.19-2007.

ER3D E-field probe have a bandwidth <10 kHz and can therefore not evaluate the RF envelope in the full audio band. DASY52 is therefore using the "indirect" measurement method according to ANSI C63.19-2011 which is the primary method. This near field probe read the averaged E-field. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by PMR calibration in order to not overestimate the field reading.

The evaluation method for the MIF is defined in ANSI C63.19-2011 section D.7. An RMS demodulated RF signal is fed to a spectral filter (similar to an A weighting filter) and forwarded to a temporal filter acting as a quasi-peak detector. The averaged output of these filtering is scaled to a 1 kHz 80% AM signal as reference. It may alternatively be determined through analysis and simulation, because it is constant and characteristic for a communication signal. DASY52 uses well-defined signals for PMR calibration. The MIF of these signals has been determined numerically. It allows a precise scaling and is therefore automatically applied.

The following table lists the MIF values evaluated by DASY manufacturer (SPEAG), and the test result will be calculated with the MIF parameter automatically. The detailed parameters for E-field probe can be found in the probe calibration report in appendix C.

MIF values applied in this test report were provided by the HAC equipment provider of SPEAG, and the worst values for all air interface are listed below to be determine the Low-power Exemption, For UID 10973 is applicable only for 5GNR TDD PC2 with 50% Duty Cycle, and all other 5GNR modes are applicable with UID 10769 more conservatively.



**BUREAU
VERITAS**

FCC HAC (RF Emission) Test Report



Certificate #6613.01

UID	Reversion	Communication System Name	MIF (dB)
10021	DAC	GSM-FDD (TDMA, GMSK)	3.63
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	3.75
10460	AAA	UMTS-FDD (WCDMA, AMR)	-25.43
10225	CAB	UMTS-FDD (HSPA+)	-20.39
10081	CAB	CDMA2000 (1xRTT, RC3)	-19.71
10295	AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	3.26
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	-17.67
10170	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	-9.76
10172	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	-1.62
10173	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	-1.44
10174	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	-1.54
10769	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	-12.08
10973	AAB	5G NR (DFT-S-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	-1.64
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	-2.02
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	0.12
10427	AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	-13.44
10069	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	-3.15
10616	AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	-5.57
10671	AAC	IEEE 802.11ax (20MHz, MCS0, 90pc duty cycle)	-5.58

The MIF measurement uncertainty listed in following table is estimated by SPEAG.

MIF (dB)	MIF Measurement Uncertainty (dB)
-7 to +5	0.2
-13 to +11	0.5
> -20	1.0

4. HAC Measurement Evaluation

4.1 M-Rating Category

The HAC Standard ANSI C63.19-2011 represents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.

Emission Categories	E-Field Emissions < 960 MHz (dB V/m)	E-Field Emissions > 960 MHz (dB V/m)
Category M1	50 - 55	40 - 45
Category M2	45 - 50	35 - 40
Category M3	40 - 45	30 - 35
Category M4	< 40	< 30

4.2 EUT Configuration and Setting

For HAC RF emission testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during HAC testing.

4.3 System Verification

The measuring results for system check are shown as below.

Frequency (MHz)	Input Power (dBm)	Target Value (V/m)	E-Field 1 (V/m)	E-Field 2 (V/m)	Average E-Field (V/m)	Deviation (%)	Test Date
835	20	105.00	108.50	106.40	107.45	-2.33	Jul. 23, 2023
1880	20	86.30	87.48	86.93	87.21	-1.05	Jul. 23, 2023
2450	20	84.80	85.80	84.41	85.11	-0.36	Jul. 23, 2023
2600	20	83.80	83.50	82.24	82.87	1.11	Jul. 23, 2023
2600	20	83.80	84.18	82.57	83.38	0.51	Aug. 05, 2023
3500	20	82.60	83.63	80.96	82.30	0.37	Jul. 23, 2023
3500	20	82.60	84.68	81.76	83.22	-0.75	Aug. 05, 2023

Note:

- Comparing to the reference target value provided by SPEAG, the validation data should be within its specification of 25 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.
- For E-Field, the deviation is $[(\text{E-Field 1} + \text{E-Field 2}) / 2 - \text{Target Value}] / \text{Target Value} \times 100\%$

4.4 Maximum Target Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

Air Interface		Max. Tune-up Power
GSM	GSM850	34.00
	EDGE850	28.50
	GSM1900	31.00
	EDGE1900	26.50
WCDMA	Band II	24.00
	Band IV	24.00
	Band V	24.00
LTE FDD	Band 2	24.50
	Band 4	23.50
	Band 5	24.50
	Band 7	25.00
	Band 12	24.50
	Band 13	22.50
	Band 17	24.50
	Band 25	24.50
	Band 26	24.50
	Band 66	23.50
LTE TDD	Band 71	24.50
	Band 38	24.50
	Band 41 PC3	22.50
	Band 41 PC2	25.50
	Band 42	22.50
	Band 43	22.50
5G NR FDD	Band 48	23.00
	n2	25.00
	n5	24.50
	n7	25.00
	n12	24.50
	n25	25.00
	n66	24.50
5G NR TDD	n71	24.50
	n38	25.00
	n41 PC3	23.50
	n41 PC2	25.50
	n48	23.00
	n77 PC3	23.00
	n77 PC2	25.50
	n78 PC3	23.00
	n78 PC2	25.50



BUREAU
VERITAS

FCC HAC (RF Emission) Test Report



Certificate #6613.01

<WLAN Ant-7>

Air Interface		Max. Tune-up Power
WLAN2.4G	802.11b	16.50
	802.11g	13.50
	802.11n HT20	13.50
	802.11n HT40	14.00
	802.11ax HE20	15.50
	802.11ax HE40	15.50
WLAN5.2G	802.11a	16.00
	802.11n HT20	16.00
	802.11n HT40	18.00
	802.11ac VHT20	16.00
	802.11ac VHT40	18.00
	802.11ac VHT80	18.00
	802.11ax HE20	16.50
	802.11ax HE40	16.50
	802.11ax HE80	16.00
WLAN5.3G	802.11a	15.50
	802.11n HT20	15.50
	802.11n HT40	17.00
	802.11ac VHT20	15.50
	802.11ac VHT40	17.00
	802.11ac VHT80	17.00
	802.11ax HE20	16.00
	802.11ax HE40	16.00
	802.11ax HE80	15.00
WLAN5.8G	802.11a	15.00
	802.11n HT20	15.00
	802.11n HT40	16.00
	802.11ac VHT20	15.00
	802.11ac VHT40	16.00
	802.11ac VHT80	16.00
	802.11ax HE20	15.00
	802.11ax HE40	15.00
	802.11ax HE80	14.00



<WLAN Ant-8>

Air Interface		Max. Tune-up Power
WLAN2.4G	802.11b	16.50
	802.11g	13.50
	802.11n HT20	13.50
	802.11n HT40	13.50
	802.11ax HE20	15.00
	802.11ax HE40	15.00
WLAN5.2G	802.11a	15.00
	802.11n HT20	15.00
	802.11n HT40	17.00
	802.11ac VHT20	15.00
	802.11ac VHT40	17.00
	802.11ac VHT80	17.00
	802.11ax HE20	15.00
	802.11ax HE40	15.00
	802.11ax HE80	15.00
WLAN5.3G	802.11a	15.50
	802.11n HT20	15.50
	802.11n HT40	17.00
	802.11ac VHT20	15.50
	802.11ac VHT40	17.00
	802.11ac VHT80	17.00
	802.11ax HE20	15.50
	802.11ax HE40	15.50
	802.11ax HE80	14.50
WLAN5.8G	802.11a	15.00
	802.11n HT20	15.00
	802.11n HT40	16.50
	802.11ac VHT20	15.00
	802.11ac VHT40	16.50
	802.11ac VHT80	16.50
	802.11ax HE20	15.00
	802.11ax HE40	14.50
	802.11ax HE80	14.50



<WLAN Ant-7+8>

Air Interface		Max. Tune-up Power
WLAN2.4G	802.11b	19.50
	802.11g	16.50
	802.11n HT20	17.00
	802.11n HT40	17.00
	802.11ax HE20	18.50
	802.11ax HE40	18.50
WLAN5.2G	802.11a	19.00
	802.11n HT20	19.00
	802.11n HT40	20.00
	802.11ac VHT20	19.00
	802.11ac VHT40	20.00
	802.11ac VHT80	20.00
	802.11ax HE20	19.00
	802.11ax HE40	19.00
	802.11ax HE80	18.00
WLAN5.3G	802.11a	19.00
	802.11n HT20	19.00
	802.11n HT40	19.50
	802.11ac VHT20	19.00
	802.11ac VHT40	19.50
	802.11ac VHT80	19.50
	802.11ax HE20	18.50
	802.11ax HE40	18.50
	802.11ax HE80	17.50
WLAN5.8G	802.11a	17.50
	802.11n HT20	17.50
	802.11n HT40	19.50
	802.11ac VHT20	17.50
	802.11ac VHT40	19.50
	802.11ac VHT80	19.50
	802.11ax HE20	18.00
	802.11ax HE40	18.00
	802.11ax HE80	17.00

4.5 Low Power Exemption Evaluation

According to ANSI C63.19-2011 section 4, RF air interface technologies that have low power have been found to produce sufficiently low RF interference potential, so it is possible to exempt them from the product testing. An RF air interface technology of a device is exempt from testing when its average antenna input power plus its worst-case MIF is ≤ 17 dBm for any of its operating modes. If a device supports multiple RF air interfaces, each RF air interface shall be evaluated individually. An RF air interface technology that is exempted from testing by above method could be rated as M4.

The low power exemption for this device is analyzed in below.

Air Interface		Max. Tune-up Power	Worst Case MIF (dB)	Power + MIF (dB)	C63.19 Testing Required
GSM	GSM850	34.00	3.63	37.63	Yes
	EDGE850	28.50	3.75	32.25	No
	GSM1900	31.00	3.63	34.63	Yes
	EDGE1900	26.50	3.75	30.25	No
WCDMA	AMR	24.00	-25.43	-1.43	No
LTE	LTE - FDD	25.00	-9.76	15.24	No
	LTE - TDD	25.50	-1.44	24.06	Yes
NR	5G NR - FDD	25.00	-12.08	12.92	No
	5G NR - TDD	25.00	-12.08	12.92	No
	5G NR - TDD (50%)	25.50	-1.64	23.86	Yes
2.4GHz WLAN	802.11b	19.50	-2.02	17.48	Yes
	802.11g	16.50	0.12	16.62	No
	802.11n HT20	17.00	-13.44	3.56	No
	802.11n HT40	17.00	-13.44	3.56	No
	802.11ax HE20	18.50	-5.58	12.92	No
	802.11ax HE40	18.50	-5.58	12.92	No
5GHz WLAN	802.11a	19.00	-3.15	15.85	No
	802.11n HT20	19.00	-13.44	5.56	No
	802.11n HT40	20.00	-13.44	6.56	No
	802.11ac VHT20	19.00	-5.57	13.43	No
	802.11ac VHT40	20.00	-5.57	14.43	No
	802.11ac VHT80	20.00	-5.57	14.43	No
	802.11ax HE20	19.00	-5.58	13.42	No
	802.11ax HE40	19.00	-5.58	13.42	No
	802.11ax HE80	18.00	-5.58	12.42	No

Note:

- The EDGE data modes were considered but not tested because GSM voice mode was worst case for the GSM air interface.
- The TDD-LTE 16QAM/64QAM data modes were considered but not tested because QPSK mode was worst case for the TDD-LTE air interface.
- The 5G NR - TDD Pi/2 BPSK (DFT-s-OFDM)/QPSK (CP-OFDM)/16QAM (DFT-s-OFDM, CP-OFDM)/64QAM (DFT-s-OFDM, CP-OFDM)/256QAM (DFT-s-OFDM, CP-OFDM) data modes were considered but not tested because QPSK (DFT-s-OFDM) mode was worst case for the 5G NR - TDD air interface.

4.6 Measured Conducted Power Results

The measuring conducted average power (Unit: dBm) are shown as below.

<GSM>

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM (GMSK, 1 Tx Slot)	32.63	32.75	32.68	29.91	29.96	29.83

<LTE>

LTE Band 38						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		37850	38000	38150
		Frequency (MHz)		2580	2595	2610
20M	QPSK	1	0	23.87	23.80	23.69

LTE Band 41 PC3								
BW	MCS Index	RB Size	RB Offset	Low	Low Mid	Mid	High Mid	High
		Channel		39750	40185	40620	41055	41490
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680
20M	QPSK	1	0	21.63	21.70	21.83	21.62	21.58

LTE Band 41 PC3								
BW	MCS Index	RB Size	RB Offset	Low	Low Mid	Mid	High Mid	High
		Channel		39750	40185	40620	41055	41490
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680
20M	QPSK	1	0	24.65	24.75	24.85	24.68	24.64

LTE Band 42 Part27Q						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		42190	42590	42990
		Frequency (MHz)		3460	3500	3540
20M	QPSK	1	0	20.98	20.92	20.88

LTE Band 42 Part96						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		43190	43340	43490
		Frequency (MHz)		3560	3575	3590
20M	QPSK	1	0	21.25	21.28	21.35

LTE Band 43						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		43690	44090	44490
		Frequency (MHz)		3610	3650	3690
20M	QPSK	1	0	21.21	21.30	20.93



LTE Band 48							
BW	MCS Index	RB Size	RB Offset	Low	Low Mid	High Mid	High
		Channel		55340	55830	56150	56640
		Frequency (MHz)		3560	3609	3641	3690
20M	QPSK	1	0	21.15	21.64	22.24	22.31

n41 (SCS 30 kHz) PC2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		509202	518598	528000
		Frequency (MHz)		2546.01	2592.99	2640
100M	DFT-s-OFDM QPSK	1	1	24.21	24.05	23.77

<NR>

Part27Q n77 (SCS 30 kHz) PC2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel			633334	
		Frequency (MHz)			3500.01	
100M	DFT-s-OFDM QPSK	1	1		24.16	

Part27O n77 (SCS 30 kHz) PC2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		650000	656000	662000
		Frequency (MHz)		3750	3840	3930
100M	DFT-s-OFDM QPSK	1	1	23.58	23.80	23.11

Part27Q n78 (SCS 30 kHz) PC2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel			633334	
		Frequency (MHz)			3500.01	
100M	DFT-s-OFDM QPSK	1	1		23.97	

Part27O n78 (SCS 30 kHz) PC2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel			650000	
		Frequency (MHz)			3750	
100M	DFT-s-OFDM QPSK	1	1		23.14	

<WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)
	802.11b 1Mbps	1	2412	18.59
		6	2437	18.61
		11	2462	18.26



**BUREAU
VERITAS**

FCC HAC (RF Emission) Test Report



Certificate #6613.01

4.7 HAC RF Emission Testing Results

Plot No.	Air Interface	Modulation/Mode	Channel	MIF	E-Field (V/m)	Margin to FCC M3 limit (dB)	E-Field M Rating
P01	GSM850	Voice	128	3.63	32.59	12.41	M4
P02	GSM850	Voice	189	3.63	33.44	11.56	M4
P03	GSM850	Voice	251	3.63	33.57	11.43	M4
P04	GSM1900	Voice	512	3.63	26.45	8.55	M4
P05	GSM1900	Voice	661	3.63	26.06	8.94	M4
P06	GSM1900	Voice	810	3.63	27.39	7.61	M4
P07	LTE 38	20M_QPSK_1RB_OS0	37850	-1.44	26.85	8.15	M4
P08	LTE 38	20M_QPSK_1RB_OS0	38000	-1.44	26.11	8.89	M4
P09	LTE 38	20M_QPSK_1RB_OS0	38150	-1.44	25.80	9.20	M4
P10	LTE 41_PC3	20M_QPSK_1RB_OS0	39750	-1.44	23.69	11.31	M4
P11	LTE 41_PC3	20M_QPSK_1RB_OS0	40185	-1.44	24.51	10.49	M4
P12	LTE 41_PC3	20M_QPSK_1RB_OS0	40620	-1.44	24.24	10.76	M4
P13	LTE 41_PC3	20M_QPSK_1RB_OS0	41055	-1.44	22.96	12.04	M4
P14	LTE 41_PC3	20M_QPSK_1RB_OS0	41490	-1.44	18.97	16.03	M4
P15	LTE 41_PC2	20M_QPSK_1RB_OS0	39750	-1.44	20.45	14.55	M4
P16	LTE 41_PC2	20M_QPSK_1RB_OS0	40185	-1.44	20.95	14.05	M4
P17	LTE 41_PC2	20M_QPSK_1RB_OS0	40620	-1.44	20.83	14.17	M4
P18	LTE 41_PC2	20M_QPSK_1RB_OS0	41055	-1.44	19.74	15.26	M4
P19	LTE 41_PC2	20M_QPSK_1RB_OS0	41490	-1.44	16.07	18.93	M4
P20	LTE 42_Part27Q	20M_QPSK_1RB_OS0	42190	-1.44	33.79	1.21	M3
P21	LTE 42_Part27Q	20M_QPSK_1RB_OS0	42590	-1.44	33.74	1.26	M3
P22	LTE 42_Part27Q	20M_QPSK_1RB_OS0	42990	-1.44	33.48	1.52	M3
P23	LTE 42_Part96	20M_QPSK_1RB_OS0	43190	-1.44	30.96	4.04	M3
P24	LTE 42_Part96	20M_QPSK_1RB_OS0	43340	-1.44	30.96	4.04	M3
P25	LTE 42_Part96	20M_QPSK_1RB_OS0	43490	-1.44	30.89	4.11	M3
P26	LTE 43	20M_QPSK_1RB_OS0	43690	-1.44	30.91	4.09	M3
P27	LTE 43	20M_QPSK_1RB_OS0	44090	-1.44	30.94	4.06	M3
P28	LTE 43	20M_QPSK_1RB_OS0	44490	-1.44	30.88	4.12	M3
P29	LTE 48	20M_QPSK_1RB_OS0	55340	-1.44	33.71	1.29	M3
P30	LTE 48	20M_QPSK_1RB_OS0	55830	-1.44	33.65	1.35	M3
P31	LTE 48	20M_QPSK_1RB_OS0	56150	-1.44	33.66	1.34	M3
P32	LTE 48	20M_QPSK_1RB_OS0	56640	-1.44	33.39	1.61	M3
P33	NR n41_PC2	QPSK	509202	-1.64	32.84	2.16	M3
P34	NR n41_PC2	QPSK	518598	-1.64	31.81	3.19	M3
P35	NR n41_PC2	QPSK	528000	-1.64	34.00	1.00	M3
P36	Part27O_NR n77_PC2	QPSK	650000	-1.64	33.62	1.38	M3
P37	Part27O_NR n77_PC2	QPSK	656000	-1.64	34.28	0.72	M3
P38	Part27O_NR n77_PC2	QPSK	662000	-1.64	34.75	0.25	M3
P39	Part27Q_NR n77_PC2	QPSK	633334	-1.64	34.58	0.42	M3
P40	WLAN2.4GHz	802.11b 1Mbps	1	-2.02	17.14	17.86	M4
P41	WLAN2.4GHz	802.11b 1Mbps	6	-2.02	17.53	17.47	M4
P42	WLAN2.4GHz	802.11b 1Mbps	11	-2.02	17.66	17.34	M4

Test Engineer: Chang Gao and Zixiao Xia



**BUREAU
VERITAS**

FCC HAC (RF Emission) Test Report



Certificate #6613.01

5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	CD835V3	1213	Sep. 17, 2020	3 Years
System Validation Dipole	SPEAG	CD1880V3	1203	Sep. 17, 2020	3 Years
System Validation Dipole	SPEAG	CD2450V3	1189	Sep. 15, 2020	3 Years
System Validation Dipole	SPEAG	CD2600V3	1026	Sep. 17, 2020	3 Years
System Validation Dipole	SPEAG	CD3500V3	1014	Sep. 16, 2020	3 Years
Dosimetric E-field Probe	SPEAG	EF3DV3	4075	Feb.17, 2023	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1633	Feb. 08, 2023	1 Year
Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	169210	Jun. 27, 2022	2 Year
Wideband Radio Communication Tester	Rohde&Schwarz	CMX500	101873	Oct. 08, 2023	2 Year
Power Meter	Rohde&Schwarz	NRX	NRX	Feb. 14, 2022	2 Year
Power Sensor	Rohde&Schwarz	NRP6A	NRP6A	Feb. 14, 2022	2 Year
Power Sensor	Rohde&Schwarz	NRP6A	NRP6A	Feb. 14, 2022	2 Year
ESG Analog Signal Generator	Rohde&Schwarz	SMB100A03	SMB100A03	Feb. 15, 2022	2 Year
Coupler	Woken	0110A056020-10	COM27RW1A3	May. 10, 2023	1 Year
Temp.&Humi.Recorder	ANYMETRE	JR912	SZ01	Jun. 19, 2022	2 Year
Test Arch Phantom	SPEAG	Arch	N/A	N/A	N/A

6. Measurement Uncertainty

HAC Uncertainty Budget for RF 2011 version According to ANSI C63.19						
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) E	(Ci) H	Standard Uncertainty (E) (±%)
Measurement System						
Probe Calibration	5.1	N	1	1	1	5.1
Axial Isotropy	4.7	R	1.732	1	1	2.7
Sensor Displacement	16.5	R	1.732	1	0.145	9.5
Boundary Effects	2.4	R	1.732	1	1	1.4
Phantom Boundary Effect	7.2	R	1.732	1	0	4.2
Linearity	4.7	R	1.732	1	1	2.7
Scaling with PMR calibration	10.0	R	1.732	1	1	5.8
System Detection Limit	1.0	R	1.732	1	1	0.6
Readout Electronics	0.3	N	1	1	1	0.3
Response Time	2.6	R	1.732	1	1	1.5
Integration Time	2.6	R	1.732	1	1	1.5
RF Ambient Conditions	3.0	R	1.732	1	1	1.7
RF Reflections	12.0	R	1.732	1	1	6.9
Probe Positioner	1.2	R	1.732	1	0.67	0.7
Probe Positioning	4.7	R	1.732	1	0.67	2.7
Extrap. and Interpolation	1.0	R	1.732	1	1	0.6
Test Sample Related						
Device Positioning Vertical	4.7	R	1.732	1	0.67	2.7
Device Positioning Lateral	1.0	R	1.732	1	1	0.6
Device Holder and Phantom	2.4	R	1.732	1	1	1.4
Power Drift	5.0	R	1.732	1	1	2.9
Phantom and Setup Related						
Phantom Thickness	2.4	R	1.732	1	0.67	1.4
Combined Std. Uncertainty						16.4%
Coverage Factor for 95 %						K=2
Expanded STD Uncertainty						32.7%

Uncertainty budget for HAC RF Emission



BUREAU
VERITAS

FCC HAC (RF Emission) Test Report



Certificate #6613.01

7. Information of the Testing Laboratories

We, Huarui 7layers High Technology (Suzhou) Co., Ltd., were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation.

If you have any comments, please feel free to contact us at the following:

Add: Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province

Tel: [+86 \(0557\) 368 1008](tel:+86(0557)3681008)

The road map of all our labs can be found in our web site also

Web: <http://www.7Layers.com>

---END---

Appendix A. Plots of System Verification

System Check_E-Field_835MHz_230723**DUT: HAC-Dipole 835 MHz**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid:

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 117.6 V/m; Power Drift = 0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 108.5 V/m

Average value os Total=(108.5+106.4)/2=107.45 V/m

PMF scaled E-field


Grid 1 M4 103.1 V/m	Grid 2 M4 106.4 V/m	Grid 3 M4 105.6 V/m
Grid 4 M4 58.63 V/m	Grid 5 M4 61.08 V/m	Grid 6 M4 60.84 V/m
Grid 7 M4 103.9 V/m	Grid 8 M4 108.5 V/m	Grid 9 M4 108.3 V/m

Cursor:

Total = 108.5 V/m

E Category: M4

Location: -2.5, 72, 8.7 mm

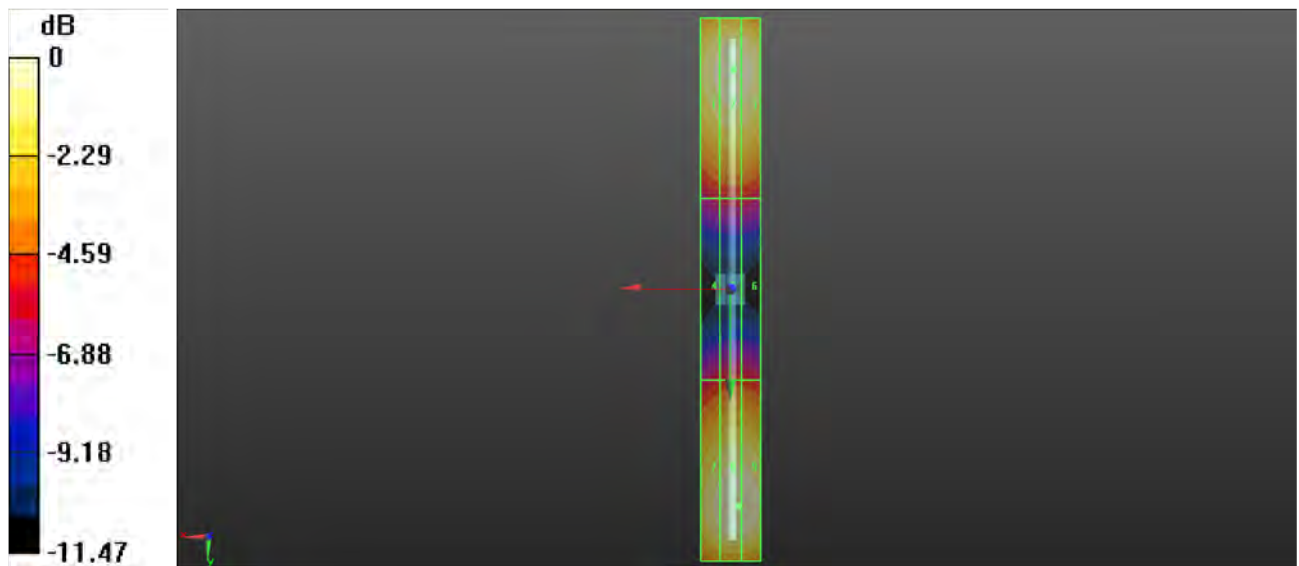

System Check_E-Field_1880MHz_230723**DUT: HAC Dipole 1880 MHz**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x241x1): Interpolated grid:
dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 143.5 V/m; Power Drift = -0.03 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 87.48 V/m

Average value os Total=(87.48+86.93)/2=87.205 V/m

PMF scaled E-field


Grid 1 M3 84.62 V/m	Grid 2 M3 87.48 V/m	Grid 3 M3 86.43 V/m
Grid 4 M3 69.50 V/m	Grid 5 M3 70.61 V/m	Grid 6 M3 70.53 V/m
Grid 7 M3 84.10 V/m	Grid 8 M3 86.93 V/m	Grid 9 M3 86.11 V/m

Cursor:

Total = 87.48 V/m

E Category: M3

Location: -0.5, -33.5, 8.7 mm

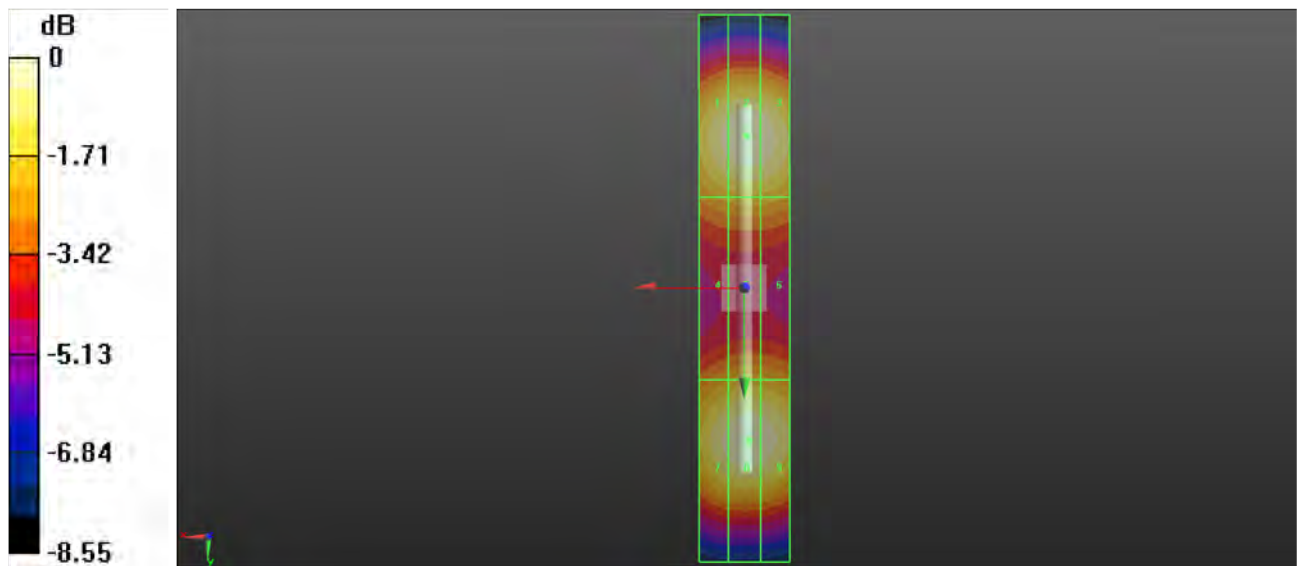

0 dB = 87.48 V/m = 38.84 dBV/m

System Check_E-Field_2450MHz_230805**DUT: HAC Dipole 2450 MHz**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD2450 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x201x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 73.62 V/m; Power Drift = 0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 85.80 V/m

Average value os Total=(85.80+84.41)/2=85.105 V/m

PMF scaled E-field


Grid 1 M3 81.66 V/m	Grid 2 M3 84.41 V/m	Grid 3 M3 83.72 V/m
Grid 4 M3 75.35 V/m	Grid 5 M3 78.31 V/m	Grid 6 M3 77.90 V/m
Grid 7 M3 82.34 V/m	Grid 8 M3 85.80 V/m	Grid 9 M3 85.23 V/m

Cursor:

Total = 85.80 V/m

E Category: M3

Location: -1.5, 24.5, 8.7 mm

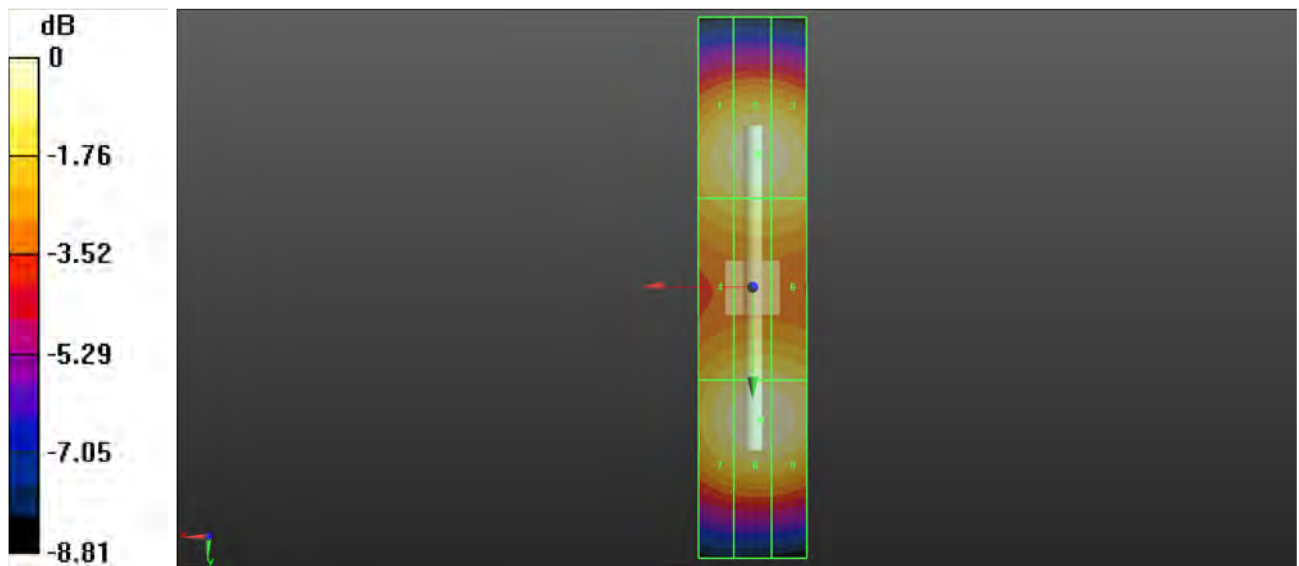

0 dB = 85.80 V/m = 38.67 dBV/m

System Check_E-Field_2600MHz_230723**DUT: HAC Dipole 2600 MHz**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD2600 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x201x1): Interpolated grid:

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 60.18 V/m; Power Drift = 0.00 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 83.50 V/m

Average value os Total=(83.50+82.24)/2=82.87 V/m

PMF scaled E-field


Grid 1 M3 80.81 V/m	Grid 2 M3 83.50 V/m	Grid 3 M3 82.67 V/m
Grid 4 M3 76.15 V/m	Grid 5 M3 77.95 V/m	Grid 6 M3 77.55 V/m
Grid 7 M3 79.87 V/m	Grid 8 M3 82.24 V/m	Grid 9 M3 81.29 V/m

Cursor:

Total = 83.50 V/m

E Category: M3

Location: -1, -23, 8.7 mm

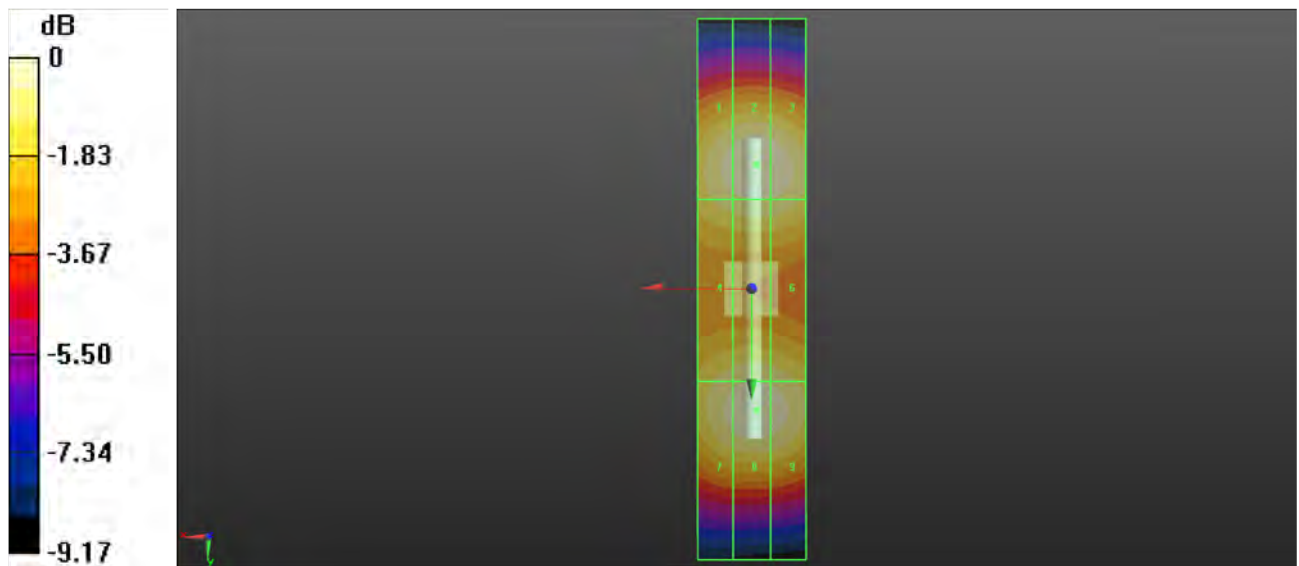

System Check_E-Field_2600MHz_230805**DUT: HAC Dipole 2600 MHz**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD2600 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x201x1): Interpolated grid:
dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 60.52 V/m; Power Drift = 0.00 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 84.18 V/m

Average value os Total=(84.18+82.57)/2=83.375 V/m

PMF scaled E-field


Grid 1 M3 81.51 V/m	Grid 2 M3 84.18 V/m	Grid 3 M3 83.33 V/m
Grid 4 M3 76.86 V/m	Grid 5 M3 78.48 V/m	Grid 6 M3 78.17 V/m
Grid 7 M3 80.16 V/m	Grid 8 M3 82.57 V/m	Grid 9 M3 81.67 V/m

Cursor:

Total = 84.18 V/m

E Category: M3

Location: -1, -23, 8.7 mm

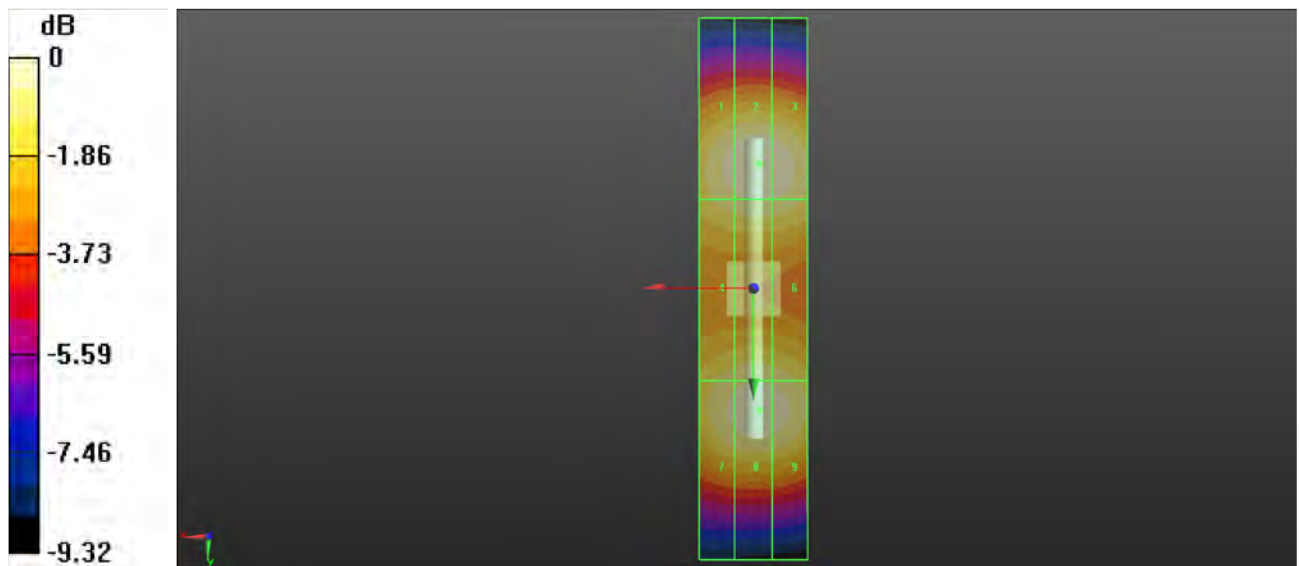

0 dB = 84.18 V/m = 38.50 dBV/m

System Check_E-Field_3500MHz_230723**DUT: HAC Dipole 3500 MHz**

Communication System: CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3500 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD3500 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x121x1): Interpolated grid:
dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.64 V/m; Power Drift = 0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 83.63 V/m

Average value os Total=(83.63+80.96)/2=82.295 V/m

PMF scaled E-field


Grid 1 M3 81.40 V/m	Grid 2 M3 83.63 V/m	Grid 3 M3 82.90 V/m
Grid 4 M3 77.97 V/m	Grid 5 M3 79.59 V/m	Grid 6 M3 79.38 V/m
Grid 7 M3 78.48 V/m	Grid 8 M3 80.96 V/m	Grid 9 M3 80.04 V/m

Cursor:

Total = 83.63 V/m

E Category: M3

Location: -0.5, -15, 8.7 mm

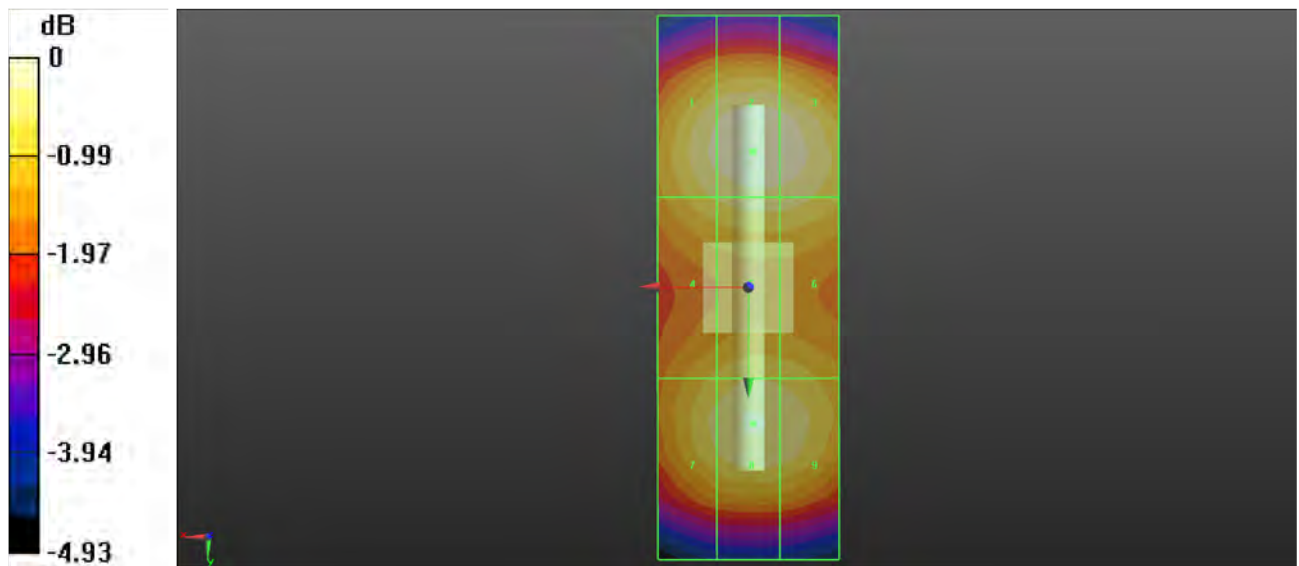

0 dB = 83.63 V/m = 38.45 dBV/m

System Check_E-Field_3500MHz_230805**DUT: HAC Dipole 3500 MHz**

Communication System: CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3500 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - measurement distance from the probe sensor center to CD3500 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x121x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.81 V/m; Power Drift = 0.06 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 84.68 V/m

Average value os Total=(84.68+81.76)/2=83.22 V/m

PMF scaled E-field


Grid 1 M3 82.52 V/m	Grid 2 M3 84.68 V/m	Grid 3 M3 83.85 V/m
Grid 4 M3 79.14 V/m	Grid 5 M3 80.72 V/m	Grid 6 M3 80.40 V/m
Grid 7 M3 79.21 V/m	Grid 8 M3 81.76 V/m	Grid 9 M3 80.90 V/m

Cursor:

Total = 84.68 V/m

E Category: M3

Location: -0.5, -15, 8.7 mm

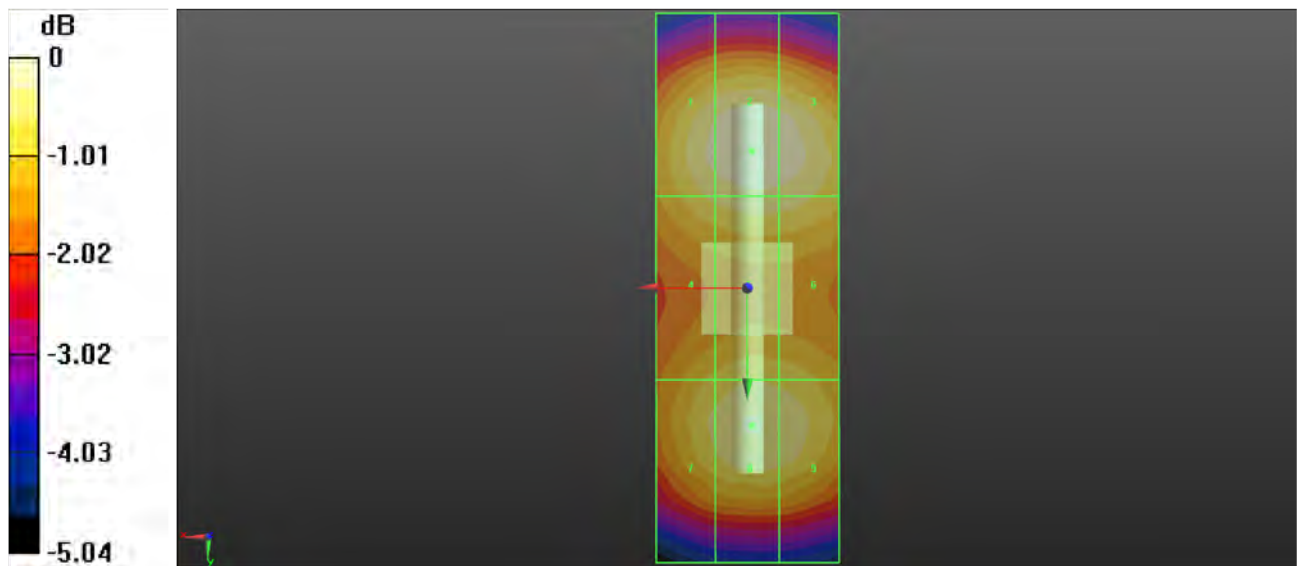

0 dB = 84.68 V/m = 38.56 dBV/m



BUREAU
VERITAS



Appendix B. Plots of HAC RF Emission Measurement

P01 RF_E_Field_GSM850_Ch128_Voice

Communication System: GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 824.2 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 53.81 V/m; Power Drift = 0.00 dB

Applied MIF = 0.00 dB

RF audio interference level = 32.59 dBV/m

Emission category: M4

E-field without scaling


Grid 1 31.06 dBV/m	Grid 2 32.59 dBV/m	Grid 3 32.49 dBV/m
Grid 4 31.13 dBV/m	Grid 5 32.44 dBV/m	Grid 6 32.36 dBV/m
Grid 7 31.22 dBV/m	Grid 8 32 dBV/m	Grid 9 31.75 dBV/m

Cursor:

Total = 32.59 dBV/m

E Category: M4

Location: -5, -20.5, 7.7 mm

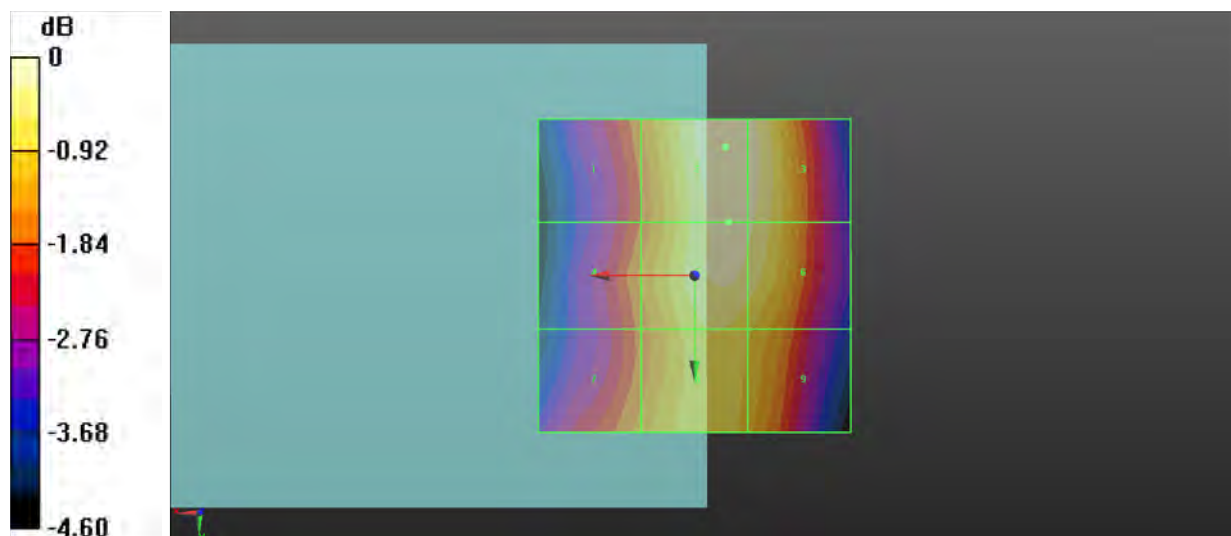

0 dB = 42.61 V/m = 32.59 dBV/m

P02 RF_E_Field_GSM850_Ch189_Voice

Communication System: GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 836.4 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 59.16 V/m; Power Drift = -0.02 dB

Applied MIF = 0.00 dB

RF audio interference level = 33.44 dBV/m

Emission category: M4

E-field without scaling


Grid 1 31.79 dBV/m	Grid 2 33.44 dBV/m	Grid 3 33.33 dBV/m
Grid 4 32 dBV/m	Grid 5 33.3 dBV/m	Grid 6 33.23 dBV/m
Grid 7 32.14 dBV/m	Grid 8 32.86 dBV/m	Grid 9 32.63 dBV/m

Cursor:

Total = 33.44 dBV/m

E Category: M4

Location: -5, -20, 7.7 mm

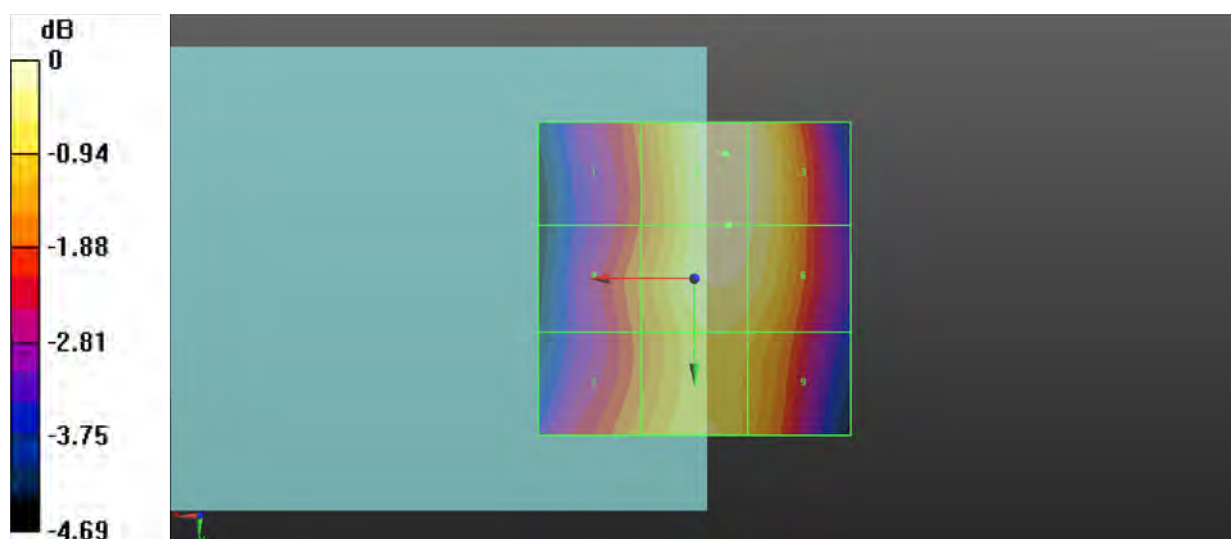

P03 RF_E_Field_GSM850_Ch251_Voice

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 848.8 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 57.54 V/m; Power Drift = 0.03 dB

Applied MIF = 0.00 dB

RF audio interference level = 33.57 dBV/m

Emission category: M4

E-field without scaling


Grid 1 31.05 dBV/m	Grid 2 33.57 dBV/m	Grid 3 33.54 dBV/m
Grid 4 31.34 dBV/m	Grid 5 33.35 dBV/m	Grid 6 33.34 dBV/m
Grid 7 31.78 dBV/m	Grid 8 32.67 dBV/m	Grid 9 32.55 dBV/m

Cursor:

Total = 33.57 dBV/m

E Category: M4

Location: -7.5, -20, 7.7 mm

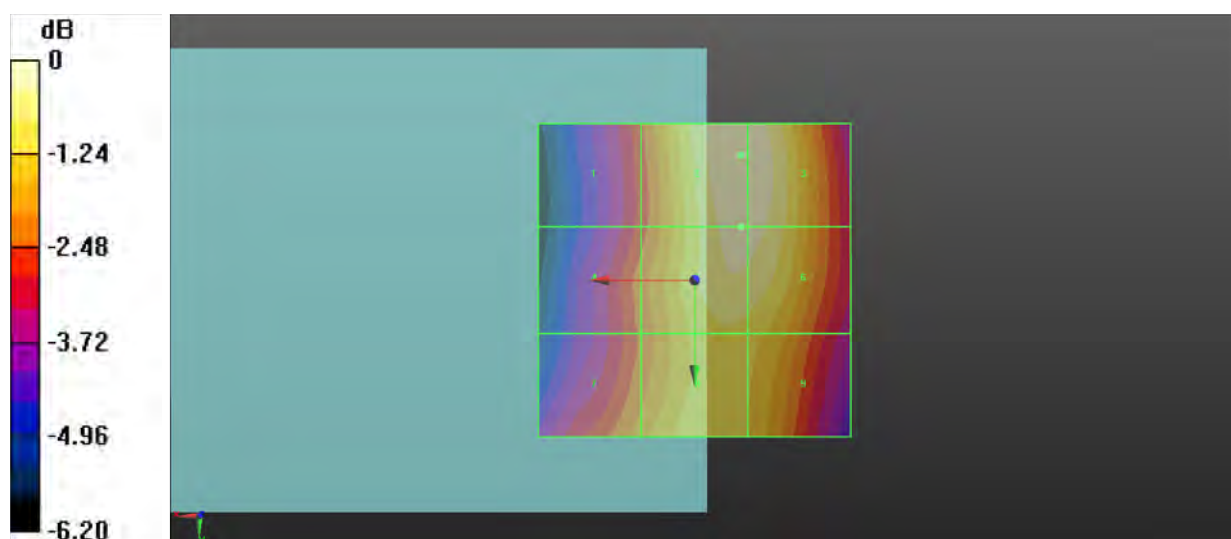

P04 RF_E_Field_GSM1900_Ch512_Voice

Communication System: GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 1850.2 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.55 V/m; Power Drift = 0.03 dB

Applied MIF = 0.00 dB

RF audio interference level = 26.45 dBV/m

Emission category: M4

E-field without scaling


Grid 1 25.42 dBV/m	Grid 2 23.66 dBV/m	Grid 3 22.45 dBV/m
Grid 4 22.01 dBV/m	Grid 5 24.68 dBV/m	Grid 6 24.67 dBV/m
Grid 7 24.63 dBV/m	Grid 8 26.45 dBV/m	Grid 9 26.16 dBV/m

Cursor:

Total = 26.45 dBV/m

E Category: M4

Location: -4, 25, 7.7 mm

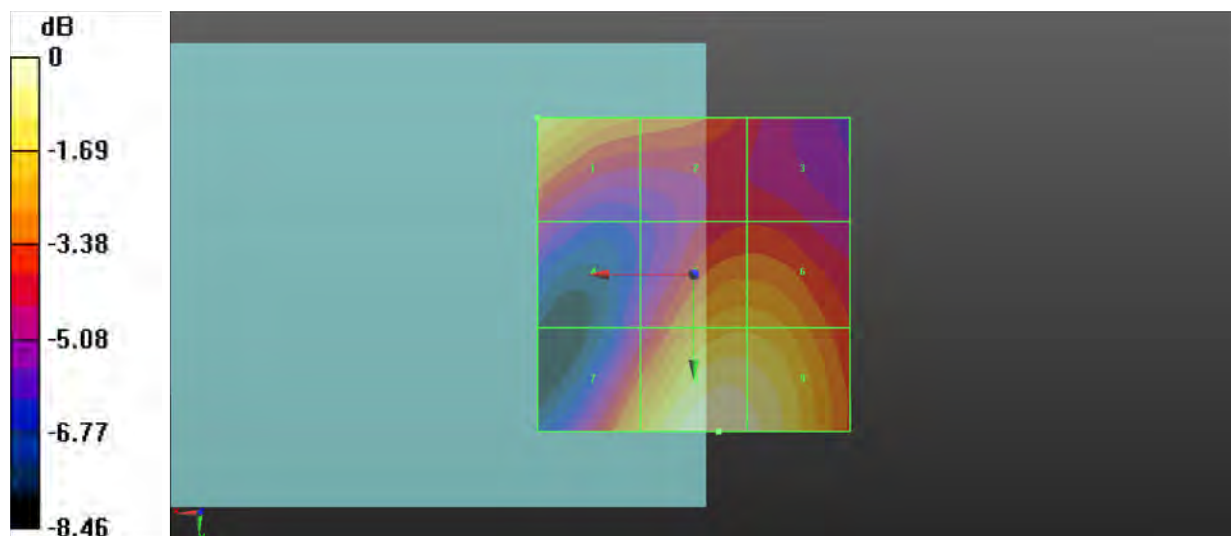

0 dB = 21.02 V/m = 26.45 dBV/m

P05 RF_E_Field_GSM1900_Ch661_Voice

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.21 V/m; Power Drift = -0.00 dB

Applied MIF = 0.00 dB

RF audio interference level = 26.06 dBV/m

Emission category: M4

E-field without scaling


Grid 1 25.84 dBV/m	Grid 2 24.34 dBV/m	Grid 3 23.31 dBV/m
Grid 4 22.5 dBV/m	Grid 5 24.1 dBV/m	Grid 6 24.11 dBV/m
Grid 7 23.66 dBV/m	Grid 8 26.06 dBV/m	Grid 9 25.82 dBV/m

Cursor:

Total = 26.06 dBV/m

E Category: M4

Location: -5, 25, 7.7 mm

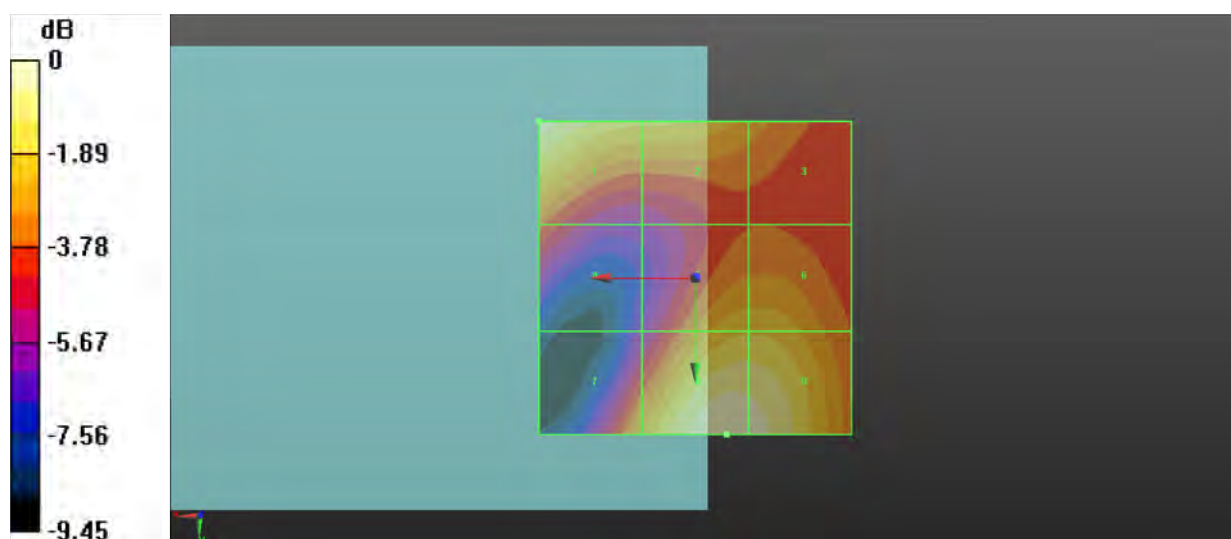

0 dB = 20.09 V/m = 26.06 dBV/m

P06 RF_E_Field_GSM1900_Ch810_Voice

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 1909.8 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.14 V/m; Power Drift = 0.10 dB

Applied MIF = 0.00 dB

RF audio interference level = 27.39 dBV/m

Emission category: M4

E-field without scaling


Grid 1 26.76 dBV/m	Grid 2 26.77 dBV/m	Grid 3 26.45 dBV/m
Grid 4 23.48 dBV/m	Grid 5 26.63 dBV/m	Grid 6 26.62 dBV/m
Grid 7 24.92 dBV/m	Grid 8 27.39 dBV/m	Grid 9 27.24 dBV/m

Cursor:

Total = 27.39 dBV/m

E Category: M4

Location: -5, 25, 7.7 mm

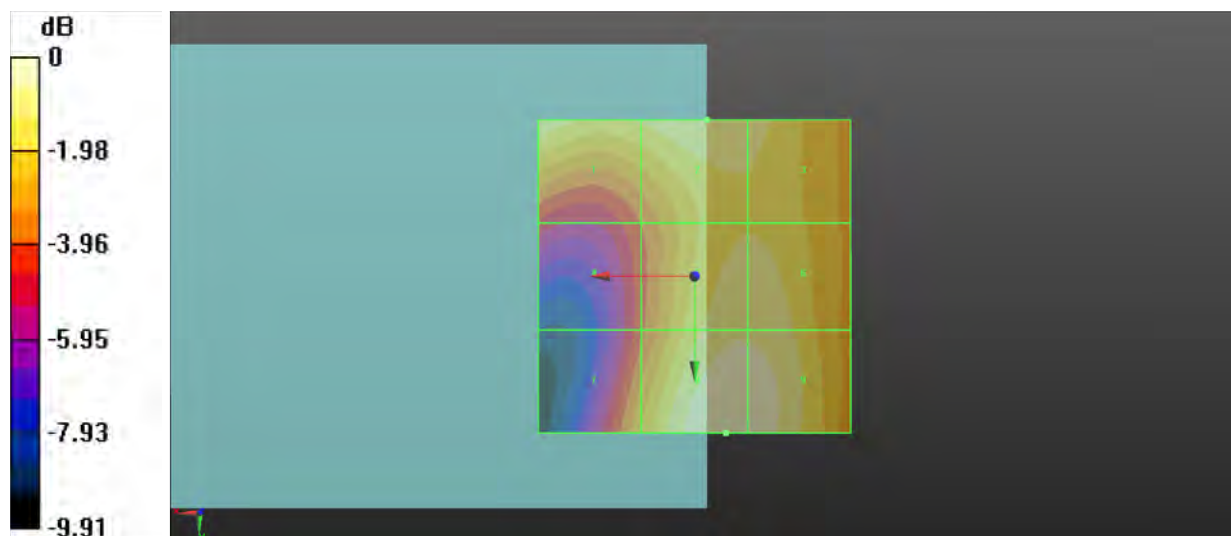

0 dB = 23.42 V/m = 27.39 dBV/m

P07 RF_E_Field_LTE 38_QPSK20M_1RB_OS0_Ch37850

Communication System: LTE_TDD; Frequency: 2580 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2580 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.22 V/m; Power Drift = 0.03 dB

Applied MIF = 0.00 dB

RF audio interference level = 26.85 dBV/m

Emission category: M4

E-field without scaling


Grid 1 25.85 dBV/m	Grid 2 26.85 dBV/m	Grid 3 25.81 dBV/m
Grid 4 20.75 dBV/m	Grid 5 24.25 dBV/m	Grid 6 24.08 dBV/m
Grid 7 20.38 dBV/m	Grid 8 23.04 dBV/m	Grid 9 23.02 dBV/m

Cursor:

Total = 26.85 dBV/m

E Category: M4

Location: 0, -25, 7.7 mm

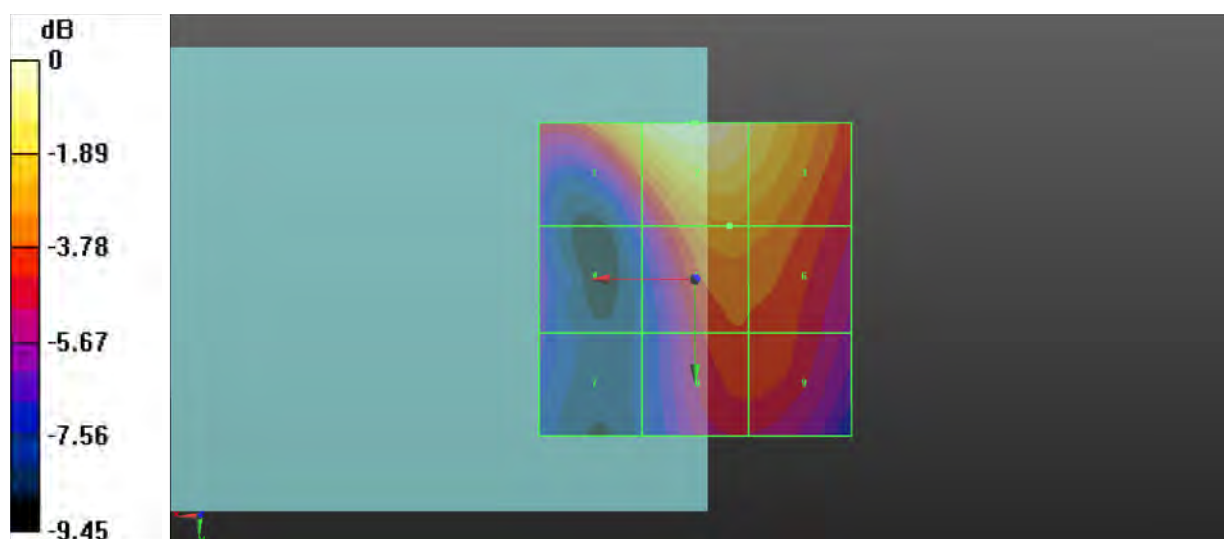

P08 RF_E_Field_LTE 38_QPSK20M_1RB_OS0_Ch38000

Communication System: LTE_TDD; Frequency: 2595 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2595 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.33 V/m; Power Drift = 0.05 dB

Applied MIF = 0.00 dB

RF audio interference level = 26.11 dBV/m

Emission category: M4

E-field without scaling


Grid 1 25.05 dBV/m	Grid 2 26.11 dBV/m	Grid 3 25.22 dBV/m
Grid 4 20.88 dBV/m	Grid 5 23.6 dBV/m	Grid 6 23.54 dBV/m
Grid 7 19.92 dBV/m	Grid 8 22.75 dBV/m	Grid 9 22.72 dBV/m

Cursor:

Total = 26.11 dBV/m

E Category: M4

Location: 0, -25, 7.7 mm

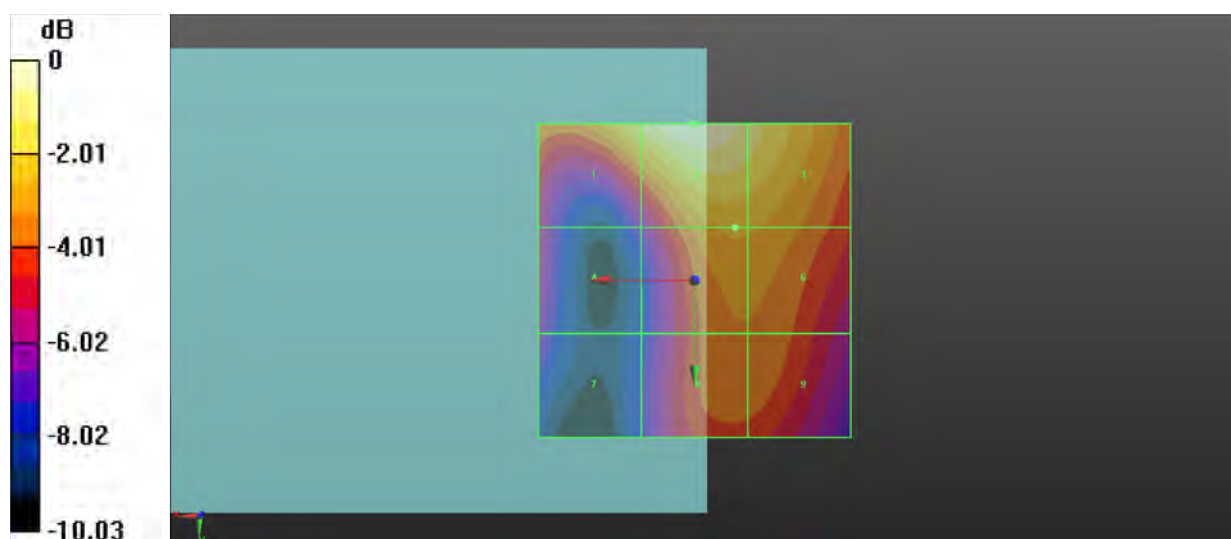

0 dB = 20.21 V/m = 26.11 dBV/m

P09 RF_E_Field_LTE 38_QPSK20M_1RB_OS0_Ch38150

Communication System: LTE_TDD; Frequency: 2610 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2610 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.26 V/m; Power Drift = 0.06 dB

Applied MIF = 0.00 dB

RF audio interference level = 25.80 dBV/m

Emission category: M4

E-field without scaling


Grid 1 24.69 dBV/m	Grid 2 25.8 dBV/m	Grid 3 24.77 dBV/m
Grid 4 21.18 dBV/m	Grid 5 22.93 dBV/m	Grid 6 22.88 dBV/m
Grid 7 20.86 dBV/m	Grid 8 22.35 dBV/m	Grid 9 22.38 dBV/m

Cursor:

Total = 25.80 dBV/m

E Category: M4

Location: 0, -25, 7.7 mm

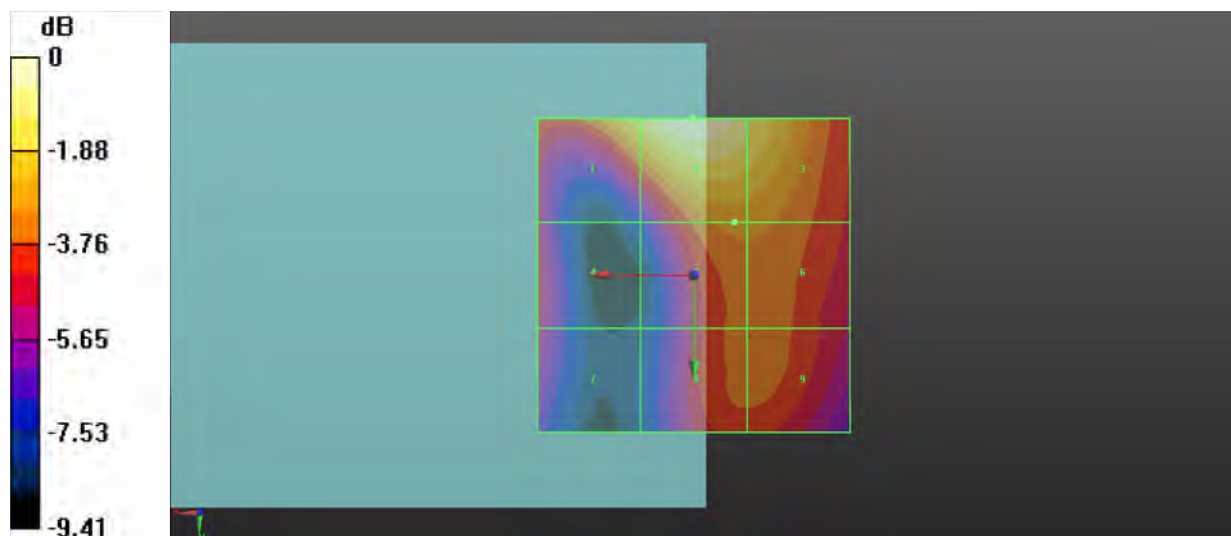

0 dB = 19.49 V/m = 25.80 dBV/m

P10 RF_E_Field_LTE 41_PC3_QPSK20M_1RB_OS0_Ch39750

Communication System: LTE_TDD; Frequency: 2506 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.22 V/m; Power Drift = 0.02 dB

Applied MIF = 0.00 dB

RF audio interference level = 23.69 dBV/m

Emission category: M4

E-field without scaling


Grid 1 23.59 dBV/m	Grid 2 23.69 dBV/m	Grid 3 21.99 dBV/m
Grid 4 20.11 dBV/m	Grid 5 21.85 dBV/m	Grid 6 20.87 dBV/m
Grid 7 16.15 dBV/m	Grid 8 18.3 dBV/m	Grid 9 18.02 dBV/m

Cursor:

Total = 23.69 dBV/m

E Category: M4

Location: 5.5, -25, 7.7 mm

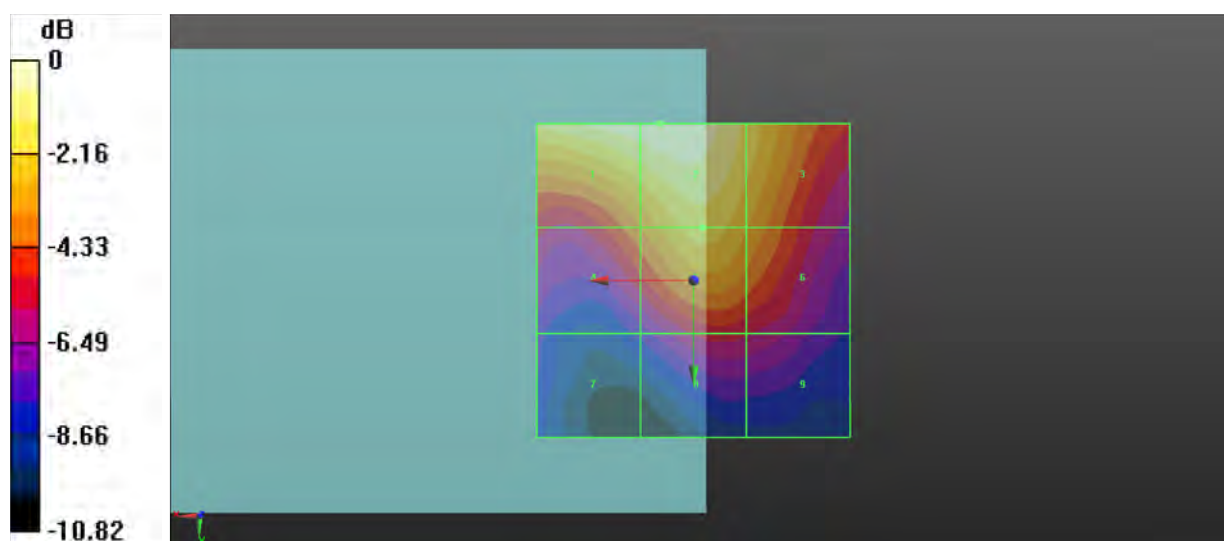

0 dB = 15.30 V/m = 23.69 dBV/m

P11 RF_E_Field_LTE 41_PC3_QPSK20M_1RB_OS0_Ch40185

Communication System: LTE_TDD; Frequency: 2549.5 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.29 V/m; Power Drift = -0.01 dB

Applied MIF = 0.00 dB

RF audio interference level = 24.51 dBV/m

Emission category: M4

E-field without scaling


Grid 1 24.5 dBV/m	Grid 2 24.51 dBV/m	Grid 3 21.79 dBV/m
Grid 4 21.23 dBV/m	Grid 5 22.22 dBV/m	Grid 6 21.18 dBV/m
Grid 7 17.73 dBV/m	Grid 8 18.9 dBV/m	Grid 9 18.42 dBV/m

Cursor:

Total = 24.51 dBV/m

E Category: M4

Location: 7.5, -25, 7.7 mm

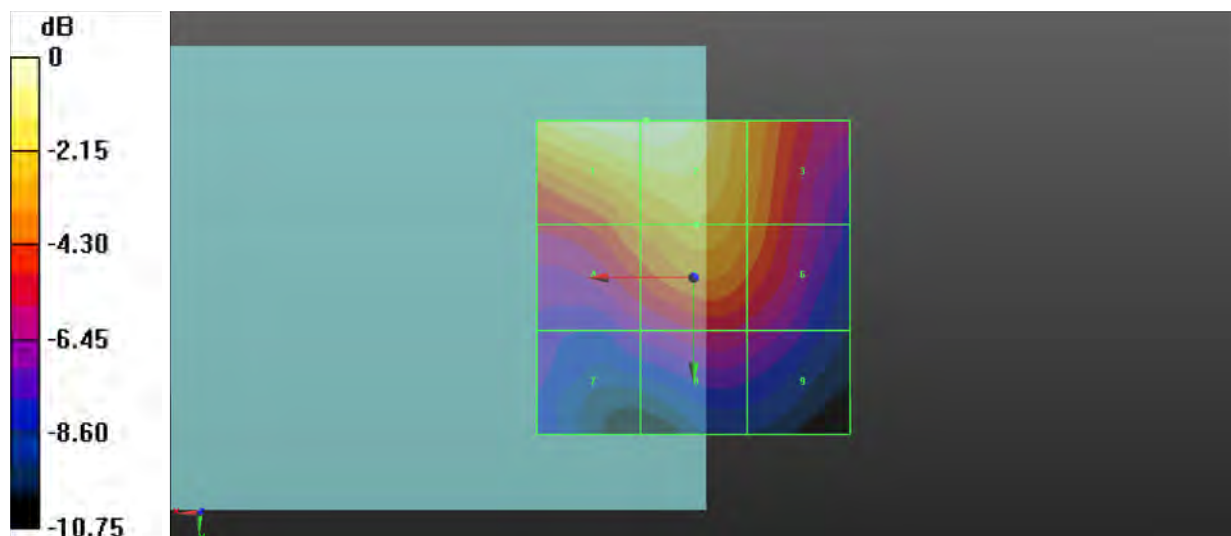

0 dB = 16.81 V/m = 24.51 dBV/m

P12 RF_E_Field_LTE 41_PC3_QPSK20M_1RB_OS0_Ch40620

Communication System: LTE_TDD; Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.86 V/m; Power Drift = -0.02 dB

Applied MIF = 0.00 dB

RF audio interference level = 24.24 dBV/m

Emission category: M4

E-field without scaling


Grid 1 24.01 dBV/m	Grid 2 24.24 dBV/m	Grid 3 22.17 dBV/m
Grid 4 20.03 dBV/m	Grid 5 21.84 dBV/m	Grid 6 21.38 dBV/m
Grid 7 17.45 dBV/m	Grid 8 19.52 dBV/m	Grid 9 19.29 dBV/m

Cursor:

Total = 24.24 dBV/m

E Category: M4

Location: 5, -25, 7.7 mm

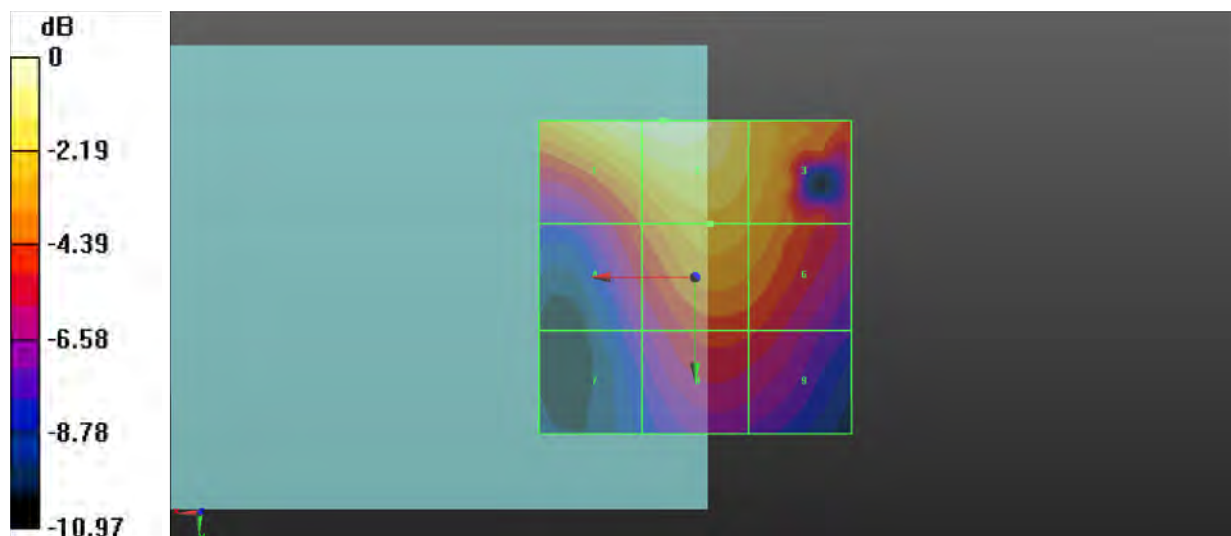

0 dB = 16.30 V/m = 24.24 dBV/m

P13 RF_E_Field_LTE 41_PC3_QPSK20M_1RB_OS0_Ch41055

Communication System: LTE_TDD; Frequency: 2636.5 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2636.5 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.25 V/m; Power Drift = -0.05 dB

Applied MIF = 0.00 dB

RF audio interference level = 22.96 dBV/m

Emission category: M4

E-field without scaling


Grid 1 22.84 dBV/m	Grid 2 22.96 dBV/m	Grid 3 20.92 dBV/m
Grid 4 18.82 dBV/m	Grid 5 19.81 dBV/m	Grid 6 18.94 dBV/m
Grid 7 15.02 dBV/m	Grid 8 16.28 dBV/m	Grid 9 16.01 dBV/m

Cursor:

Total = 22.96 dBV/m

E Category: M4

Location: 2, -25, 7.7 mm

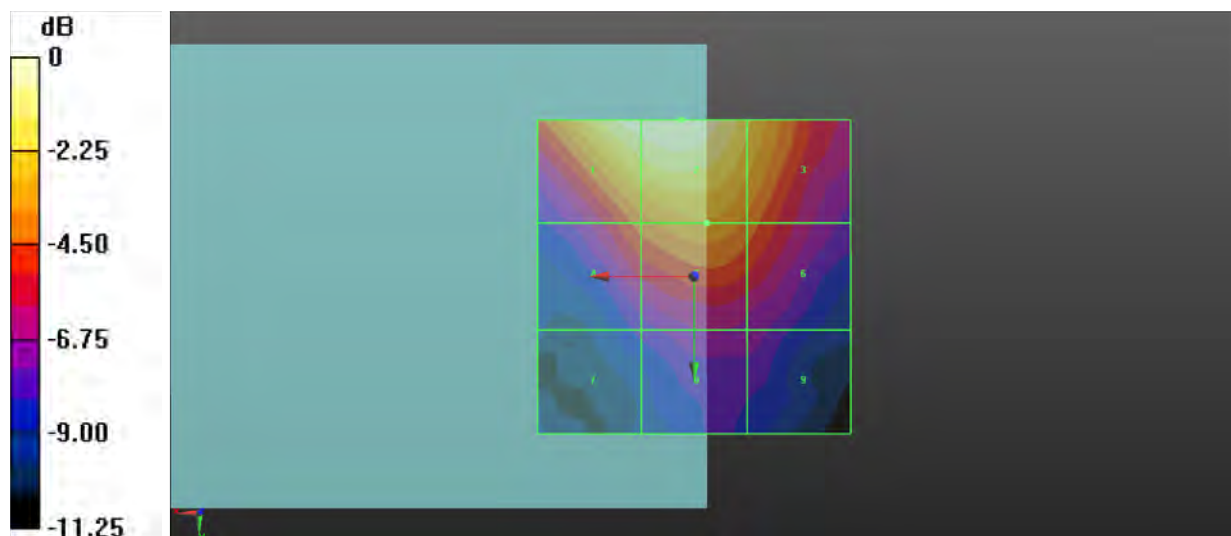

0 dB = 14.06 V/m = 22.96 dBV/m

P14 RF_E_Field_LTE 41_PC3_QPSK20M_1RB_OS0_Ch41490

Communication System: LTE_TDD; Frequency: 2680 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.698 V/m; Power Drift = -0.41 dB

Applied MIF = 0.00 dB

RF audio interference level = 18.97 dBV/m

Emission category: M4

E-field without scaling


Grid 1 18.29 dBV/m	Grid 2 18.97 dBV/m	Grid 3 17.68 dBV/m
Grid 4 15.07 dBV/m	Grid 5 16.73 dBV/m	Grid 6 16.19 dBV/m
Grid 7 13.13 dBV/m	Grid 8 14.94 dBV/m	Grid 9 14.97 dBV/m

Cursor:

Total = 18.97 dBV/m

E Category: M4

Location: 1.5, -25, 7.7 mm

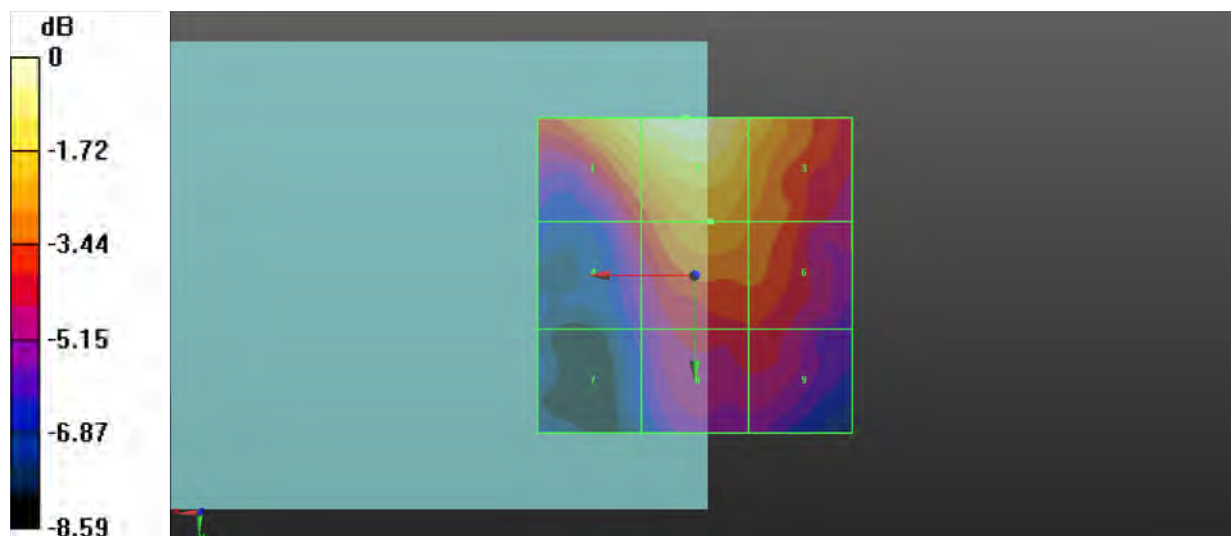

0 dB = 8.883 V/m = 18.97 dBV/m

P15 RF_E_Field_LTE 41_PC2_QPSK20M_1RB_OS0_Ch39750

Communication System: LTE_TDD; Frequency: 2506 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.05 V/m; Power Drift = 0.05 dB

Applied MIF = 0.00 dB

RF audio interference level = 20.45 dBV/m

Emission category: M4

E-field without scaling


Grid 1 20.44 dBV/m	Grid 2 20.45 dBV/m	Grid 3 19 dBV/m
Grid 4 17.28 dBV/m	Grid 5 18.78 dBV/m	Grid 6 17.97 dBV/m
Grid 7 14.01 dBV/m	Grid 8 15.86 dBV/m	Grid 9 15.46 dBV/m

Cursor:

Total = 20.45 dBV/m

E Category: M4

Location: 2, -25, 7.7 mm

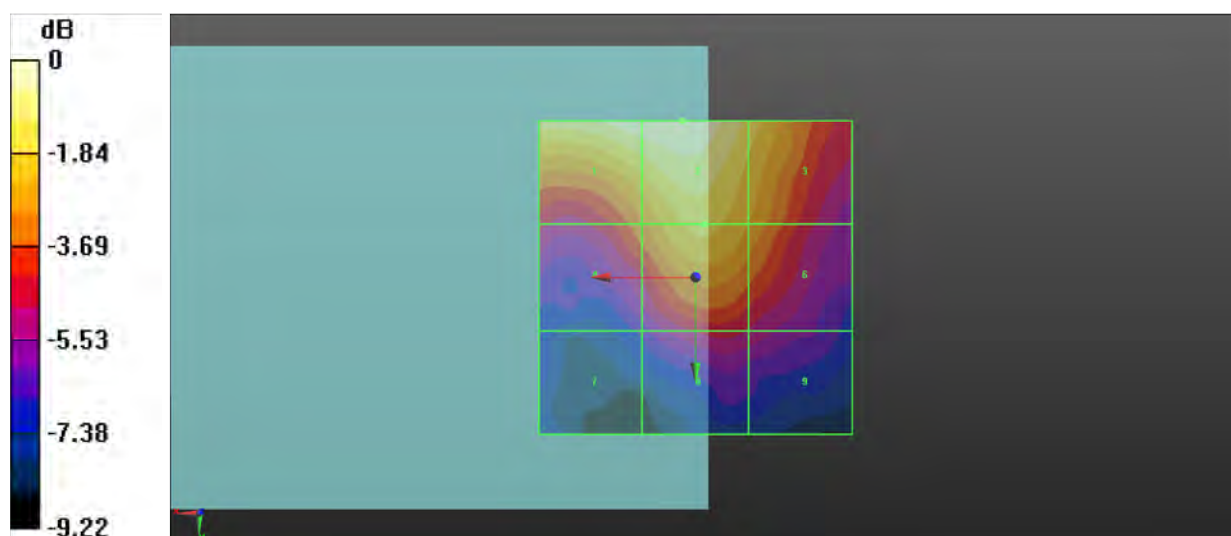

P16 RF_E_Field_LTE 41_PC2_QPSK20M_1RB_OS0_Ch40185

Communication System: LTE_TDD; Frequency: 2549.5 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.846 V/m; Power Drift = -0.02 dB

Applied MIF = 0.00 dB

RF audio interference level = 20.95 dBV/m

Emission category: M4

E-field without scaling


Grid 1 20.9 dBV/m	Grid 2 20.95 dBV/m	Grid 3 18.54 dBV/m
Grid 4 17.59 dBV/m	Grid 5 18.83 dBV/m	Grid 6 17.92 dBV/m
Grid 7 14.72 dBV/m	Grid 8 16.06 dBV/m	Grid 9 15.53 dBV/m

Cursor:

Total = 20.95 dBV/m

E Category: M4

Location: 6.5, -25, 7.7 mm

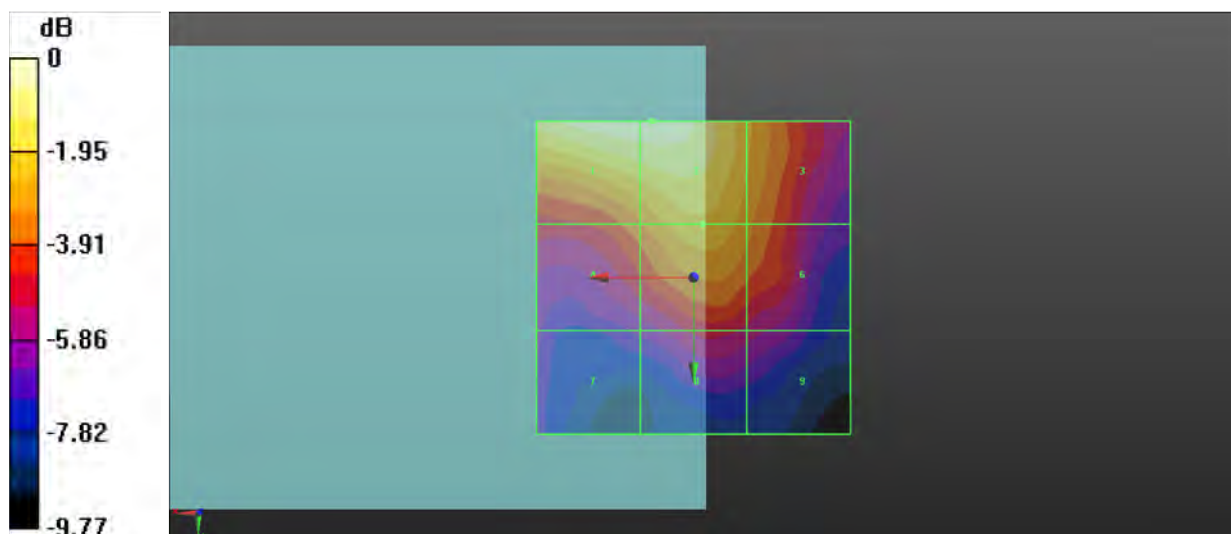

P17 RF_E_Field_LTE 41_PC2_QPSK20M_1RB_OS0_Ch40620

Communication System: LTE_TDD; Frequency: 2593 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.324 V/m; Power Drift = 0.05 dB

Applied MIF = 0.00 dB

RF audio interference level = 20.83 dBV/m

Emission category: M4

E-field without scaling


Grid 1 20.71 dBV/m	Grid 2 20.83 dBV/m	Grid 3 18.82 dBV/m
Grid 4 16.92 dBV/m	Grid 5 18.6 dBV/m	Grid 6 17.98 dBV/m
Grid 7 14.38 dBV/m	Grid 8 16.46 dBV/m	Grid 9 16.2 dBV/m

Cursor:

Total = 20.83 dBV/m

E Category: M4

Location: 5, -25, 7.7 mm

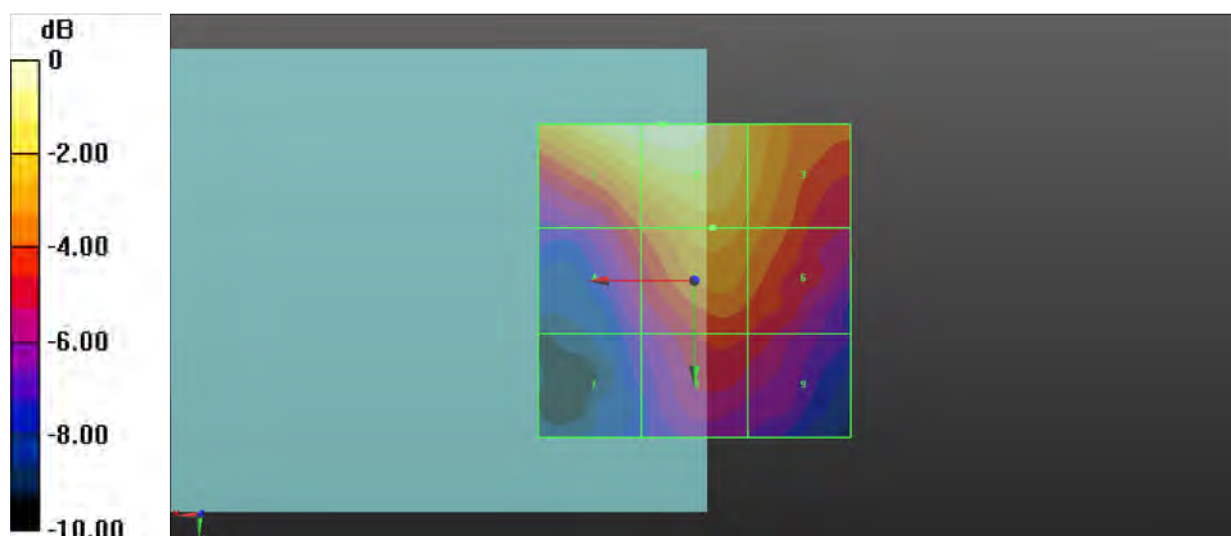

P18 RF_E_Field_LTE 41_PC2_QPSK20M_1RB_OS0_Ch41055

Communication System: LTE_TDD; Frequency: 2636.5 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2636.5 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.114 V/m; Power Drift = -0.09 dB

Applied MIF = 0.00 dB

RF audio interference level = 19.74 dBV/m

Emission category: M4

E-field without scaling


Grid 1 19.52 dBV/m	Grid 2 19.74 dBV/m	Grid 3 17.71 dBV/m
Grid 4 15.71 dBV/m	Grid 5 16.59 dBV/m	Grid 6 15.76 dBV/m
Grid 7 12.29 dBV/m	Grid 8 13.67 dBV/m	Grid 9 13.48 dBV/m

Cursor:

Total = 19.74 dBV/m

E Category: M4

Location: 4, -25, 7.7 mm

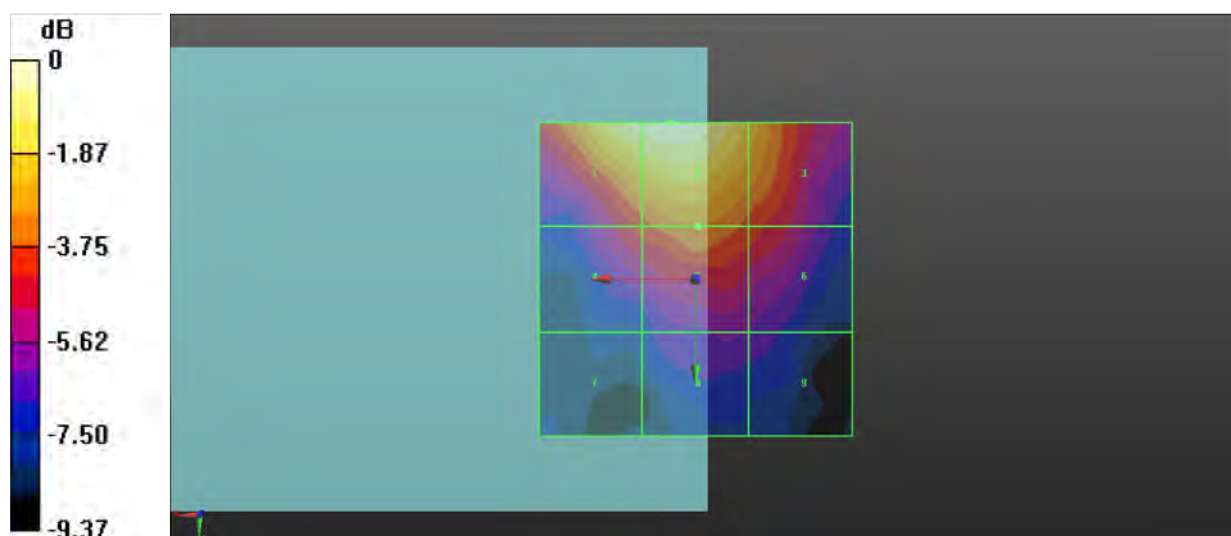

0 dB = 9.709 V/m = 19.74 dBV/m

P19 RF_E_Field_LTE 41_PC2_QPSK20M_1RB_OS0_Ch41490

Communication System: LTE_TDD; Frequency: 2680 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.807 V/m; Power Drift = -0.17 dB

Applied MIF = 0.00 dB

RF audio interference level = 16.07 dBV/m

Emission category: M4

E-field without scaling


Grid 1 15.45 dBV/m	Grid 2 16.07 dBV/m	Grid 3 14.92 dBV/m
Grid 4 12.1 dBV/m	Grid 5 13.97 dBV/m	Grid 6 13.37 dBV/m
Grid 7 11.69 dBV/m	Grid 8 12.84 dBV/m	Grid 9 12.3 dBV/m

Cursor:

Total = 16.07 dBV/m

E Category: M4

Location: 0.5, -25, 7.7 mm

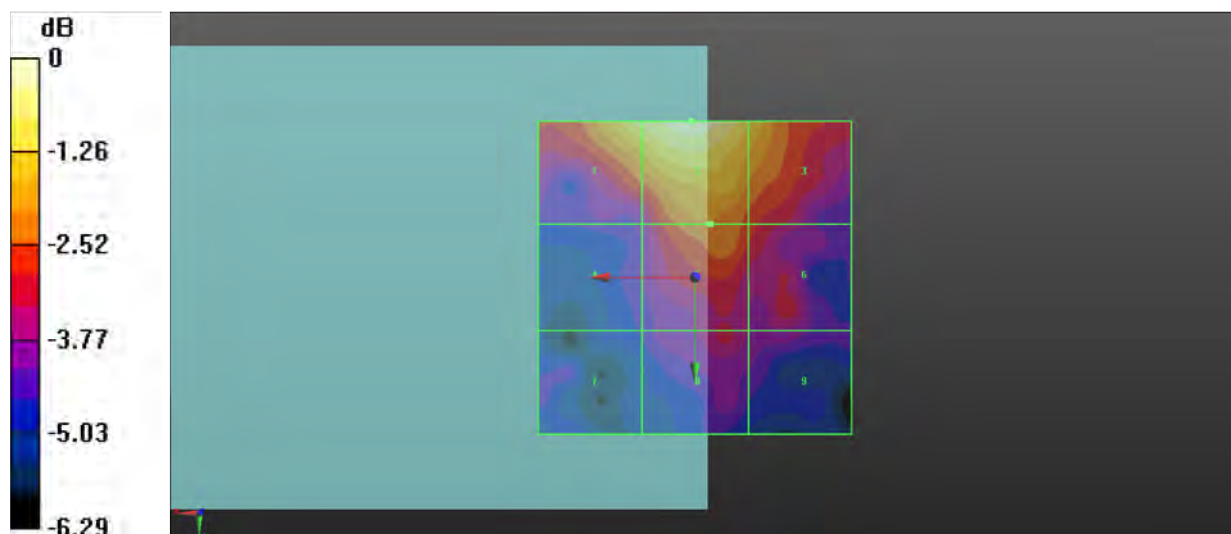

P20 RF_E_Field_LTE 42_Part27Q_QPSK20M_1RB_OS0_Ch42190

Communication System: LTE_TDD; Frequency: 3460 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3460 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 72.10 V/m; Power Drift = -0.01 dB

Applied MIF = 0.00 dB

RF audio interference level = 33.79 dBV/m

Emission category: M4

E-field without scaling


Grid 1 29.6 dBV/m	Grid 2 31.77 dBV/m	Grid 3 31.49 dBV/m
Grid 4 32.37 dBV/m	Grid 5 33.79 dBV/m	Grid 6 32.75 dBV/m
Grid 7 32.36 dBV/m	Grid 8 33.65 dBV/m	Grid 9 32.6 dBV/m

Cursor:

Total = 33.79 dBV/m

E Category: M3

Location: -1, 5, 7.7 mm

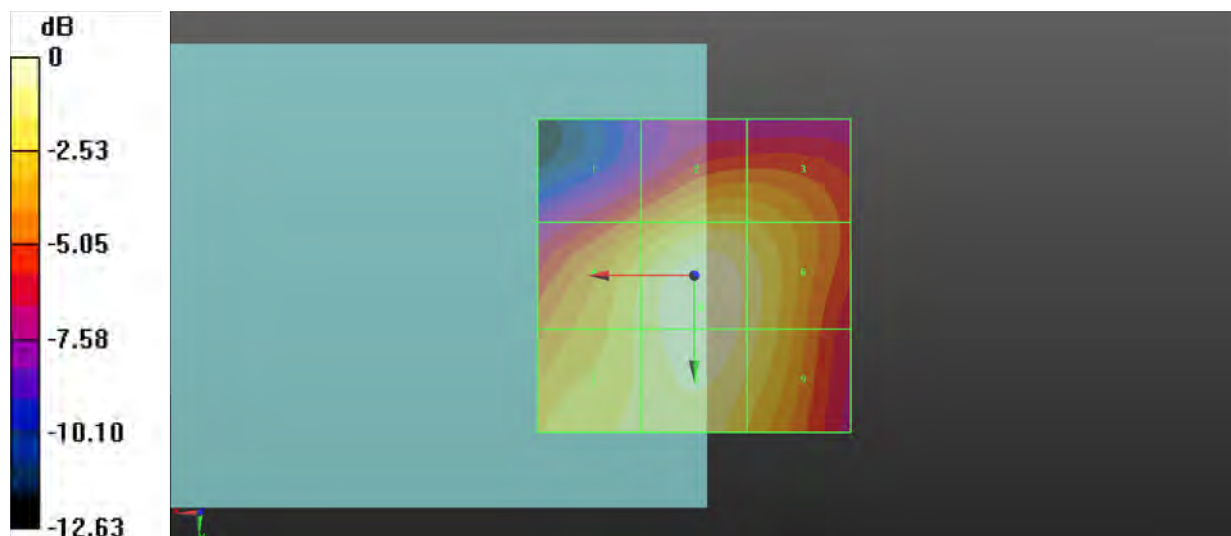

0 dB = 48.93 V/m = 33.79 dBV/m

P21 RF_E_Field_LTE 42_Part27Q_QPSK20M_1RB_OS0_Ch42590

Communication System: LTE_TDD; Frequency: 3500 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3500 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 74.34 V/m; Power Drift = -0.01 dB

Applied MIF = 0.00 dB

RF audio interference level = 33.74 dBV/m

Emission category: M3

E-field without scaling


Grid 1 30.55 dBV/m	Grid 2 32.22 dBV/m	Grid 3 31.73 dBV/m
Grid 4 32.63 dBV/m	Grid 5 33.74 dBV/m	Grid 6 32.45 dBV/m
Grid 7 32.39 dBV/m	Grid 8 33.3 dBV/m	Grid 9 31.86 dBV/m

Cursor:

Total = 33.74 dBV/m

E Category: M3

Location: 0, 1.5, 7.7 mm

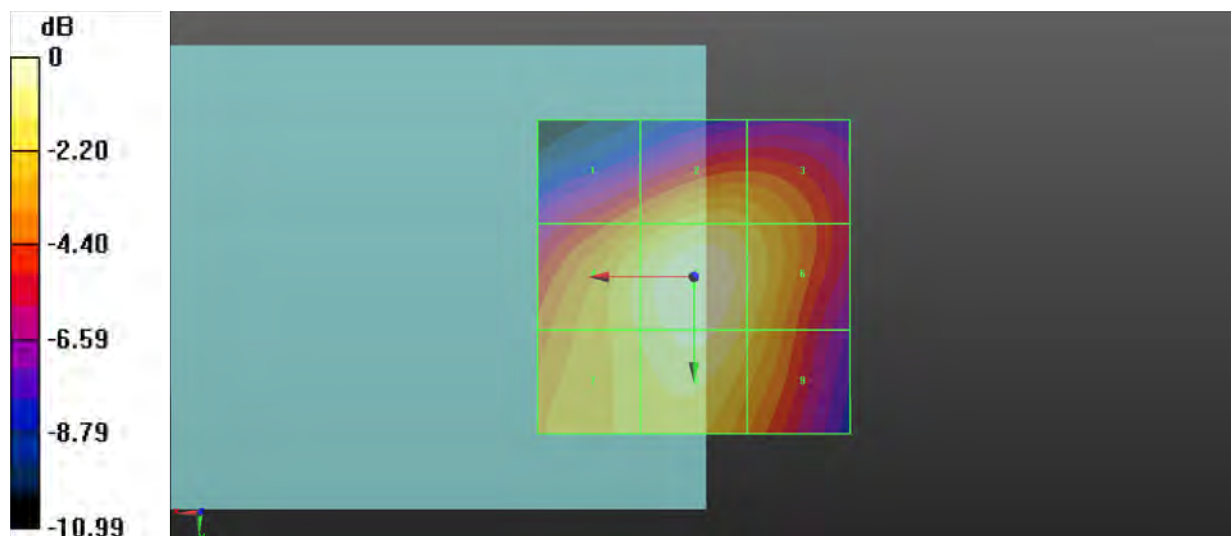

0 dB = 48.62 V/m = 33.74 dBV/m

P22 RF_E_Field_LTE 42_Part27Q_QPSK20M_1RB_OS0_Ch42990

Communication System: LTE_TDD; Frequency: 3540 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3540 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 71.96 V/m; Power Drift = -0.03 dB

Applied MIF = 0.00 dB

RF audio interference level = 33.48 dBV/m

Emission category: M3

E-field without scaling


Grid 1 30.55 dBV/m	Grid 2 32.44 dBV/m	Grid 3 32.03 dBV/m
Grid 4 32.16 dBV/m	Grid 5 33.48 dBV/m	Grid 6 32.48 dBV/m
Grid 7 31.81 dBV/m	Grid 8 32.88 dBV/m	Grid 9 31.68 dBV/m

Cursor:

Total = 33.48 dBV/m

E Category: M3

Location: -1, 1, 7.7 mm

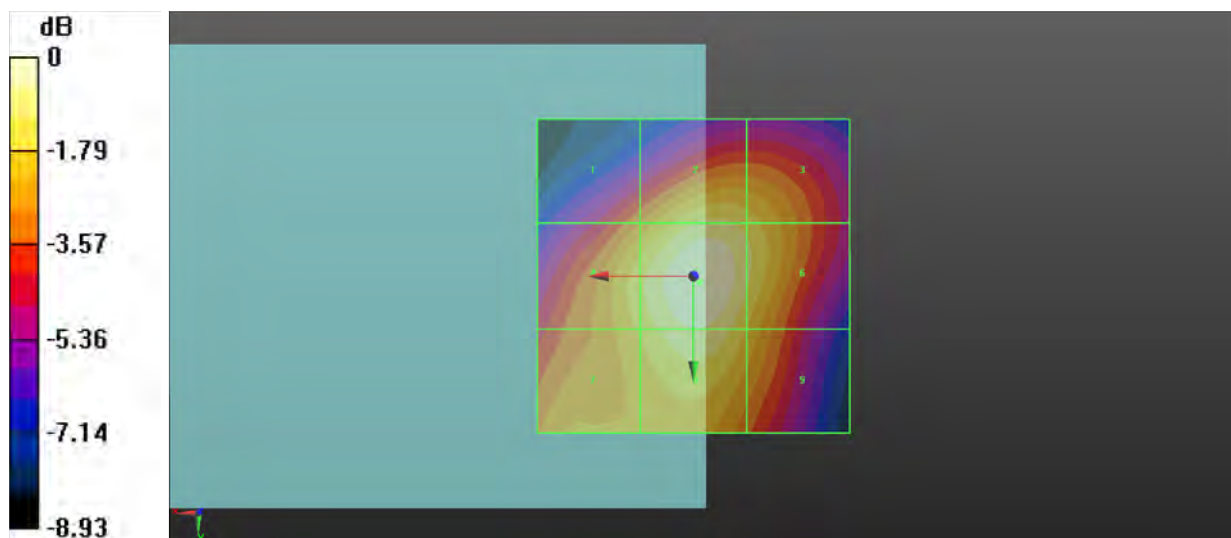

0 dB = 47.18 V/m = 33.48 dBV/m

P23 RF_E_Field_LTE 42_Part27Q_QPSK20M_1RB_OS0_Ch43190

Communication System: LTE_TDD; Frequency: 3560 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3560 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 53.06 V/m; Power Drift = 0.03 dB

Applied MIF = 0.00 dB

RF audio interference level = 30.96 dBV/m

Emission category: M3

E-field without scaling


Grid 1 27.49 dBV/m	Grid 2 29.2 dBV/m	Grid 3 28.65 dBV/m
Grid 4 29.81 dBV/m	Grid 5 30.96 dBV/m	Grid 6 29.6 dBV/m
Grid 7 29.69 dBV/m	Grid 8 30.67 dBV/m	Grid 9 29.48 dBV/m

Cursor:

Total = 30.96 dBV/m

E Category: M3

Location: 0, 2, 7.7 mm

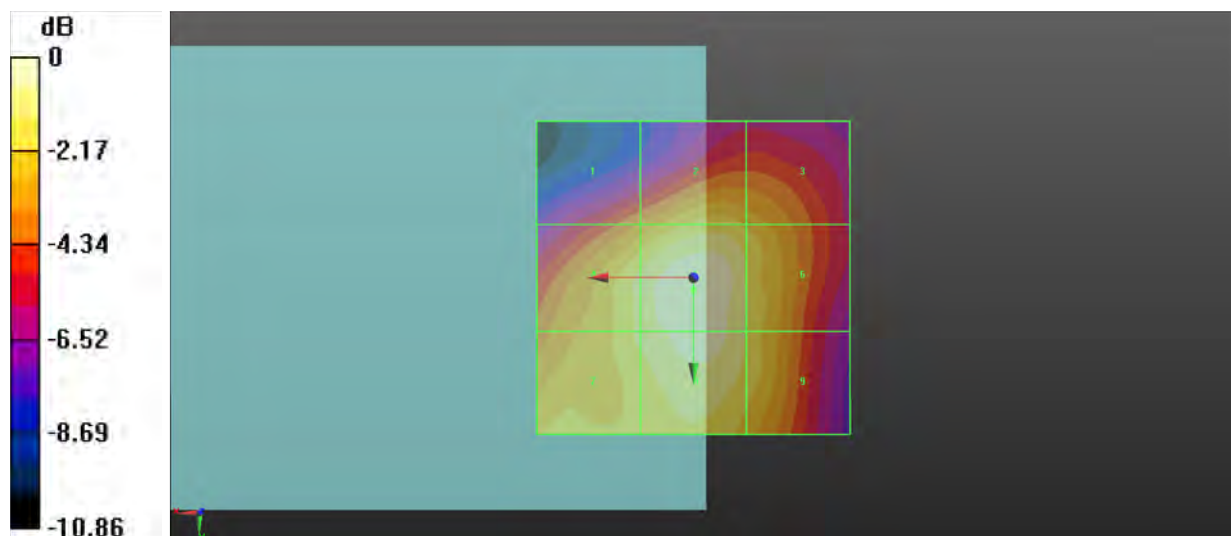

0 dB = 35.34 V/m = 30.97 dBV/m

P24 RF_E_Field_LTE 42_Part27Q_QPSK20M_1RB_OS0_Ch43340

Communication System: LTE_TDD; Frequency: 3575 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3575 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 53.27 V/m; Power Drift = -0.27 dB

Applied MIF = 0.00 dB

RF audio interference level = 30.96 dBV/m

Emission category: M3

E-field without scaling


Grid 1 27.7 dBV/m	Grid 2 29.35 dBV/m	Grid 3 28.7 dBV/m
Grid 4 29.86 dBV/m	Grid 5 30.96 dBV/m	Grid 6 29.91 dBV/m
Grid 7 29.43 dBV/m	Grid 8 30.61 dBV/m	Grid 9 29.75 dBV/m

Cursor:

Total = 30.96 dBV/m

E Category: M3

Location: -0.5, 0.5, 7.7 mm

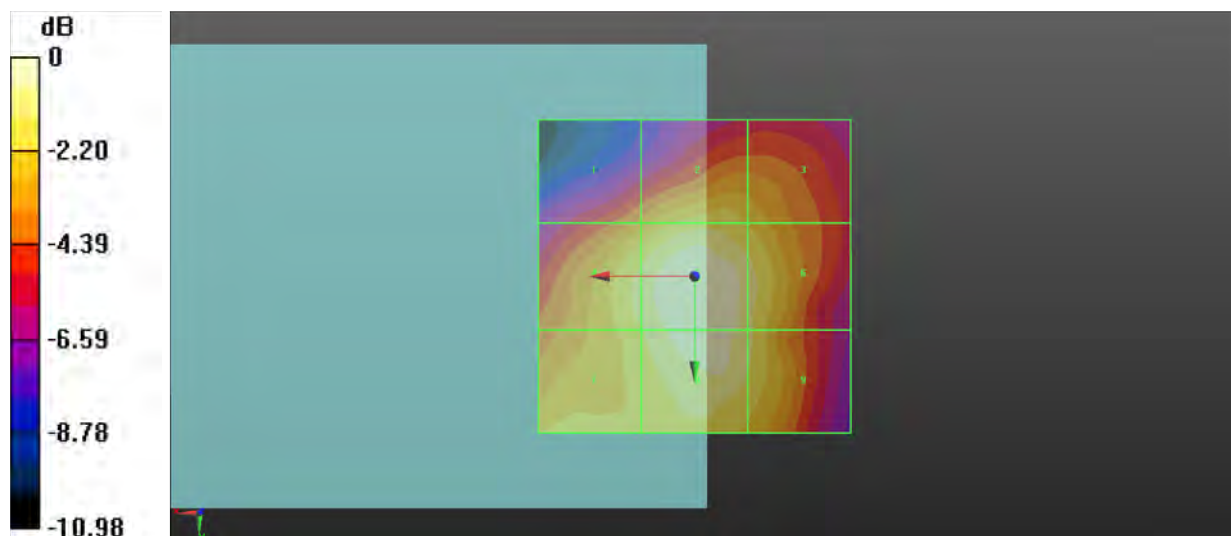

0 dB = 35.30 V/m = 30.96 dBV/m

P25 RF_E_Field_LTE 42_Part27Q_QPSK20M_1RB_OS0_Ch43490

Communication System: LTE TDD; Frequency: 3590 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3590 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 43.23 V/m; Power Drift = 1.72 dB

Applied MIF = 0.00 dB

RF audio interference level = 30.89 dBV/m

Emission category: M3

E-field without scaling


Grid 1 27.74 dBV/m	Grid 2 29.28 dBV/m	Grid 3 28.72 dBV/m
Grid 4 29.8 dBV/m	Grid 5 30.89 dBV/m	Grid 6 29.64 dBV/m
Grid 7 29.54 dBV/m	Grid 8 30.7 dBV/m	Grid 9 29.45 dBV/m

Cursor:

Total = 30.89 dBV/m

E Category: M3

Location: -0.5, 2, 7.7 mm

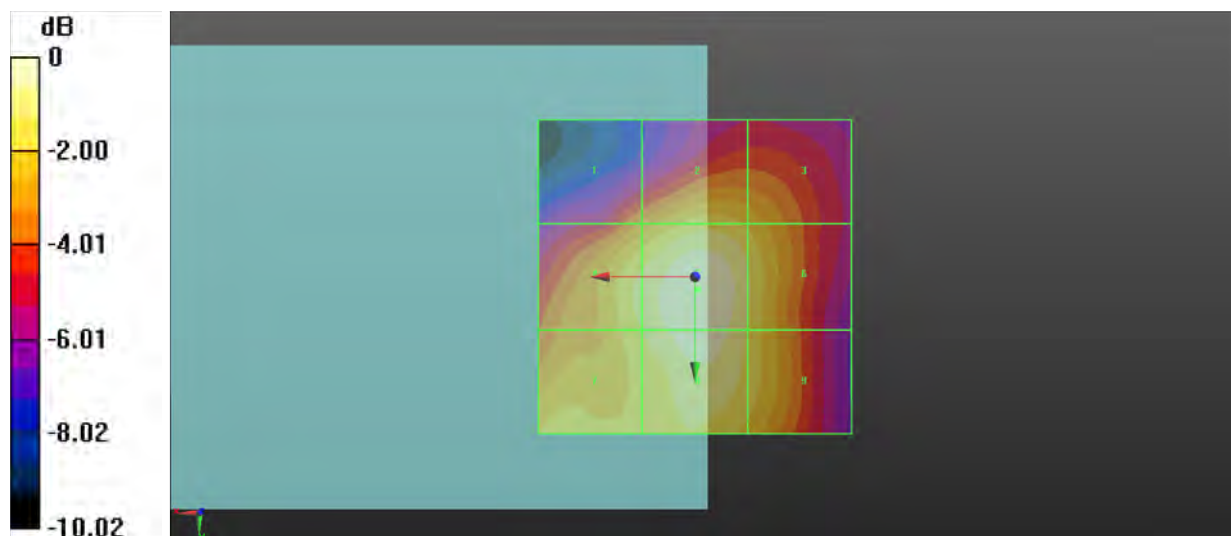

0 dB = 35.02 V/m = 30.89 dBV/m

P26 RF_E_Field_LTE 43_QPSK20M_1RB_OS0_Ch43690

Communication System: LTE TDD; Frequency: 3610 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3610 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 53.10 V/m; Power Drift = -0.03 dB

Applied MIF = 0.00 dB

RF audio interference level = 30.91 dBV/m

Emission category: M3

E-field without scaling


Grid 1 28.02 dBV/m	Grid 2 29.52 dBV/m	Grid 3 29 dBV/m
Grid 4 29.88 dBV/m	Grid 5 30.91 dBV/m	Grid 6 29.85 dBV/m
Grid 7 29.57 dBV/m	Grid 8 30.68 dBV/m	Grid 9 29.69 dBV/m

Cursor:

Total = 30.91 dBV/m

E Category: M3

Location: -0.5, 2, 7.7 mm

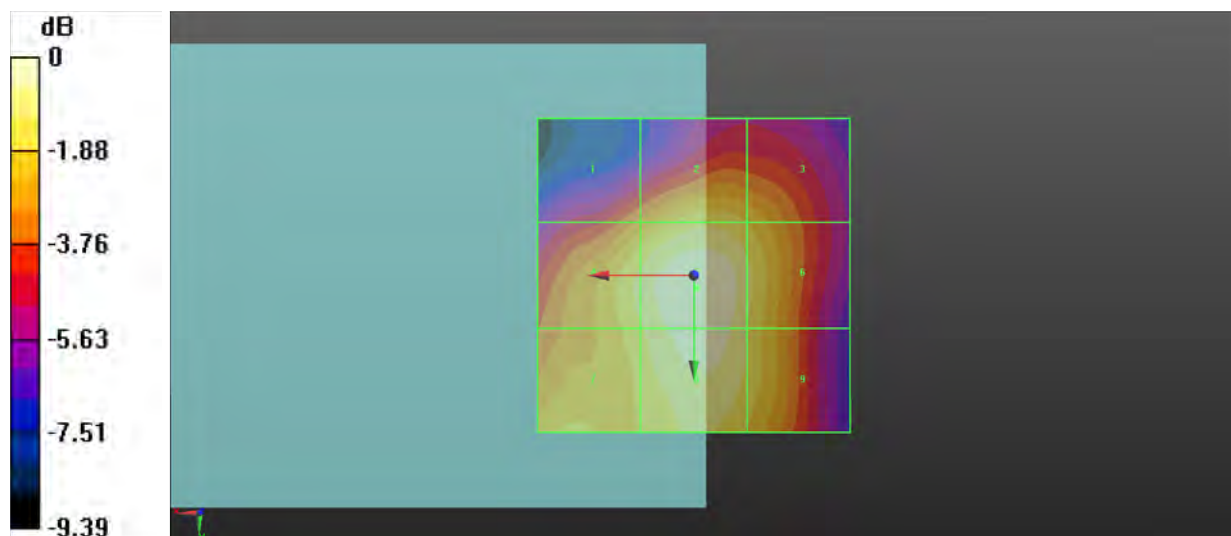

0 dB = 35.10 V/m = 30.91 dBV/m

P27 RF_E_Field_LTE 43_QPSK20M_1RB_OS0_Ch44090

Communication System: LTE_TDD; Frequency: 3650 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3650 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 52.47 V/m; Power Drift = -0.18 dB

Applied MIF = 0.00 dB

RF audio interference level = 30.94 dBV/m

Emission category: M3

E-field without scaling


Grid 1 27.6 dBV/m	Grid 2 29.49 dBV/m	Grid 3 29.13 dBV/m
Grid 4 29.54 dBV/m	Grid 5 30.94 dBV/m	Grid 6 29.95 dBV/m
Grid 7 29.72 dBV/m	Grid 8 30.82 dBV/m	Grid 9 29.95 dBV/m

Cursor:

Total = 30.94 dBV/m

E Category: M3

Location: -1.5, 4.5, 7.7 mm

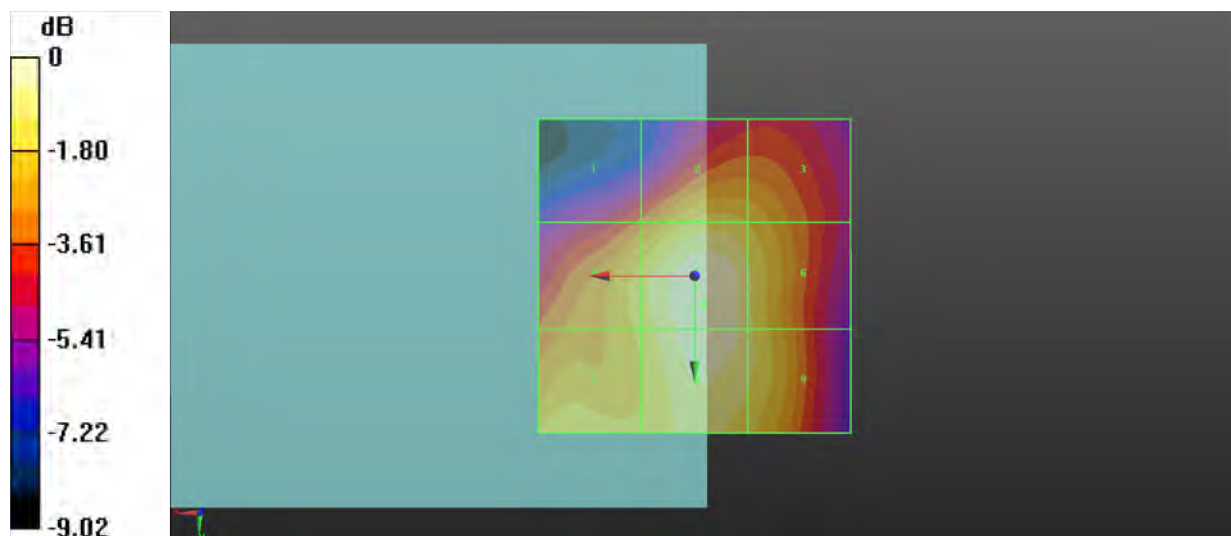

0 dB = 35.25 V/m = 30.94 dBV/m

P28 RF_E_Field_LTE 43_QPSK20M_1RB_OS0_Ch44490

Communication System: LTE_TDD; Frequency: 3690 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3690 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 51.24 V/m; Power Drift = -0.41 dB

Applied MIF = 0.00 dB

RF audio interference level = 30.88 dBV/m

Emission category: M3

E-field without scaling


Grid 1 27.36 dBV/m	Grid 2 28.96 dBV/m	Grid 3 28.4 dBV/m
Grid 4 29.41 dBV/m	Grid 5 30.87 dBV/m	Grid 6 29.99 dBV/m
Grid 7 29.49 dBV/m	Grid 8 30.88 dBV/m	Grid 9 30.21 dBV/m

Cursor:

Total = 30.88 dBV/m

E Category: M3

Location: -2.5, 11, 7.7 mm

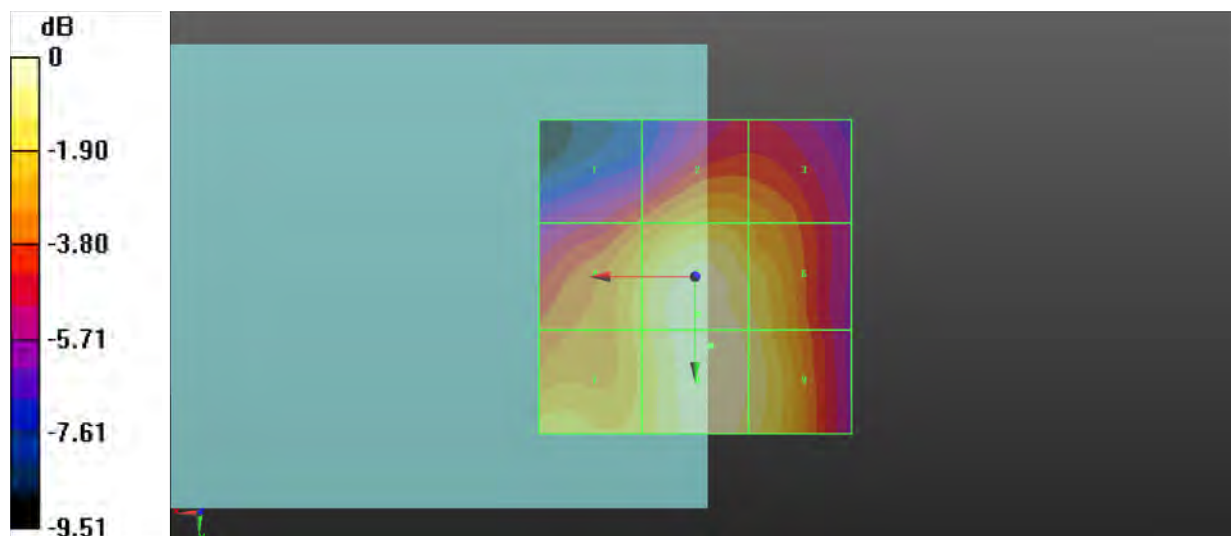

0 dB = 34.98 V/m = 30.88 dBV/m

P29 RF_E_Field_LTE 48_QPSK20M_1RB_OS0_Ch55340

Communication System: LTE_TDD; Frequency: 3560 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3560 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 72.11 V/m; Power Drift = 0.01 dB

Applied MIF = 0.00 dB

RF audio interference level = 33.71 dBV/m

Emission category: M3

E-field without scaling


Grid 1 30.83 dBV/m	Grid 2 32.83 dBV/m	Grid 3 32.47 dBV/m
Grid 4 32.25 dBV/m	Grid 5 33.71 dBV/m	Grid 6 32.85 dBV/m
Grid 7 31.75 dBV/m	Grid 8 33.12 dBV/m	Grid 9 32.14 dBV/m

Cursor:

Total = 33.71 dBV/m

E Category: M3

Location: -1.5, 0.5, 7.7 mm

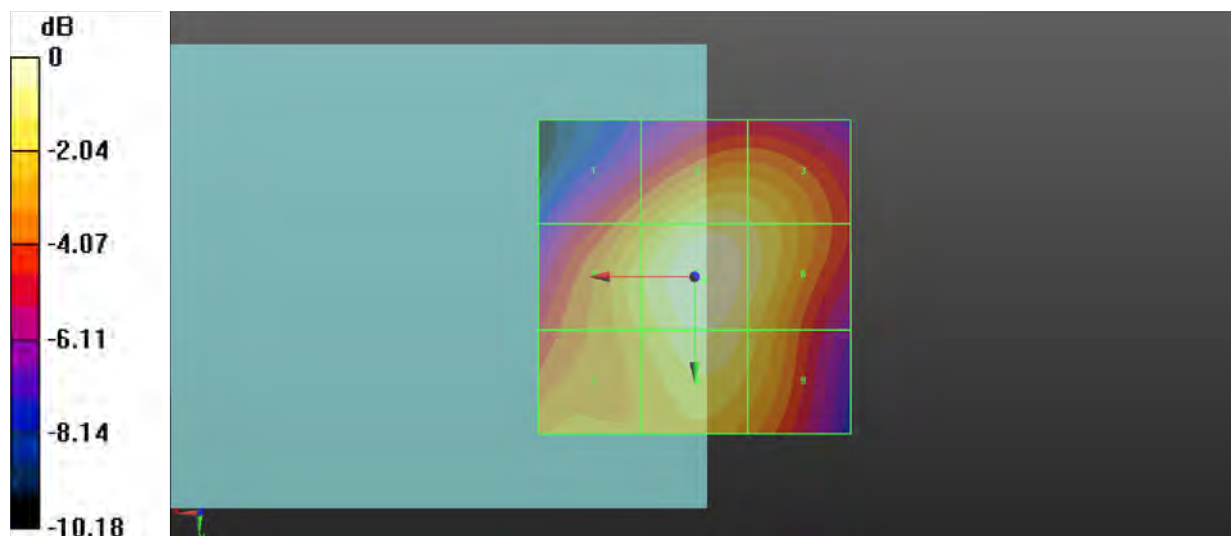

0 dB = 48.50 V/m = 33.71 dBV/m

P30 RF_E_Field_LTE 48_QPSK20M_1RB_OS0_Ch55830

Communication System: LTE_TDD; Frequency: 3609 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3609 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 71.65 V/m; Power Drift = 0.00 dB

Applied MIF = 0.00 dB

RF audio interference level = 33.65 dBV/m

Emission category: M3

E-field without scaling


Grid 1 30.95 dBV/m	Grid 2 32.97 dBV/m	Grid 3 32.65 dBV/m
Grid 4 32.18 dBV/m	Grid 5 33.65 dBV/m	Grid 6 32.95 dBV/m
Grid 7 31.72 dBV/m	Grid 8 33.05 dBV/m	Grid 9 32.2 dBV/m

Cursor:

Total = 33.65 dBV/m

E Category: M3

Location: -2, 0, 7.7 mm

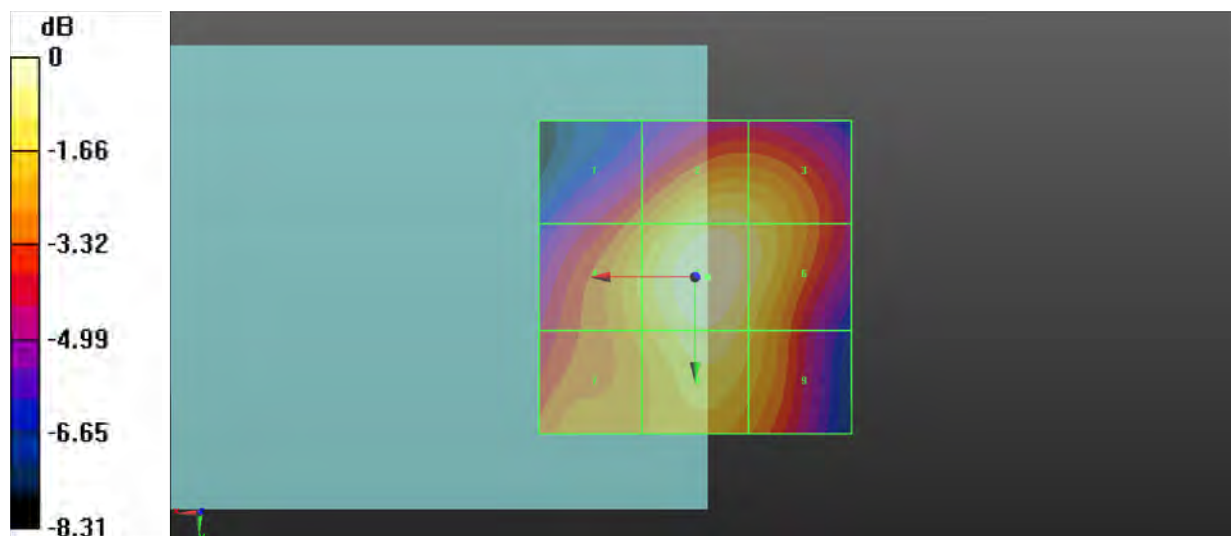

0 dB = 48.15 V/m = 33.65 dBV/m

P31 RF_E_Field_LTE 48_QPSK20M_1RB_OS0_Ch56150

Communication System: LTE_TDD; Frequency: 3641 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3641 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 70.61 V/m; Power Drift = 0.07 dB

Applied MIF = 0.00 dB

RF audio interference level = 33.66 dBV/m

Emission category: M3

E-field without scaling


Grid 1 31.08 dBV/m	Grid 2 33.28 dBV/m	Grid 3 33 dBV/m
Grid 4 32.1 dBV/m	Grid 5 33.66 dBV/m	Grid 6 33.12 dBV/m
Grid 7 31.47 dBV/m	Grid 8 32.95 dBV/m	Grid 9 32.2 dBV/m

Cursor:

Total = 33.66 dBV/m

E Category: M3

Location: -2.5, -1.5, 7.7 mm

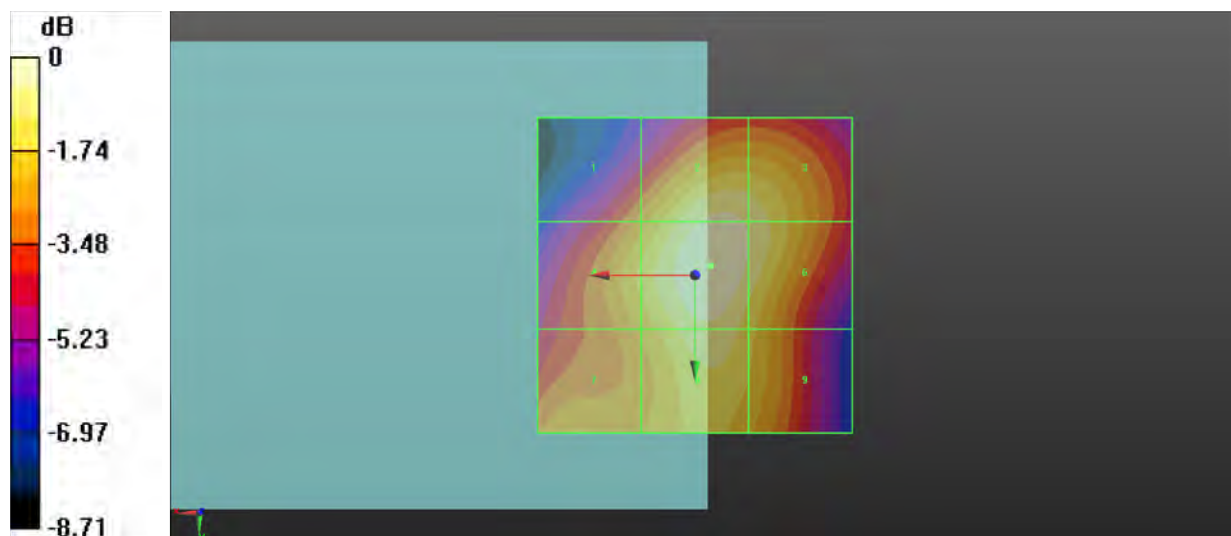

0 dB = 48.21 V/m = 33.66 dBV/m

P32 RF_E_Field_LTE 48_QPSK20M_1RB_OS0_Ch56640

Communication System: LTE_TDD; Frequency: 3690 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3690 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 68.00 V/m; Power Drift = 0.04 dB

Applied MIF = 0.00 dB

RF audio interference level = 33.39 dBV/m

Emission category: M3

E-field without scaling


Grid 1 30.52 dBV/m	Grid 2 32.77 dBV/m	Grid 3 32.56 dBV/m
Grid 4 31.62 dBV/m	Grid 5 33.39 dBV/m	Grid 6 32.82 dBV/m
Grid 7 31.63 dBV/m	Grid 8 33.2 dBV/m	Grid 9 32.59 dBV/m

Cursor:

Total = 33.39 dBV/m

E Category: M3

Location: -2.5, 1.5, 7.7 mm

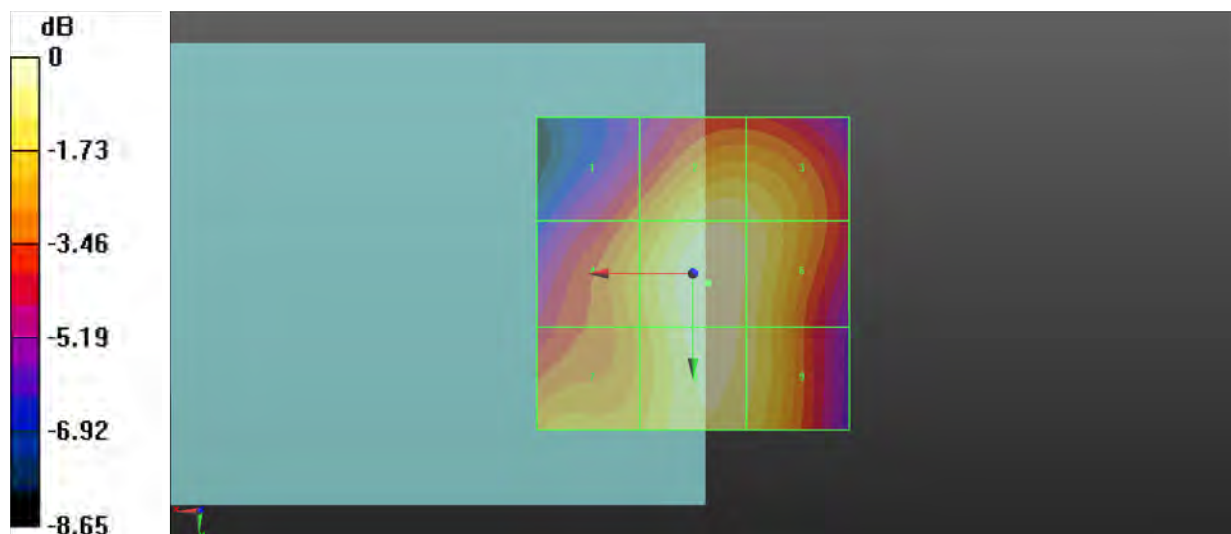

P33 RF_E_Field_NR n41_PC2_DFT-s-OFDM_QPSK100M_1RB_OS0_Ch509202

Communication System: NR; Frequency: 2546.01 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2546.01 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 53.94 V/m; Power Drift = 0.00 dB

Applied MIF = 0.00 dB

RF audio interference level = 32.84 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 31.43 dBV/m	Grid 2 M3 32.84 dBV/m	Grid 3 M3 32.41 dBV/m
Grid 4 M3 30.56 dBV/m	Grid 5 M3 31.8 dBV/m	Grid 6 M3 31.04 dBV/m
Grid 7 M4 27 dBV/m	Grid 8 M4 29.67 dBV/m	Grid 9 M4 29.65 dBV/m

Cursor:

Total = 32.84 dBV/m

E Category: M3

Location: -2.5, -25, 7.7 mm

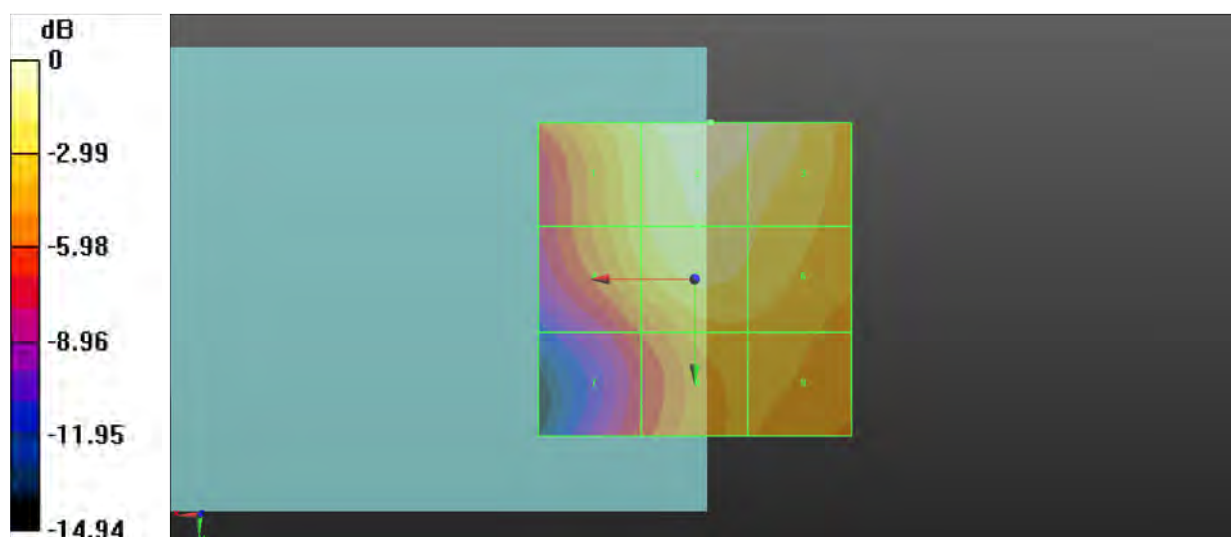

0 dB = 43.84 V/m = 32.84 dBV/m

P34 RF_E_Field_NR n41_PC2_DFT-s-OFDM_QPSK100M_1RB_OS0_Ch518598

Communication System: NR; Frequency: 2592.99 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2592.99 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 57.80 V/m; Power Drift = -0.04 dB

Applied MIF = 0.00 dB

RF audio interference level = 31.81 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 30.79 dBV/m	Grid 2 M3 31.12 dBV/m	Grid 3 M3 30.97 dBV/m
Grid 4 M4 29.62 dBV/m	Grid 5 M3 31.81 dBV/m	Grid 6 M3 31.6 dBV/m
Grid 7 M4 29.36 dBV/m	Grid 8 M3 31.68 dBV/m	Grid 9 M3 31.52 dBV/m

Cursor:

Total = 31.81 dBV/m

E Category: M3

Location: -4.5, 4, 7.7 mm

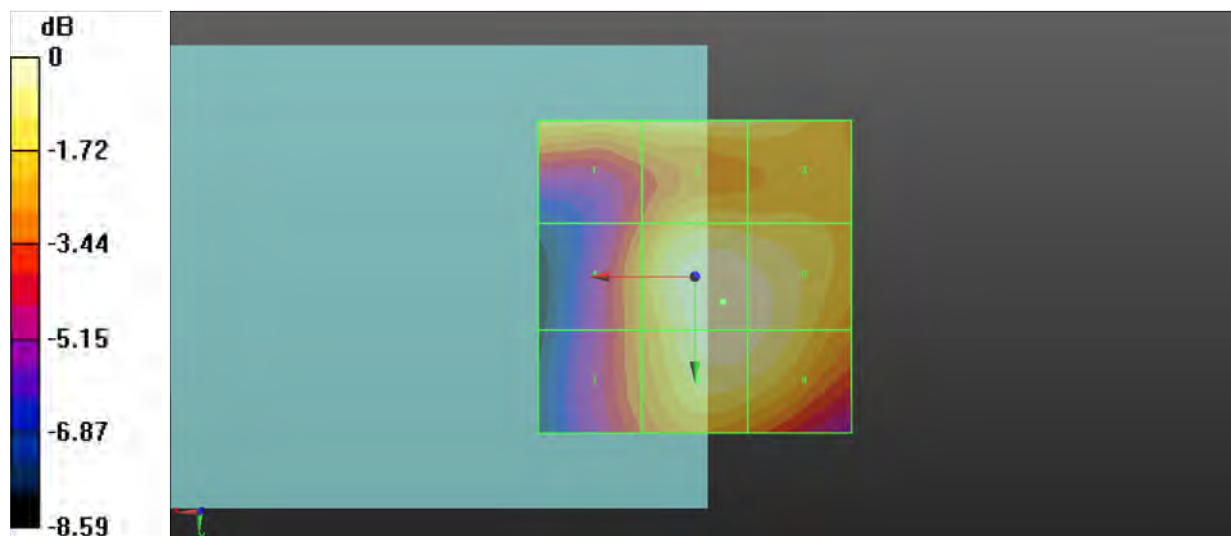

0 dB = 38.93 V/m = 31.81 dBV/m

P35 RF_E_Field_NR n41_PC2_DFT-s-OFDM_QPSK100M_1RB_OS0_Ch528000

Communication System: NR; Frequency: 2640 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2640 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 58.72 V/m; Power Drift = 0.05 dB

Applied MIF = 0.00 dB

RF audio interference level = 34.00 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 34 dBV/m	Grid 2 M3 33.33 dBV/m	Grid 3 M3 30.37 dBV/m
Grid 4 M3 30.73 dBV/m	Grid 5 M3 31.42 dBV/m	Grid 6 M3 30.51 dBV/m
Grid 7 M4 28.48 dBV/m	Grid 8 M3 30.6 dBV/m	Grid 9 M3 30.41 dBV/m

Cursor:

Total = 34.00 dBV/m

E Category: M3

Location: 19, -25, 7.7 mm

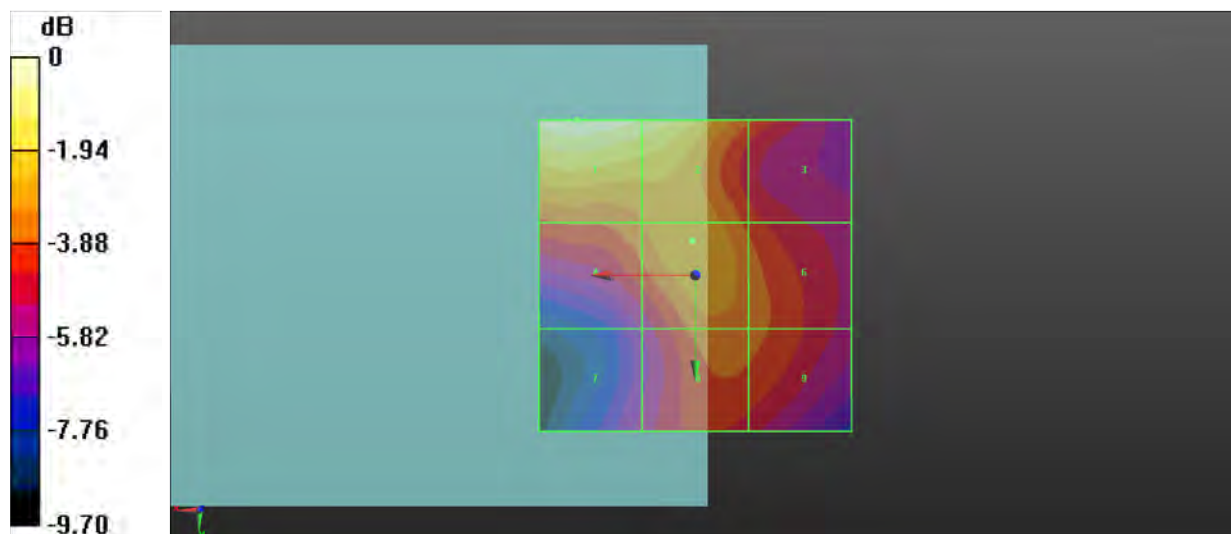

0 dB = 50.13 V/m = 34.00 dBV/m

P36 RF_E_Field_NR n77_PC2_DFT-s-OFDM_QPSK100M_1RB_OS0_Ch650000

Communication System: NR; Frequency: 3750 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3750 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 69.85 V/m; Power Drift = 0.03 dB

Applied MIF = 0.00 dB

RF audio interference level = 33.62 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 30.38 dBV/m	Grid 2 M3 31.85 dBV/m	Grid 3 M3 31.16 dBV/m
Grid 4 M3 32.39 dBV/m	Grid 5 M3 33.62 dBV/m	Grid 6 M3 32.49 dBV/m
Grid 7 M3 32.21 dBV/m	Grid 8 M3 33.5 dBV/m	Grid 9 M3 32.47 dBV/m

Cursor:

Total = 33.62 dBV/m

E Category: M3

Location: -0.5, 5, 7.7 mm

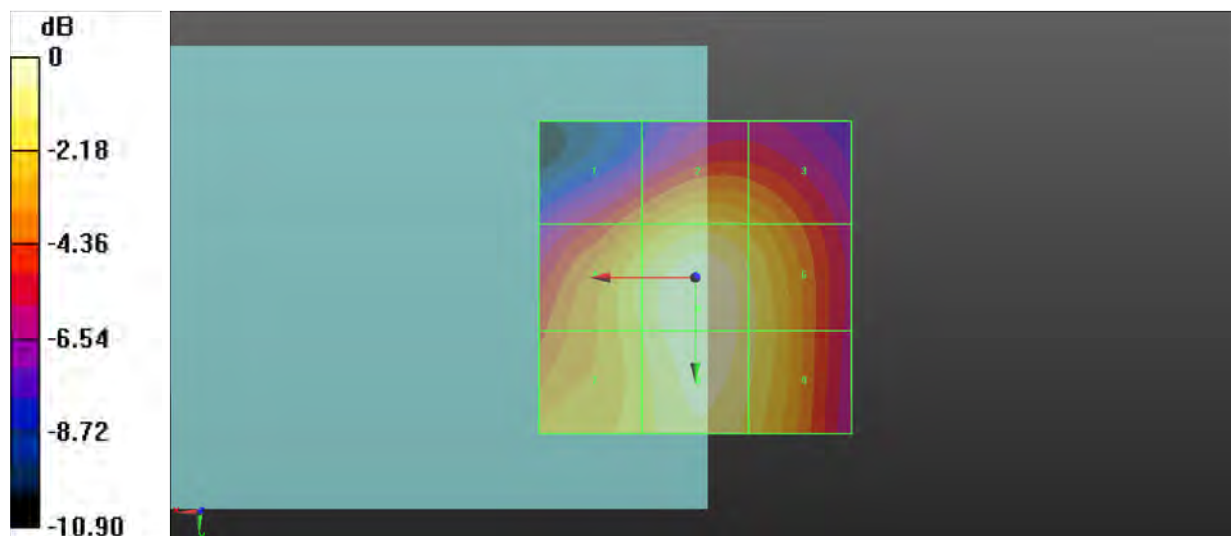

P37 RF_E_Field_NR n77_PC2_DFT-s-OFDM_QPSK100M_1RB_OS0_Ch656000

Communication System: NR; Frequency: 3840 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3840 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 74.13 V/m; Power Drift = 0.05 dB

Applied MIF = 0.00 dB

RF audio interference level = 34.28 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 31.3 dBV/m	Grid 2 M3 32.6 dBV/m	Grid 3 M3 31.84 dBV/m
Grid 4 M3 33.17 dBV/m	Grid 5 M3 34.28 dBV/m	Grid 6 M3 33.15 dBV/m
Grid 7 M3 33.03 dBV/m	Grid 8 M3 34.18 dBV/m	Grid 9 M3 33.15 dBV/m

Cursor:

Total = 34.28 dBV/m

E Category: M3

Location: -0.5, 5.5, 7.7 mm

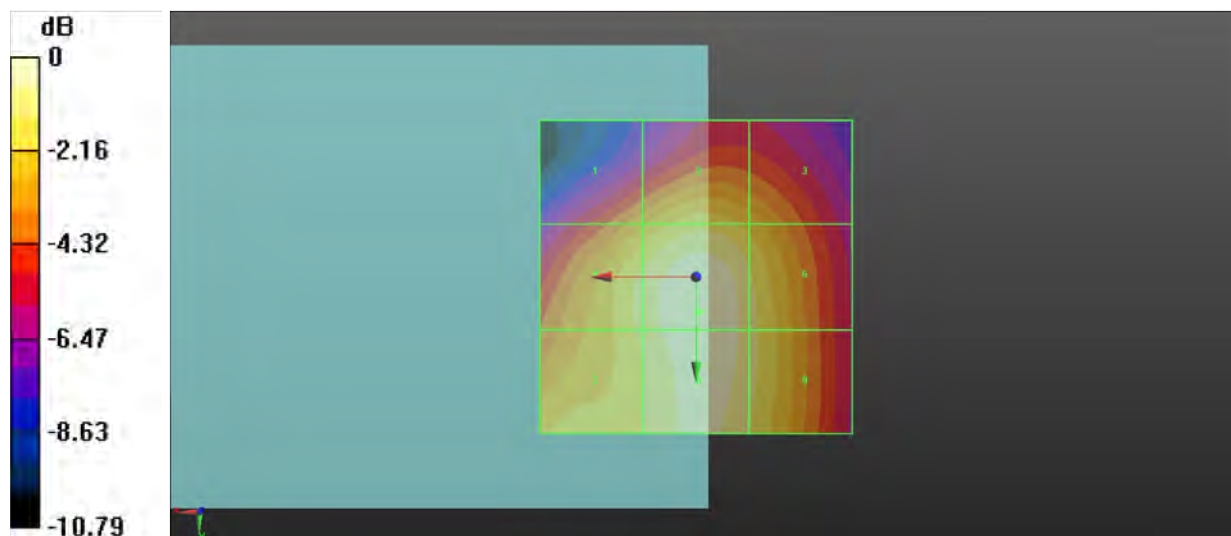

0 dB = 51.76 V/m = 34.28 dBV/m

P38 RF_E_Field_NR n77_PC2_DFT-s-OFDM_QPSK100M_1RB_OS0_Ch662000

Communication System: NR; Frequency: 3930 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3930 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 81.96 V/m; Power Drift = 0.01 dB

Applied MIF = 0.00 dB

RF audio interference level = 34.75 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 31.64 dBV/m	Grid 2 M3 33.2 dBV/m	Grid 3 M3 32.61 dBV/m
Grid 4 M3 33.51 dBV/m	Grid 5 M3 34.75 dBV/m	Grid 6 M3 33.73 dBV/m
Grid 7 M3 33.69 dBV/m	Grid 8 M3 34.55 dBV/m	Grid 9 M3 33.61 dBV/m

Cursor:

Total = 34.75 dBV/m

E Category: M3

Location: -1, 2, 7.7 mm

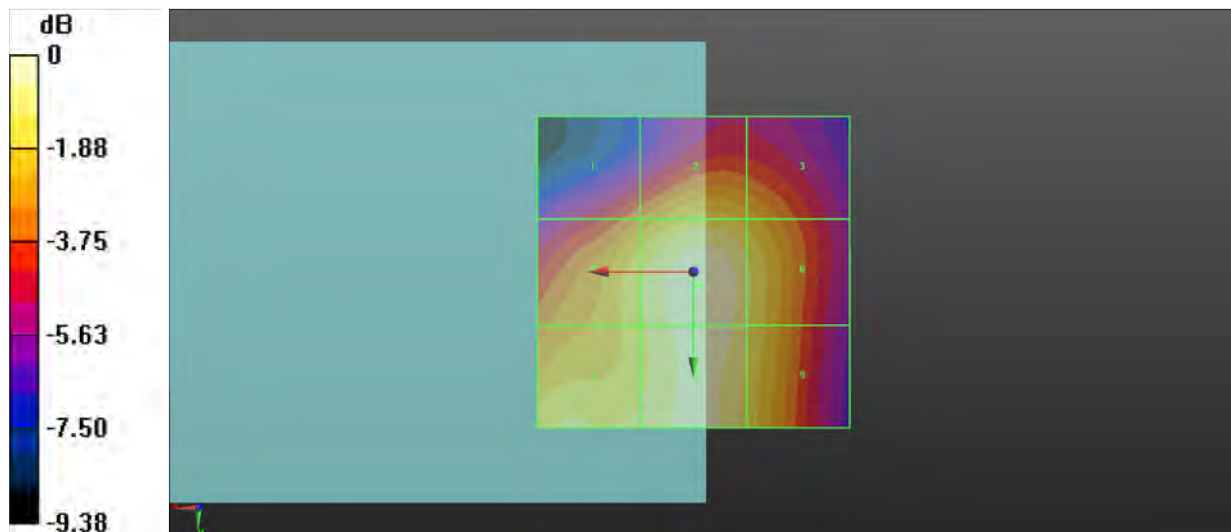

P39 RF_E_Field_NR n77_PC2_DFT-s-OFDM_QPSK100M_1RB_OS0_Ch633334

Communication System: NR; Frequency: 3500 MHz; Duty Cycle: 1:2.33

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 3500 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 78.17 V/m; Power Drift = 0.01 dB

Applied MIF = 0.00 dB

RF audio interference level = 34.58 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 30.3 dBV/m	Grid 2 M3 31.98 dBV/m	Grid 3 M3 31.47 dBV/m
Grid 4 M3 33.3 dBV/m	Grid 5 M3 34.58 dBV/m	Grid 6 M3 33.35 dBV/m
Grid 7 M3 33.22 dBV/m	Grid 8 M3 34.38 dBV/m	Grid 9 M3 33.25 dBV/m

Cursor:

Total = 34.58 dBV/m

E Category: M3

Location: -0.5, 5, 7.7 mm

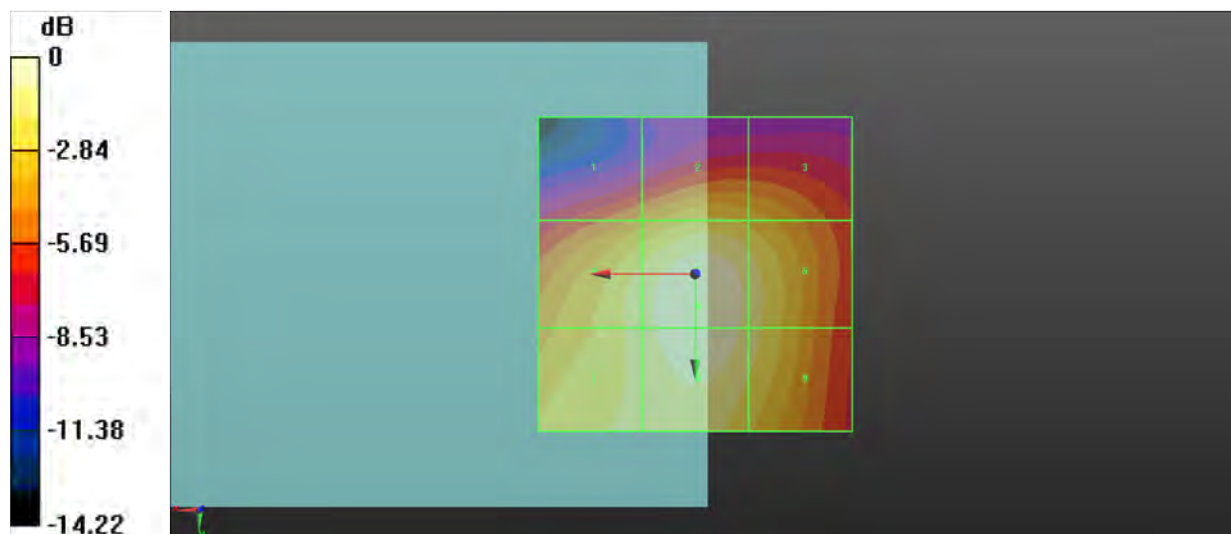

P40 RF_E_Field_WIFI2.4G_802.11b 1Mbps_Ch1

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2412 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.087 V/m; Power Drift = 0.22 dB

Applied MIF = 0.00 dB

RF audio interference level = 17.14 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 13.21 dBV/m	Grid 2 M4 13.92 dBV/m	Grid 3 M4 13.17 dBV/m
Grid 4 M4 14.05 dBV/m	Grid 5 M4 15.2 dBV/m	Grid 6 M4 14.32 dBV/m
Grid 7 M4 15.18 dBV/m	Grid 8 M4 17.14 dBV/m	Grid 9 M4 15.06 dBV/m

Cursor:

Total = 17.14 dBV/m

E Category: M4

Location: 0, 23.5, 7.7 mm

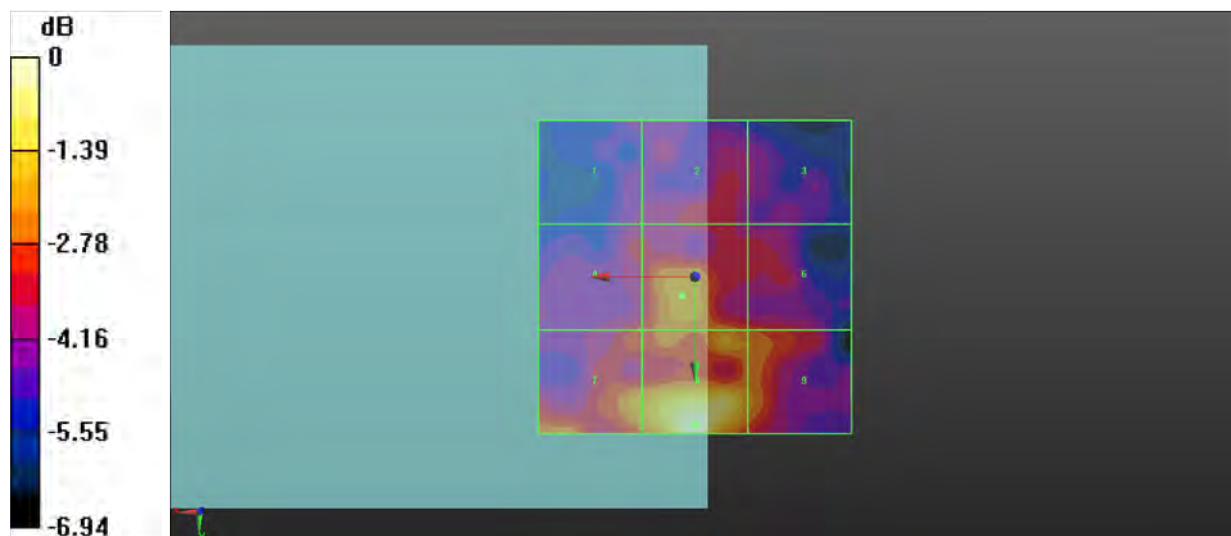

0 dB = 7.198 V/m = 17.14 dBV/m

P41 RF_E_Field_WIFI2.4G_802.11b 1Mbps_Ch6

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2437 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.050 V/m; Power Drift = -0.31 dB

Applied MIF = 0.00 dB

RF audio interference level = 17.53 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 14.18 dBV/m	Grid 2 M4 14.26 dBV/m	Grid 3 M4 13.22 dBV/m
Grid 4 M4 16.01 dBV/m	Grid 5 M4 16.44 dBV/m	Grid 6 M4 15.79 dBV/m
Grid 7 M4 17.09 dBV/m	Grid 8 M4 17.53 dBV/m	Grid 9 M4 16.17 dBV/m

Cursor:

Total = 17.53 dBV/m

E Category: M4

Location: 0, 20.5, 7.7 mm

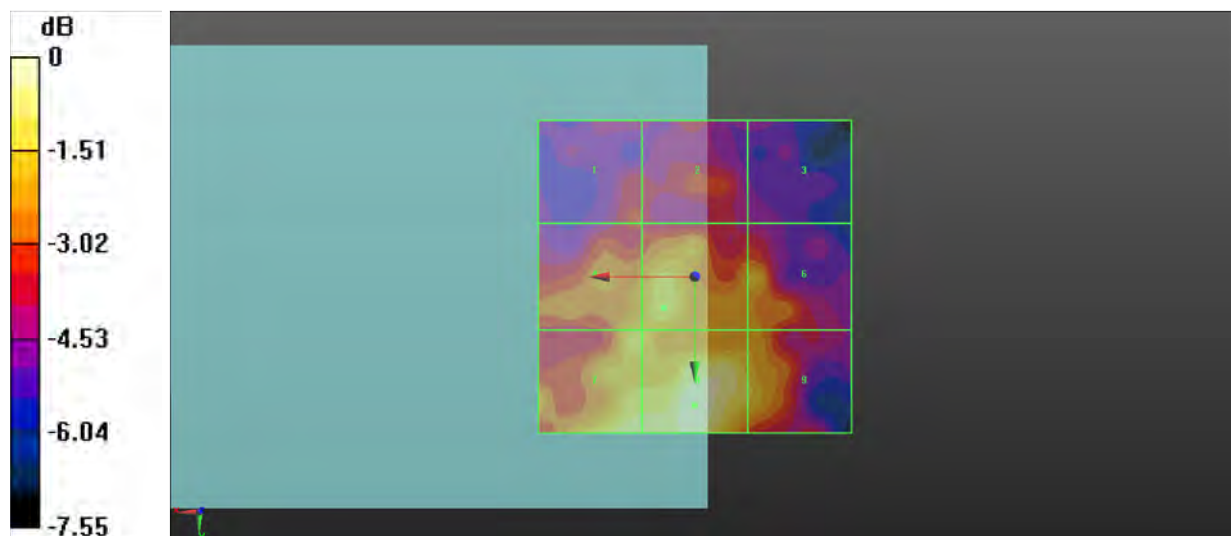

0 dB = 7.527 V/m = 17.53 dBV/m

P42 RF_E_Field_WIFI2.4G_802.11b 1Mbps_Ch11

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: EF3DV3 - SN4075; ConvF(1, 1, 1) @ 2462 MHz; Calibrated: 2023/02/17
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.408 V/m; Power Drift = -0.76 dB

Applied MIF = 0.00 dB

RF audio interference level = 17.66 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 13.66 dBV/m	Grid 2 M4 14.88 dBV/m	Grid 3 M4 14.4 dBV/m
Grid 4 M4 15.23 dBV/m	Grid 5 M4 16.69 dBV/m	Grid 6 M4 15.99 dBV/m
Grid 7 M4 16.81 dBV/m	Grid 8 M4 17.66 dBV/m	Grid 9 M4 16.88 dBV/m

Cursor:

Total = 17.66 dBV/m

E Category: M4

Location: -4.5, 15.5, 7.7 mm

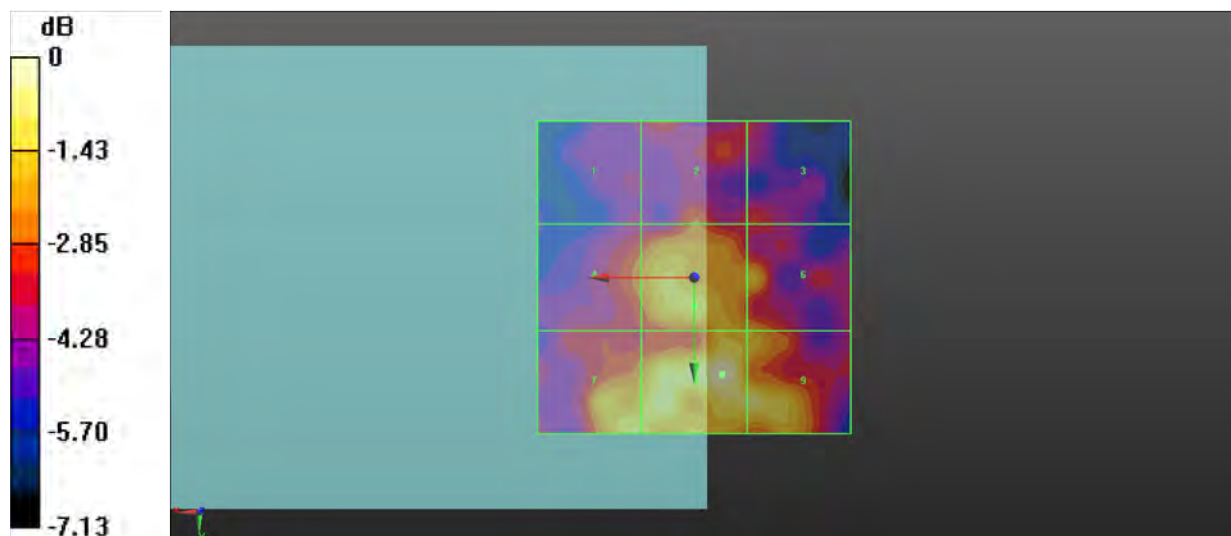

0 dB = 7.634 V/m = 17.66 dBV/m