

TEST REPORT

Product : remote control
Trade mark : N/A
Model/Type reference : YM-YKQ01
Serial Number : N/A
Report Number : EED32P80375201
FCC ID : 2BBDM-LYDST0001
Date of Issue : Jun. 06, 2023
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Hubei Yimu Electronic Technology Co., Ltd.
7-16-103 Modern Sino-Canada Science and Technology City, West of
Yewang Road, Shazui Street, Xiantao, Hubei Province

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Compiled by:

mark.chen.

Reviewed by:

Tom Chen

Approved by:

Mark Chen

Tom Chen

Report Seal

Aaron Ma

Jun. 06, 2023

Aaron Ma

Check No.: 9842200323



1 Version

Version No.	Date	Description
00	Jun. 06, 2023	Original



2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10:2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10:2013	N/A
Field Strength of the Fundamental Signal	47 CFR Part 15 Subpart C Section 15.231 (b)	ANSI C63.10:2013	PASS
Spurious Emissions	47 CFR Part 15 Subpart C Section 15.231 (b)/15.209	ANSI C63.10:2013	PASS
20dB Bandwidth	47 CFR Part 15 Subpart C Section 15.231 (c)	ANSI C63.10:2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.231 (a)	ANSI C63.10:2013	PASS

Remark:

1.N/A:The product is powered by DC 3.0V Battery.

2.Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

3 Contents

1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT AND MODE	6
4.4 DESCRIPTION OF SUPPORT UNITS	7
4.5 TEST LOCATION	7
4.6 DEVIATION FROM STANDARDS	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
4.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
4.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	7
5 EQUIPMENT LIST	8
6 TEST RESULTS AND MEASUREMENT DATA	10
6.1 ANTENNA REQUIREMENT	10
6.2 SPURIOUS EMISSIONS	11
6.2.1 <i>Duty Cycle</i>	11
6.2.2 <i>Spurious Emissions</i>	13
6.3 20DB BANDWIDTH	18
6.4 DWELL TIME	19
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	21
APPENDIX 2 PHOTOGRAPHS OF EUT	23

4 General Information

4.1 Client Information

Applicant:	Hubei Yimu Electronic Technology Co., Ltd.
Address of Applicant:	7-16-103 Modern Sino-Canada Science and Technology City, West of Yewang Road, Shazui Street, Xiantao, Hubei Province
Manufacturer:	Hubei Yimu Electronic Technology Co., Ltd.
Address of Manufacturer:	7-16-103 Modern Sino-Canada Science and Technology City, West of Yewang Road, Shazui Street, Xiantao, Hubei Province
Factory:	Hubei Yimu Electronic Technology Co., Ltd.
Address of Factory:	7-16-103 Modern Sino-Canada Science and Technology City, West of Yewang Road, Shazui Street, Xiantao, Hubei Province

4.2 General Description of EUT

Product Name:	remote control
Model No.(EUT):	YM-YKQ01
Trade Mark:	N/A
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Power Supply:	Battery DC 3.0V
Frequency Range:	433.92MHz
Modulation Type:	ASK
Number of Channels:	1
Antenna Type:	PCB antenna
Test voltage:	DC 3.0V
Sample Received Date:	May 09, 2023
Sample tested Date:	May 09, 2023 to Jun. 01, 2023

4.3 Test Environment and Mode

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

4.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

4.6 Deviation from Standards

None.

4.7 Abnormalities from Standard Conditions

None.

4.8 Other Information Requested by the Customer

None.

4.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz) 0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz) 4.3dB (30MHz-1GHz) 4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz) 3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

5 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	R&S	FSV40	101200	08-01-2022	07-31-2023

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Due Date
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05/22/2022	05/21/2025
Receiver	R&S	ESCI7	100938-003	09/28/2022	09/27/2023
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/22/2022	05/21/2025
Multi device Controller	maturo	NCD/070/10711112	---	---	---
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/15/2021	04/14/2024
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/17/2021	04/16/2024
Microwave Preamplifier	Agilent	8449B	3008A02425	06/20/2022	06/19/2023
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	02-27-2023	02-26-2024
Spectrum Analyzer	Keysight	N9020B	MY57111112	02-21-2023	02-20-2024
Spectrum Analyzer	Keysight	N9030B	MY57140871	02-21-2023	02-20-2024
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-28-2021	04-27-2024
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-15-2021	04-14-2024
Horn Antenna	ETS-LINDGREN	3117	57407	07-04-2021	07-03-2024
Preamplifier	EMCI	EMC184055SE	980597	04-13-2023	04-12-2024
Preamplifier	EMCI	EMC001330	980563	03-28-2023	03-27-2024
Preamplifier	JS Tonscend	TAP-011858	AP21B806112	07-29-2022	07-28-2023
Communication test set	R&S	CMW500	102898	12-23-2022	12-22-2023
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-11-2023	04-10-2024
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2021	01-08-2024
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:	Please see Internal photos The antenna is PCB antenna.


6.2 Spurious Emissions

6.2.1 Duty Cycle

Test Requirement: 47 CFR Part 15C Section 15.35 (c)

Test Method: ANSI C63.10:2013

Test Setup:

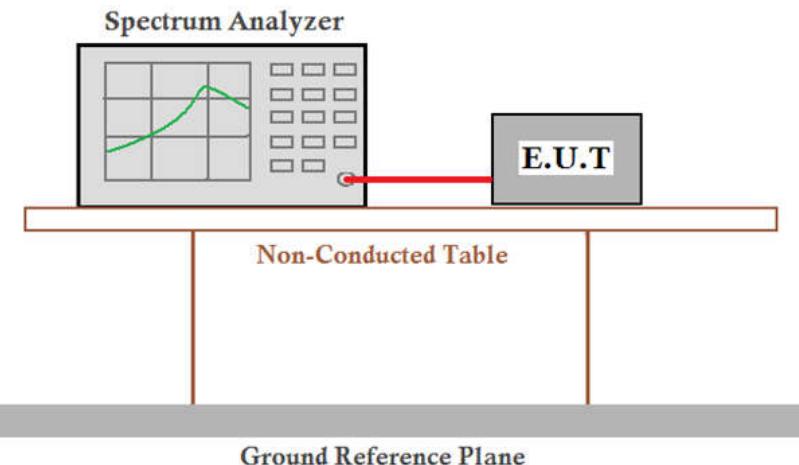

Limit: N/A


Test Mode: Transmitting mode



Test Results: Pass

Test plot as follows:

Time slot:

the pulse train length is greater than 100 ms

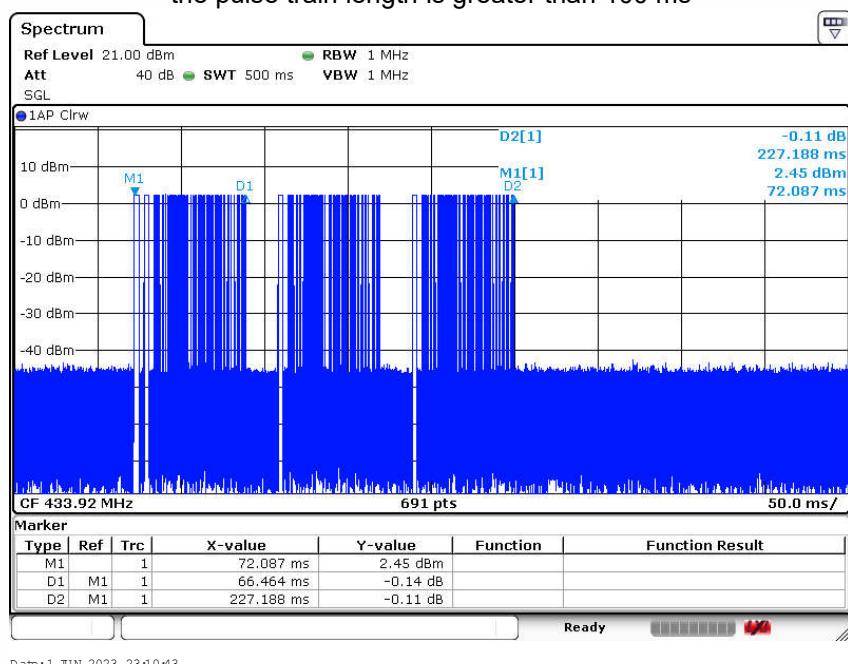

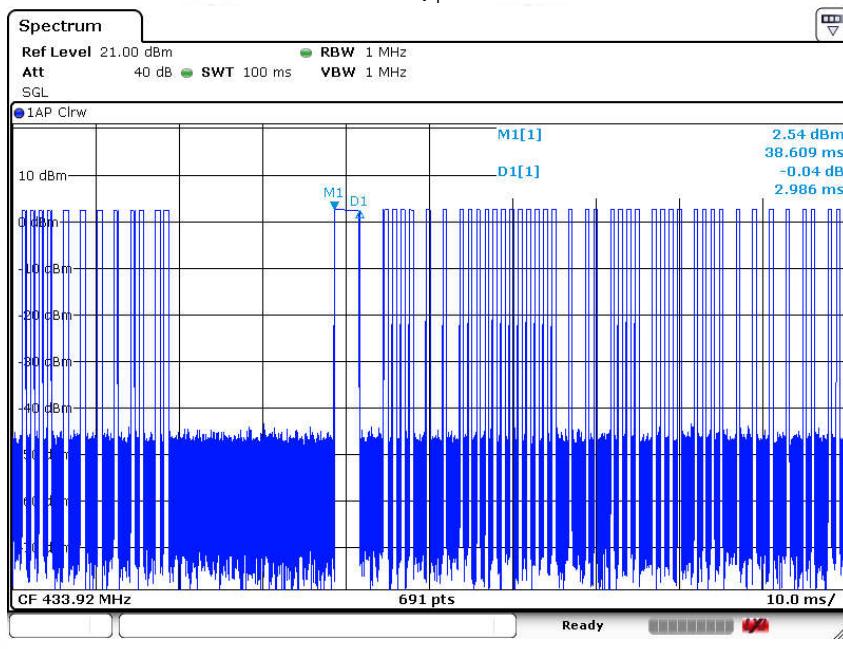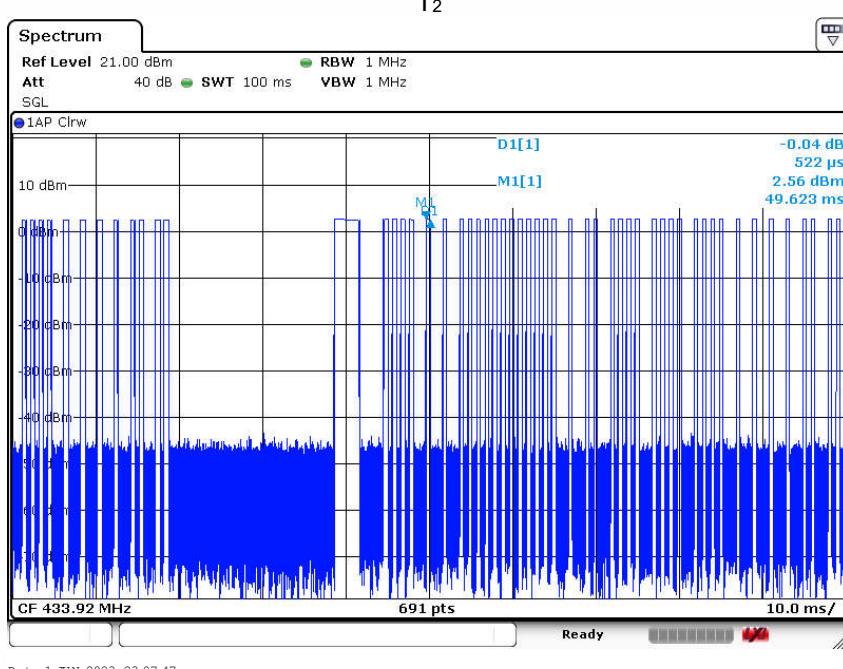T₁

 T₂


T ₁ (ms)	T ₂ (ms)	T on time (ms)	T period (ms)	Duty cycle %
2.986	0.522	30.652	100	30.652

Note: T on time= T₁*1 + T₂*53 = 2.986*1 + 0.522*53 =30.652 (ms)

Duty cycle=T on time / T period

6.2.2 Spurious Emissions

Test Requirement: 47 CFR Part 15C Section 15.231(b) and 15.209

Test Method: ANSI C63.10: 2013

Test Site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Test Setup:

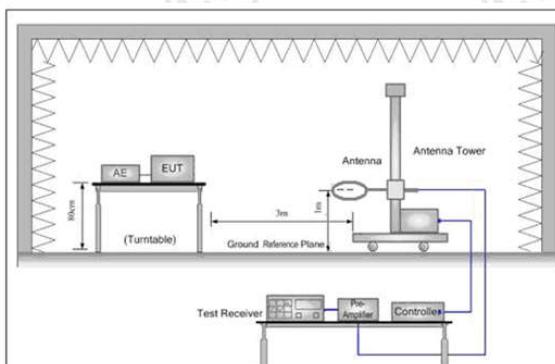


Figure 1. Below 30MHz

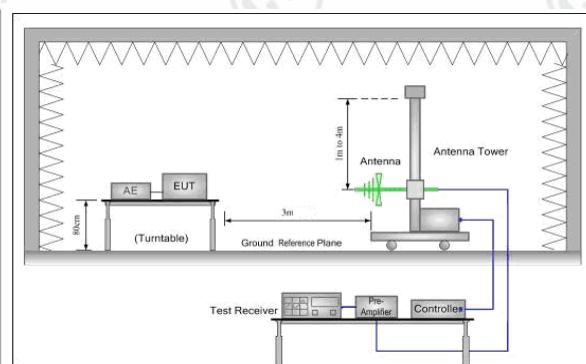


Figure 2. 30MHz to 1GHz

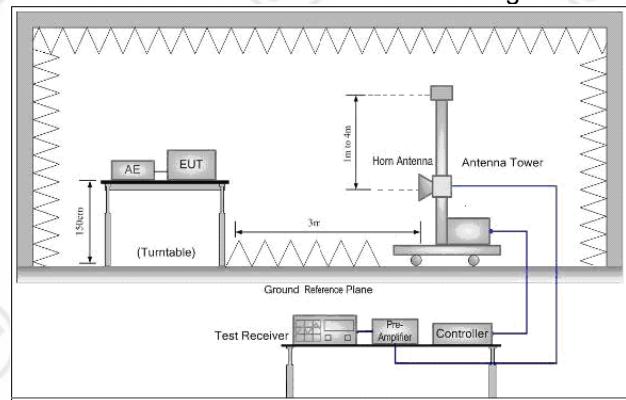


Figure 3. Above 1GHz

Test Procedure:

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the only channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

**Limit:
(Spurious Emissions)**

**Limit:
(Field strength of the fundamental signal)**

(Field strength of spurious emission)

Test Mode: Transmitting mode
Test Results: Pass

Fundamental Frequency	Limit (dB μ V/m @3m)	Remark
433.92MHz	80.8	Average Value /quasi-peak Value
	100.8	Peak Value

Limit (dB μ V/m @3m)	Remark
60.8	Average Value /quasi-peak Value
80.8	Peak Value

Spurious Emissions


9KHz-30MHz

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.


30MHz-1GHz

Horizontal:

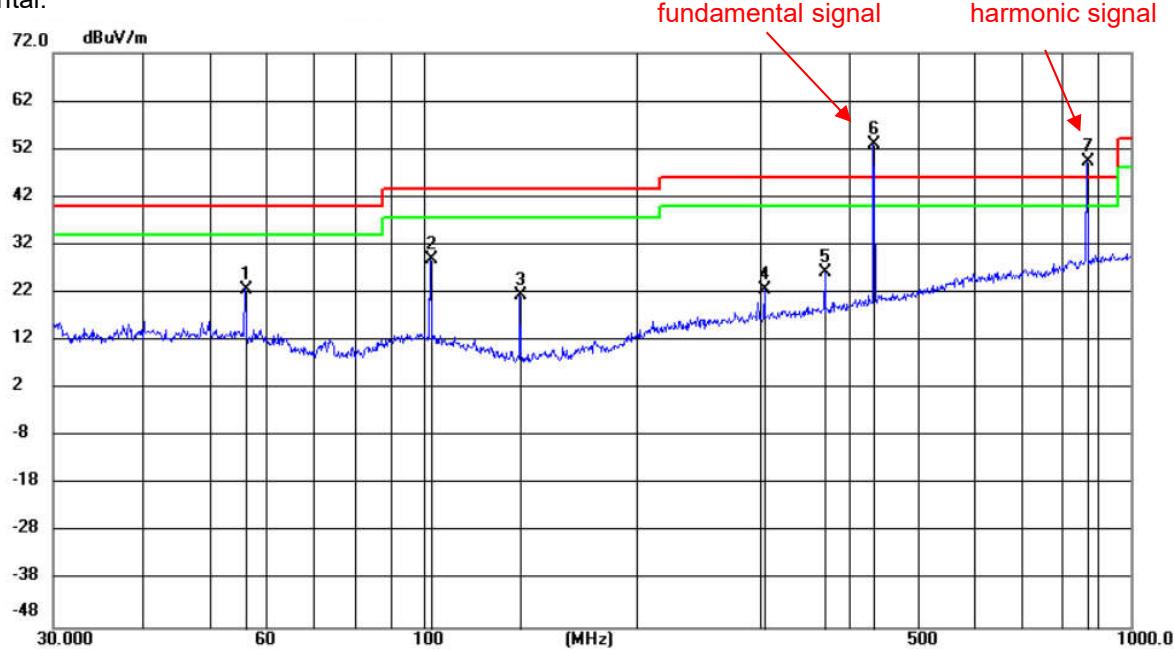

No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		Level	Factor	ment					
	MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	56.0891	8.96	13.84	22.80	40.00	-17.20	peak	100	108
2	102.6292	15.13	13.68	28.81	43.50	-14.69	peak	199	118
3	137.0833	12.31	9.28	21.59	43.50	-21.91	peak	199	148
4	304.1829	5.45	17.34	22.79	46.00	-23.21	peak	100	299
5	370.7022	7.60	18.76	26.36	46.00	-19.64	peak	100	249
6 *	433.9129	32.69	20.12	52.81	80.80	-27.99	QP	199	77
7 X	867.9120	21.51	27.76	49.27	60.80	-11.53	QP	100	108

Vertical:

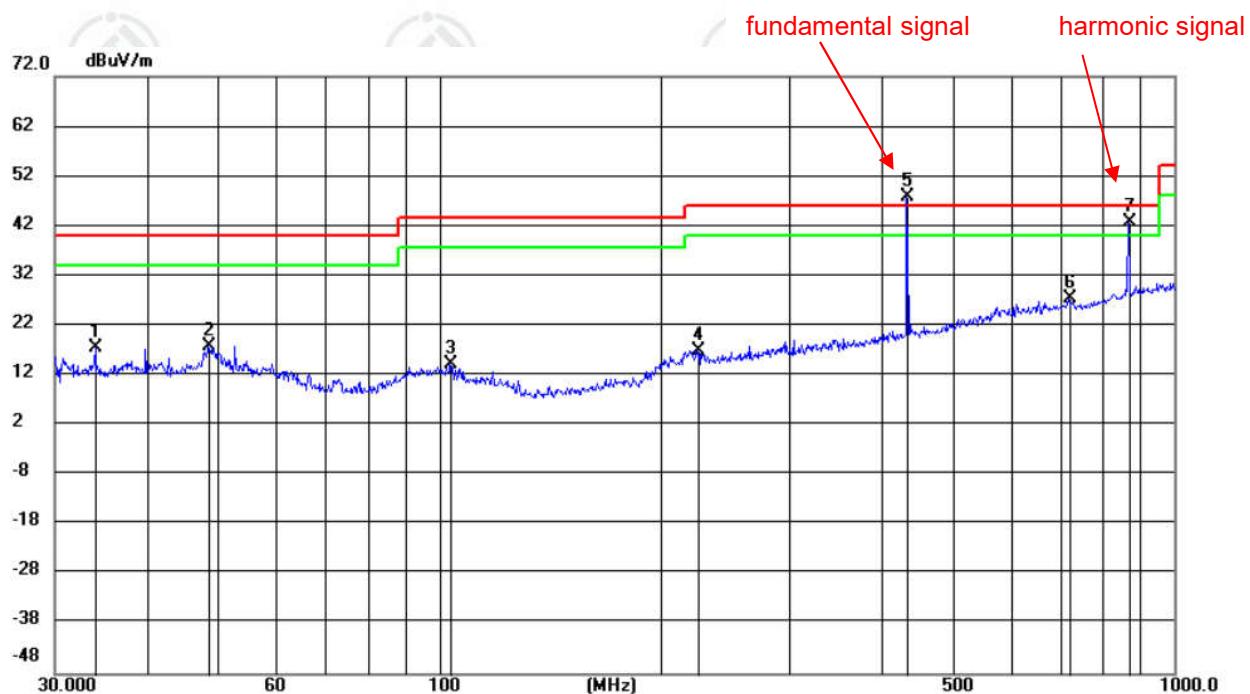

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table		
			Level	Factor	ment				Height	Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		34.1081	4.13	13.49	17.62	40.00	-22.38	peak	200	97	
2		48.5696	3.54	14.31	17.85	40.00	-22.15	peak	100	352	
3		103.5328	0.62	13.54	14.16	43.50	-29.34	peak	100	352	
4		225.2684	2.42	14.66	17.08	46.00	-28.92	peak	200	249	
5	*	433.9129	27.63	20.12	47.75	80.80	-33.05	QP	100	35	
6		719.5778	2.40	25.07	27.47	46.00	-18.53	peak	100	146	
7	!	867.9120	14.96	27.76	42.72	60.80	-18.08	QP	200	359	

Above 1GHz

Average value:	
Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	T on time =30.652ms
	T period =100ms
	PDCF=-10.27

Horizontal:

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1301.63	1.06	43.83	44.89	80.8	35.91	PASS	Horizontal	PK
		--	--	34.62	60.8	26.18	PASS	Horizontal	AV
2	2169.517	4.12	40.93	45.05	80.8	35.75	PASS	Horizontal	PK
		--	--	34.78	60.8	26.02	PASS	Horizontal	AV
3	3905.06	-19.09	74.36	55.27	80.8	25.53	PASS	Horizontal	PK
		--	--	45	60.8	15.8	PASS	Horizontal	AV

Vertical:

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1815.082	3.39	46.42	49.81	80.8	30.99	PASS	Vertical	PK
		--	--	39.54	60.8	21.26	PASS	Vertical	AV
2	3905.06	-19.09	77.38	58.29	80.8	22.51	PASS	Vertical	PK
		--	--	48.02	60.8	12.78	PASS	Vertical	AV
3	4773.118	-16.32	67.77	51.45	80.8	29.35	PASS	Vertical	PK
		--	--	41.18	60.8	19.62	PASS	Vertical	AV

Remark:


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor
- 2) Scan from 9kHz to 5GHz, the disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) Average value=Peak value + PDCF

6.3 20dB Bandwidth

Test Requirement: IEC 15.231 (c)

Test Method:

Test Setup:

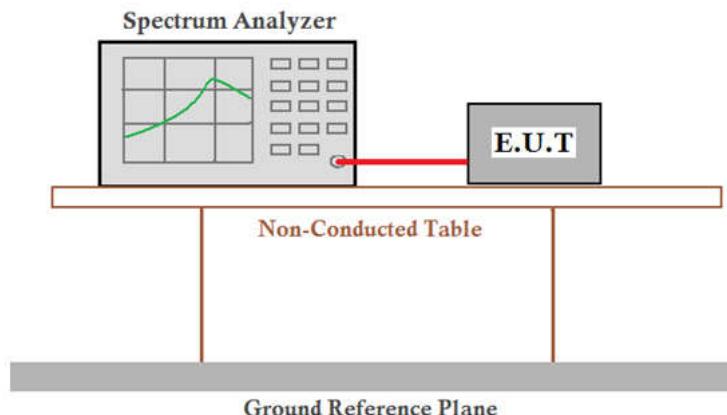

Limit:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.


Test Mode: Transmitting mode

Test Results: Pass

Test data

20dB bandwidth (MHz)	Limit (MHz)	Results
0.05137	1.0848	PASS


Test plot as follows:

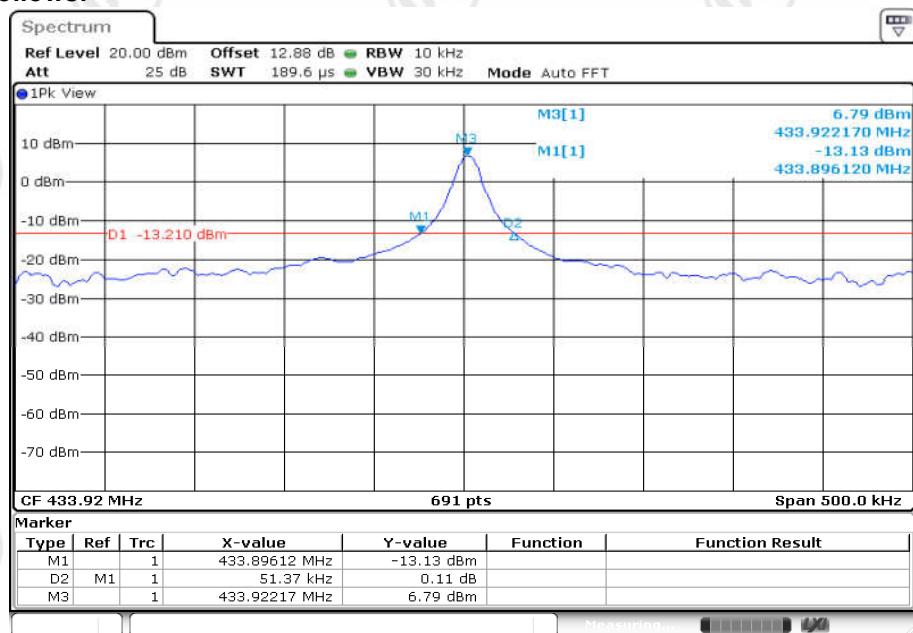

6.4 Dwell Time

Test Requirement: 47 CFR Part 15C Section 15.231 (a)
Test Method: ANSI C63.10:2013

Test Setup:

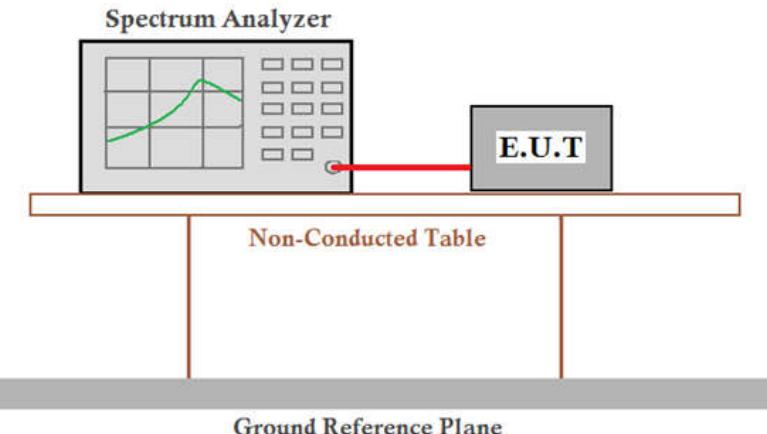

Limit: Not more than 5 seconds
Test Mode: Transmitting mode
Test Results: Pass

Requirements:

1. Regulation 15.231 (a) The provisions of this Section are restricted to periodic operation within the band 40.66~40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Radio control of toys is not permitted. Continuous transmissions, such as voice or video, and data transmissions are not permitted. The prohibition against data transmissions does not preclude the use of recognition codes. Those codes are used to identify the sensor that is activated or to identify the particular component as being part of the system.

Result:

The EUT is a remote switch without audio or video transmitted.


The EUT meets the requirements of this section.

2. Regulation 15.231 (a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Result:

Test item	Limit (S)	Results (S)
Transmitting time	≤5	0.2174

Test plot as follows:

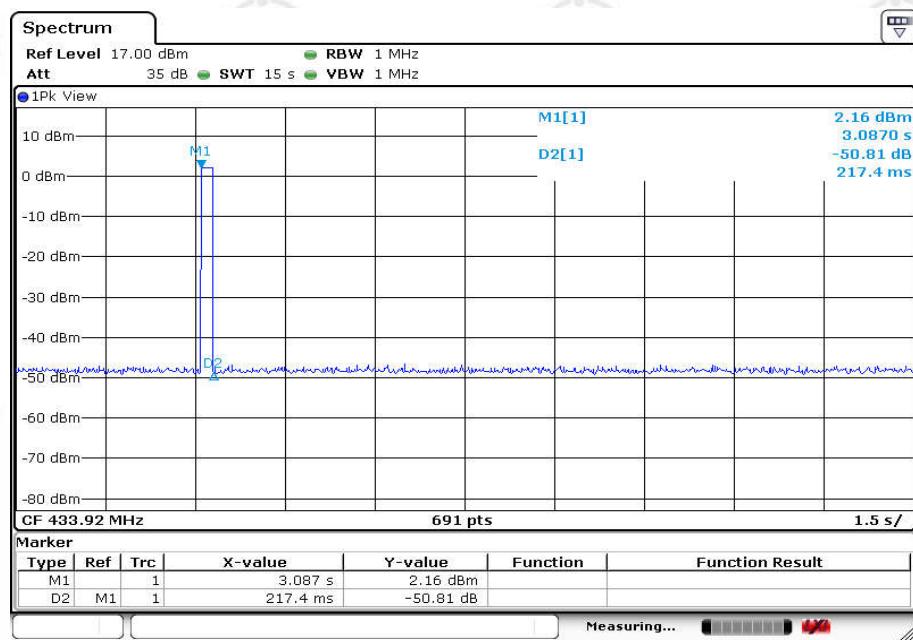

3. Regulation 15.231 (a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Result:

The EUT does not have automatic transmission.

4. Regulation 15.231 (a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

Result:

The EUT does not employ periodic transmission.

5. Regulation 15.231 (a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

Result:

This section is not applicable to the EUT.