
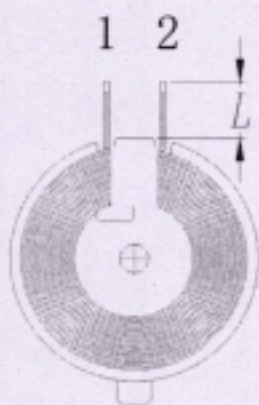
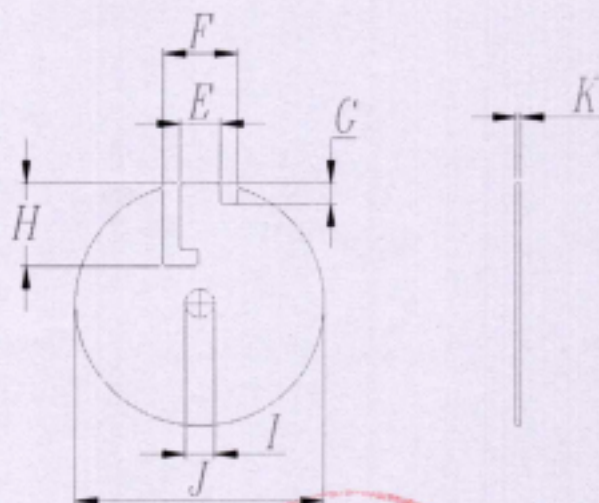


Plane structure drawing: Unit: MM

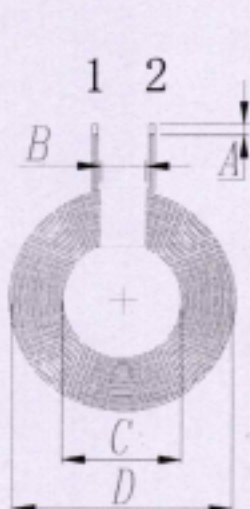

A	3.051
B	8
C	20.5±0.2
D	40±1
E	7±0.3
F	13±0.5
G	4.0±0.5
H	14.5±0.5
I	5.2±0.2
J	43.5±0.5
K	0.5±0.1
L	10±1
M	1.3±0.1

Dongguan Jieruisi Technology Co., Ltd

Address: 2nd Floor, No. 152 Guanchang Road, Dongguan City, Guangdong Province

一.Product parameters:

Foot position	Wire diameter	Number of turns	Remark
1-2	0.08*24*2P	10	Hot air stranding wire

二.Technical requirements:

- 1, fix the end of the wire to prevent the phenomenon of loose and broken lines
2. According to customer requirements, cut the too long thread, plated with tin, and the plating depth is $3\pm 1\text{MM}$
- 3, point the appropriate white glue on the magnetic disc, paste the coil, and ensure that the product surface is clean and tidy in the process
- 4, the soft magnetic sheet is with round holes, without damage
5. Additional processes (according to customer requirements) : The back of the finished product is affixed with a diameter of 42mm round double-sided tape, after packaging

三 : Electrical parameters:

1. Inductance value, Q value:

PIN 1-2= $6.3\text{UH}\pm 5\%$

Q value ≥ 42

The above inductance values are based on Quanhua 1062A instrument, 10KHZ/0.3Vrms as the standard or equivalent instrument.

Q value is based on Quanhua 1062A instrument, 100KHZ/0.3Vrms as standard or equivalent instrument