

FCC TEST REPORT

FCC ID:2BBEP-2961

On Behalf of

Shantou Chaoyang District Ruoxin Trading Co., Ltd

Bluetooth headset

Model No.: 2961

Prepared for : Shantou Chaoyang District Ruoxin Trading Co., Ltd
Address : No. 3, Shangyi Lane, Xianbo Shuizha, Gurao Town, Chaoyang
District, Shantou City, China

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2504003-C01-R04
Date of Receipt : March 28, 2025
Date of Test : March 28, 2025-April 10, 2025
Date of Report : April 10, 2025
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description	9
2.6. Software test version and power setting information	9
2.7. Test Conditions	10
2.8. Test Facility	10
2.9. Measurement Uncertainty	10
2.10. Test Equipment List	11
3. Maximum Peak Output Power	12
3.1. Limit	12
3.2. Test Procedure	12
3.3. Test Setup	12
3.4. Test Result	12
4. Bandwidth	13
4.1. Limit	13
4.2. Test Procedure	13
4.3. Test Result	13
5. Carrier Frequency Separation	25
5.1. Limit	25
5.2. Test Procedure	25
5.3. Test Result	25
6. Number Of Hopping Channel	31
6.1. Limit	31
6.2. Test Procedure	31
6.3. Test Result	31
7. Dwell Time	33
7.1. Test limit	33
7.2. Test Procedure	33
7.3. Test Result	33
8. Out-of-band Emissions	43
8.1. Test Limits	43
8.2. Test Procedure	43
8.3. Test Setup	43
8.4. Test Results	43
9. Radiated Emissions	68
9.1. Limit	68
9.2. Block Diagram of Test setup	71

9.3. Test Procedure	72
9.4. Test Results	72
10. Band Edge Test	80
10.1. Block Diagram of Test Setup	80
10.2. Test Limit	80
10.3. Test Procedure	80
10.4. Test Results	81
11. Power Line Conducted Emissions	84
11.1. Block Diagram of Test Setup	84
11.2. Limit	84
11.3. Test Procedure	84
11.4. Test Results	85
12. Frequency stability	88
12.1. Test limit	88
12.2. Test Procedure	88
12.3. Test Setup	88
12.4. Test Results	88
13. Antenna Requirements	89
13.1. Limit	89
13.2. Result	89
14. Photos of test setup	90
15. Photos of EUT	90

TEST REPORT DECLARATION

Applicant : Shantou Chaoyang District Ruoxin Trading Co., Ltd

Address : No. 3, Shangyi Lane, Xianbo Shuizha, Gurao Town, Chaoyang District, Shantou City, China

Manufacturer : Shantou Chaoyang District Ruoxin Trading Co., Ltd

Address : No. 3, Shangyi Lane, Xianbo Shuizha, Gurao Town, Chaoyang District, Shantou City, China

EUT Description : Bluetooth headset

(A) Model No. : 2961

(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247


ANSI C63.10:2013

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part 15C requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....: Felix Pang
Test Engineer


.....

Approved by (name + signature).....: Simple Guan
Project Manager


.....

Date of issue.....: April 10, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	April 10, 2025	Initial released Issue	Felix Pang



1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1), RSS-247(5.4 b), ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215, RSS-247(5.1 a), ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1), RSS-247(5.1 b), ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1), RSS-247(5.1 d),ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1), RSS-247(5.1 d),ANSI C63.10 :2013	P
Radiated Spurious Emission	FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10 :2013	P
Out-of-band Emissions	FCC Part 15: 15.247(d), RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10 :2013	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d), RSS-Gen(6.13), RSS-247(5.5), ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207, RSS-GEN(8.8),ANSI C63.10 :2013	P
Frequency stability	RSS-GEN(6.11)	N/A
Antenna requirement	FCC Part 15: 15.203, RSS-GEN(6.8)	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty. 5. Measurement method usage KDB 558074 D01 15.247 Meas Guidance v05r02.		

2. General Information

2.1. Description of Device (EUT)

Product Name : Bluetooth headset

Model No. : 2961

Diff : The product has different colored shells, and this test used EUT with white shells. the test data of EUT with white shell can represent the remaining colors.

Power supply : Input: DC 5 V or DC 3.7V powered by battery

Radio Technology : Bluetooth EDR

Operation frequency : 2402-2480MHz

Channel No. : 79 channels

Channel Separation : 1MHz

Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK

Antenna Type : PCB antenna, maximum gain is -0.58dBi.

PMN : N/A

HVIN : N/A

Software version : N/A

Hardware version/FVIN : N/A

Note : Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.

2.2. Accessories of Device (EUT)

Accessories 1 : N/A
Manufacturer : N/A
Model : N/A
Rating : N/A

2.3. Tested Supporting System Details


No.	Description	Manufacturer	Model	Serial Number
1	AC Adapter	HUAWEI	HW-050450C00	N/A
2	N/A	N/A	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators

Conducted Emission



Radiated Emission



2.5. Test Mode Description

The test software used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK / Pi/4-DQPSK / 8DPSK Carrier Tx Mode	CH0	2402
	CH39	2441
	CH78	2480
GFSK / Pi/4-DQPSK / 8DPSK hopping on Tx Mode	CH0 to CH78	2402 to 2480
GFSK / Pi/4-DQPSK / 8DPSK hopping off Tx Mode	CH0	2402
	CH39	2441
	CH78	2480

2.6. Software test version and power setting information

Software testing version	FCC_BT_Tool V1.0.9		
Mode	The client 's preset testing software is used to control the operation of EUT in continuous transmission mode and select the testing channel, wireless mode:		
Power level setup by client			
Mode	Channel	Frequency (MHz)	Soft Set
GFSK, Pi/4-DQPSK, 8DPSK	CH0	2402	TX level is set as defaults value.
	CH39	2441	TX level is set as defaults value.
	CH78	2480	TX level is set as defaults value.

2.7. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.8. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

2.9. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V)
	2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Conducted-Spurious Emission	1.26dB

2.10. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G18 G-45dB	SK202203290 1	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118G -45	SK202001080 1	/	2024.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02- 1111533-Fz	/	2024.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P00 8	/	2024.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	202211251638	/	2024.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2024.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2024.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2024.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2024.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2024.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2024.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer		Version			
RE	EZ EMC	Farad		PSI-3A1			
CE	EZ EMC	Farad		PSI-3A1			
RF	RTS	TACHOY		V1.0.0			

3. Maximum Peak Output Power

3.1. Limit


Please refer FCC part 15.247 & RSS-247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power meter. The Power meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Mode	Frequency (MHz)	Total Power (dBm)	Limit (dBm)	Verdict
1-DH5	2402	-4.73	21	Pass
1-DH5	2441	-4.33	21	Pass
1-DH5	2480	-5.36	21	Pass
2-DH5	2402	-0.58	21	Pass
2-DH5	2441	-0.29	21	Pass
2-DH5	2480	-1.29	21	Pass
3-DH5	2402	-0.32	21	Pass
3-DH5	2441	0.1	21	Pass
3-DH5	2480	-0.93	21	Pass

4. Bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in RSS-GEN, FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.807	Pass
NVNT	1-DH5	2441	Ant1	0.94	Pass
NVNT	1-DH5	2480	Ant1	0.925	Pass
NVNT	2-DH5	2402	Ant1	1.257	Pass
NVNT	2-DH5	2441	Ant1	1.263	Pass
NVNT	2-DH5	2480	Ant1	1.256	Pass
NVNT	3-DH5	2402	Ant1	1.315	Pass
NVNT	3-DH5	2441	Ant1	1.296	Pass
NVNT	3-DH5	2480	Ant1	1.318	Pass



Test Graphs



-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1


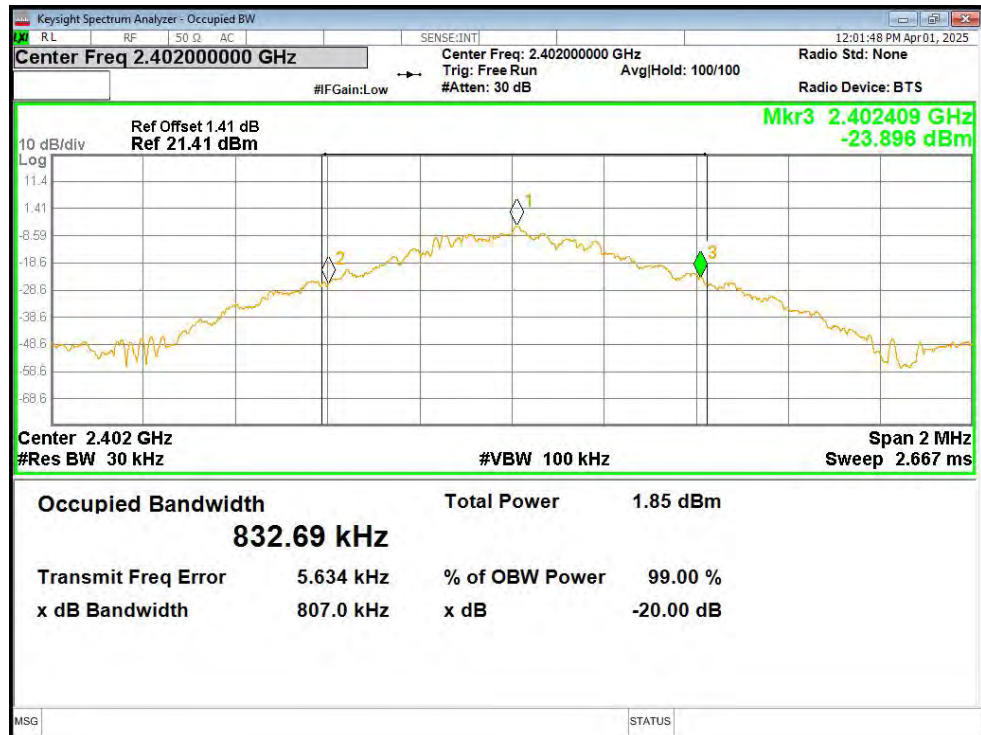



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

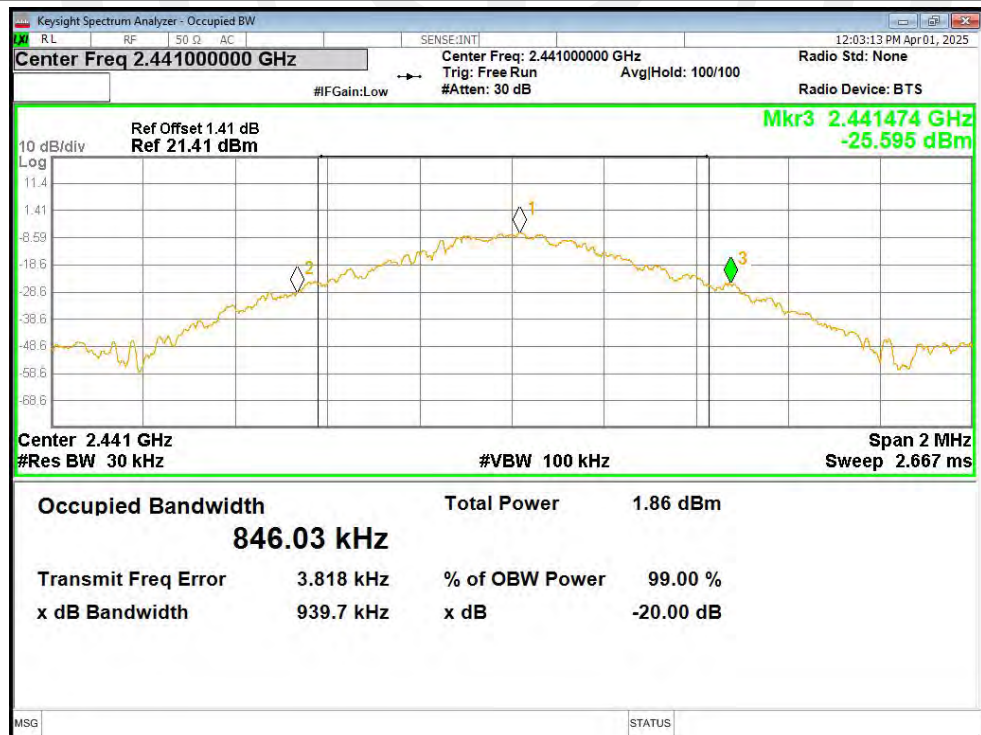

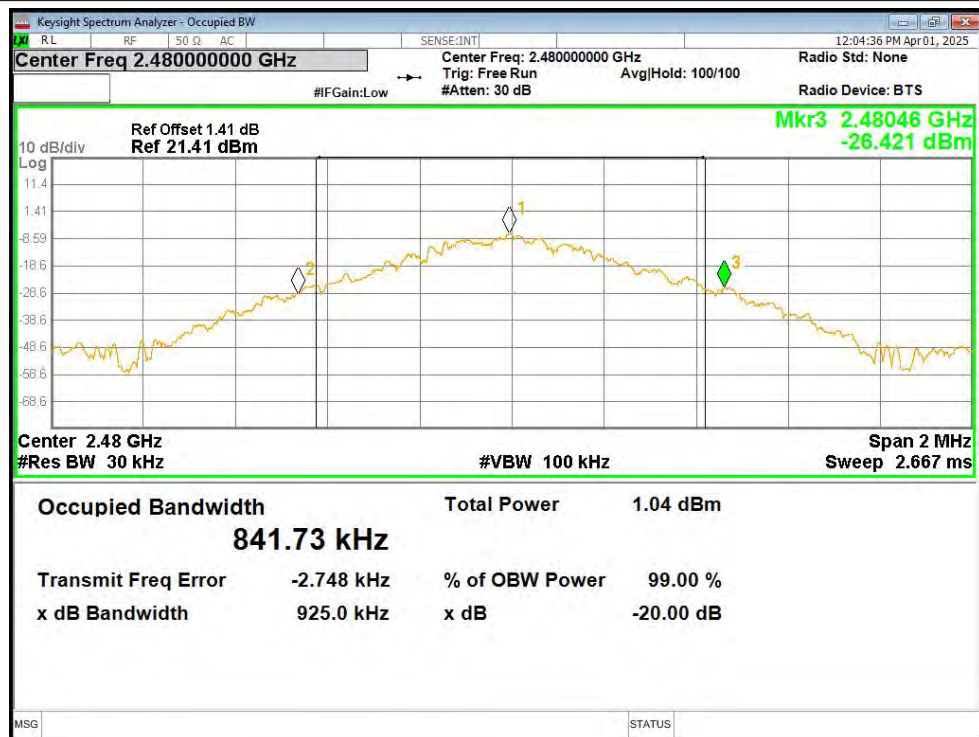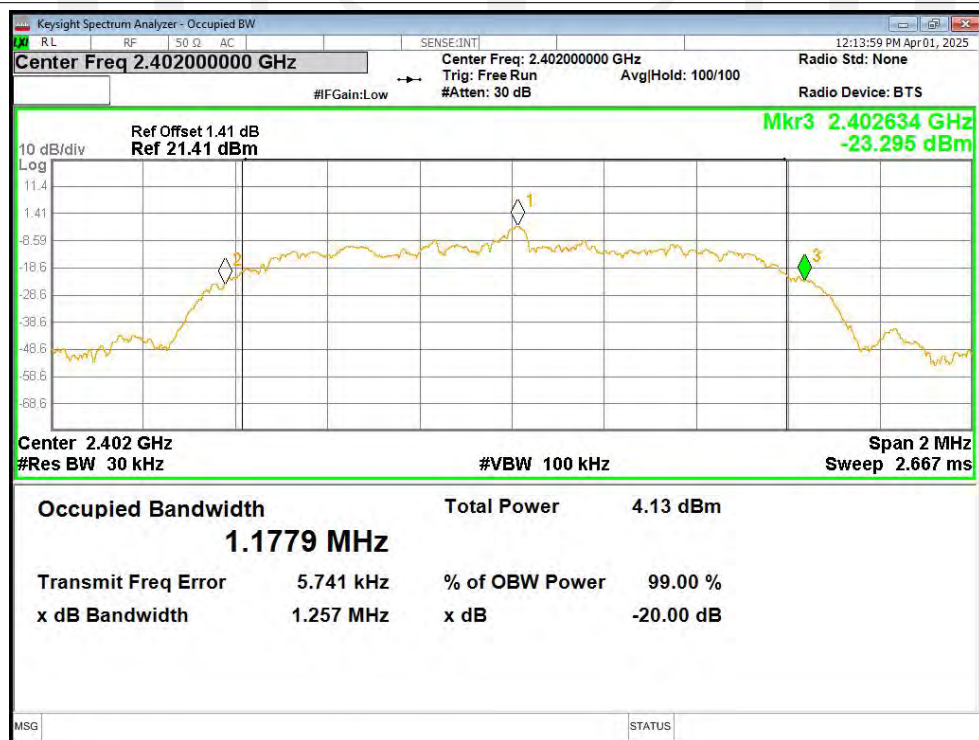-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1**-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1**

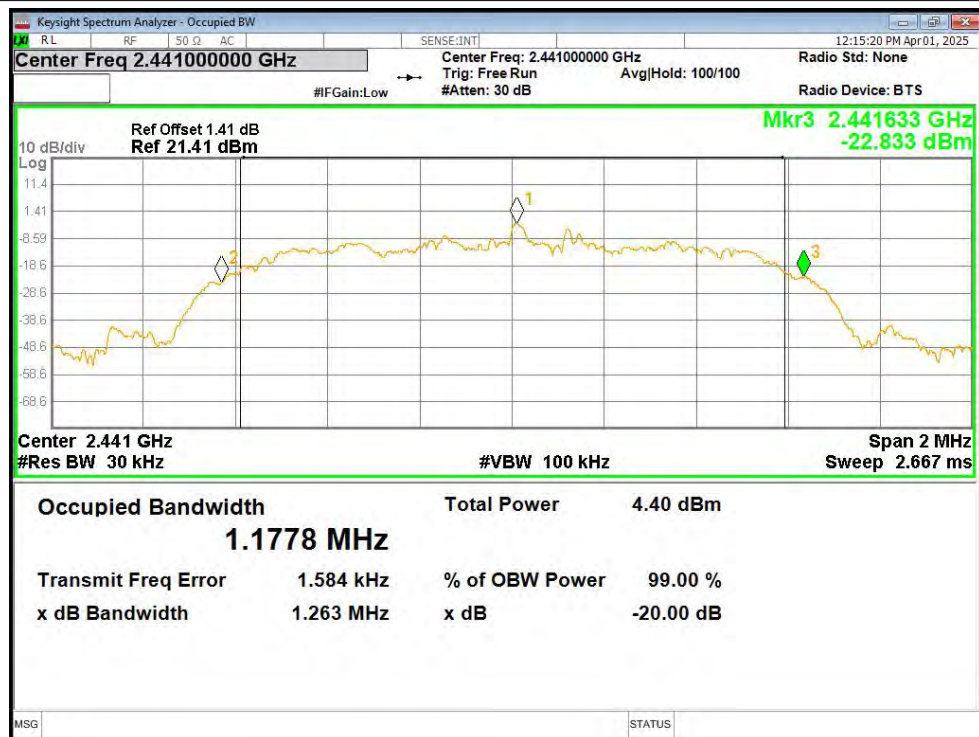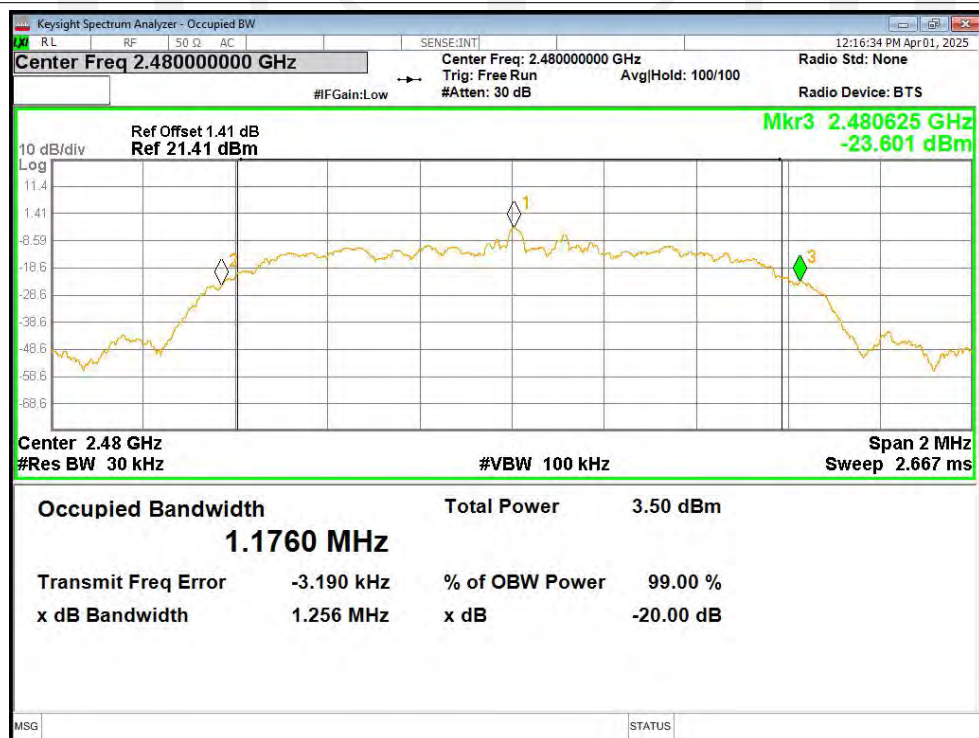
-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1**-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1**

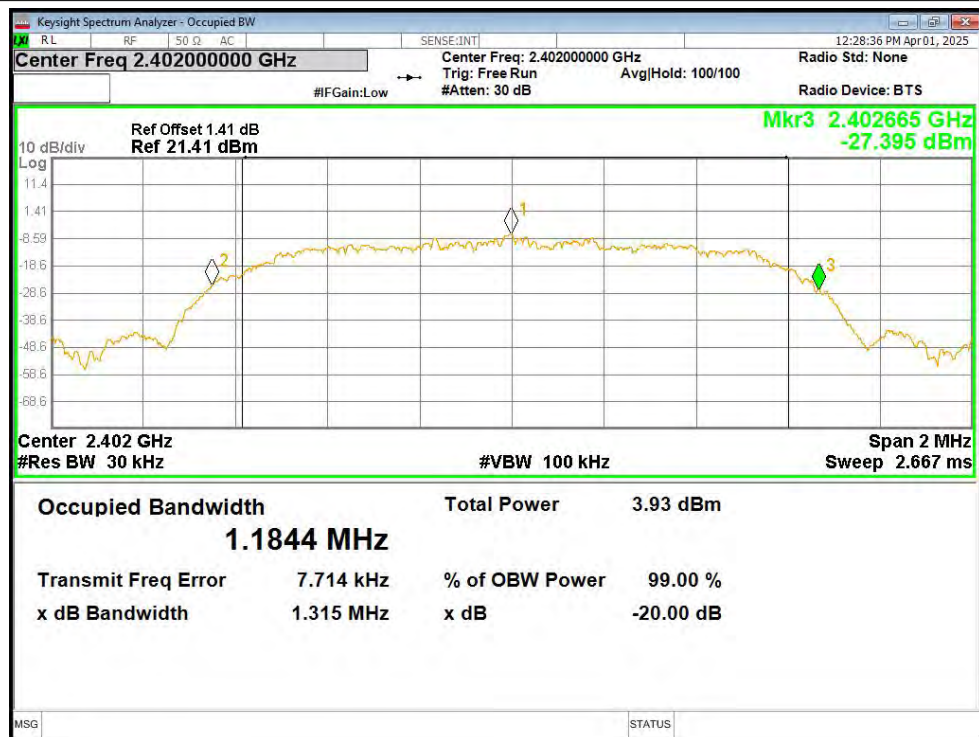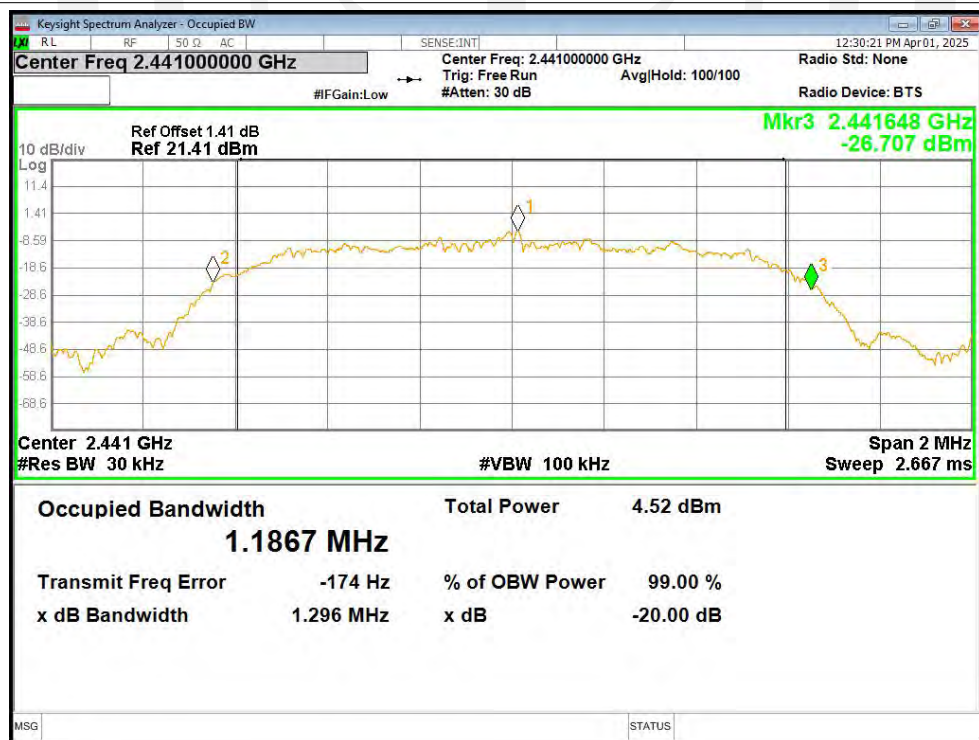-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1**-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1**

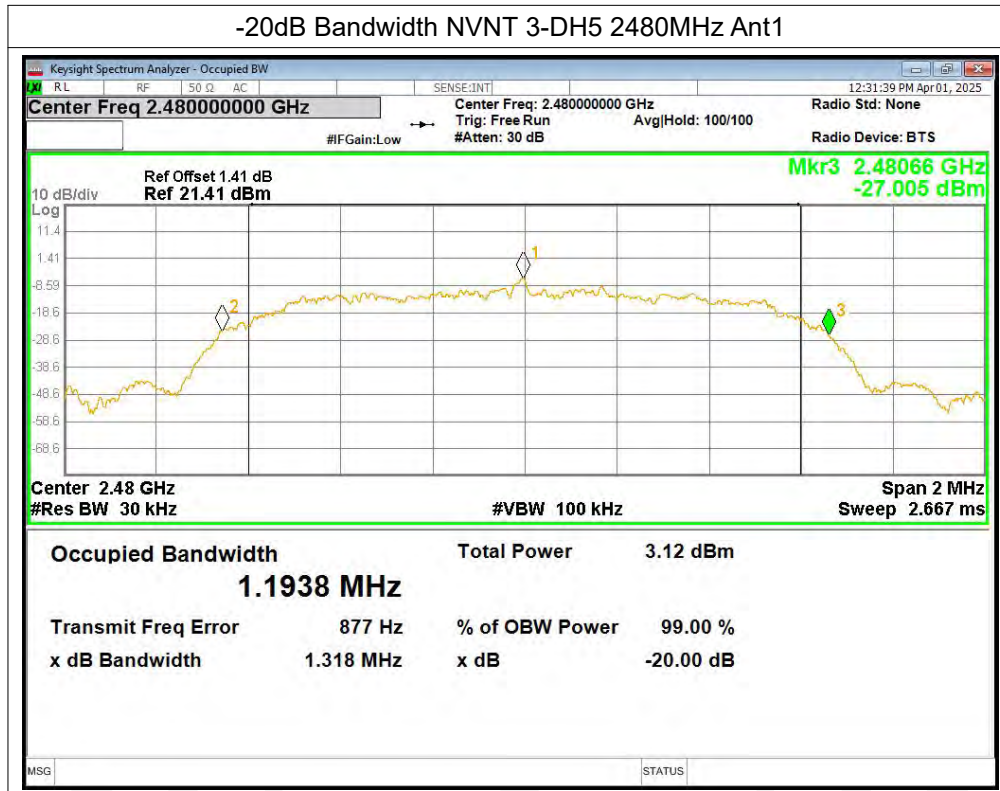


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.846
NVNT	1-DH5	2441	Ant1	0.83
NVNT	1-DH5	2480	Ant1	0.84
NVNT	2-DH5	2402	Ant1	1.19
NVNT	2-DH5	2441	Ant1	1.193
NVNT	2-DH5	2480	Ant1	1.187
NVNT	3-DH5	2402	Ant1	1.181
NVNT	3-DH5	2441	Ant1	1.188
NVNT	3-DH5	2480	Ant1	1.178

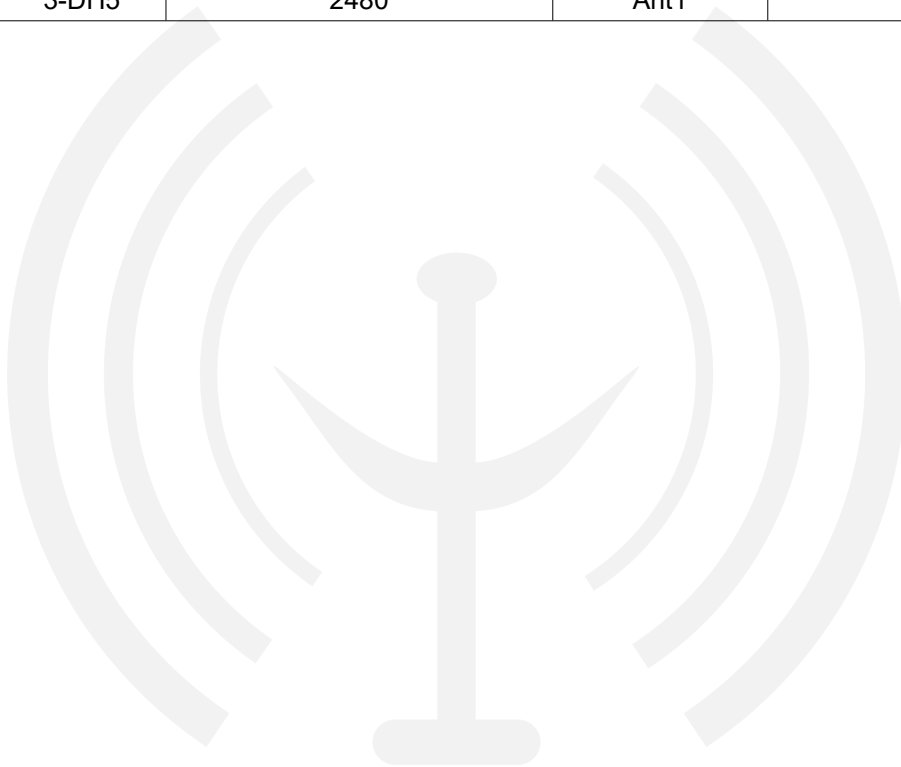


Test Graphs


OBW NVNT 1-DH5 2402MHz Ant1

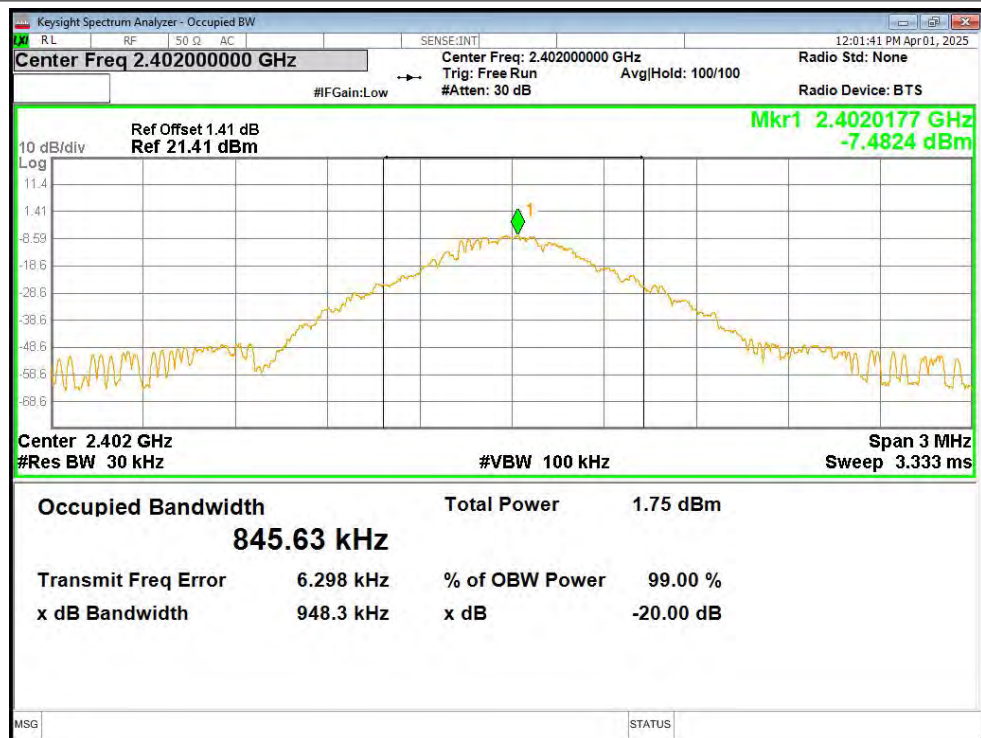


OBW NVNT 1-DH5 2441MHz Ant1

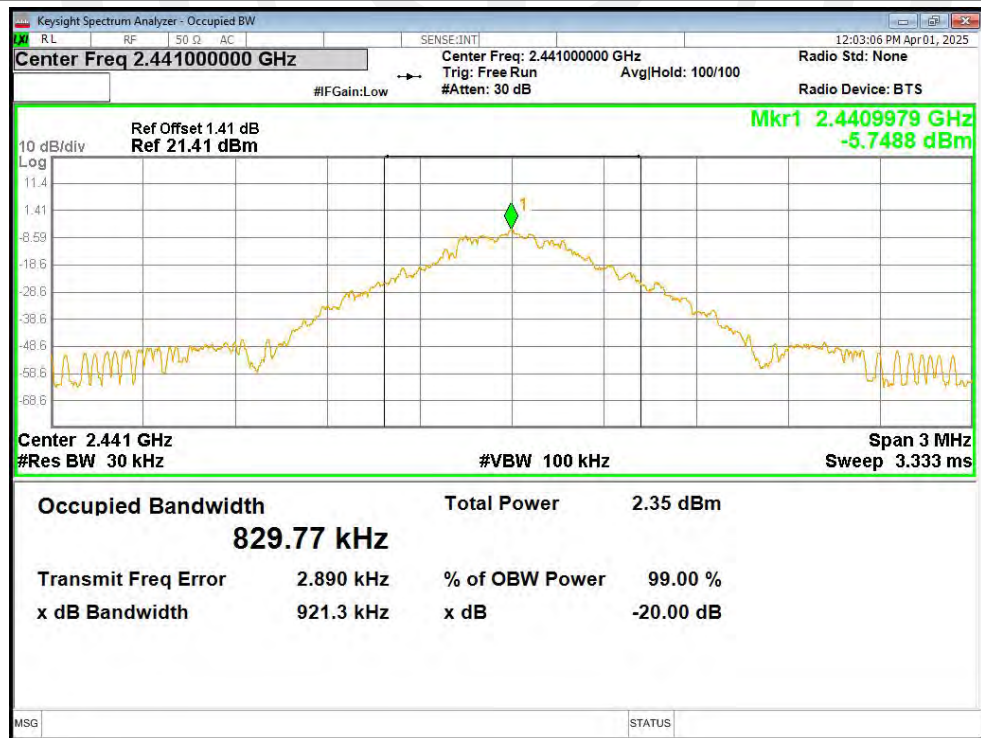


OBW NVNT 1-DH5 2480MHz Ant1

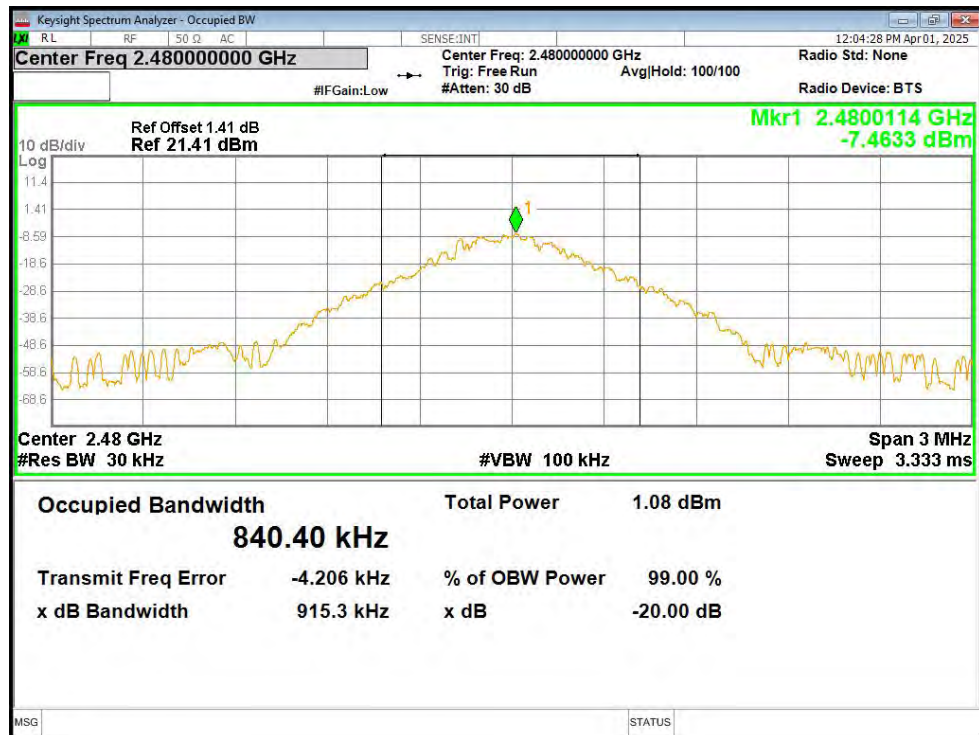


OBW NVNT 2-DH5 2402MHz Ant1

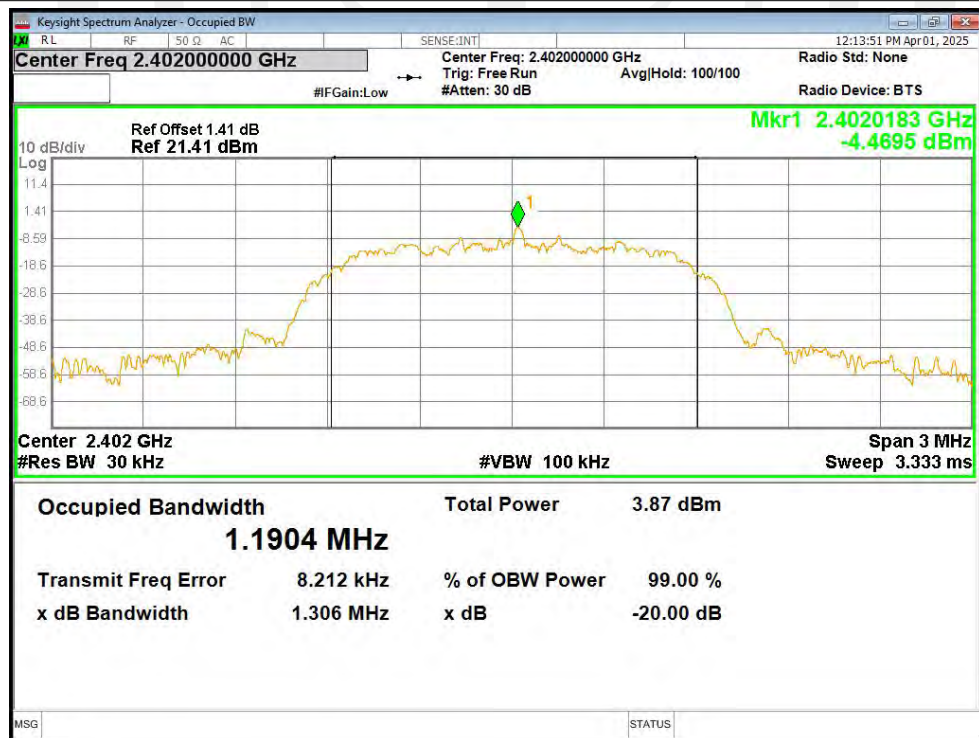


OBW NVNT 2-DH5 2441MHz Ant1

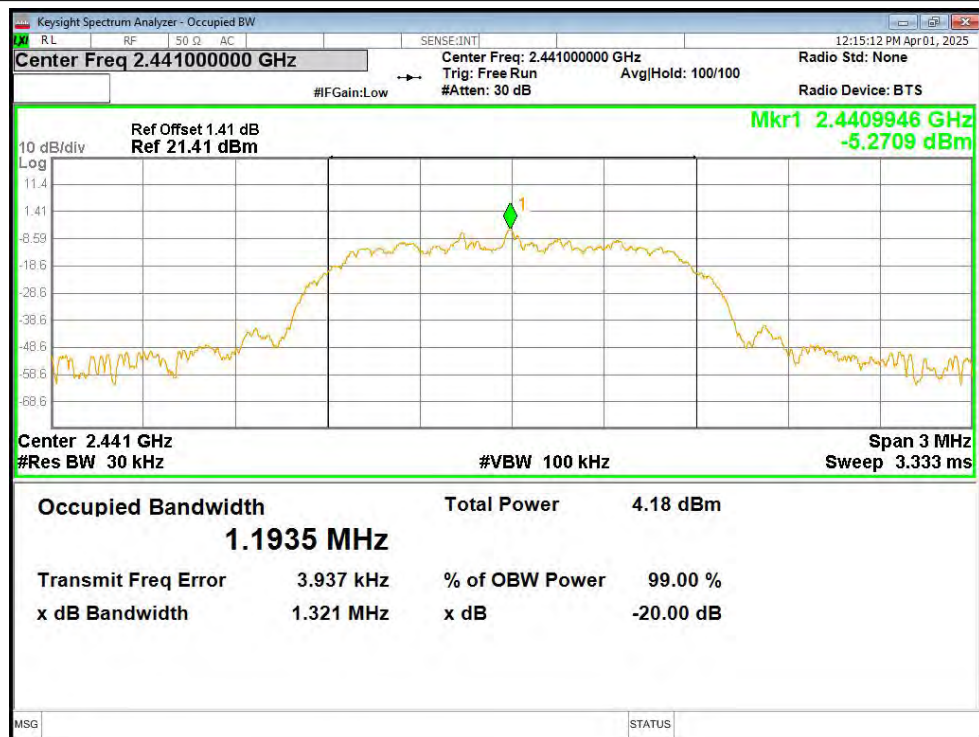


OBW NVNT 2-DH5 2480MHz Ant1

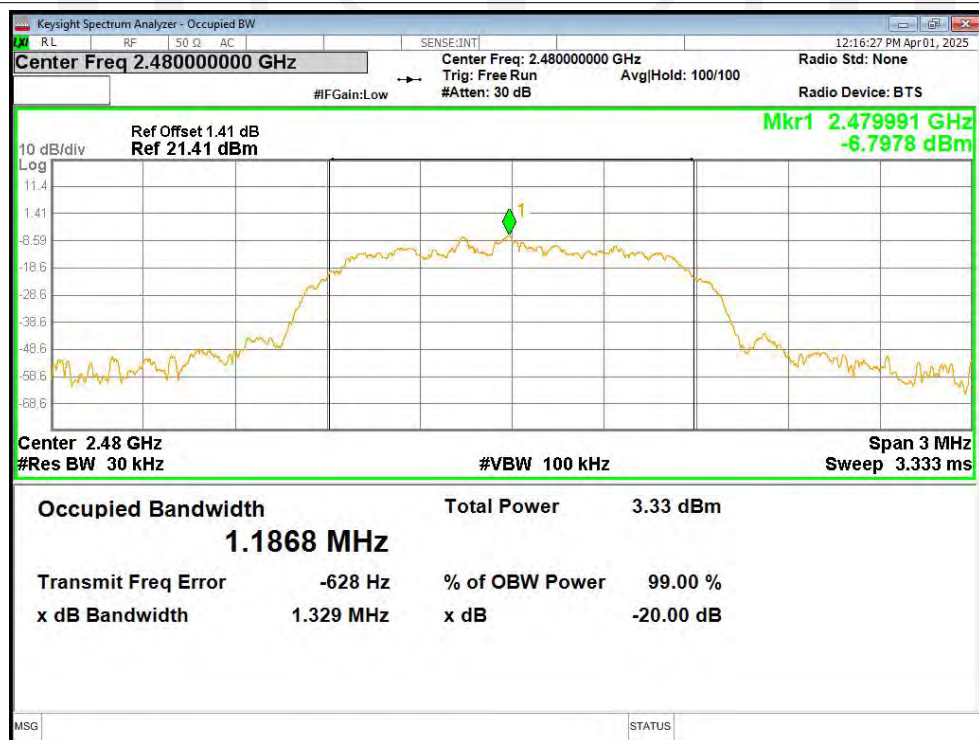


OBW NVNT 3-DH5 2402MHz Ant1

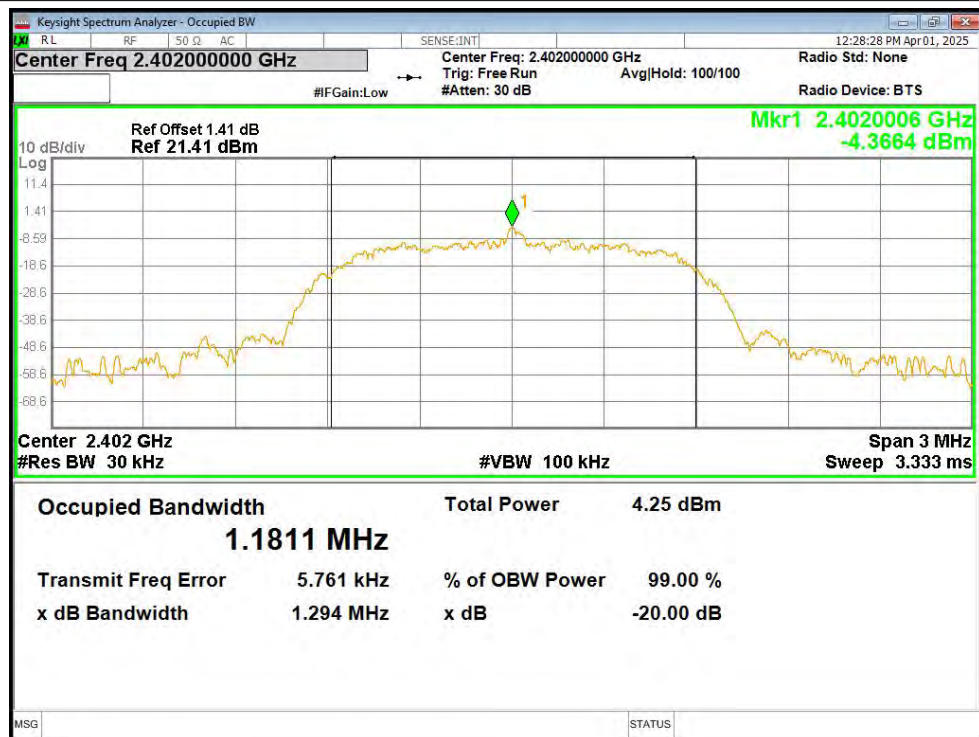

OBW NVNT 3-DH5 2441MHz Ant1

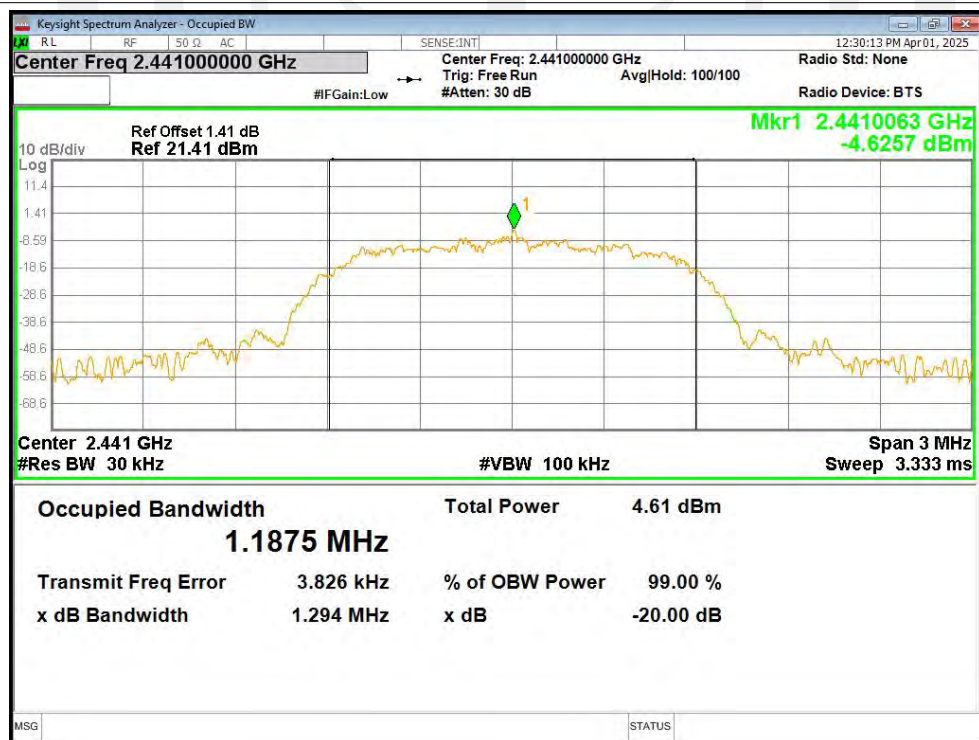

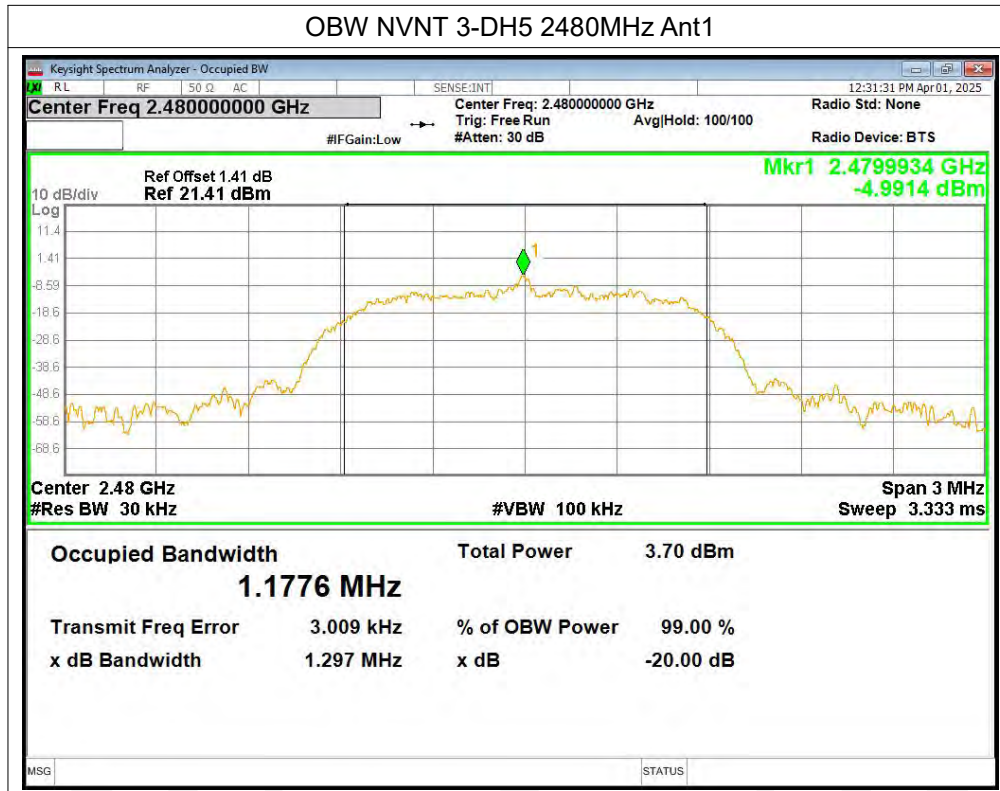

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW
Please refer FCC part 15.247 & RSS-247.

5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.

5.3. Test Result

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402	2403.154	1.154	0.538	Pass
NVNT	1-DH5	Ant1	2440.84	2441.844	1.004	0.627	Pass
NVNT	1-DH5	Ant1	2478.834	2480.006	1.172	0.617	Pass
NVNT	2-DH5	Ant1	2401.818	2403.156	1.338	0.838	Pass
NVNT	2-DH5	Ant1	2440.996	2442.136	1.14	0.842	Pass
NVNT	2-DH5	Ant1	2478.846	2479.986	1.14	0.837	Pass
NVNT	3-DH5	Ant1	2401.988	2402.994	1.006	0.877	Pass
NVNT	3-DH5	Ant1	2440.994	2441.988	0.994	0.864	Pass
NVNT	3-DH5	Ant1	2479.156	2480.156	1	0.879	Pass

Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1




CFS NVNT 1-DH5 2441MHz Ant1




CFS NVNT 1-DH5 2480MHz Ant1




CFS NVNT 2-DH5 2402MHz Ant1

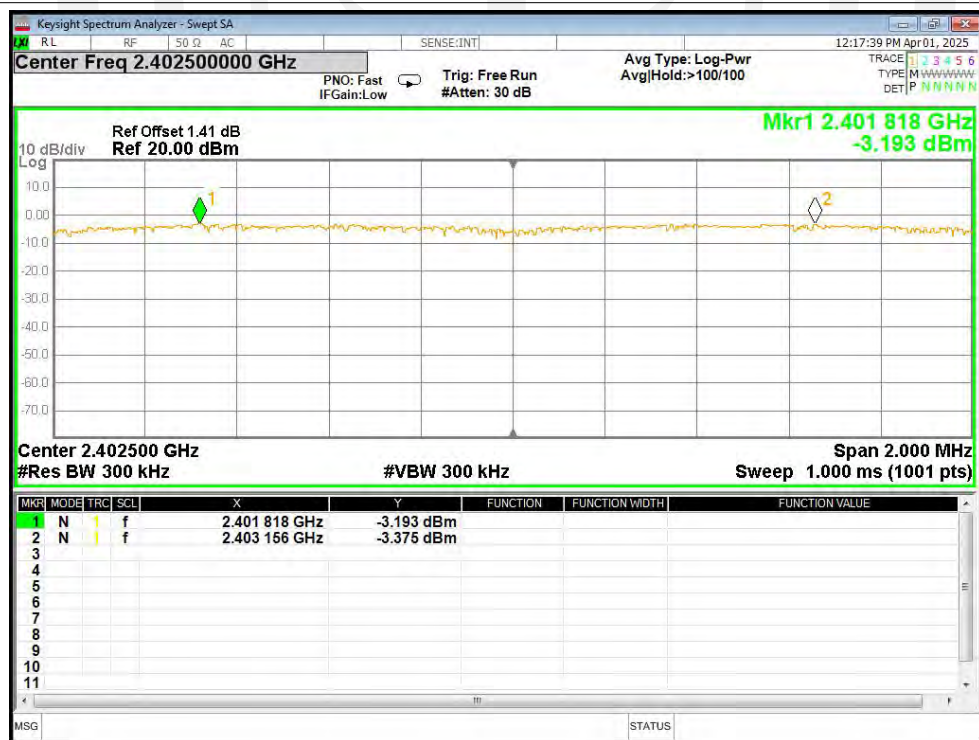

CFS NVNT 2-DH5 2441MHz Ant1

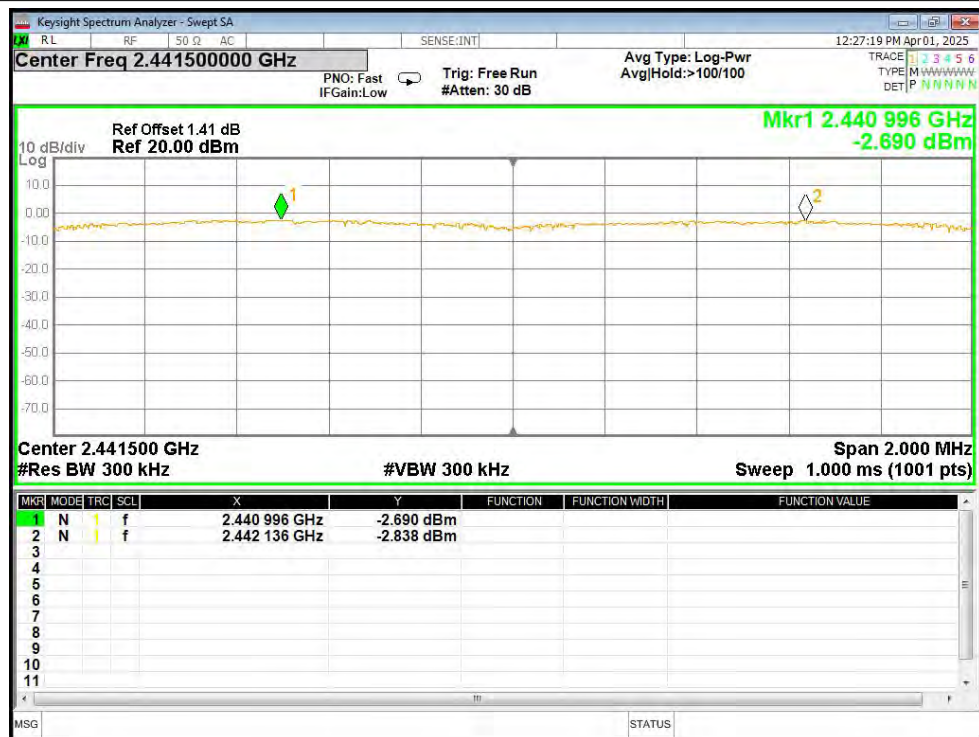


CFS NVNT 2-DH5 2480MHz Ant1

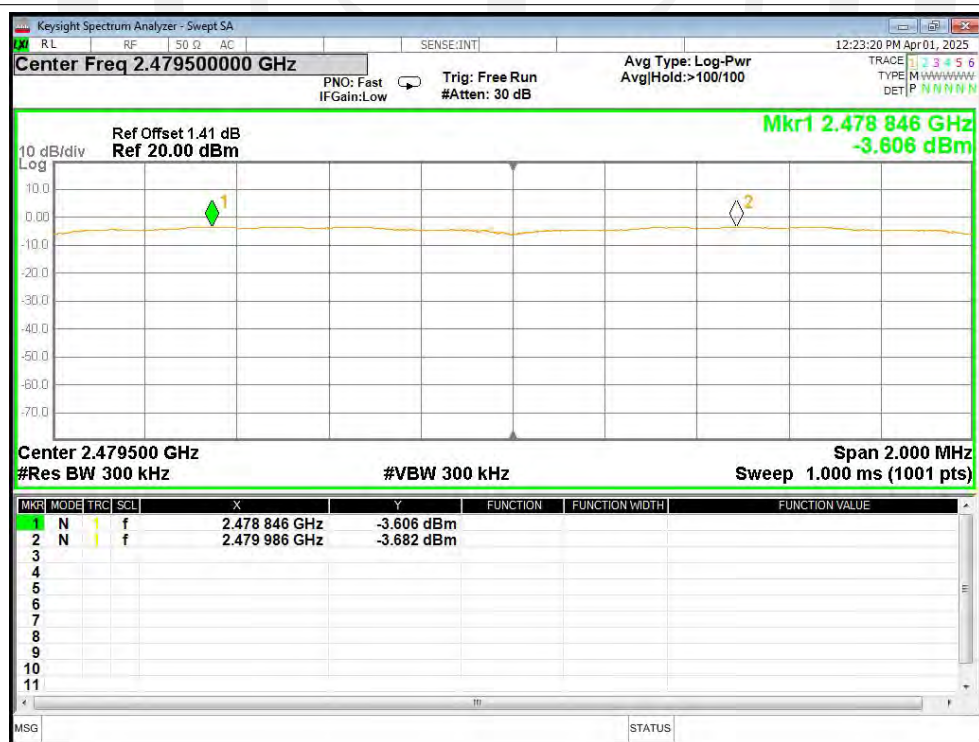


CFS NVNT 3-DH5 2402MHz Ant1



CFS NVNT 3-DH5 2441MHz Ant1

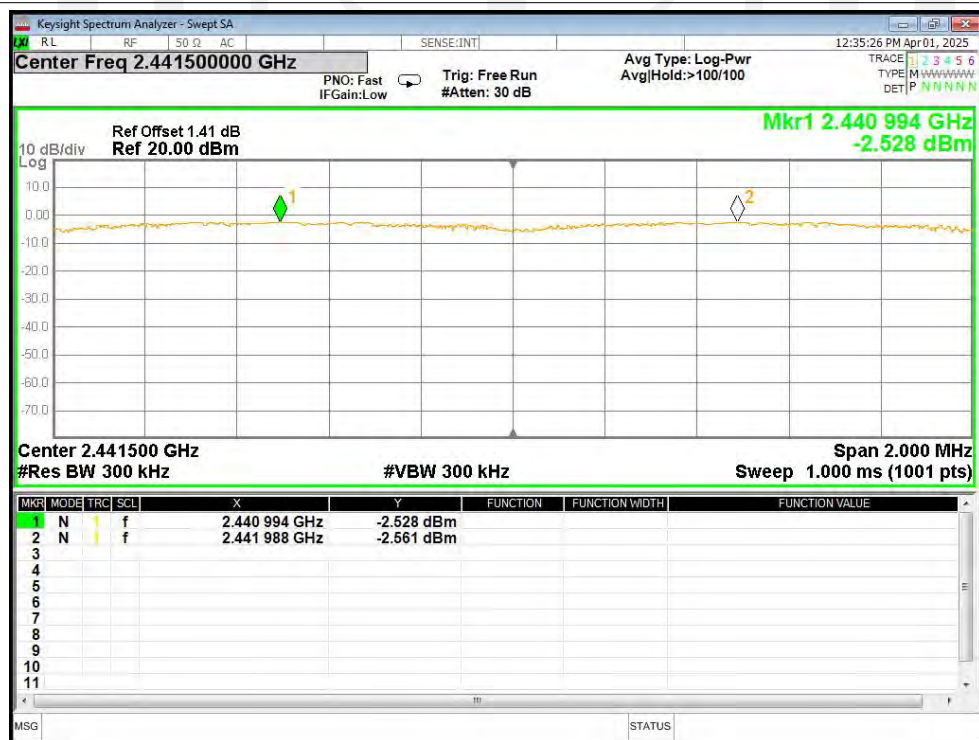

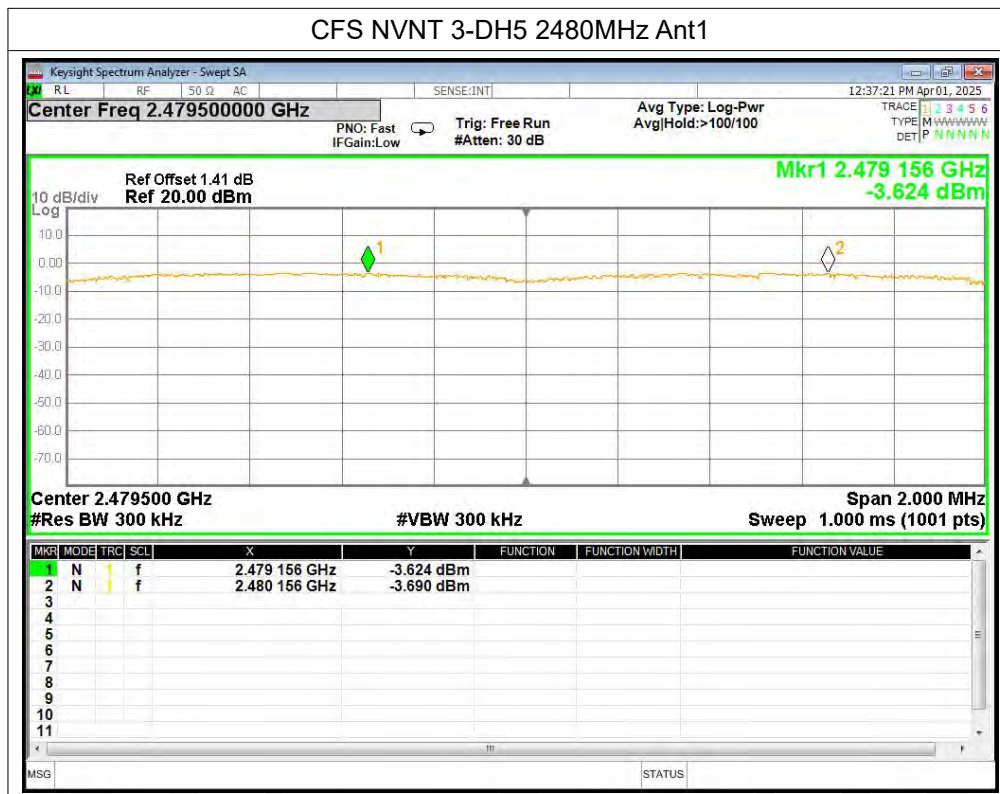

6. Number Of Hopping Channel

6.1. Limit


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Please refer FCC part 15.247 & RSS-247.

6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result

Modulation	Hopping Num	Limit	Result
1-DH5	79	15	Pass
2-DH5	79	15	Pass
3-DH5	79	15	Pass

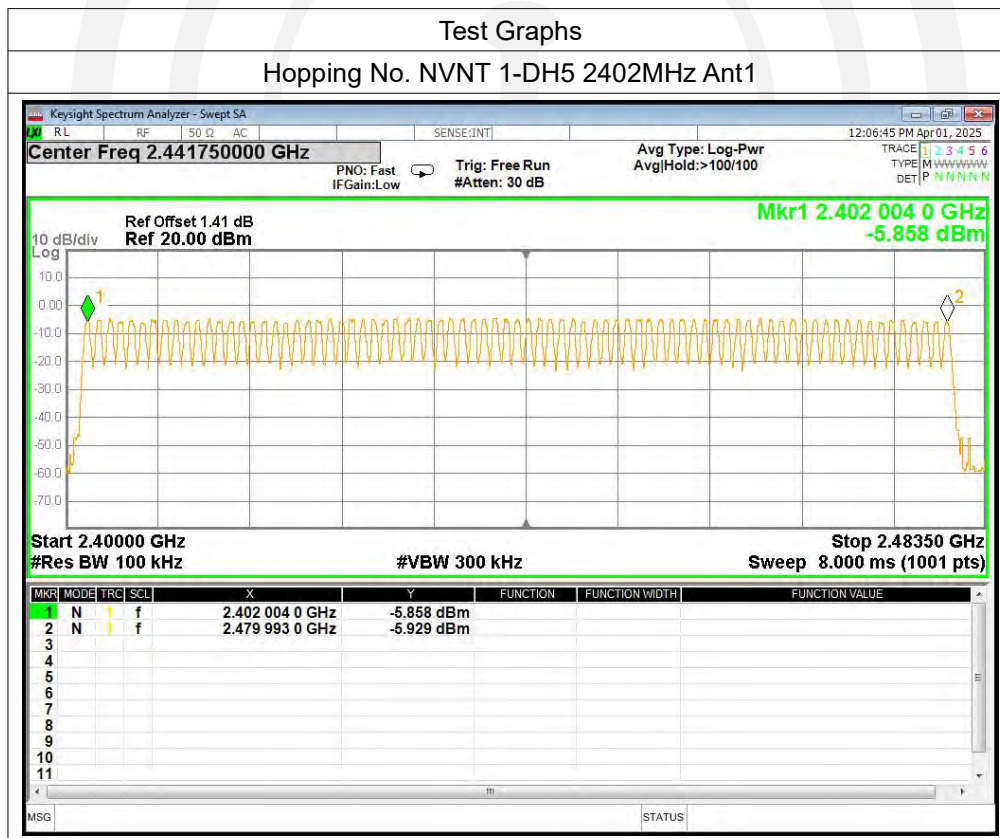

Hopping No. NVNT 2-DH5 2402MHz Ant1



Hopping No. NVNT 3-DH5 2402MHz Ant1



7. Dwell Time

7.1. Test limit

Please refer FCC part 15.247 & RSS-247.

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 sec- onds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.2.6. The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

7.2.7. Dwell Time=Pulse Time* Hops Number

7.3. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.412	131.84	320	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.668	268.548	161	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.916	326.592	112	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.422	133.774	317	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.674	256.122	153	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.922	280.512	96	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.423	133.668	316	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.673	282.737	169	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.924	327.488	112	31600	400	Pass

Test Graphs

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst




Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated



Dwell NVNT 1-DH3 2441MHz Ant1 One Burst




Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

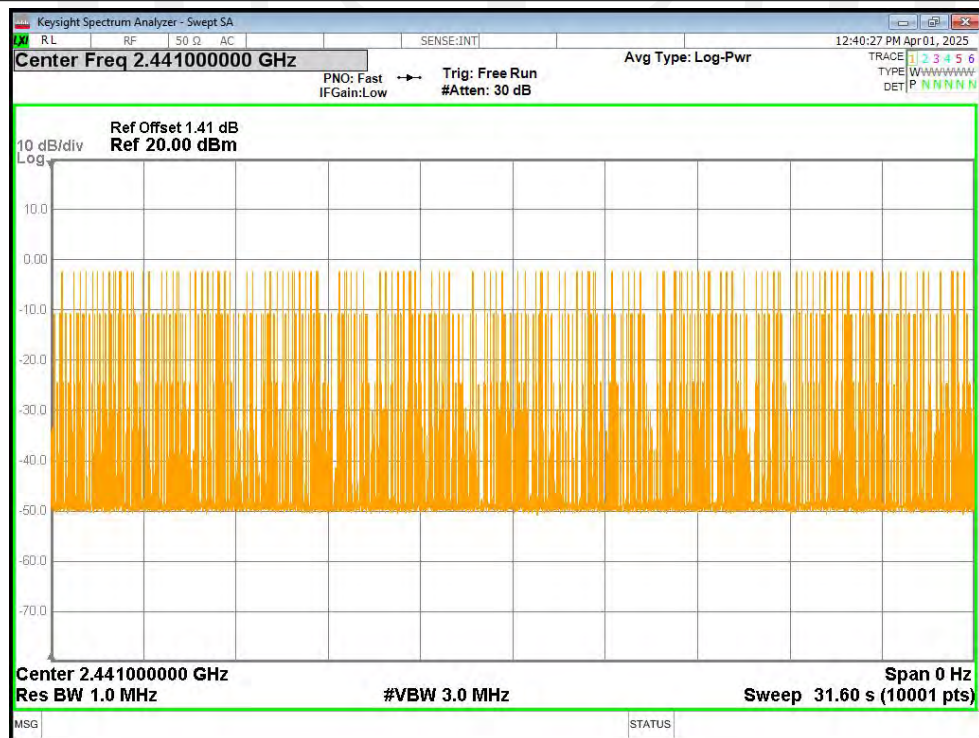

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst




Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

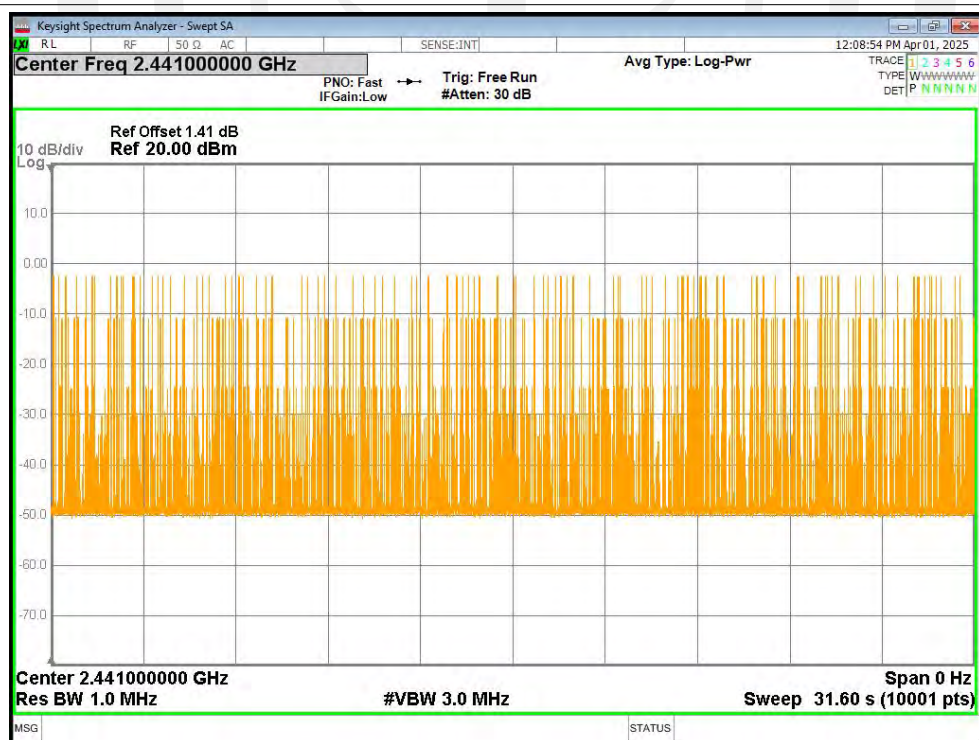

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst




Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

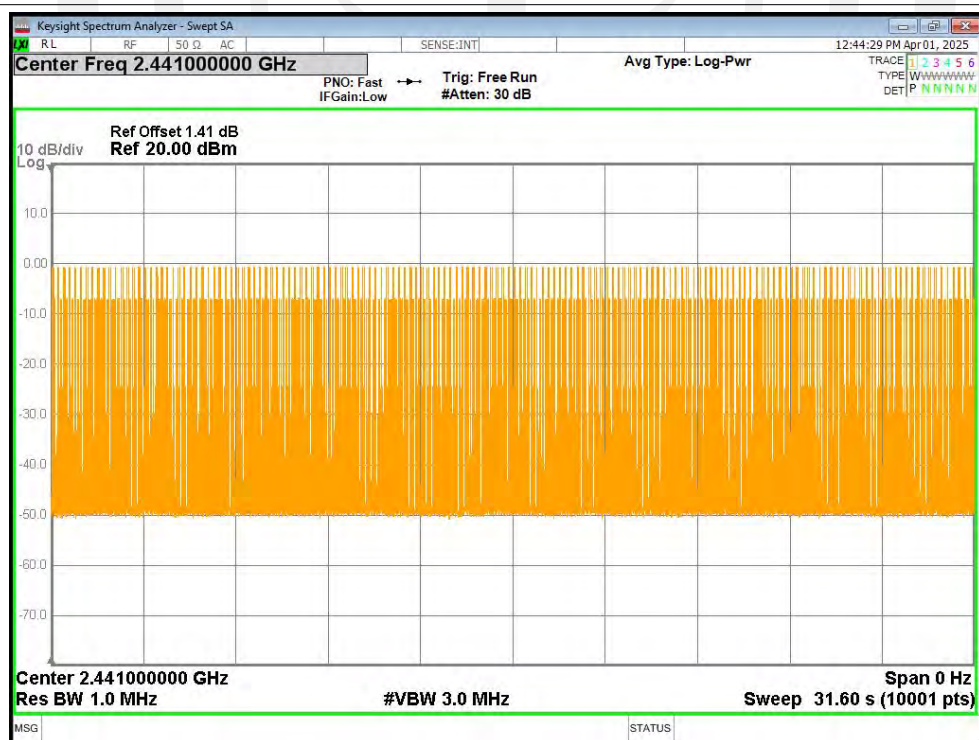

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst




Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

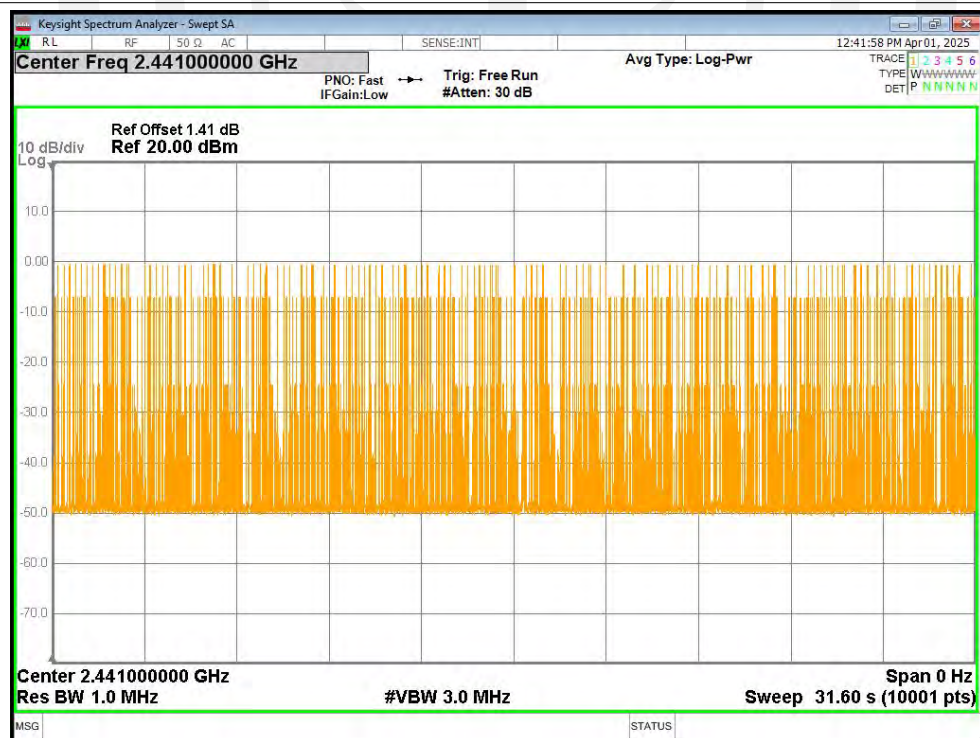

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst




Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

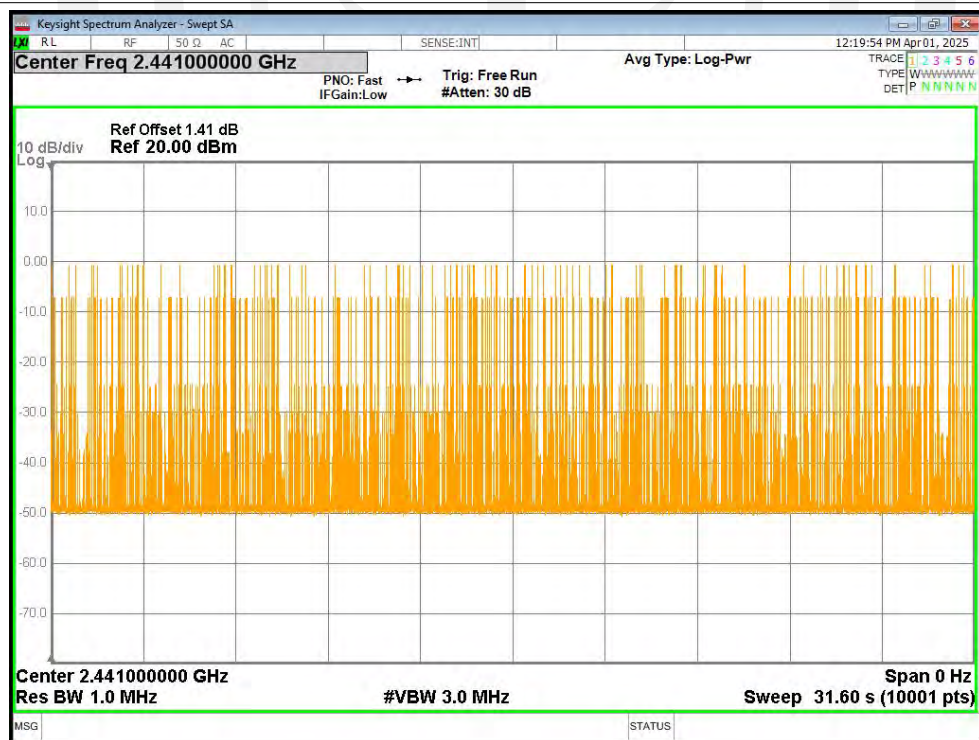

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst




Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

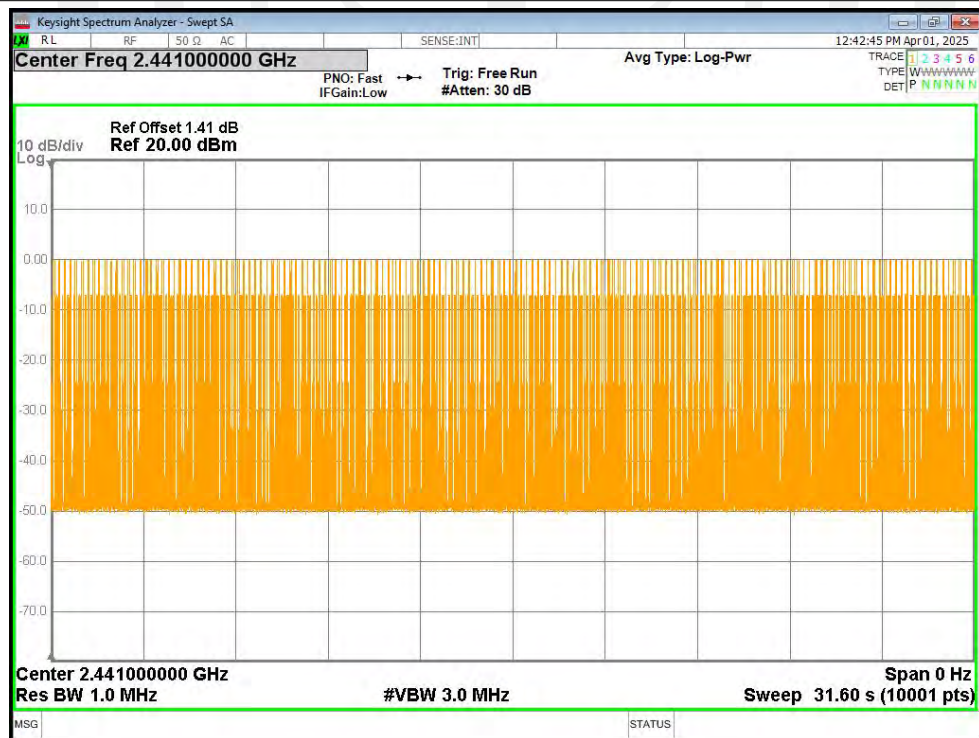

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst




Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

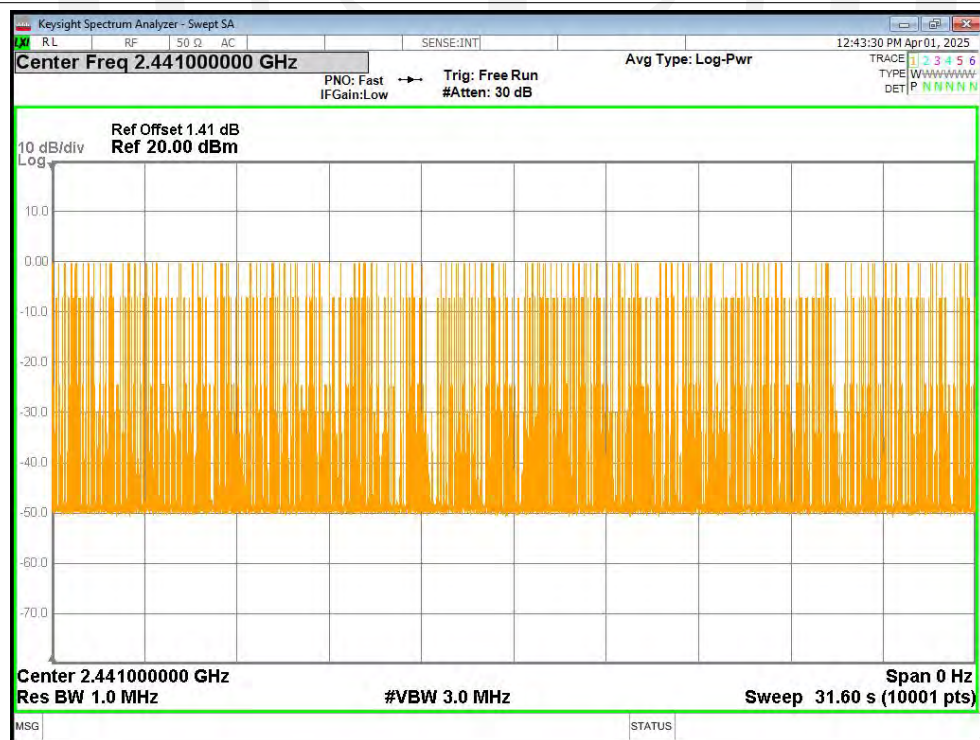

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst



Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

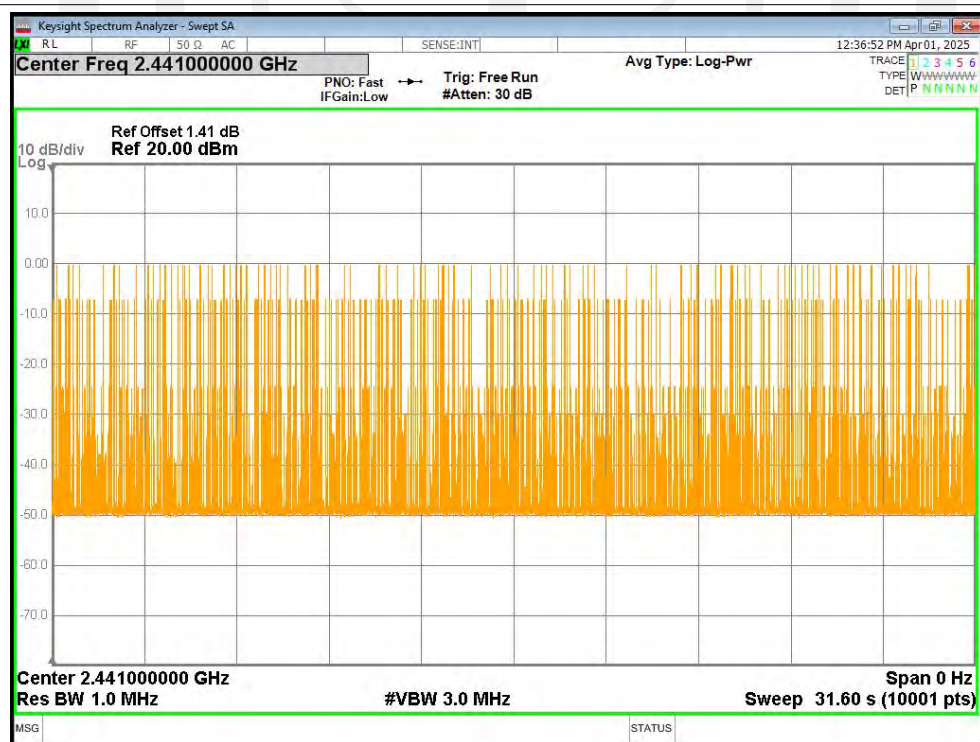

8. Out-of-band Emissions


8.1. Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC Part 15.209(a) is not required. Please refer section RSS-GEN&15.247.

8.2. Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

8.3. Test Setup



8.4. Test Results

PASS.

The test results are listed in next pages.


Band Edge: Pass

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-41.24	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-49.18	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-44.39	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-49.19	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-44.9	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-51.46	-20	Pass



Test Graphs


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

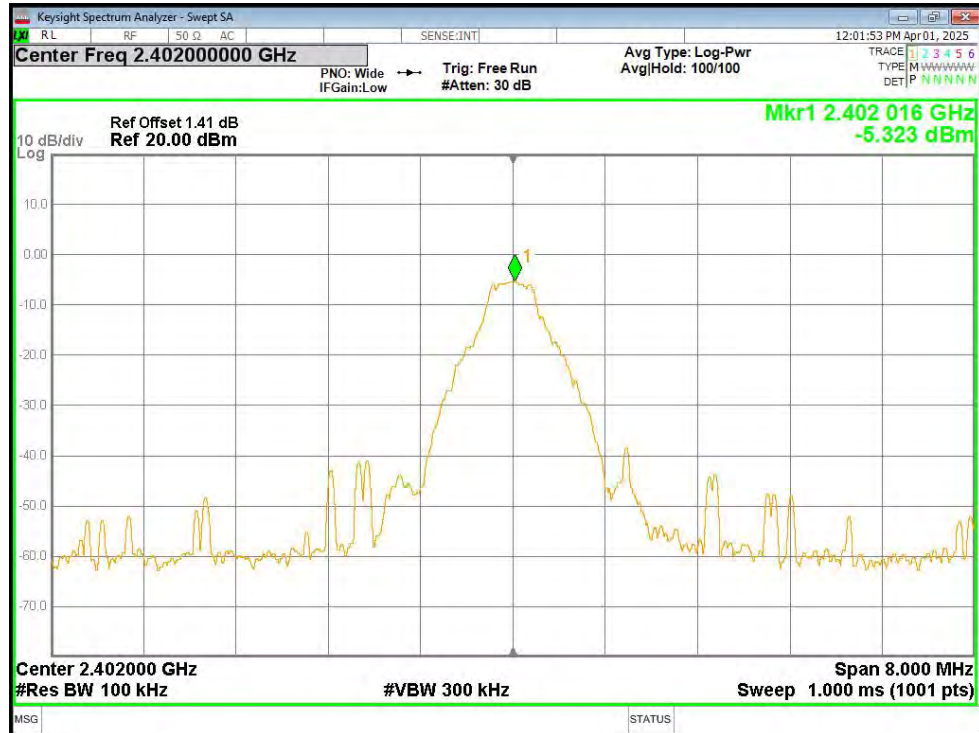


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission




Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

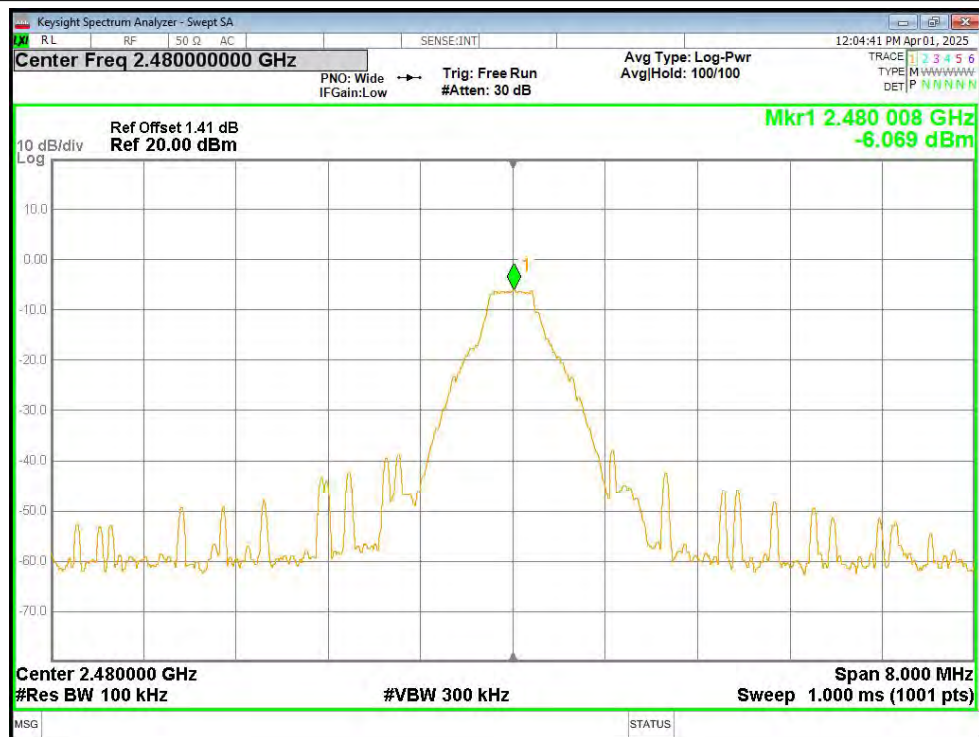


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

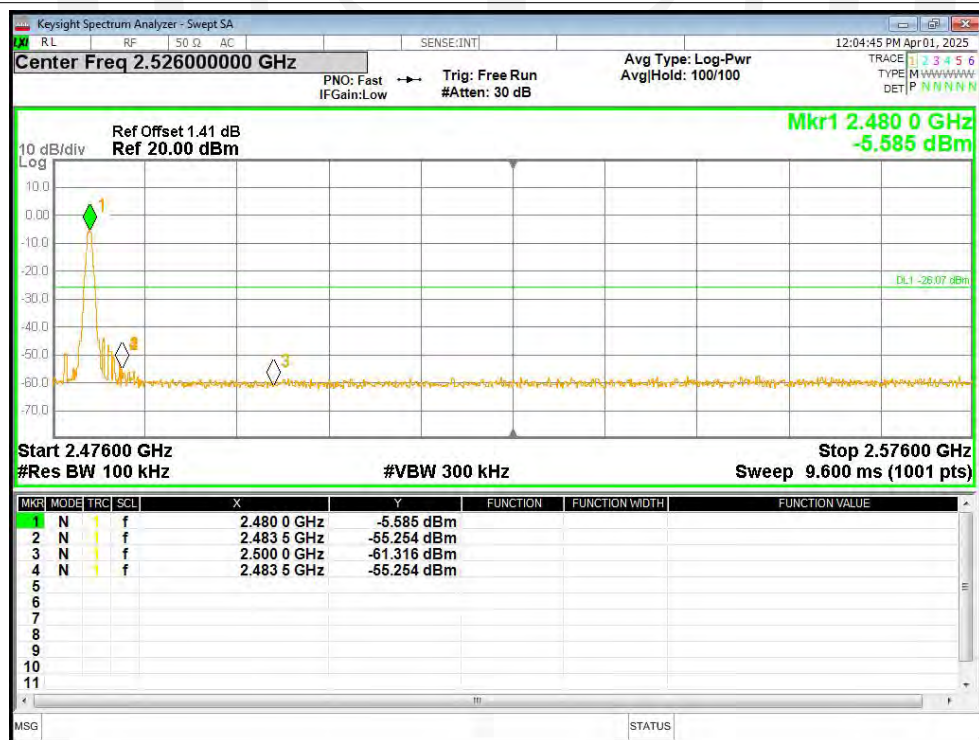


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

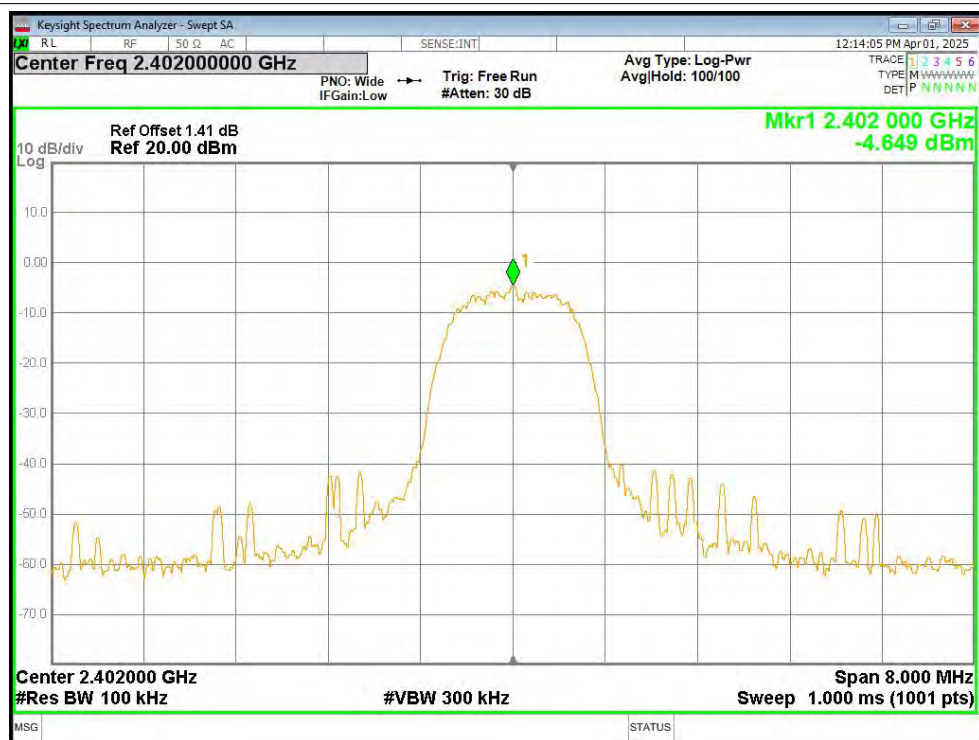

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

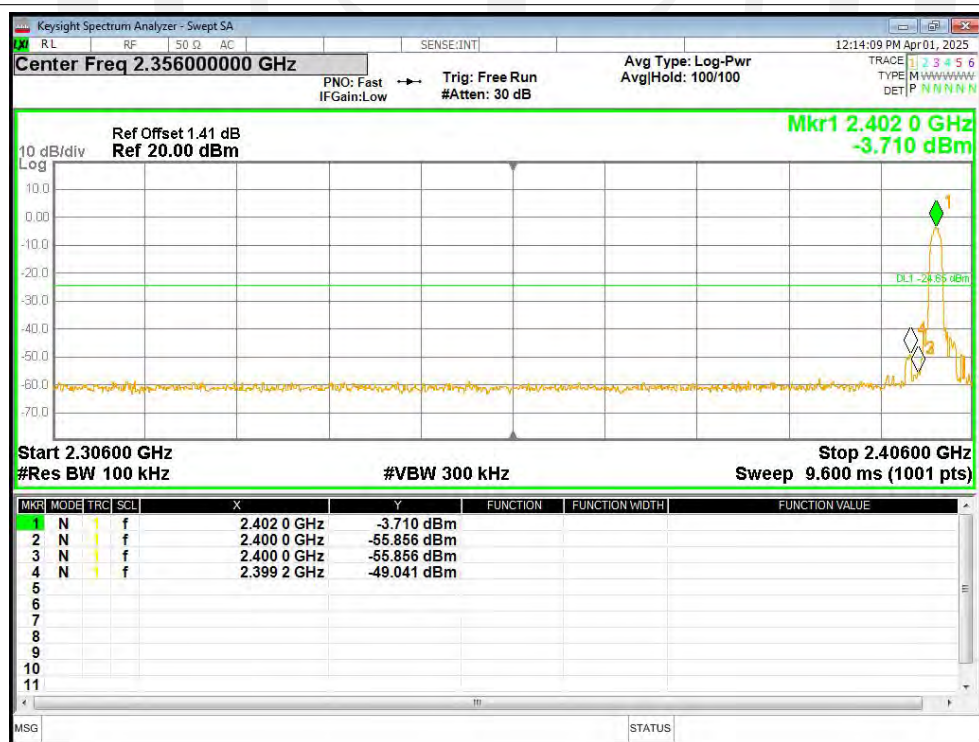

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

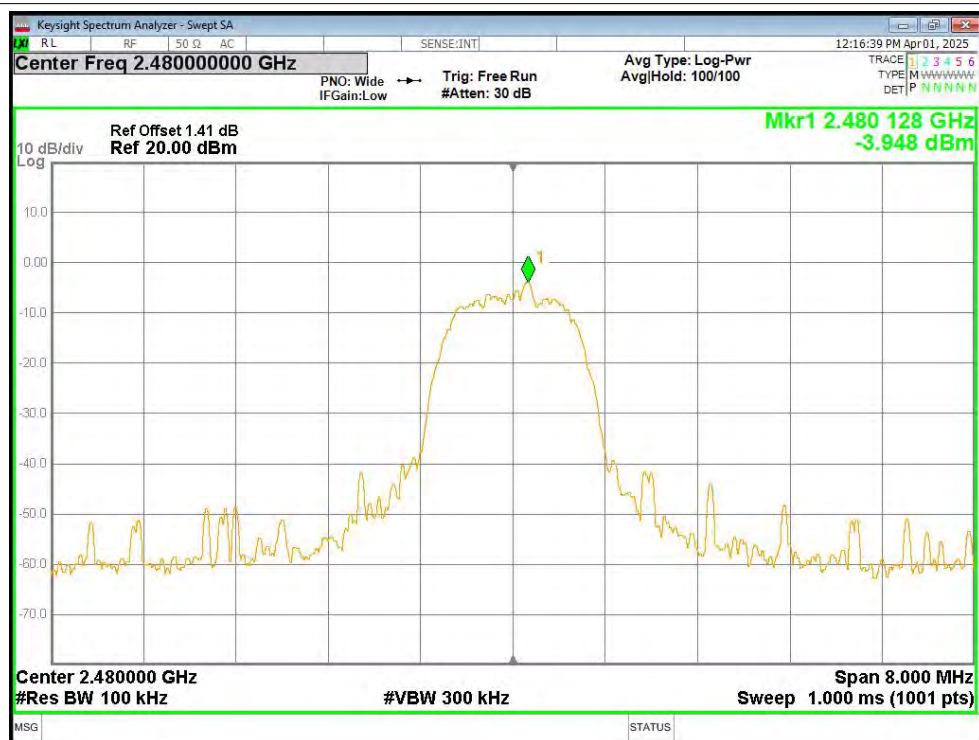

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

