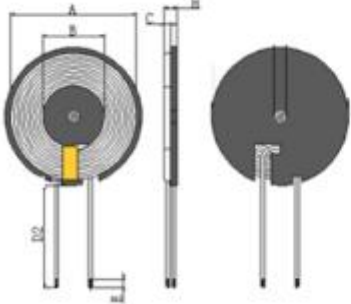

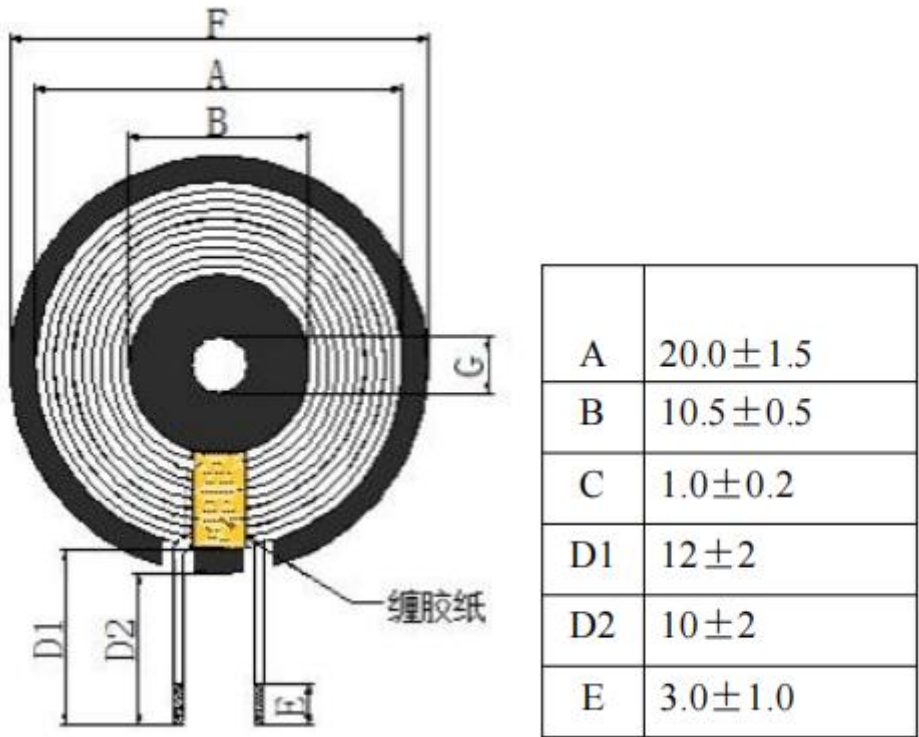


Address:301, Building A, lane 4, Shaxin Road, ShaYing Community,Maluan street,
Pingshan District, Shenzhen, Guangdong

Earbuds ANT

SPECIFICATION FOR APPROVAL																																																	
1.MECHANICAL DIMENSION (UNIT:mm) 					2. SCHEMATICS- 																																												
A	B	C	D2	E	H				I																																								
43.5±0.5	20.5±0.5	0.8±0.05	10±3	3.5±2	2.8MAX																																												
3.WINDING: <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="width:5%;">ST EP</th> <th style="width:20%;">START-FINISH</th> <th style="width:35%;">WIRE TYPE</th> <th style="width:15%;">TURNS</th> <th style="width:10%;">TAPE</th> <th style="width:15%;">REMARK</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">N1</td> <td style="text-align: center;">S-F</td> <td style="text-align: center;">热风线Ø0.08*80*1P UEW</td> <td style="text-align: center;">10TS (Ref)</td> <td></td> <td></td> </tr> </tbody> </table>										ST EP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK	N1	S-F	热风线Ø0.08*80*1P UEW	10TS (Ref)																														
ST EP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK																																												
N1	S-F	热风线Ø0.08*80*1P UEW	10TS (Ref)																																														
4. ELECTRICAL SPECIFICATION: <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="width:10%;">ITEM</th> <th style="width:20%;">L</th> <th style="width:20%;">DCR</th> <th style="width:20%;">Q值</th> <th style="width:30%;">HI-POT</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">TES T</td> <td style="text-align: center;">线圈加磁片</td> <td style="text-align: center;">S-F</td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">CON</td> <td style="text-align: center;">100KHz, 0.25V</td> <td style="text-align: center;">AT 25℃</td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">SPEC</td> <td style="text-align: center;">6.4uH±10%</td> <td style="text-align: center;">85mΩ Max</td> <td style="text-align: center;">45</td> <td></td> </tr> </tbody> </table>										ITEM	L	DCR	Q值	HI-POT	TES T	线圈加磁片	S-F			CON	100KHz, 0.25V	AT 25℃			SPEC	6.4uH±10%	85mΩ Max	45																					
ITEM	L	DCR	Q值	HI-POT																																													
TES T	线圈加磁片	S-F																																															
CON	100KHz, 0.25V	AT 25℃																																															
SPEC	6.4uH±10%	85mΩ Max	45																																														
5.BILF OF MATERIAL : <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="width:5%;">NO.</th> <th style="width:20%;">ITEM</th> <th style="width:35%;">MATERIAL SPECIFICATION</th> <th style="width:25%;">MANUFACTURER</th> <th style="width:15%;">SGS NO.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">热风线0.08*24*2股</td> <td style="text-align: center;">热风线0.08*80*1组</td> <td style="text-align: center;">NANJINGJINNINGCO,LTD</td> <td></td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">无铅锡条</td> <td style="text-align: center;">无铅锡条</td> <td style="text-align: center;">QIAODO</td> <td></td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">磁片</td> <td style="text-align: center;">Ø43.5*0.8磁片硬磁片开L槽</td> <td style="text-align: center;">TAIYI CO.,LTD</td> <td></td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">胶水</td> <td style="text-align: center;">黄胶9999</td> <td style="text-align: center;">LIANCHENG CO.,LTD</td> <td></td> </tr> <tr> <td style="text-align: center;">5</td> <td style="text-align: center;">高温胶纸</td> <td style="text-align: center;">8mm宽高温胶纸</td> <td style="text-align: center;">CUDAK CO.,LTD</td> <td></td> </tr> <tr> <td style="text-align: center;">6</td> <td style="text-align: center;">背胶</td> <td style="text-align: center;">Ø41.8*0.1</td> <td style="text-align: center;">CUDAK CO.,LTD</td> <td></td> </tr> <tr> <td style="text-align: center;">7</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>										NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.	1	热风线0.08*24*2股	热风线0.08*80*1组	NANJINGJINNINGCO,LTD		2	无铅锡条	无铅锡条	QIAODO		3	磁片	Ø43.5*0.8磁片硬磁片开L槽	TAIYI CO.,LTD		4	胶水	黄胶9999	LIANCHENG CO.,LTD		5	高温胶纸	8mm宽高温胶纸	CUDAK CO.,LTD		6	背胶	Ø41.8*0.1	CUDAK CO.,LTD		7				
NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.																																													
1	热风线0.08*24*2股	热风线0.08*80*1组	NANJINGJINNINGCO,LTD																																														
2	无铅锡条	无铅锡条	QIAODO																																														
3	磁片	Ø43.5*0.8磁片硬磁片开L槽	TAIYI CO.,LTD																																														
4	胶水	黄胶9999	LIANCHENG CO.,LTD																																														
5	高温胶纸	8mm宽高温胶纸	CUDAK CO.,LTD																																														
6	背胶	Ø41.8*0.1	CUDAK CO.,LTD																																														
7																																																	
HRSW ELECTRONICS CO.,LTD					PART NO		TITLE																																										
DRAWN BY					CHECKED BY		APPROVED BY																																										
何伟华					韦小红		韦小红																																										

Address:301, Building A, lane 4, Shaxin Road, ShaYing Community,Maluan street,
Pingshan District, Shenzhen, Guangdong
Phone ANT



Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	Inductive Loop Antenna	N/A	1.0dBi	Phone Antenna
2	N/A	N/A	Inductive Loop Antenna	N/A	1.0dBi	Earbuds Antenna