



FCC CERTIFICATION TEST REPORT

Report No.: DDT-B23052904-2E02

Applicant	:	Tianjin Wavecreating Micro Intelligent Technology Co., Ltd.
Address	:	RM2601-2, No.2 Building, TEDA Service Outsourcing Industrial Park, NO.19, Xinhuanxi Road, TEDA, Tianjin, China
Equipment under Test	:	access control card reader
Model No.	:	PD8634, PD8633, PD8635, OE8601, QE8601E, E8602, 0E8602E, OE8603, QE8603E, QE8605, QE8606, QE8606E, QE8608, QE8671, AC8030, AC8031, AC8630, AC8631, AC8632, AC8633, AC8130, AC8131, AC8830
Trade Mark	:	N/A
FCC ID	:	2BBFN-PD8634
Manufacturer	:	Tianjin Wavecreating Micro Intelligent Technology Co., Ltd.
Address	:	RM2601-2, No.2 Building, TEDA Service Outsourcing Industrial Park, NO.19, Xinhuanxi Road, TEDA, Tianjin, China

Issued By: Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, E-mail: ddt@dgddt.com, <http://www.ddttest.com>



REPORT

TABLE OF CONTENTS

	Test report declares.....	3
1	Summary of test results	6
2	General test information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT.....	8
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard.....	8
2.6.	Test environment conditions	8
2.7.	Test laboratory	8
2.8.	Measurement uncertainty	9
3	Equipment used during test	10
4	20dB Bandwidth.....	11
4.1.	Block diagram of test setup.....	11
4.2.	Limits	11
4.3.	Test Procedure.....	11
4.4.	Test Result.....	11
4.5.	Original test data.....	12
5	Radiated emission	13
5.1.	Block diagram of test setup.....	13
5.2.	Limit	14
5.3.	Test Procedure.....	14
5.4.	Test result	15
6	Field Strength Of Fundamental	19
6.1.	Block diagram of test setup.....	19
6.2.	Limits	19
6.3.	Test Procedure.....	19
6.4.	Test Result.....	20
7	Frequency Stability	21
7.1.	Limit	21
7.2.	Test Procedure.....	21
7.3.	Test Result.....	21
8	Power Line Conducted Emission	22
8.1.	Block diagram of test setup.....	22
8.2.	Power Line Conducted Emission Limits	22
8.3.	Test Procedure.....	22
8.4.	Test Result.....	23

9	Antenna Requirements	25
10	Test setup photograph	26
11	Photos of the EUT	29

TEST REPORT DECLARE

Applicant	:	Tianjin Wavecreating Micro Intelligent Technology Co., Ltd.
Address	:	RM2601-2, No.2 Building, TEDA Service Outsourcing Industrial Park, NO.19, Xinhuanxi Road, TEDA, Tianjin, China
Equipment under Test	:	access control card reader
Model No.	:	PD8634, PD8633, PD8635, OE8601, QE8601E, E8602, 0E8602E, OE8603, QE8603E, QE8605, QE8606, QE8606E, QE8608, QE8671, AC8030, AC8031, AC8630, AC8631, AC8632, AC8633, AC8130, AC8131, AC8830
Trade Mark	:	N/A
Manufacturer	:	Tianjin Wavecreating Micro Intelligent Technology Co., Ltd.
Address	:	RM2601-2, No.2 Building, TEDA Service Outsourcing Industrial Park, NO.19, Xinhuanxi Road, TEDA, Tianjin, China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C

Test procedure used:

ANSI C63.10:2020

We Declare:

The equipment described above is tested by Tianjin Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Tianjin Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.



Report No:	DDT-B23052904-2E02		
Date of Receipt:	May 30, 2023	Date of Test:	May 30, 2023 ~ May 31, 2023

Prepared By:

Sunny Zhang

Sunny Zhang/Engineer

Approved By:

Leon Li

Leon Li/RF Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Tianjin Dongdian Testing Service Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Revision history

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	May 31, 2023	

1 Summary of test results

Description of Test Item	Standard	Results
20dB Bandwidth	FCC Part 15: 15.215	PASS
Radiated Emission	FCC Part 15: 15.209	PASS
Field Strength Of Fundamental	FCC Part 15: 15.225	PASS
Frequency Stability	FCC Part 15: 15.225	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2 General test information

2.1. Description of EUT

EUT* Name	:	access control card reader
Test Model Number	:	PD8634
EUT function description	:	Please reference user manual of this device
Power supply	:	DC 48V supplied through PoE+
Radio Specification	:	NFC
Wireless charging Operation frequency	:	13.56MHz
Number of Channel	:	1
Antenna Type	:	Loop antenna

Note1: EUT is the ab. of equipment under test.

Note2: All models are identical except the mode name and color, sales area, customer number.

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number or Type	Serial No.	Other
Ethernet POE Switch	TP-LINK	TL-SG1005P	1129195002359	N/A

2.4. Block diagram of EUT configuration for test



2.5. Deviations of test standard

No Deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	20-28°C
Humidity range:	20-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, <http://www.ddttest.com>, Email: ddt@dgddt.com

NVLAP (National Voluntary Laboratory Accreditation Program) CODE: 500036-0

CNAS (China National Accreditation Service for Conformity Assessment) CODE: L13402

FCC Designation Number: CN5004; FCC Test Firm Registration Number: 368676

ISED (Innovation, Science and Economic Development Canada) Company Number: 27768

Conformity Assessment Body Identifier: CN0125

VCCI Facility Registration Number: C-20089, T-20093, R-20125, G-20122

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	0.14%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.12 dB (10 MHz \leq f < 3.6 GHz); 0.32 dB (3.6 GHz \leq f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.51 dB
Power Spectral Density	0.12 dB (10 MHz \leq f < 3.6 GHz); 0.32 dB (3.6 GHz \leq f < 8 GHz)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 3.4×10^{-8} (Conducted method)
Conducted Spurious Emissions	0.12 dB (10 MHz \leq f < 3.6 GHz); 0.32 dB (3.6 GHz \leq f < 8 GHz) 0.52 dB (8 GHz \leq f < 22 GHz)
Uncertainty for Radio Frequency (RBW < 20 kHz)	3×10^{-7}
Temperature	$\pm 2^\circ\text{C}$
Humidity	$\pm 1\%$
Uncertainty for Radiation Emission Test (9 kHz - 30 MHz)	2.51 dB
Uncertainty for Radiation Emission Test (30 MHz - 1 GHz)	2.72 dB (Antenna Polarize: V) 2.72 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	2.74 dB (1 - 6 GHz) 2.72 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.40 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3 Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (MWRFtest system)					
Microwave Signal Generator	R&S	SMF100A	101396	2023/05/29	1 Year
MXG Vector Signal Generator	Keysight	N5182A	MY50143288	2023/03/07	1 Year
EMI Test Receiver	R&S	ESU26	100243	2023/03/03	1 Year
Signal Analyzer	R&S	FSV	101730	2023/04/04	1 Year
Wideband Radio Communication Tester	R&S	CMW500	158800	2022/06/11	1 Year
Power Sensor	KEYSIGHT	U2021XA	MY59150007	2023/03/22	1 Year
DC Power Supply	inSTEK	PSP-2010	EN122317	2023/02/12	1 Year
Test Software	MWRFtest	MTS8310	V03	N/A	N/A
Radiated Emission -10m EMI Chamber					
Broadband Horn Antenna	TESEQ	BHA 9118	31754	2022/10/12	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	2023/05/06	1 Year
Active Loop Antenna	R&S	HFH2-Z2	100269	2022/07/11	1 Year
Low noise amplifier	MITEQ	TPA0118-36	0914	2023/02/16	1 Year
EMI Test Receiver	R&S	ESCI	101024	2023/02/15	1 Year
EMI Test Receiver	R&S	ESCI	101030	2023/02/15	1 Year
EMI Test Receiver	R&S	ESU26	100244	2023/03/03	1 Year
Bilog Antenna	TESEQ	CBL6112D	29068	2022/10/10	2 Year
Bilog Antenna	TESEQ	CBL6112D	29069	2022/10/10	2 Year
Amplifier	Sonoma	310N	300913	2023/02/15	1 Year
Amplifier	Sonoma	310N	300914	2023/02/15	1 Year
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector1	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector2	N/A	N/A
Test software	TOYO	EP5/RSE	Ver 1.9.1	N/A	N/A
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESCI	101397	2023/02/15	1 Year
LISN	R&S	ENV216	101122	2023/02/15	1 Year
Test software	TOYO	EP5/CE	V 5.4.40	N/A	N/A

4 20dB Bandwidth

4.1. Block diagram of test setup

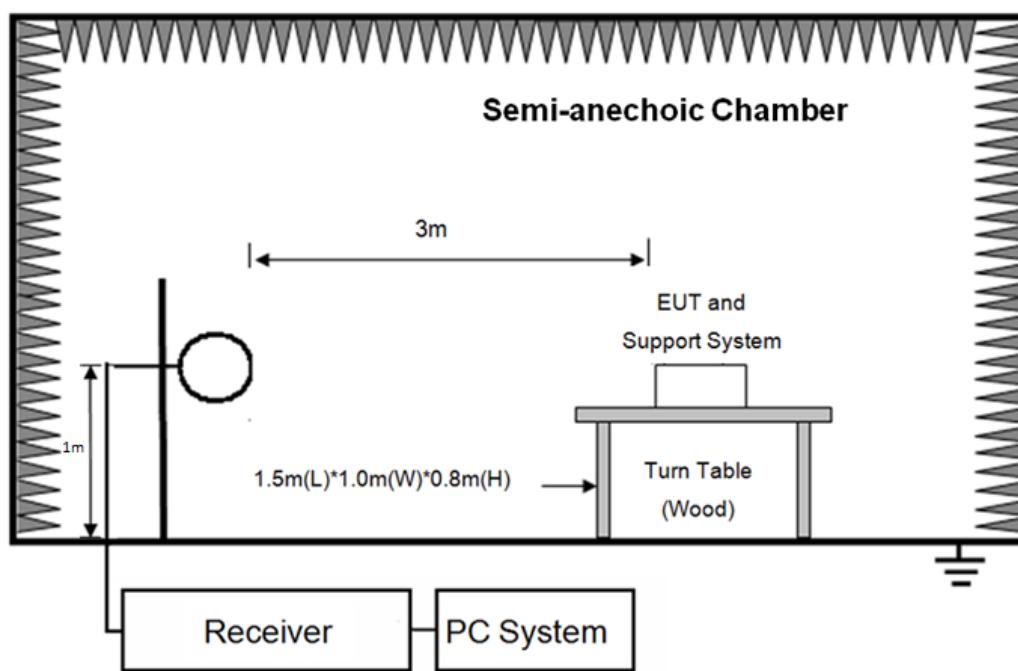

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.3. Test Procedure

- (1) The EUT was rotated 360 degrees and scanning the peak frequency spectrum.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 Hz RBW and 300 Hz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.4. Test Result

Freq. (MHz)	20dB bandwidth Result (kHz)	Conclusion
13.56	0.492	PASS


4.5. Original test data

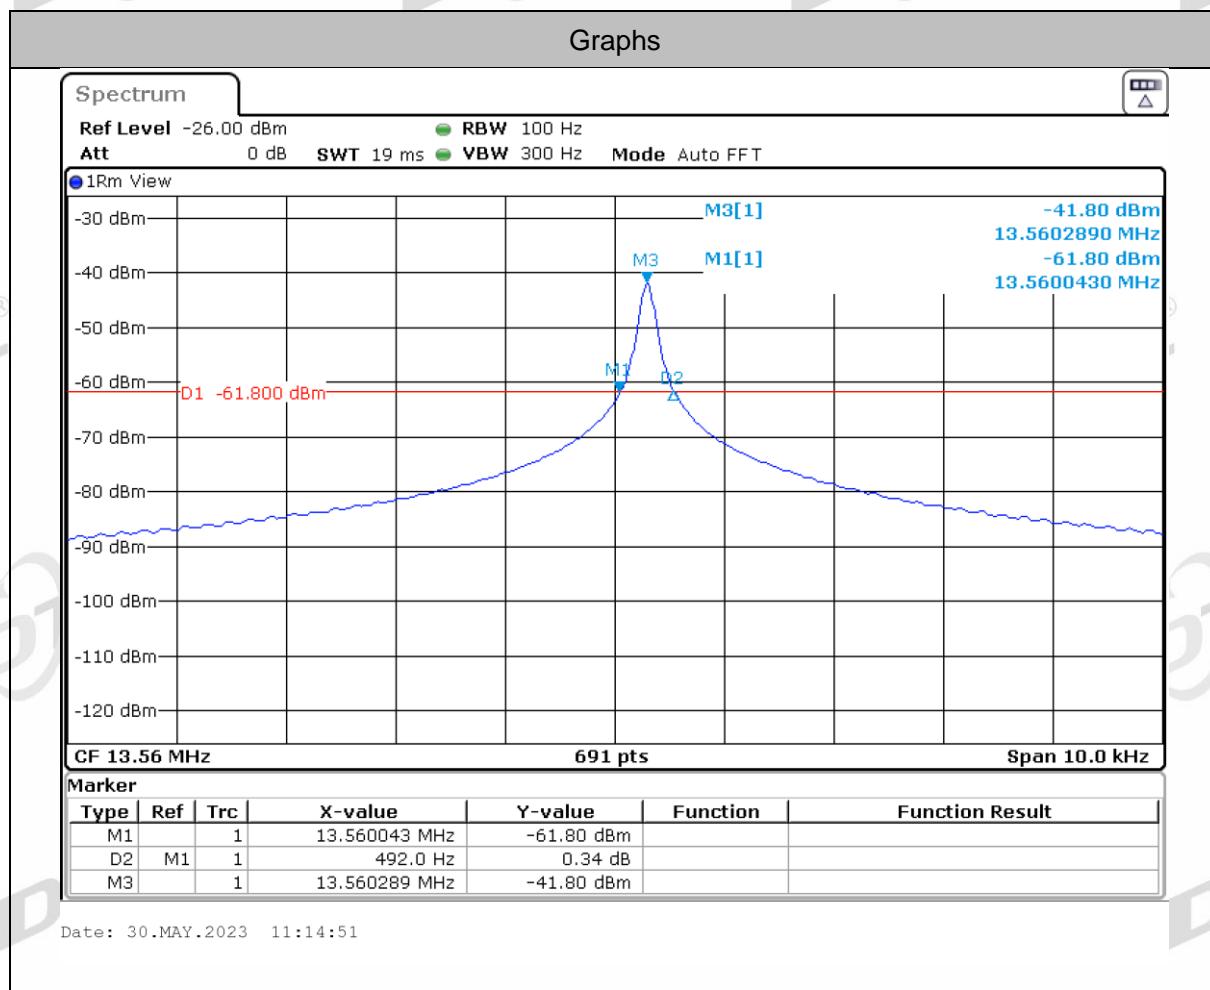


5 Radiated emission

5.1. Block diagram of test setup

Test Setup Diagram for 9 kHz~30MHz

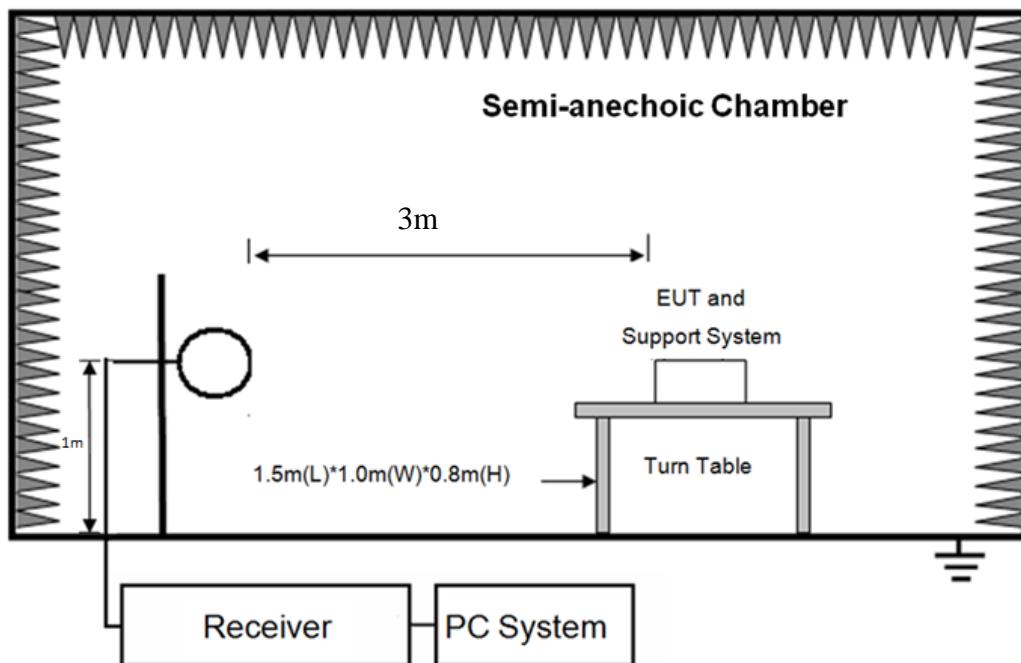

Test Setup Diagram for 30MHz~1GHz

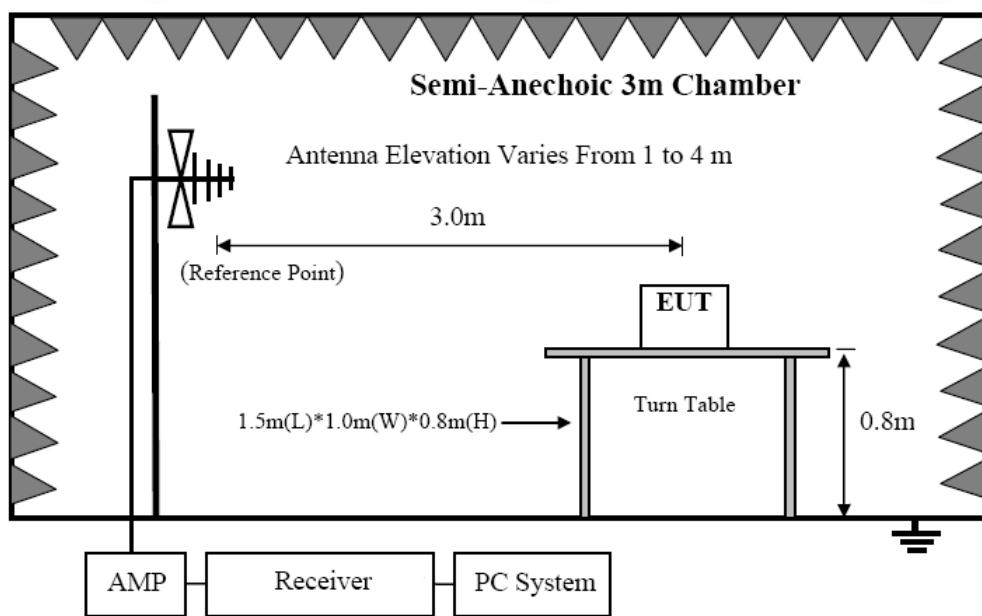

5.2. Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F) (kHz)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F) (kHz)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

Note: (1)The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz.Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{10m}(\text{dBuV}/\text{m}) = \text{Limit}_{300m}(\text{dBuV}/\text{m}) + 40\text{Log}(300m/10m) = \text{Limit}_{300m}(\text{dBuV}/\text{m}) + 59.08$$

$$\text{Limit}_{10m}(\text{dBuV}/\text{m}) = \text{Limit}_{30m}(\text{dBuV}/\text{m}) + 40\text{Log}(30m/10m) = \text{Limit}_{30m}(\text{dBuV}/\text{m}) + 19.08$$

$$\text{Limit}_{3m}(\text{dBuV}/\text{m}) = \text{Limit}_{300m}(\text{dBuV}/\text{m}) + 40\text{Log}(300m/3m) = \text{Limit}_{300m}(\text{dBuV}/\text{m}) + 80$$

$$\text{Limit}_{3m}(\text{dBuV}/\text{m}) = \text{Limit}_{30m}(\text{dBuV}/\text{m}) + 40\text{Log}(30m/3m) = \text{Limit}_{30m}(\text{dBuV}/\text{m}) + 40$$

5.3. Test Procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.

(2) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9kHz-30MHz	Active Loop antenna	3m
30MHz-1GHz	Trilog Broadband Antenna	3m

According ANSI C63.10:2020 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9kHz to 1GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m(Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions. Spectrum frequency from 9kHz to 1GHz (tenth harmonic of fundamental frequency) was investigated.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

(5) The emissions from 9kHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz, for emissions from 9kHz-90kHz, 110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9kHz to 1GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9kHz-150kHz	300Hz
150kHz-30MHz	9kHz
30MHz-1GHz	120kHz

(7) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

5.4. Test result

PASS. (See below detailed test result)


Below 30MHz:

Radiated Emission Test Result

Test Site : DDT 10m Chamber
Test Date : 05-30-2023
EUT : access control card reader
Power Supply : POE
Memo :

Tested By : Sunny
Model Number : PD8634
Test Mode : Tx mode

Data: 41

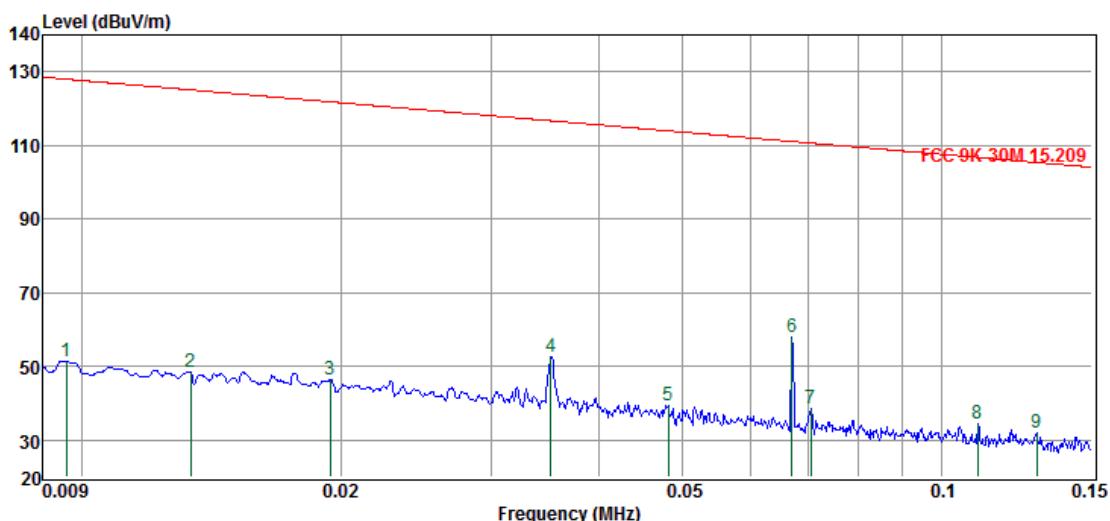


Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	0.01	31.79	19.56	0.03	51.38	127.98	-76.60	Peak	HORIZONTAL
2	0.01	28.77	19.68	0.03	48.48	125.07	-76.59	Peak	HORIZONTAL
3	0.02	26.60	19.79	0.03	46.42	121.82	-75.40	Peak	HORIZONTAL
4	0.04	32.86	19.74	0.03	52.63	116.69	-64.06	Peak	HORIZONTAL
5	0.05	19.55	19.70	0.03	39.28	113.95	-74.67	Peak	HORIZONTAL
6	0.07	38.34	19.70	0.03	58.07	111.07	-53.00	Peak	HORIZONTAL
7	0.07	18.90	19.70	0.03	38.63	110.63	-72.00	Peak	HORIZONTAL
8	0.11	14.55	19.69	0.03	34.27	106.74	-72.47	Peak	HORIZONTAL
9	0.13	12.14	19.66	0.03	31.83	105.37	-73.54	Peak	HORIZONTAL

Radiated Emission Test Result

Test Site : DDT 10m Chamber
Test Date : 05-30-2023
Tested By : Sunny
EUT : access control card reader
Model Number : PD8634
Power Supply : POE
Test Mode : Tx mode
Memo :


Data: 42

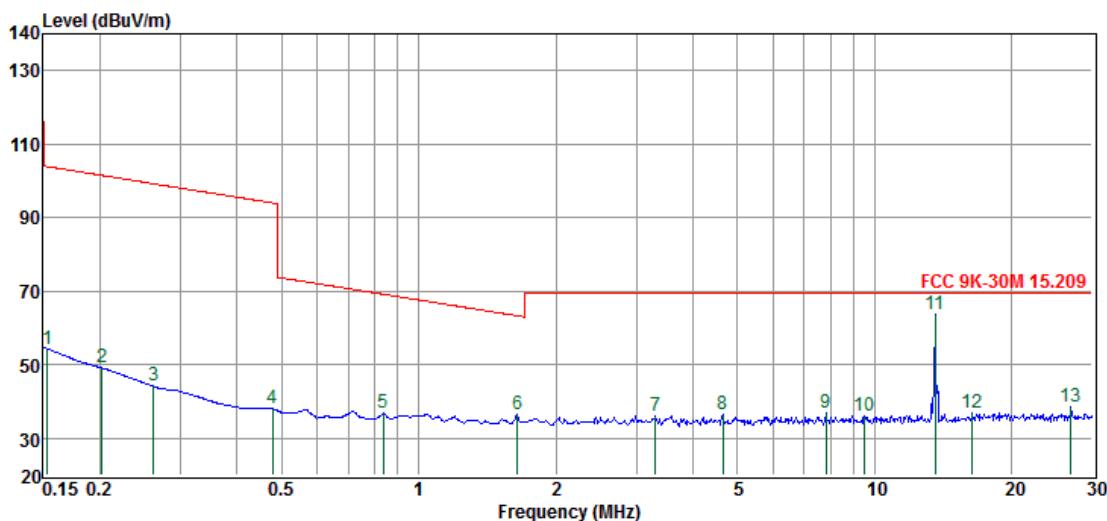

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	0.15	34.73	19.64	0.03	54.40	103.89	-49.49	Peak	HORIZONTAL
2	0.20	29.51	19.60	0.02	49.13	101.50	-52.37	Peak	HORIZONTAL
3	0.26	24.49	19.63	0.02	44.14	99.24	-55.10	Peak	HORIZONTAL
4	0.48	18.28	19.70	0.03	38.01	93.99	-55.98	Peak	HORIZONTAL
5	0.83	16.83	19.92	0.02	36.77	69.17	-32.40	Peak	HORIZONTAL
6	1.65	16.57	19.93	0.08	36.58	63.28	-26.70	Peak	HORIZONTAL
7	3.31	16.06	19.95	0.13	36.14	69.54	-33.40	Peak	HORIZONTAL
8	4.65	16.26	19.99	0.16	36.41	69.54	-33.13	Peak	HORIZONTAL
9	7.81	16.50	20.00	0.26	36.76	69.54	-32.78	Peak	HORIZONTAL
10	9.50	15.62	20.00	0.34	35.96	69.54	-33.58	Peak	HORIZONTAL
11	13.55	43.57	19.93	0.39	63.89	69.54	-5.65	Peak	HORIZONTAL
12	16.40	16.65	20.02	0.43	37.10	69.54	-32.44	Peak	HORIZONTAL
13	26.98	17.87	20.34	0.52	38.73	69.54	-30.81	Peak	HORIZONTAL

Above 30MHz:

Transmission mode:

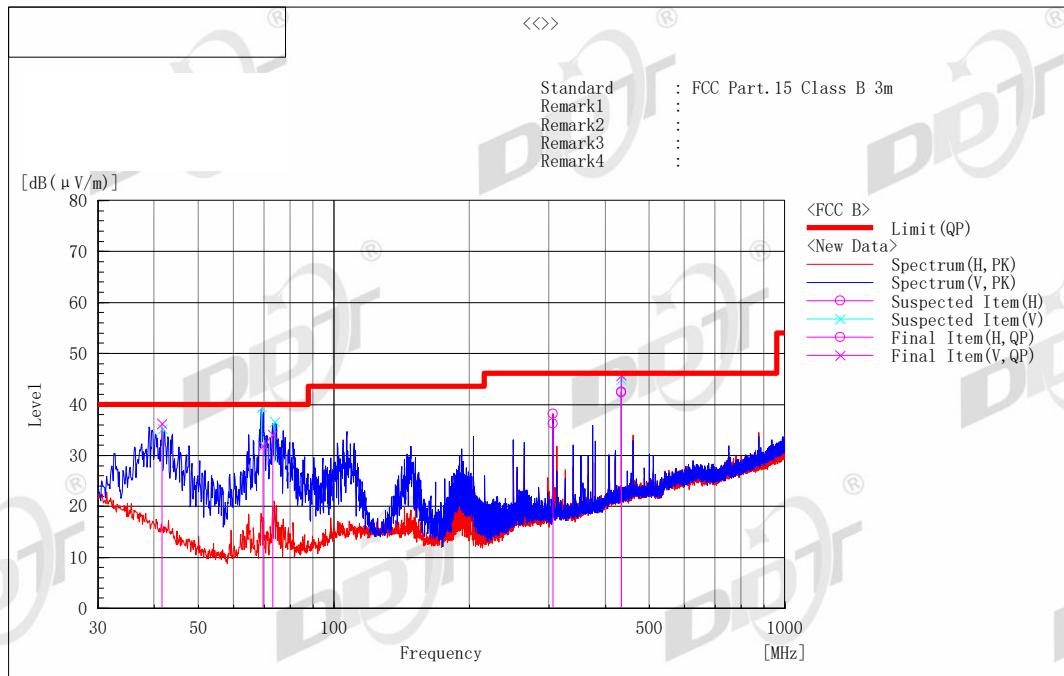

Final Result

No.	Frequency (P)	Reading QP [dB (μ V)]	c. f [dB(1/m)]	Result QP [dB (μ V/m)]	Limit QP [dB (μ V/m)]	Margin QP [dB] [cm]	Height [cm]	Angle [°]	System	Remark
1	433.923	H 45.7	-3.4	42.3	46.0	3.7	199.0	255.1	1	
2	305.996	H 43.7	-7.5	36.2	46.0	9.8	101.0	241.0	1	
3	41.608	V 47.7	-11.5	36.2	40.0	3.8	100.0	193.6	2	
4	69.712	V 48.9	-17.0	31.9	40.0	8.1	201.0	288.6	2	
5	73.211	V 51.2	-17.1	34.1	40.0	5.9	202.0	32.5	2	
6	433.927	V 48.7	-3.0	45.7	46.0	0.3	100.0	250.3	2	

Note) Receiving antenna polarization: Horizontal and/or Vertical

Test Distance: 3 m, Antenna Height: 1 m to 4 m

Level QP (Quasi-Peak) = Reading QP + Factor (Antenna Factor + Cable Loss - Amp. Gain)

Margin QP (Quasi-Peak) = Limit - Level QP

6 Field Strength Of Fundamental

6.1. Block diagram of test setup

Same with 5.1.

6.2. Limits


- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

6.3. Test Procedure

Same with 5.3.

6.4. Test Result

PASS. (See below detailed test result)

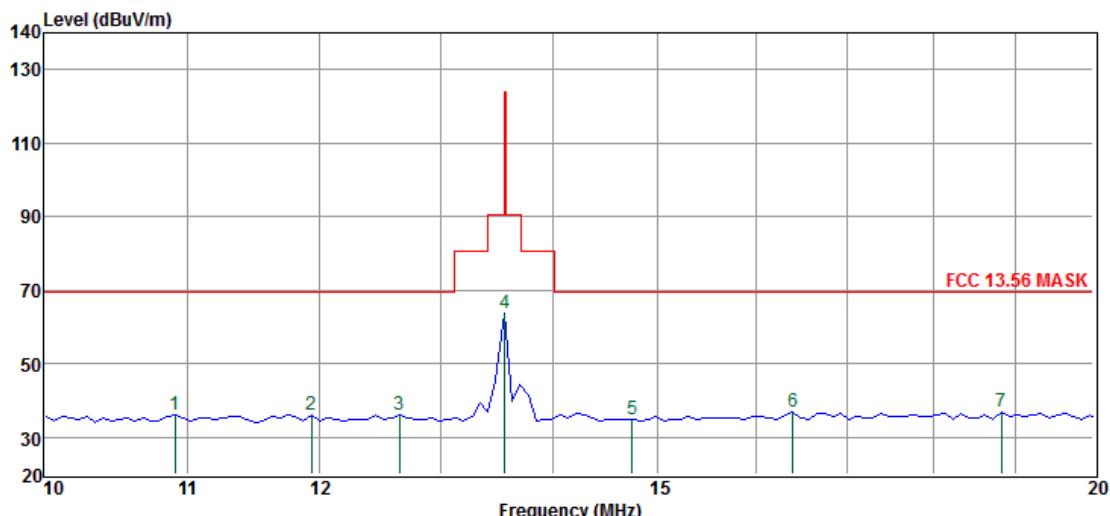

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	10.91	15.82	19.98	0.39	36.19	69.54	-33.35	Peak
2	11.93	15.54	19.96	0.43	35.93	69.54	-33.61	Peak
3	12.65	15.61	19.94	0.41	35.96	69.54	-33.58	Peak
4	13.56	43.58	19.92	0.39	63.89	124.00	-60.11	Peak
5	14.75	14.72	19.90	0.37	34.99	69.54	-34.55	Peak
6	16.40	16.65	20.02	0.43	37.10	69.54	-32.44	Peak
7	18.82	16.17	20.22	0.47	36.86	69.54	-32.68	Peak

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: 150k-30MHz, RBW: 10kHz, Sweep time: auto.

7 Frequency Stability

7.1. Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ ($\pm 1.356\text{kHz}$) of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

7.2. Test Procedure

ANSI C63.10-2020 Clause 6.8


7.3. Test Result

PASS. (See below detailed test result)

Voltage	Temperature	Frequency (MHz)	Measured Frequency(MHz)	Frequency Tolerance(kHz)	Limit ($\pm 1.356\text{kHz}$)	Conclusion
Normal	20°C	13.5600000	13.5602890	0.2890	± 1.356	PASS
High	20°C	13.5600000	13.5602897	0.2897	± 1.356	PASS
Low	20°C	13.5600000	13.5602900	0.2900	± 1.356	PASS
Normal	-20°C	13.5600000	13.5602924	0.2924	± 1.356	PASS
Normal	-10°C	13.5600000	13.5602919	0.2919	± 1.356	PASS
Normal	0°C	13.5600000	13.5602939	0.2939	± 1.356	PASS
Normal	10°C	13.5600000	13.5602930	0.2930	± 1.356	PASS
Normal	30°C	13.5600000	13.5602890	0.2890	± 1.356	PASS
Normal	40°C	13.5600000	13.5603047	0.2900	± 1.356	PASS
Normal	50°C	13.5600000	13.5602890	0.2890	± 1.356	PASS

8 Power Line Conducted Emission

8.1. Block diagram of test setup

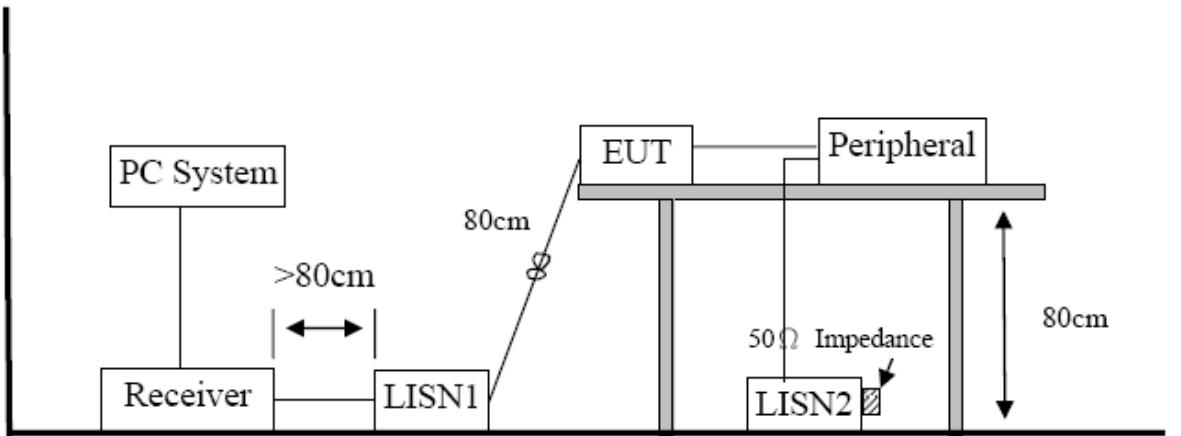

8.2. Power Line Conducted Emission Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

8.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 3 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.


The bandwidth of test receiver is set at 9 kHz.

8.4. Test Result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Test data:

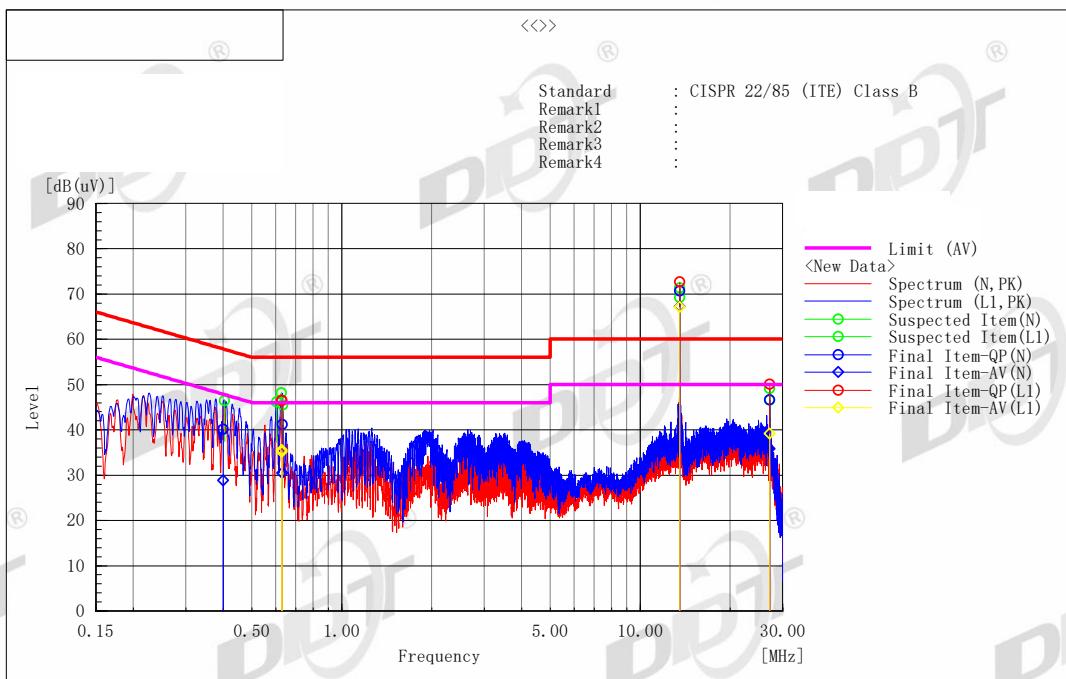

Final Result

--- N Phase ---											
No.	Frequency	Reading QP	Reading CAV	c. f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV	Remark
	[MHz]	[dB(uV)]	[dB(uV)]		[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]	
1	0.63151	31.4	20.6	9.8	41.2	30.4	56.0	46.0	14.8	15.6	
2	13.55985	60.4	56.9	10.3	70.7	67.2	60.0	50.0	-10.7	-17.2	
3	0.40072	30.3	19.0	9.8	40.1	28.8	57.8	47.8	17.7	19.0	
4	27.12029	36.3	25.5	10.3	46.6	35.8	60.0	50.0	13.4	14.2	

--- L1 Phase ---											
No.	Frequency	Reading QP	Reading CAV	c. f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV	Remark
	[MHz]	[dB(uV)]	[dB(uV)]		[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]	
1	0.62903	36.7	25.7	9.8	46.5	35.5	56.0	46.0	9.5	10.5	
2	0.62959	36.7	25.3	9.8	46.5	35.1	56.0	46.0	9.5	10.9	
3	13.55985	62.4	56.8	10.3	72.7	67.1	60.0	50.0	-12.7	-17.1	
4	27.12004	39.8	28.8	10.3	50.1	39.1	60.0	50.0	9.9	10.9	

Note1) Level (Quasi-Peak and/or C/Average) = Meter Reading + Factor

Note2) Line = Polarity of input power (Live or Neutral)

N: Abbreviation of Neutral Polarity, L1: Abbreviation of Live Polarity,

Note3) Factor = LISN Insertion Loss + Cable Loss

Note4) Margin = Limit – Level (Quasi-Peak and/or C/Average)

Note5) C/Average: Abbreviation of CISPR Average

Note6) 13.56MHz is a fundamental frequency of the EUT, subject to the radiated emission limits in § 15.209, the conducted limit shall not apply.

9 Antenna Requirements

For intentional device, according to FCC 47 CFR Section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.