

TEST REPORT

Product Name : C10A Remote Control
Brand Mark : N/A
Model No. : C10A
FCC ID : 2BBHI-C10A1
Report Number : BLA-EMC-202305-A8801
Date of Sample Receipt : 2023/5/25
Date of Test : 2023/5/25 to 2023/6/6
Date of Issue : 2023/6/6
Test Standard : 47 CFR Part 15, Subpart C 15.231
Test Result : Pass

Prepared for:

shen zhen shi si mi rui ke ji you xian gong si
Room 401, Building 5, Fulongte Industrial Park, Huaxing Road, Langkou
Community, Dalang Street, Longhua District, Shenzhen

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

Jozu

Review by:

Sueels

Approved by:

Blue Zheng

Date:

2023/6/6



REPORT REVISE RECORD

Version No.	Date	Description
00	2023/6/6	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	7
5	TEST MODE	7
6	MEASUREMENT UNCERTAINTY	7
7	DESCRIPTION OF SUPPORT UNIT	8
8	LABORATORY LOCATION	8
9	TEST INSTRUMENTS LIST	9
10	RADIATED EMISSIONS	11
10.1	LIMITS	11
10.2	BLOCK DIAGRAM OF TEST SETUP	12
10.3	PROCEDURE	12
10.1	TEST DATA	13
11	FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.231(B))	18
11.1	LIMITS	18
11.2	BLOCK DIAGRAM OF TEST SETUP	19
11.3	PROCEDURE	19
11.4	TEST DATA	21
12	DWELL TIME (15.231(A))	25
12.1	LIMITS	25
12.2	BLOCK DIAGRAM OF TEST SETUP	25
12.3	TEST DATA	26
13	20DB BANDWIDTH	27
13.1	LIMITS	27
13.2	BLOCK DIAGRAM OF TEST SETUP	27
13.3	TEST DATA	28
14	ANTENNA REQUIREMENT	29
14.1	CONCLUSION	29

APPENDIX A: PHOTOGRAPHS OF TEST SETUP	30
APPENDIX B: PHOTOGRAPHS OF EUT	31

BlueAsia

1 TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
Field strength of the fundamental signal	15.231 (b)	Pass
Spurious emissions	15.231 (b)/15.209	Pass
20dB Bandwidth	15.231(c)	Pass
Dwell time	15.231 (a)(2)	Pass
Conducted Emission	15.207	N/A

Remarks:

N/A: The EUT not applicable of the test item.

Pass: The EUT complies with the essential requirements in the standard.

Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

2 GENERAL INFORMATION

Applicant	shen zhen shi si mi rui ke ji you xian gong si
Address	Room 401, Building 5, Fulongte Industrial Park, Huaxing Road, Langkou Community, Dalang Street, Longhua District, Shenzhen
Manufacturer	shen zhen shi si mi rui ke ji you xian gong si
Address	Room 401, Building 5, Fulongte Industrial Park, Huaxing Road, Langkou Community, Dalang Street, Longhua District, Shenzhen
Factory	shen zhen shi si mi rui ke ji you xian gong si
Address	Room 401, Building 5, Fulongte Industrial Park, Huaxing Road, Langkou Community, Dalang Street, Longhua District, Shenzhen
Product Name	C10A Remote Control
Test Model No.	C10A

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	LXZK-TX1021-CE-FCC-650
Software Version	IT-056-R=2F55C
Operation Frequency:	433.92MHz
Channel numbers:	1
Modulation type:	ASK
Antenna Type:	PCB antenna
Antenna gain:	-3dBi(Provided by customer)
Battery information	DC3V

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode:	Keep the EUT in transmitting mode with modulation
Remark: Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30MHz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
--	--	--	--	--

Note:

“--” means no any support device during testing.

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2023/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2023/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2023/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2023/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of RF Conducted Test

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2023/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2023/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2023/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audioprecision	N/A	ATSI-41094	2022/7/1	2023/6/30


10 RADIATED EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.231
Test Method	ANSI C63.10 (2013) Section 6.4&6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

10.1 LIMITS

Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)	Remark
	433.92 MHz	80.8 100.8	Average Value Peak Value
Limit: (Spurious Emissions)	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
	Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits higher field strength.		
	a. The EUT was placed on the top of a rotating table 0.8m(below 1GHz) /1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.		
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.		
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.		
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.		
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.		
	f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.		

10.2 BLOCK DIAGRAM OF TEST SETUP

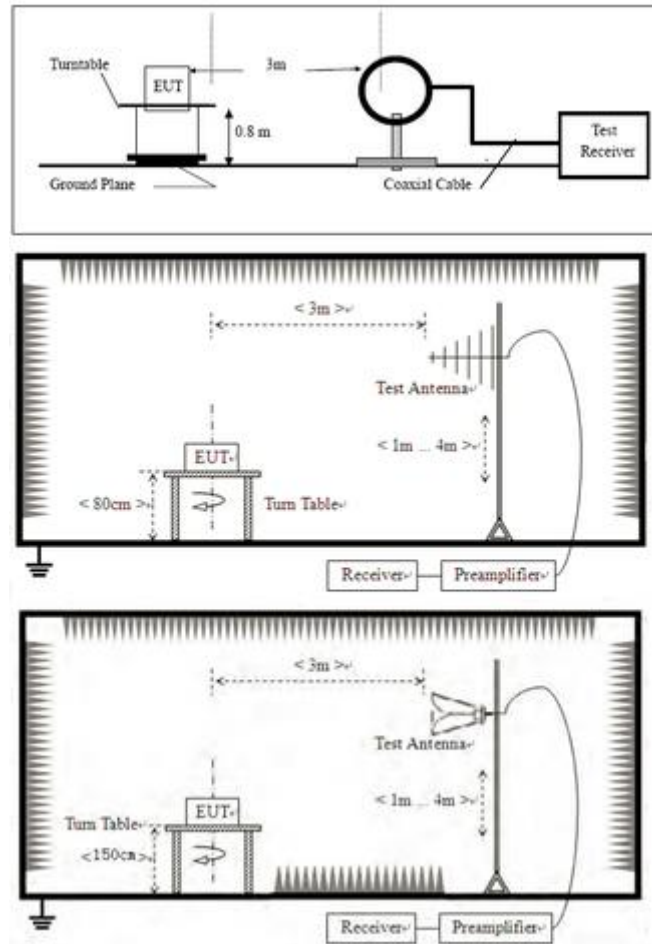


10.3 PROCEDURE

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.


10.1 TEST DATA

30M-1G Horizontal

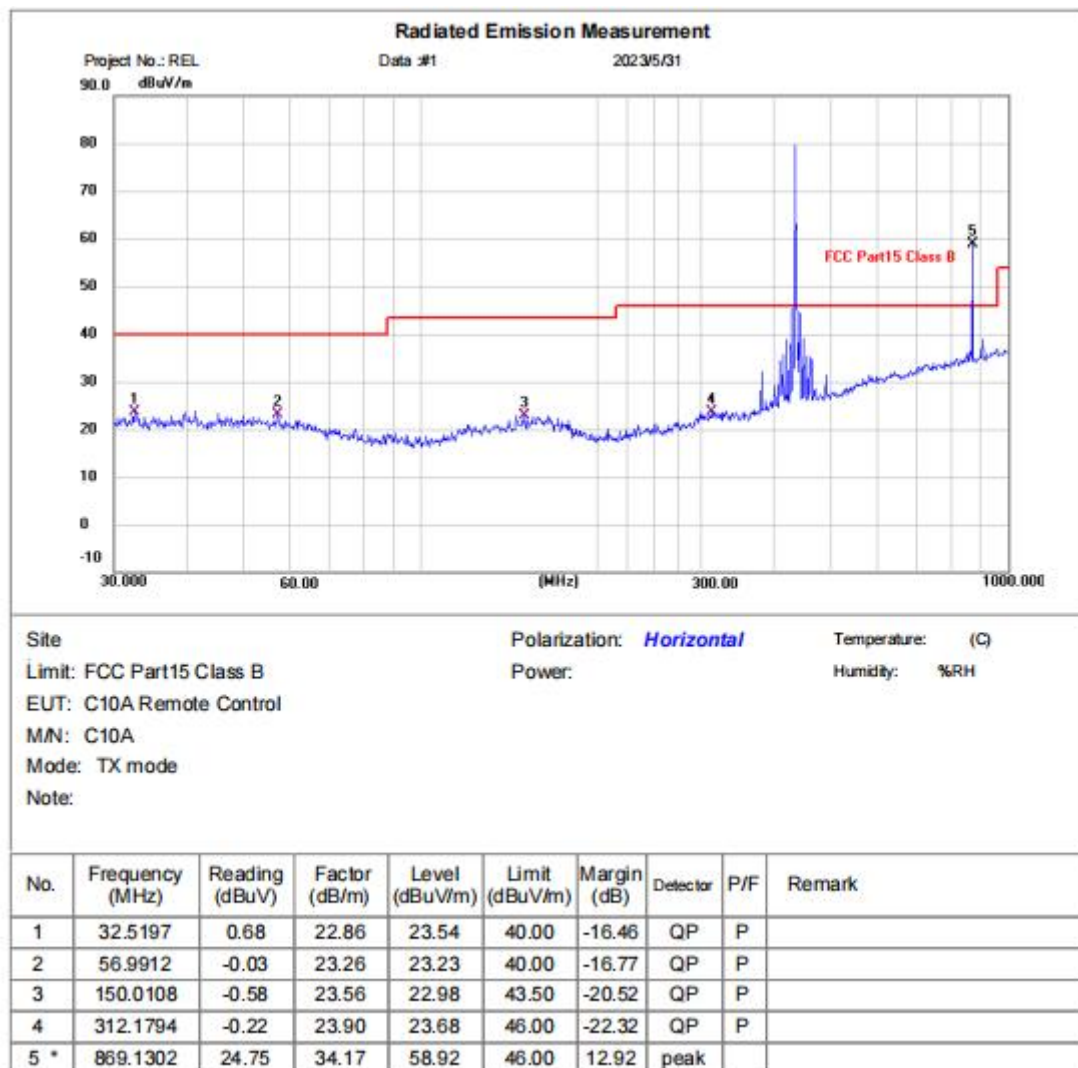

No.	Frequency (MHz)	Peak Result (dBuV/m)	Duty cycle factor	Average Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result
1	869.1302	58.92	-8.31	50.61	60.8	-10.19	Pass

30M-1G Vertical

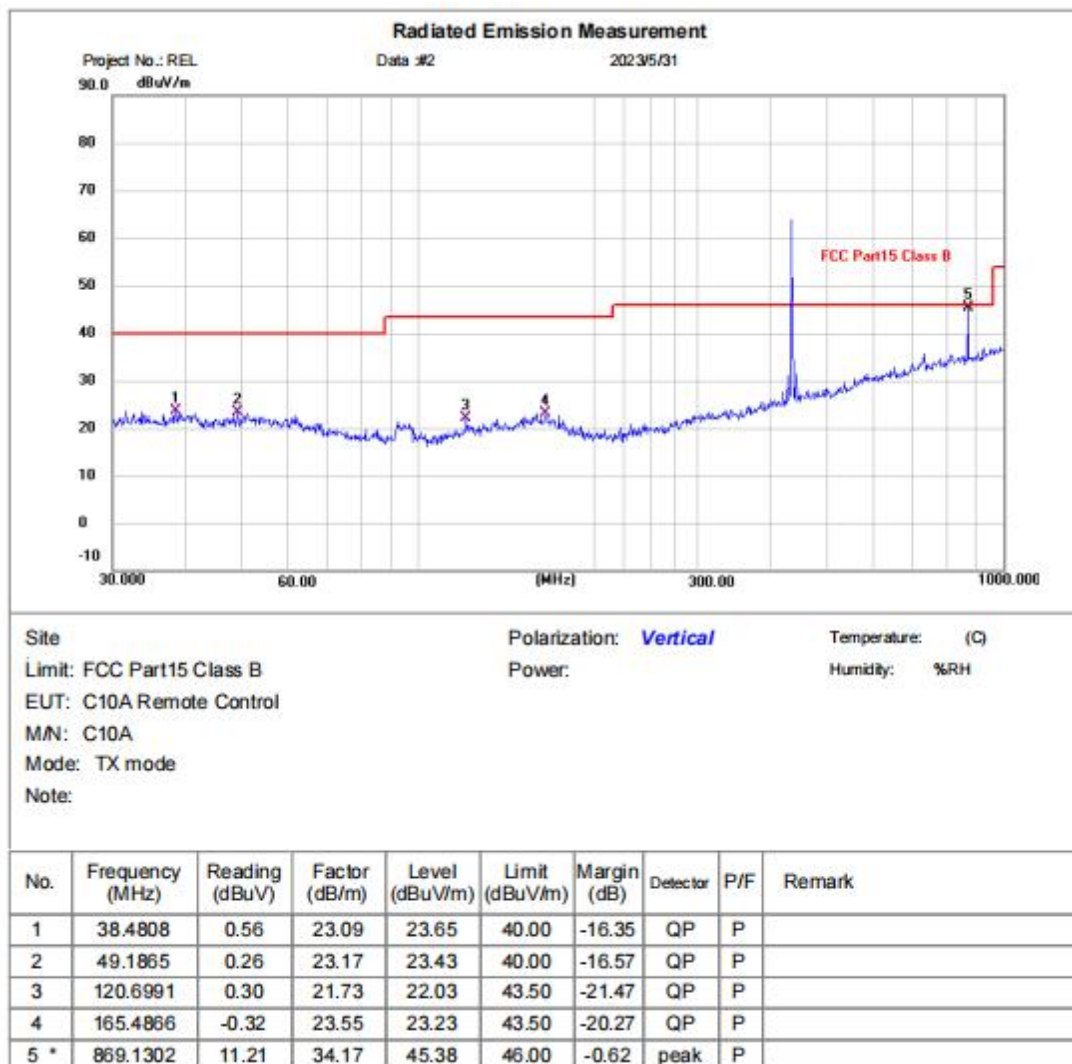


No.	Frequency (MHz)	Peak Result (dBuV/m)	Duty cycle factor	Average Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result
1	869.1302	45.38	-8.31	37.07	60.8	-23.73	Pass

Remark:

- 1.Final Level =Receiver Read level +Correct factor
- 2.Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
- 3.Average value = Peak value + Duty Cycle Factor

Above 1GHz Horizontal

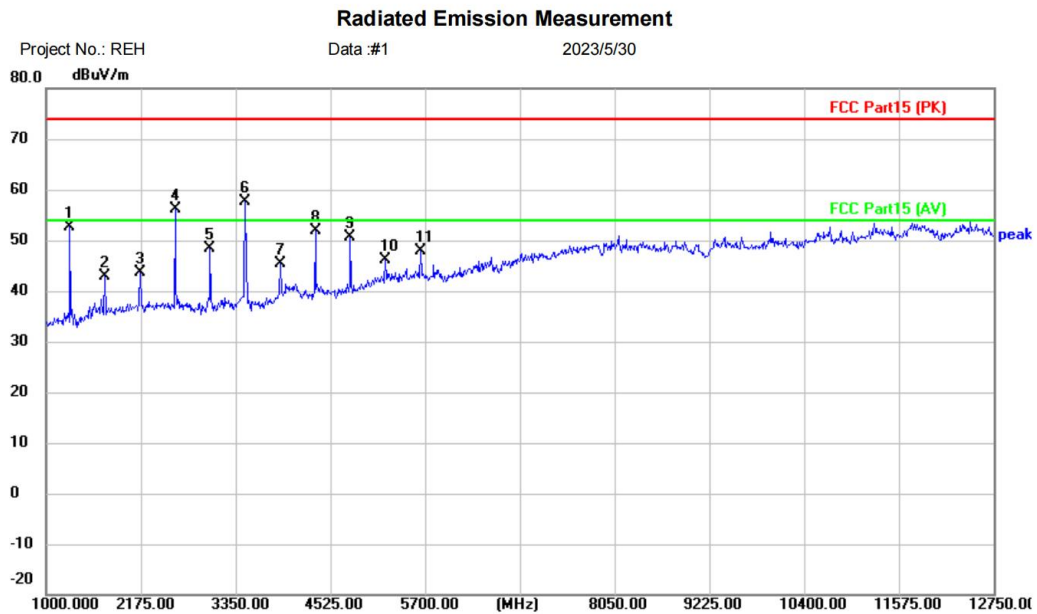


Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: C10A Remote Control
M/N: C10A
Mode: TX mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1293.750	61.69	-8.96	52.73	74.00	-21.27	peak	
2		1728.500	49.23	-6.26	42.97	74.00	-31.03	peak	
3		2163.250	48.73	-4.99	43.74	74.00	-30.26	peak	
4		2598.000	60.37	-4.16	56.21	74.00	-17.79	peak	
5		3032.750	52.26	-3.99	48.27	74.00	-25.73	peak	
6	*	3467.500	60.53	-2.92	57.61	74.00	-16.39	peak	

No.	Frequency (MHz)	Peak Result (dBuV/m)	Duty cycle factor	Average Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result
1	1293.750	52.73	-8.31	44.42	60.8	-16.38	Pass
2	1728.500	42.97	-8.31	34.66	60.8	-26.14	Pass
3	2163.250	43.74	-8.31	35.43	60.8	-25.37	Pass
4	2598.000	56.21	-8.31	47.9	60.8	-12.9	Pass
5	3032.750	48.27	-8.31	39.96	60.8	-20.84	Pass
6	3467.500	57.61	-8.31	49.3	60.8	-11.5	Pass

Vertical

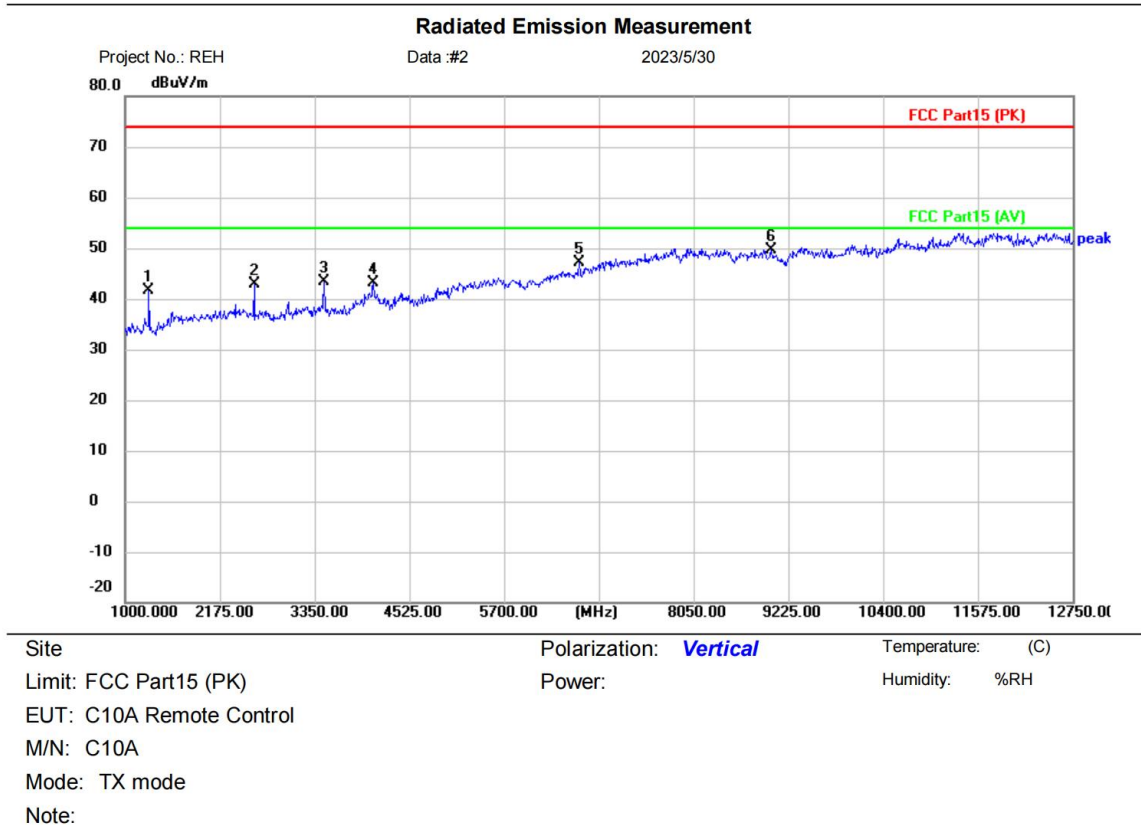

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1293.750	50.49	-8.96	41.53	74.00	-32.47	peak	
2		2598.000	47.08	-4.15	42.93	74.00	-31.07	peak	
3		3467.500	46.32	-2.92	43.40	74.00	-30.60	peak	
4		4078.500	42.57	0.45	43.02	74.00	-30.98	peak	
5		6628.250	39.92	7.10	47.02	74.00	-26.98	peak	
6	*	9013.500	38.96	10.67	49.63	74.00	-24.37	peak	

No.	Frequency (MHz)	Peak Result (dBuV/m)	Duty cycle factor	Average Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result
1	1293.750	41.53	-8.31	33.22	60.8	-27.58	Pass
2	2598.000	42.93	-8.31	34.62	60.8	-26.18	Pass
3	3467.500	43.40	-8.31	35.09	60.8	-25.71	Pass
4	4078.500	43.02	-8.31	34.71	60.8	-26.09	Pass
5	6628.250	47.02	-8.31	38.71	60.8	-22.09	Pass
6	9013.500	49.63	-8.31	41.32	60.8	-19.48	Pass

Remark:

1. Final Level = Receiver Read level + Correct factor
2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. Average value = Peak value + Duty Cycle Factor

BlueAsia

11 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.231(B))


Test Standard	47 CFR Part 15, Subpart C 15.231
Test Method	ANSI C63.10 (2013) Section 6.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

11.1 LIMITS

Fundamental frequency(MHz)	Field strength of fundamental(microvolts/meter)	Field strength of spurious emissions(microvolts/meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750	125 to 375
174-260	3750	375
260-470	3750 to 12500	375 to 1250
Above 470	12500	1250

Remark: the emission limit is based on measurement instrumentation employing an average detector at a distance of 3 meters. The frequencies above 1000MHz are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

11.2 BLOCK DIAGRAM OF TEST SETUP

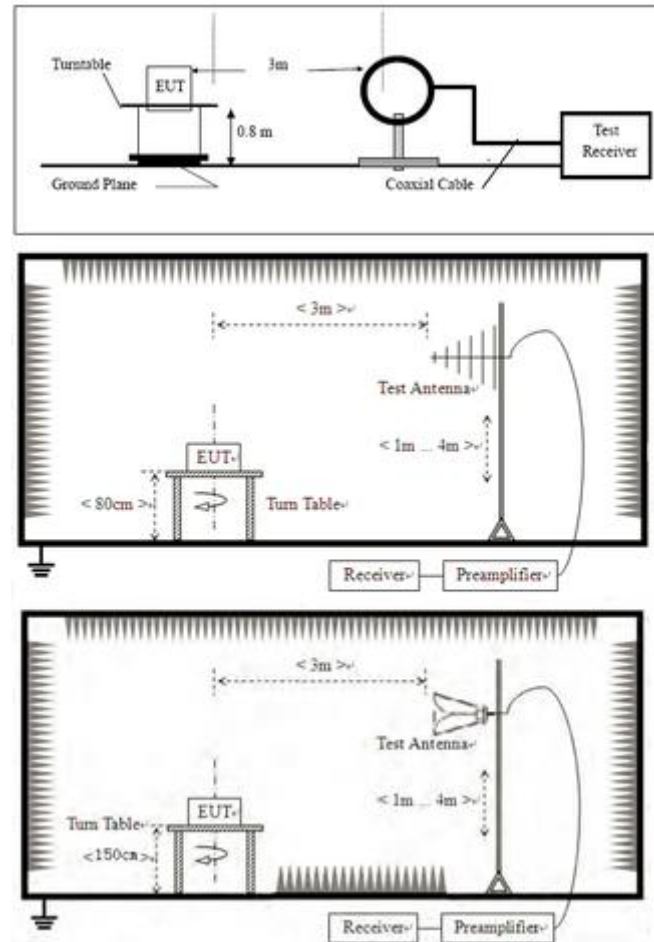

11.3 PROCEDURE


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

BlueAsia


11.4 TEST DATA

Peak value						
Frequency (MHz)	Read Level (dBuV)	Correct Facor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
433.92	52.64	26.79	79.43	100.80	-21.37	Horizontal
433.92	35.28	26.79	62.07	100.80	-38.73	Vertical
Average value						
Frequency (MHz)	Peak value	Duty cycle factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
433.92	79.43	-8.31	71.12	80.80	-9.68	Horizontal
433.92	62.07	-8.31	53.76	80.80	-27.04	Vertical
Calculate Formula:	Average value = Peak value + Duty Cycle Factor					
	Duty cycle factor = $20\log(\text{Duty cycle})$					
	Duty cycle = on time/ period					
Test data:	T on time = $1.19\text{ms} \times 13 + 0.35\text{ms} \times 12 = 19.67(\text{ms})$					
	T period = $51.2(\text{ms})$					
	Duty cycle = 38.42%					
	Duty cycle factor = $20\log(\text{Duty cycle}) = -8.31$					

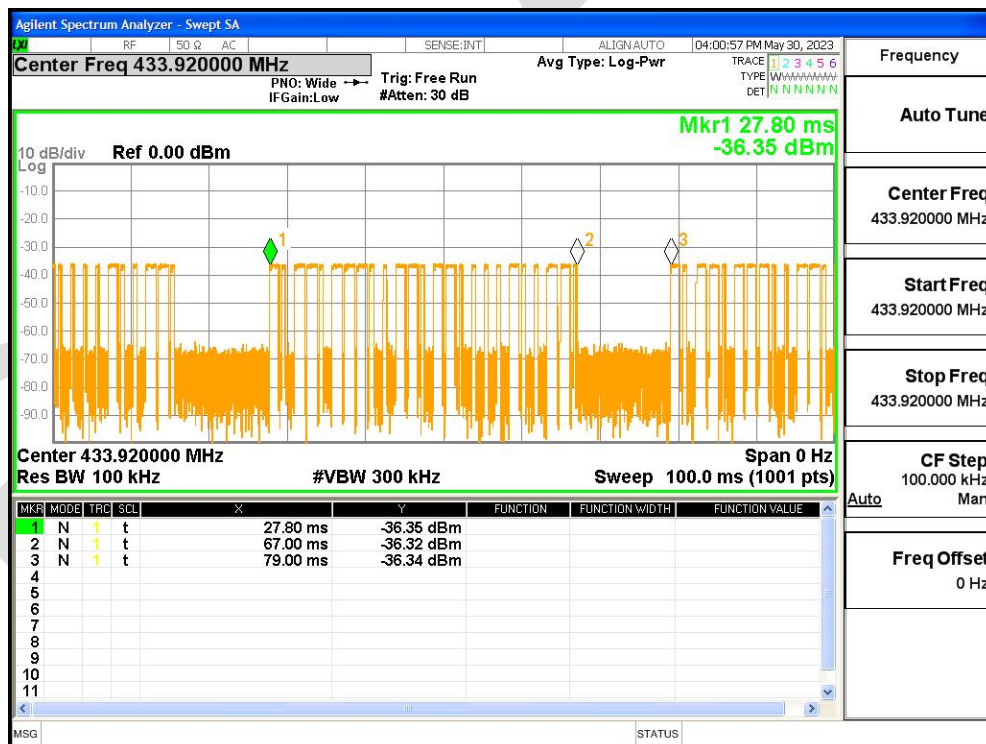


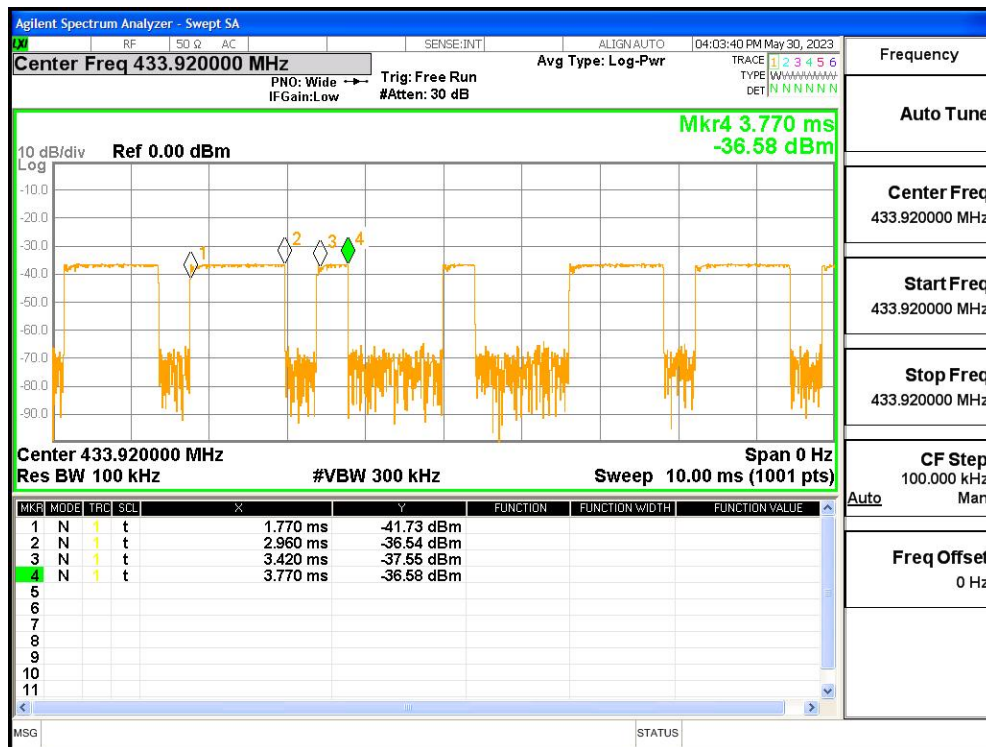

Vertical

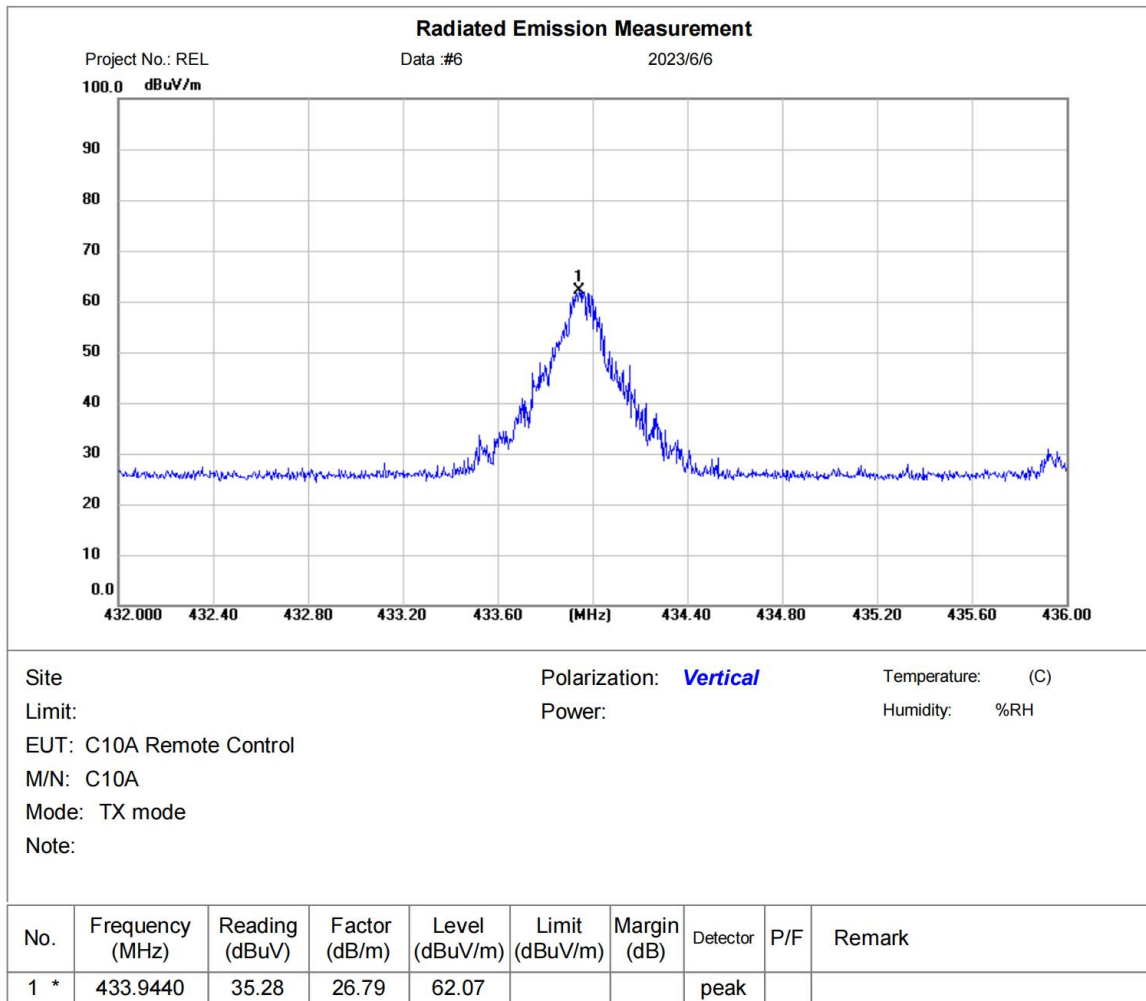

Horizontal

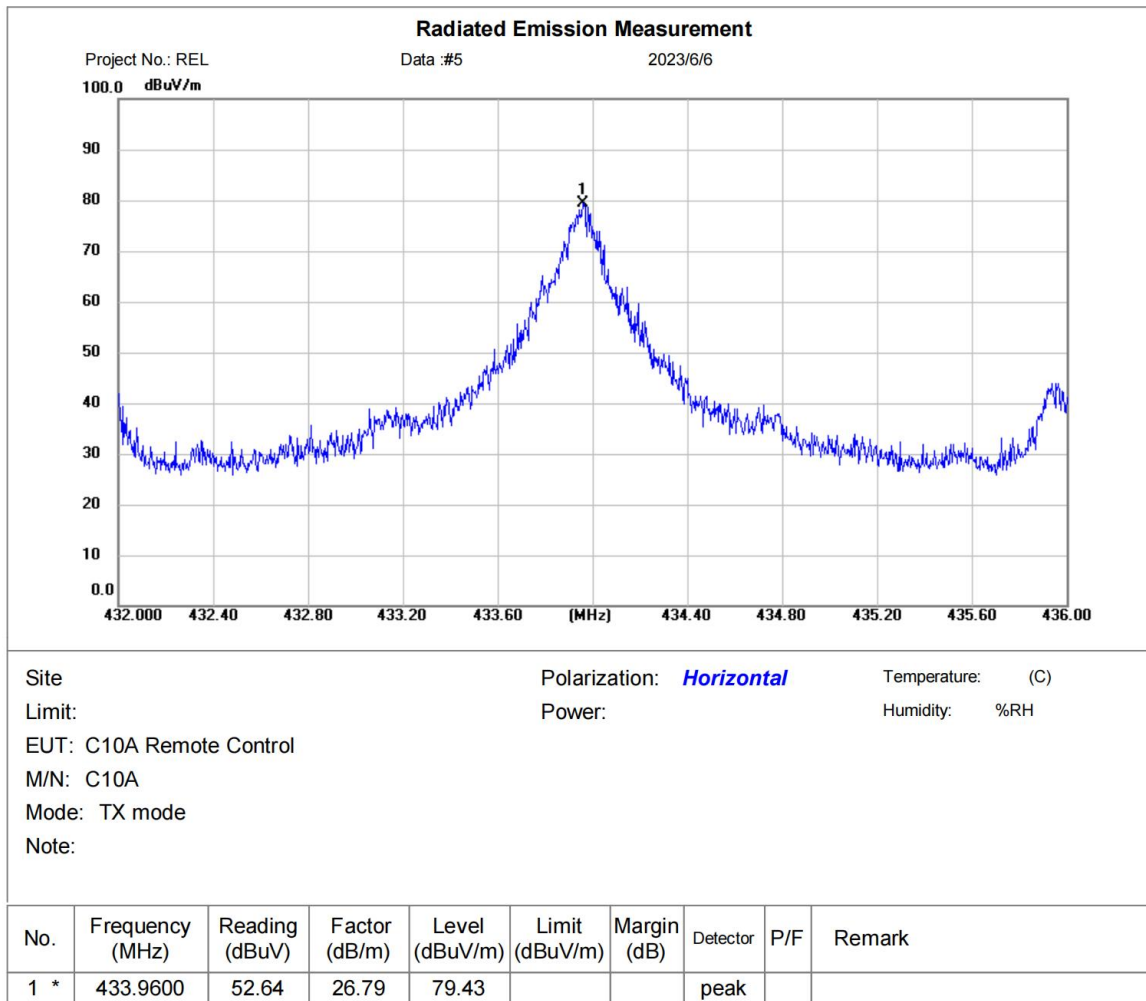


12 DWELL TIME (15.231(A))

Test Standard	47 CFR Part 15, Subpart C 15.231
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

12.1 LIMITS

Device type	Limit
Manually operated transmitter	The switch automatically deactivate the transmitter within not more than 5 seconds of being released
Automatically activated transmitter	Cease transmission within 5 seconds after activation
Periodic transmissions to determine system integrity of transmitters used in security or safety applications	The total transmission time does not exceed 2 seconds per hour

12.2 BLOCK DIAGRAM OF TEST SETUP

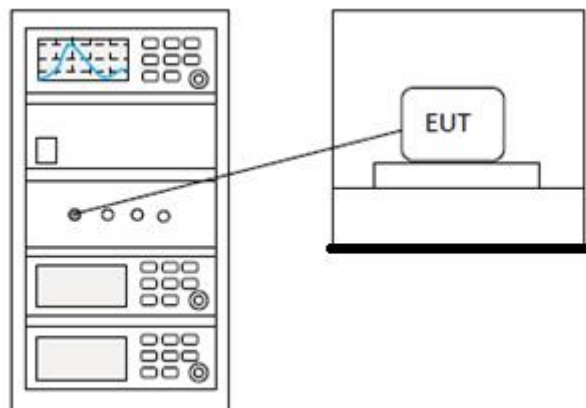

12.3 TEST DATA



Measurement Data

Duration time (second)	Limit (second)	Result
0.191	<5.0	Pass


13 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.231
Test Method	ANSI C63.10 (2013) Section 6.9
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%


13.1 LIMITS

Frequency range(MHz)	Limit
70-900	No wider than 0.25% of the center frequency
Above 900	No wider than 0.5% of the center frequency

13.2 BLOCK DIAGRAM OF TEST SETUP

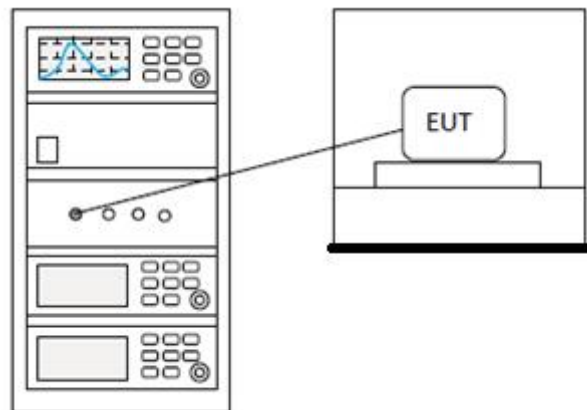

13.3 TEST DATA

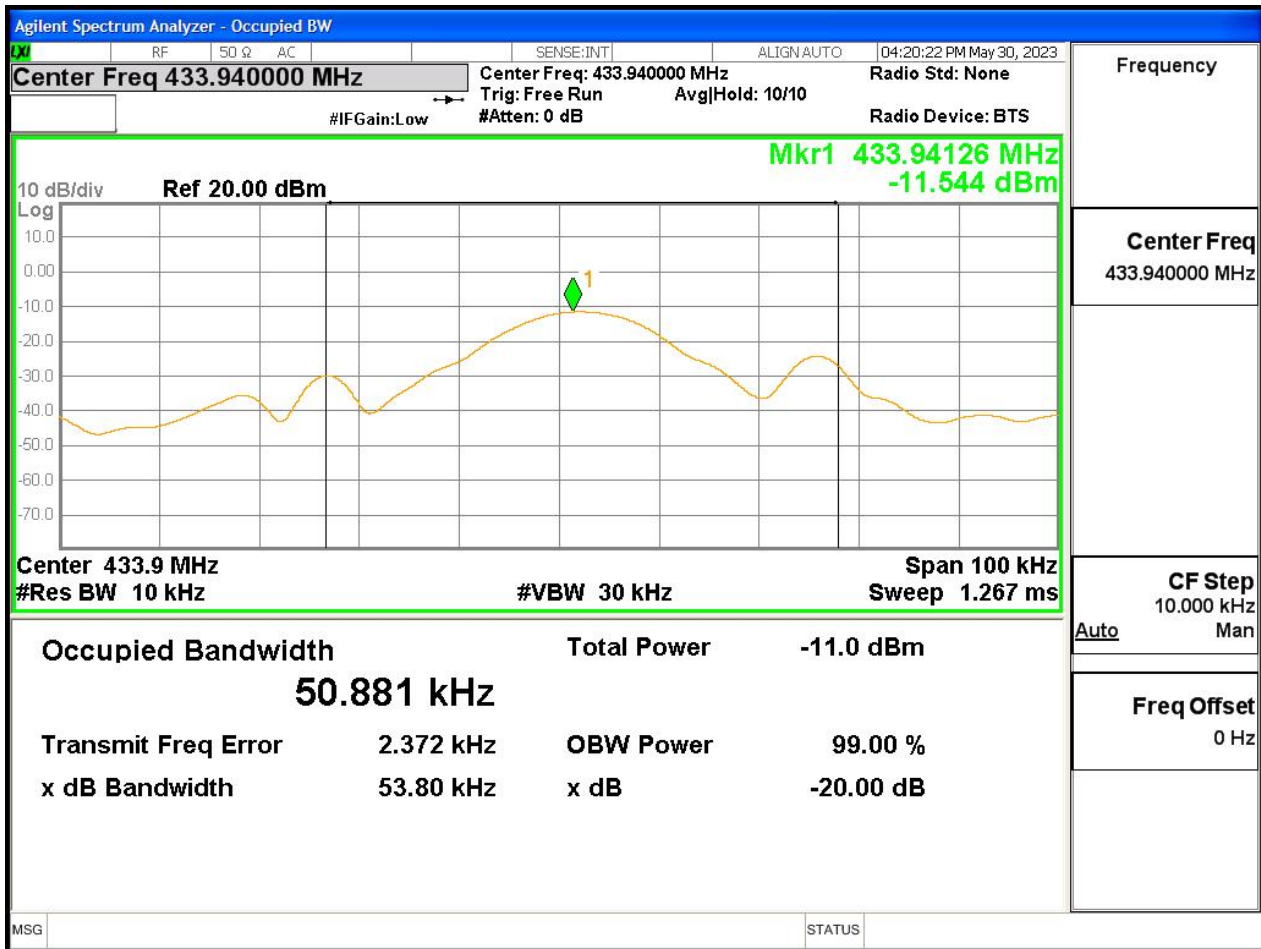

Measurement Data


20dB bandwidth (MHz)	Limit (MHz)	Results
0.054	1.0848	Passed

Note: Limit= Fundamental frequency×0.25%=433.92×0.25%=1.0848MHz

14 ANTENNA REQUIREMENT


Test Standard	47 CFR Part 15, Subpart C 15.231
Test Method	N/A

14.1 CONCLUSION

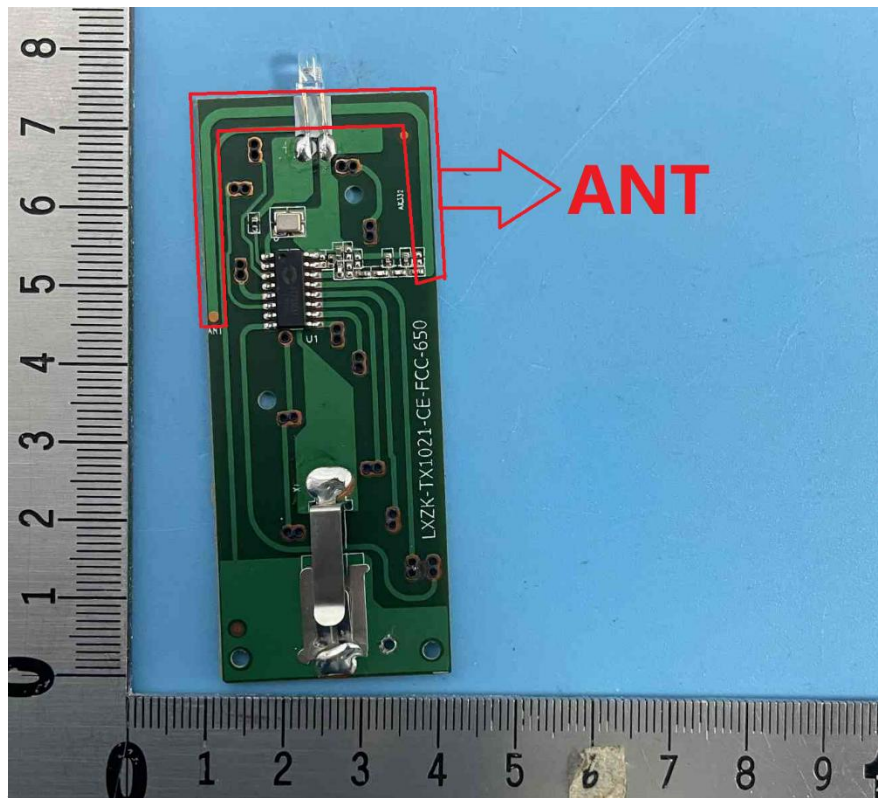




APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Radiated Emissions

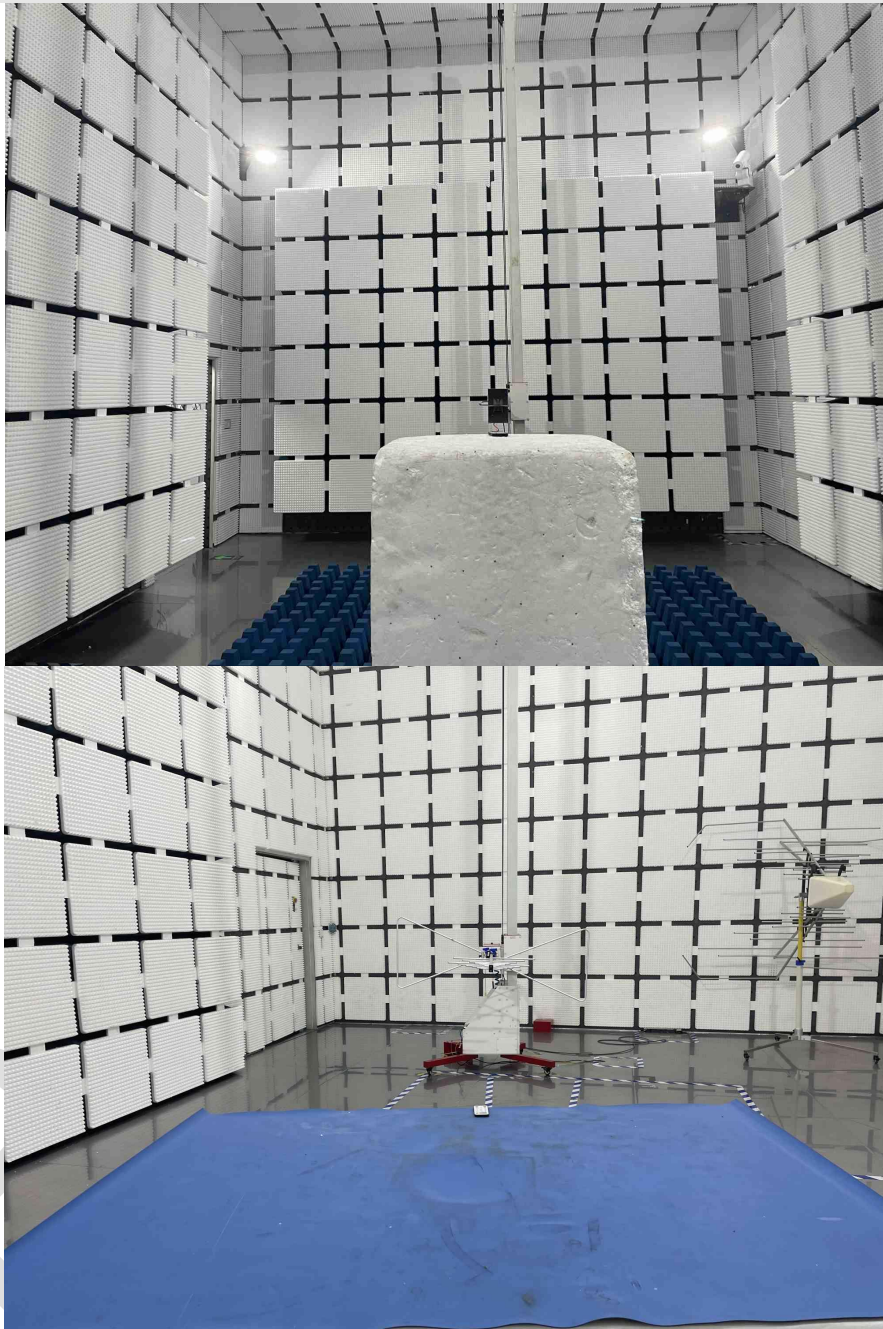



APPENDIX B: PHOTOGRAPHS OF EUT

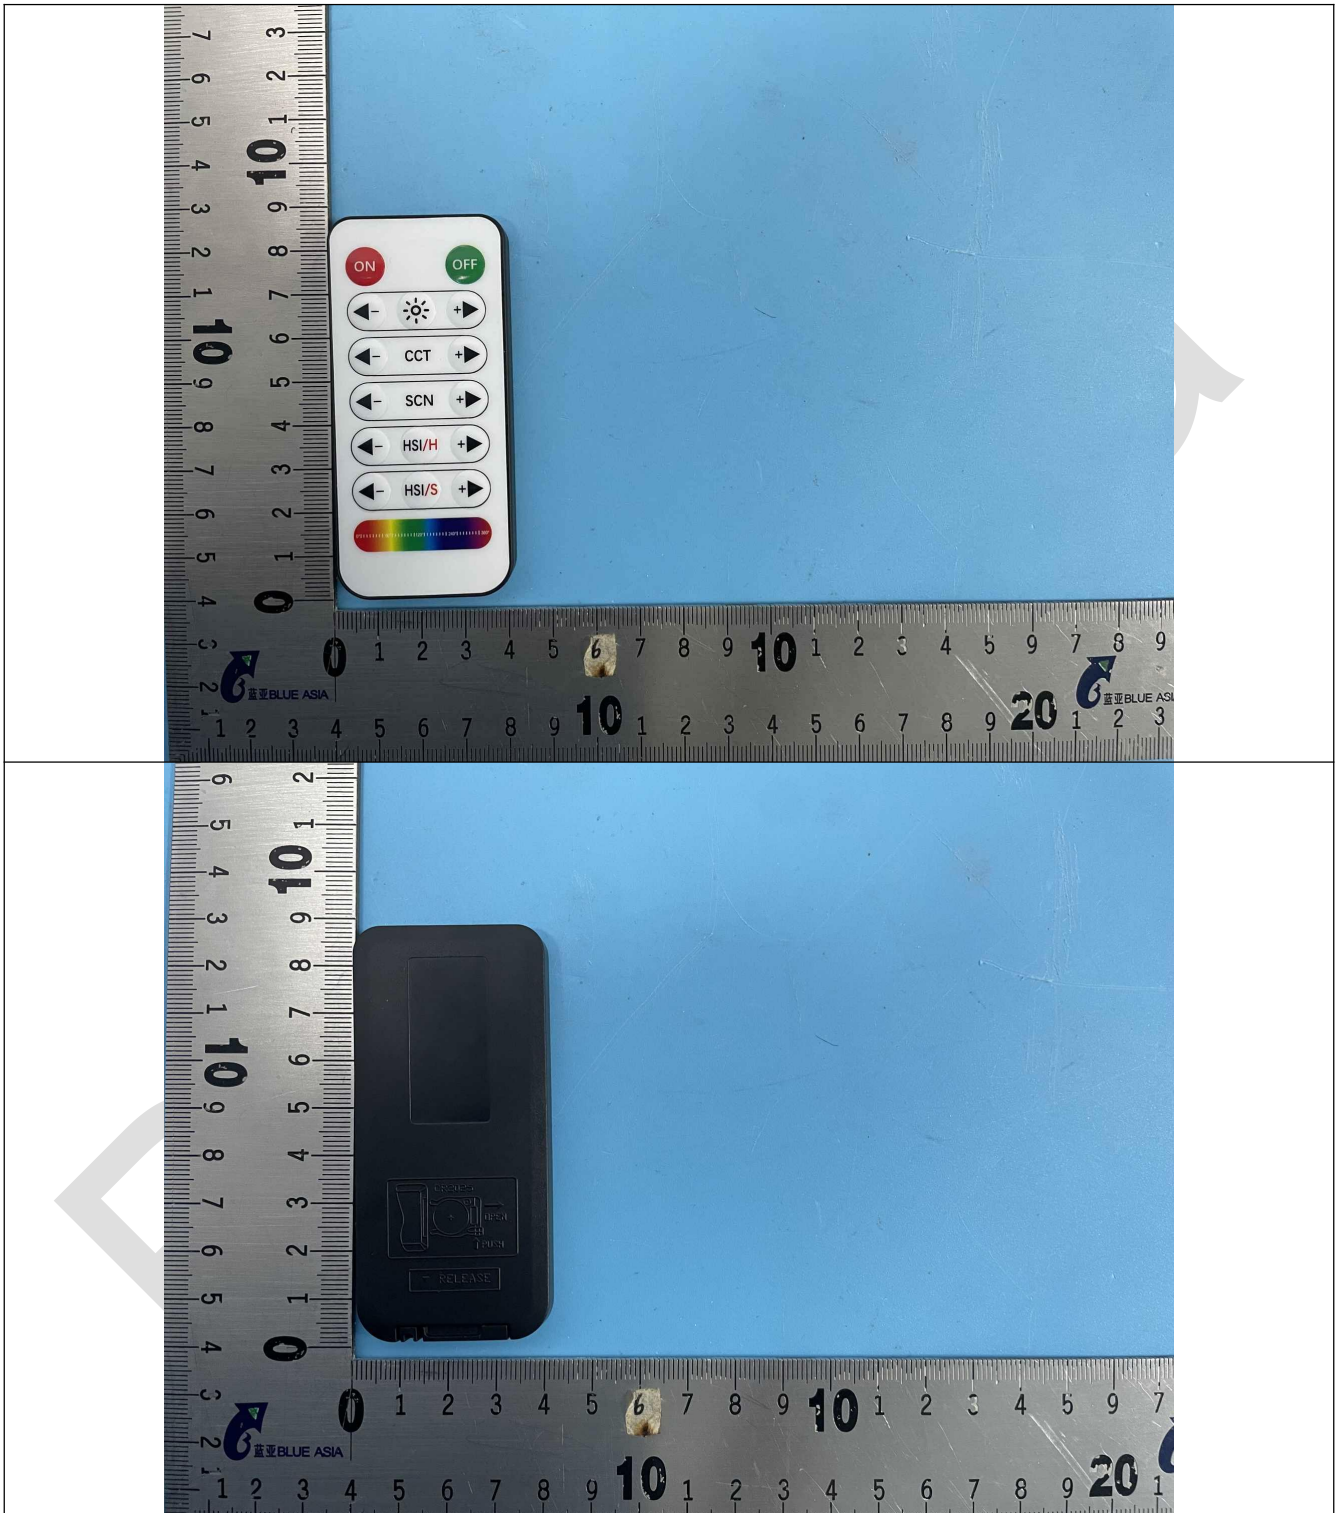

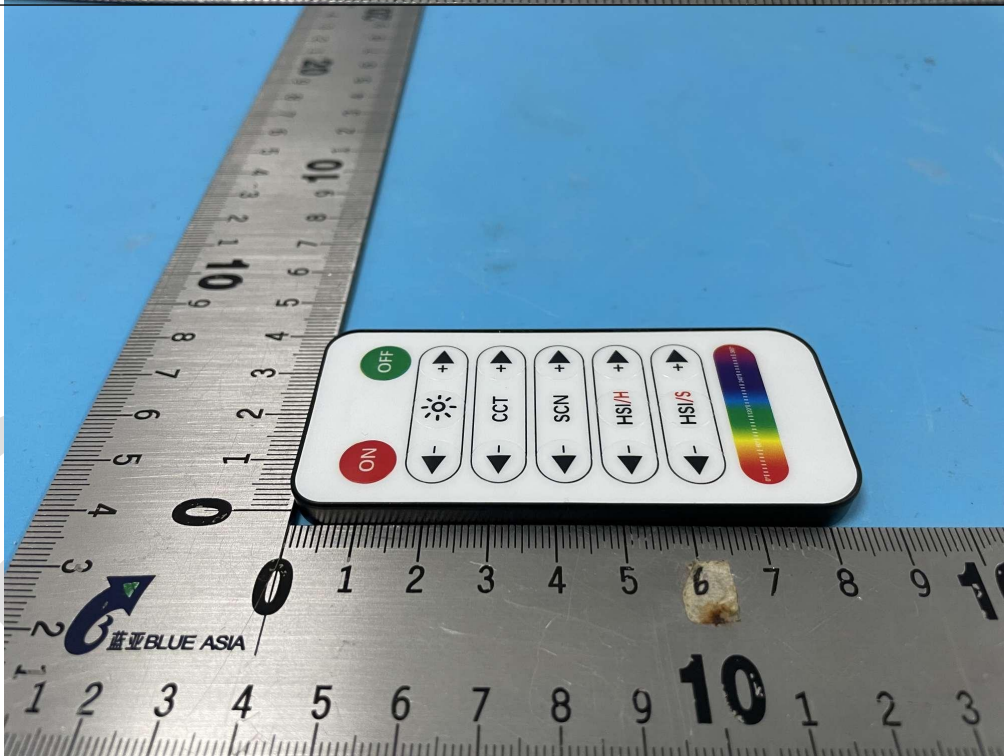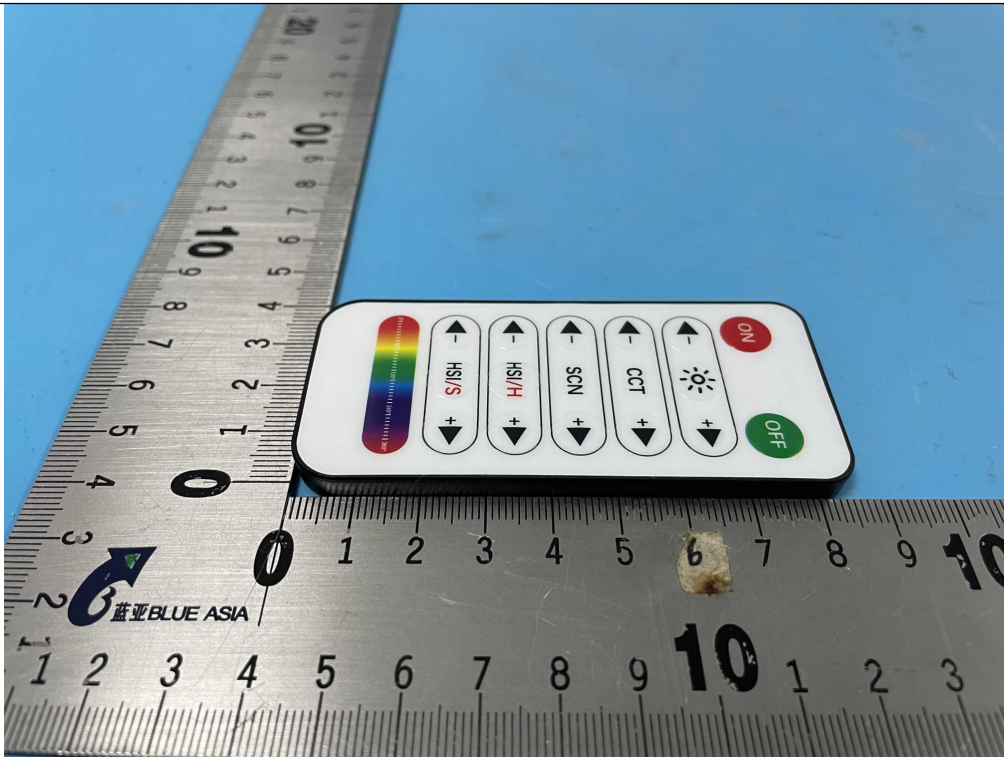



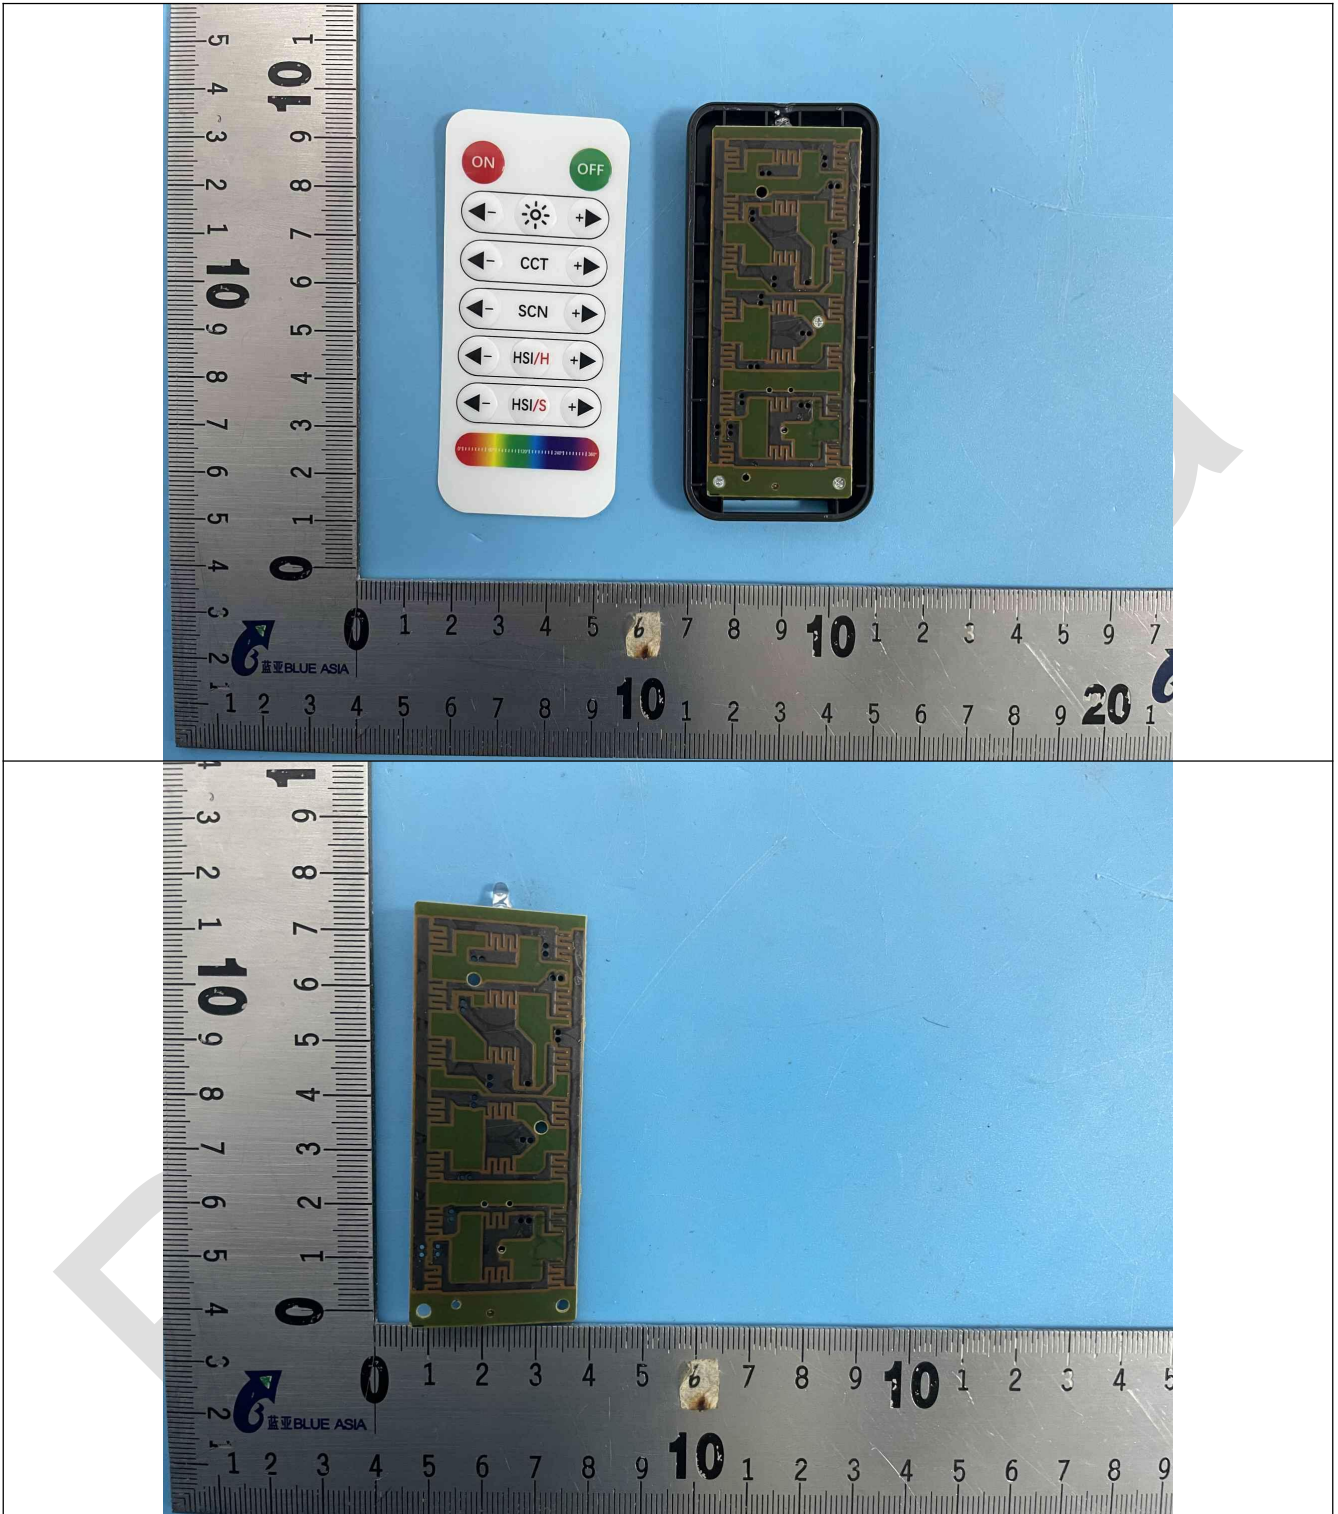

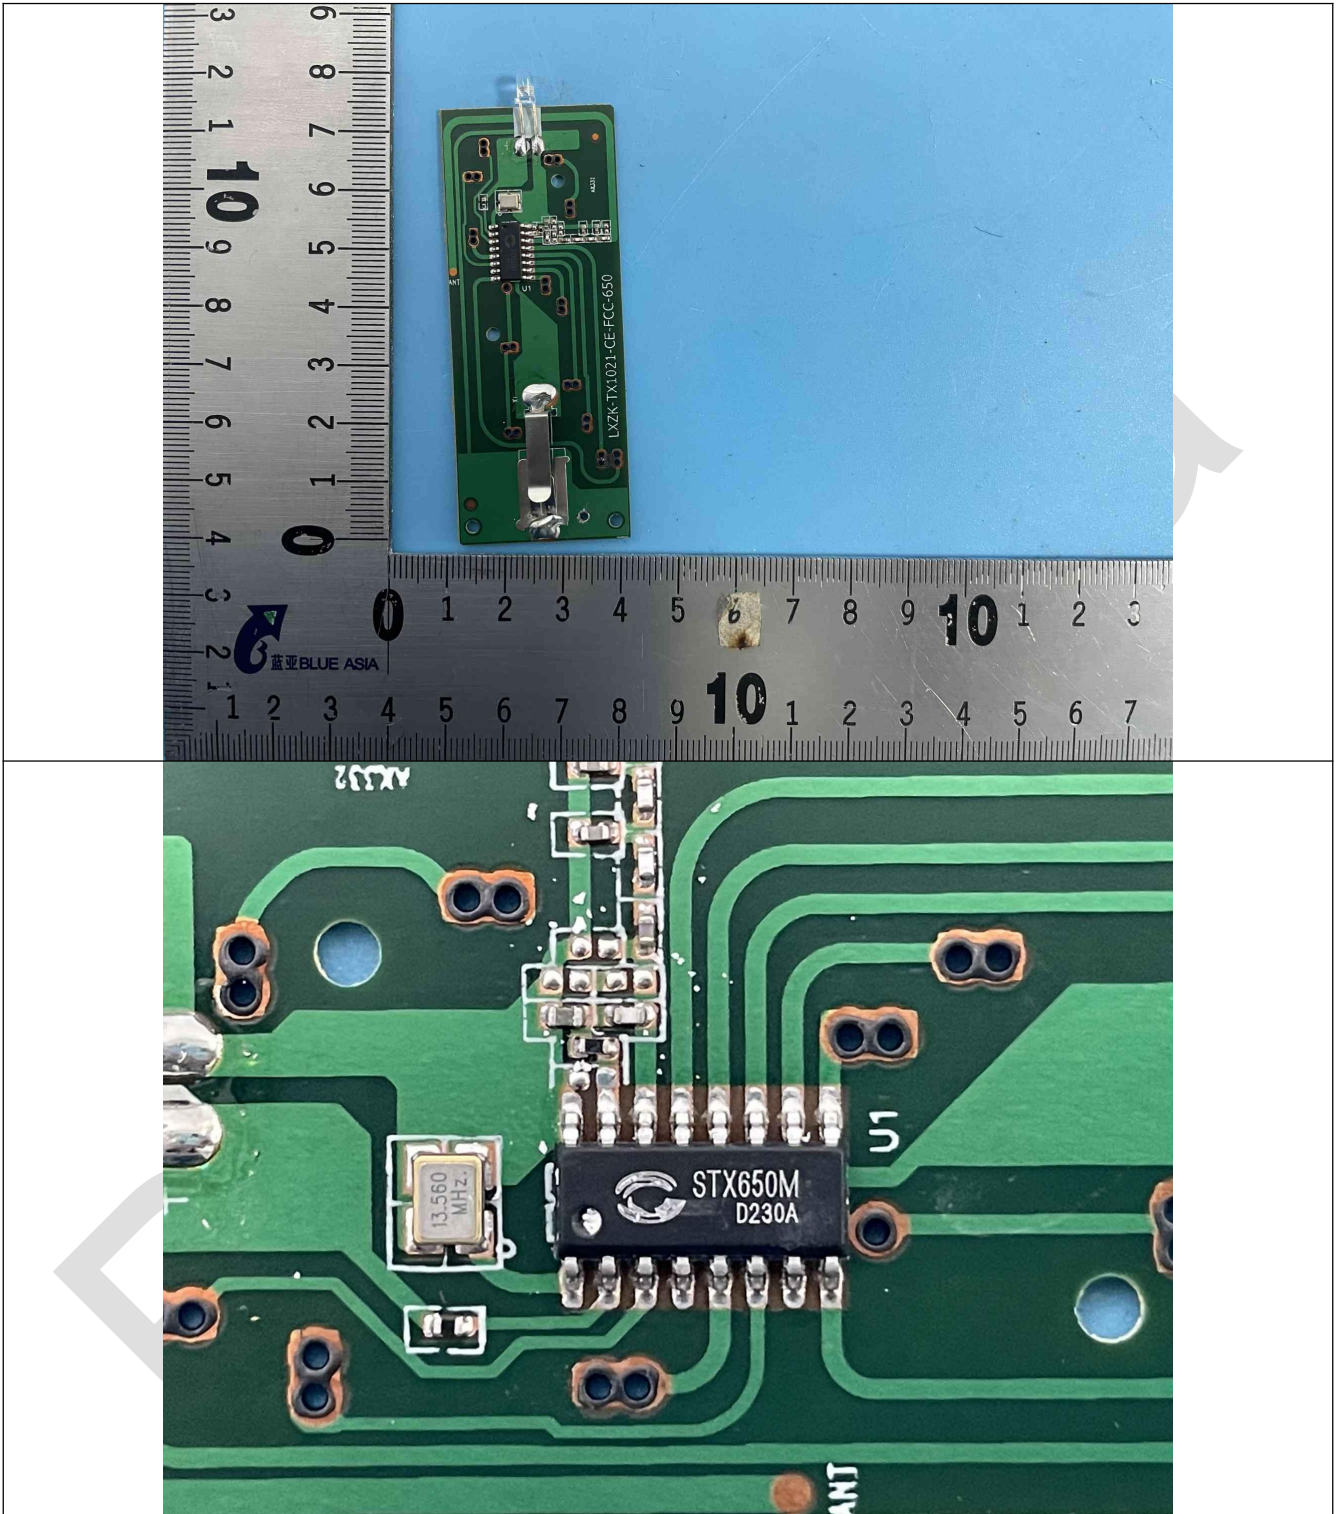

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia