



REPORT No.: SZ25030399W01

TEST REPORT

APPLICANT : Suunto Sports
Technology(Dongguan)Co., Ltd.

PRODUCT NAME : Outdoor Watch

MODEL NAME : OW244

BRAND NAME : SUUNTO

FCC ID : 2BBLIOW244

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2025-03-31

TEST DATE : 2025-04-22 to 2025-05-30

ISSUE DATE : 2025-07-28

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	4
1.2. Test Equipment List	5
1.3. Measurement Uncertainty	7
1.4. Testing Laboratory	7
2. General Description	8
2.1. Information of Applicant and Manufacturer	8
2.2. Information of EUT	8
2.3. Channel List of EUT	9
2.4. Test Configuration of EUT	10
2.5. Test Conditions	10
2.6. Test Setup Layout Diagram	10
3. Test Results	13
3.1. Antenna Requirement	13
3.2. Duty Cycle of Test Signal	14
3.3. Maximum Peak Conducted Output Power	15
3.4. Maximum Average Conducted Output Power	16
3.5. 6 dB Bandwidth	17
3.6. Conducted Spurious Emissions and Band Edge	18
3.7. Power Spectral Density	19
3.8. Conducted Emission	20
3.9. Restricted Frequency Bands	21
3.10. Radiated Emission	22
Annex A Test Data and Result	24



REPORT No.: SZ25030399W01

Change History		
Version	Date	Reason for change
1.0	2025-07-28	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	N/A	Duty Cycle of Test Signal	Apr. 23, 2025	Li Zikai	PASS	/
3	15.247(b)	Maximum Peak Conducted Output Power	Apr. 23, 2025	Li Zikai	PASS	/
4	15.247(b)	Maximum Average Conducted Output Power	Apr. 23, 2025	Li Zikai	PASS	/
5	15.247(a)	Bandwidth	Apr. 23, 2025	Li Zikai	PASS	/
6	15.247(d)	Conducted Spurious Emission and Band Edge	Apr. 23, 2025	Li Zikai	PASS	/
7	15.247(e)	Power Spectral Density	Apr. 23, 2025	Li Zikai	PASS	/
8	15.207	Conducted Emission	May 30, 2025	Fan Shengquan	PASS	/
9	15.247(d)	Restricted Frequency Bands	May 23, 2025	Gao Jianrou	PASS	/
10	15.209, 15.247(d)	Radiated Emission	May 23, 2025	Gao Jianrou	PASS	/

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 2: Any additions, deviation, or exclusions from the method shall be noted in the “Remark”.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.01.15	2026.01.14
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2025.01.06	2026.01.05
LISN	8127449	NSLK 8127	Schwarzbeck	2025.01.09	2026.01.08
Pulse Limiter (10dB)	VTSD 9561 F- B #206	VTSD 9561-F	Schwarzbeck	2024.05.30	2025.05.29
				2025.05.13	2026.05.12
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2024.07.02	2025.07.01

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0
TS+ -[JS32-CE]	Tonscend	2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2024.05.30	2025.05.29
				2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2024.06.03	2025.06.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2024.06.22	2025.06.21
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2024.05.30	2025.05.29
				2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2024.05.30	2025.05.29
				2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2024.05.30	2025.05.29
				2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2024.05.30	2025.05.29
				2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2024.05.30	2025.05.29
				2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2024.05.30	2025.05.29
				2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2024.07.03	2025.07.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2024.07.03	2025.07.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2024.07.03	2025.07.02
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.04.19	2028.04.18
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.11.30	2025.11.29



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	$\pm 2.77\text{dB}$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Suunto Sports Technology(Dongguan)Co., Ltd.
Applicant Address:	Room 108, No. 5, Longxi Road, Nancheng Street, Dongguan City, Guangdong Province, China
Manufacturer:	Suunto Oy
Manufacturer Address:	Tammiston kauppatie 7 A, FIN-01510 Vantaa, Finland

2.2. Information of EUT

Product Name:	Outdoor Watch	
Sample No.:	1#, 4#, 15#	
Hardware Version:	MB244	
Software Version:	2.42.15	
Equipment Type:	Bluetooth LE	
Bluetooth Version:	5.3	
Modulation Type:	GFSK	
Data Rate:	1Mbps, 2Mbps	
Operating Frequency Range:	2402MHz-2480MHz	
Antenna Type:	Metal Frame Antenna	
Antenna Gain:	-8.95dBi	
Accessory Information:	Battery	
	Brand Name:	VDL
	Model No.:	562827PN5
	Serial No.:	N/A
	Capacity:	620mAh
	Rated Voltage:	3.87V
	Charge Limit:	4.45V
	Manufacturer:	Chongqing VDL Electronics Co., LTD.
	USB Cable	
	Model No.:	CC246
	Manufacturer:	Suunto OY

Note 1: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed



description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


The EUT is controlled by dedicated software to transmit at the default maximum power level.

2.5. Test Conditions


Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

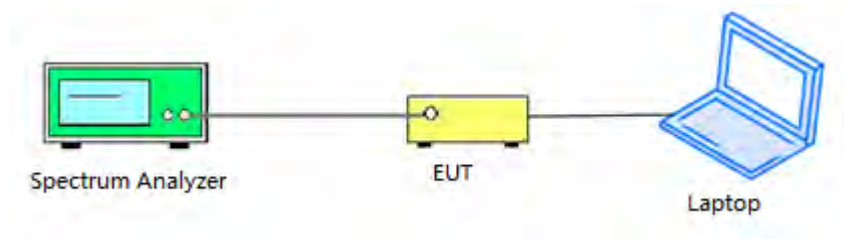


2.6.2. Conducted Emission Measurement

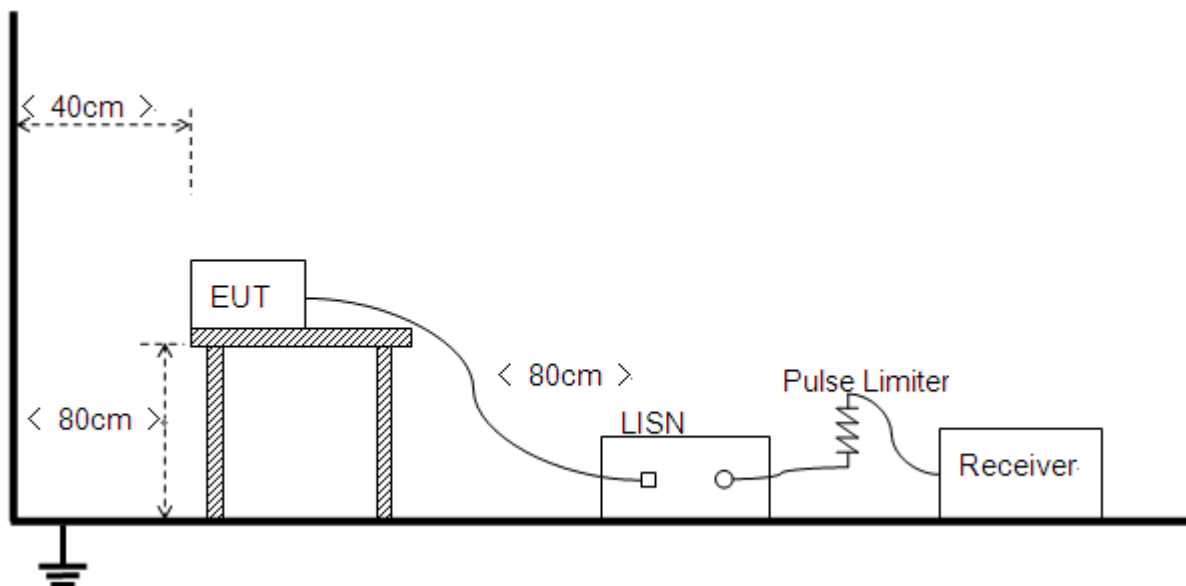


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

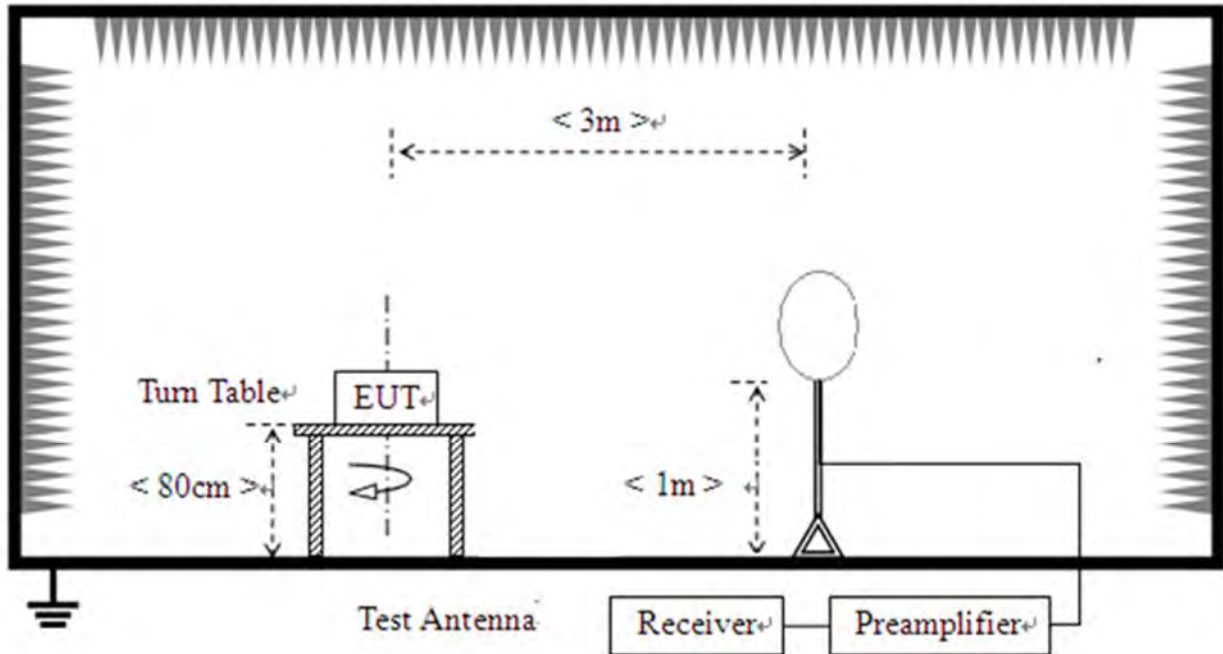

2) For radiated emissions from 30MHz to 1GHz

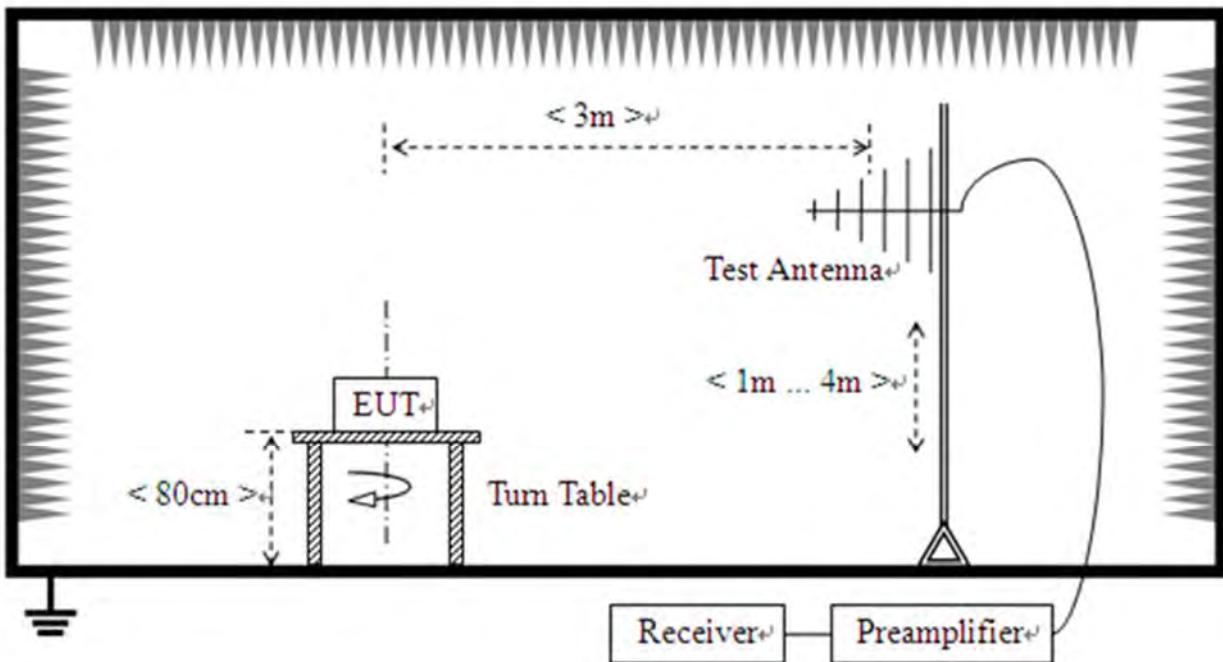

3) For radiated emissions above 1GHz

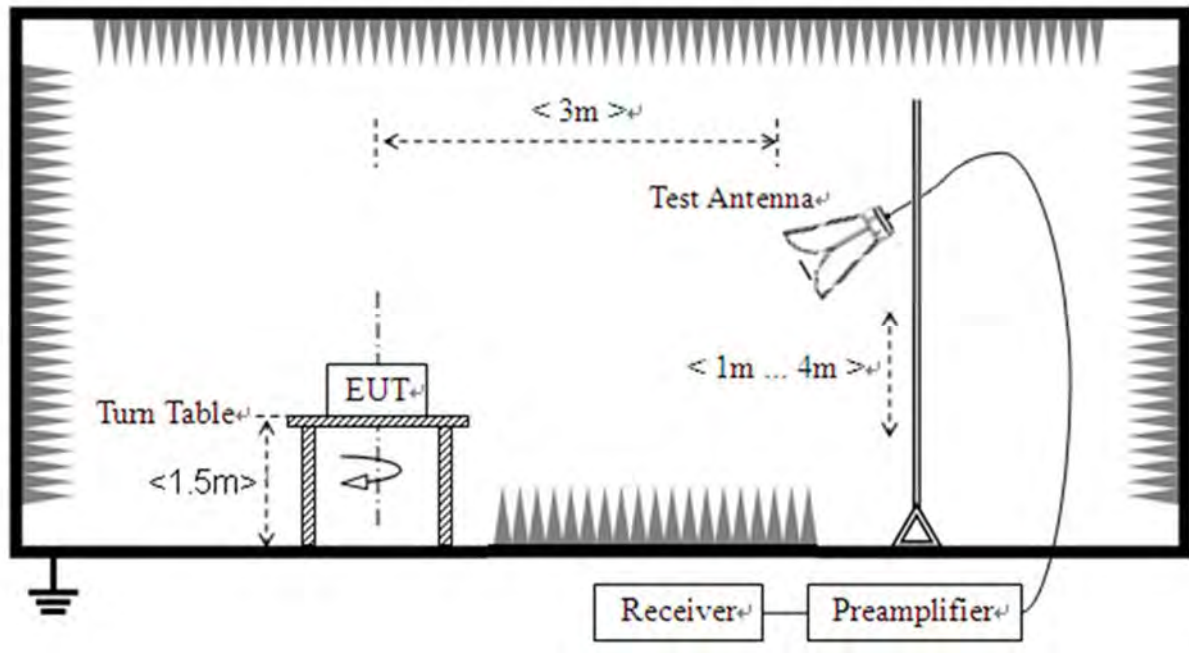

3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
☒ Internal ☐ External	☐ FPC Antenna ☐ Spring Antenna ☐ Ceramic Antenna ☐ Integrated Antenna ☐ Dipole Antenna ☐ PCB Antenna ☐ PIFA Antenna ☒ Metal Frame Antenna	☐ I-PEX Connector ☐ SMA Connector ☐ RP-SMA Connector ☒ Metal Shrapnel ☐ Layout

3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e.,no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Maximum Average Conducted Output Power

3.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4. Test Result

Refer to Annex A.3 in this report.



3.5.6 dB Bandwidth

3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100\text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq 6\text{ dB}$.

3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result

Refer to Annex A.4 in this report.



3.6. Conducted Spurious Emissions and Band Edge

3.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.7. Power Spectral Density

3.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.

3.8. Conducted Emission

3.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.8.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4. Test Result

Refer to Annex A.8 in this report.



3.9. Restricted Frequency Bands

3.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.9 in this report.

3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.10.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4.Test Result

Refer to Annex A.10 in this report.



Annex A Test Data and Result


A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	100	0	0
NVNT	BLE 1M	2440	Ant1	100	0	0
NVNT	BLE 1M	2480	Ant1	100	0	0
NVNT	BLE 2M	2402	Ant1	100	0	0
NVNT	BLE 2M	2440	Ant1	100	0	0
NVNT	BLE 2M	2480	Ant1	100	0	0




Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

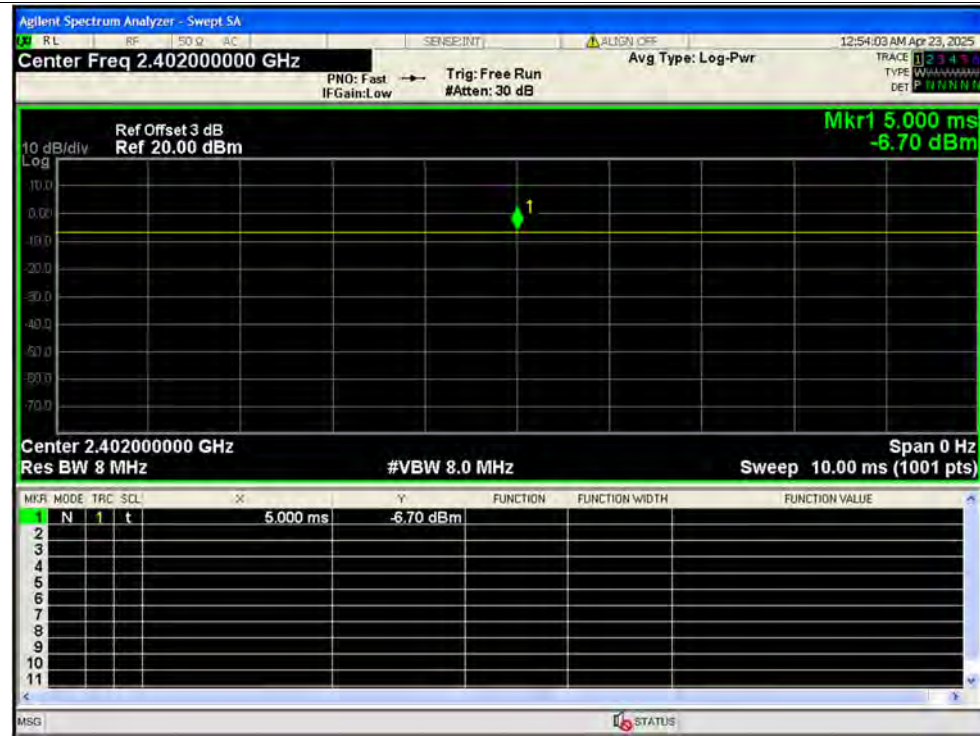


Duty Cycle NVNT BLE 1M 2440MHz Ant1

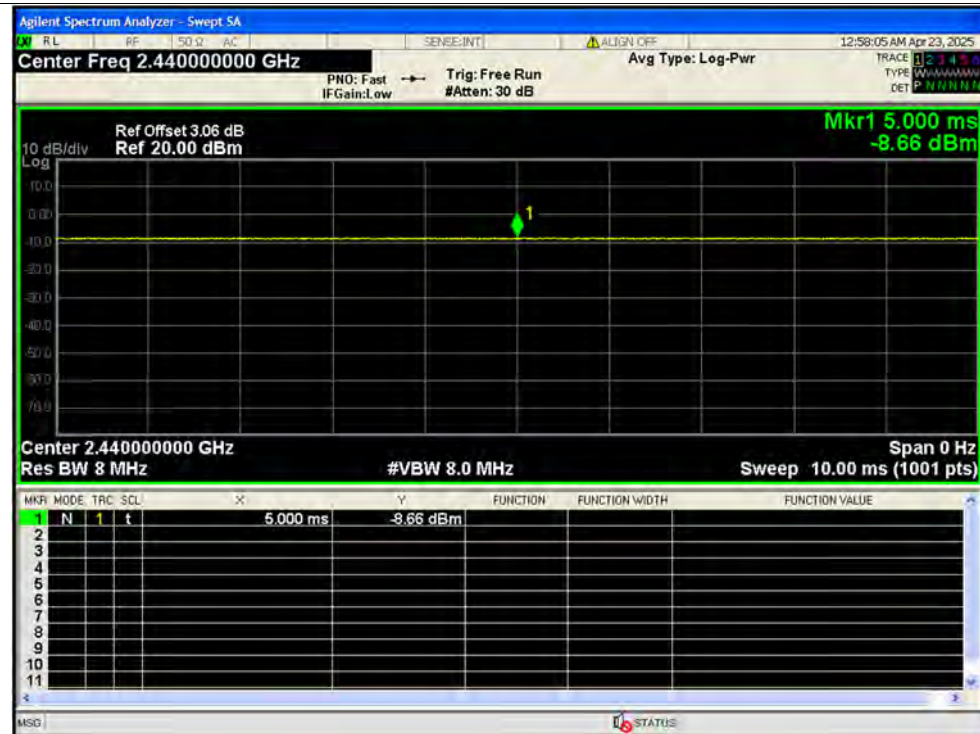




Duty Cycle NVNT BLE 1M 2480MHz Ant1

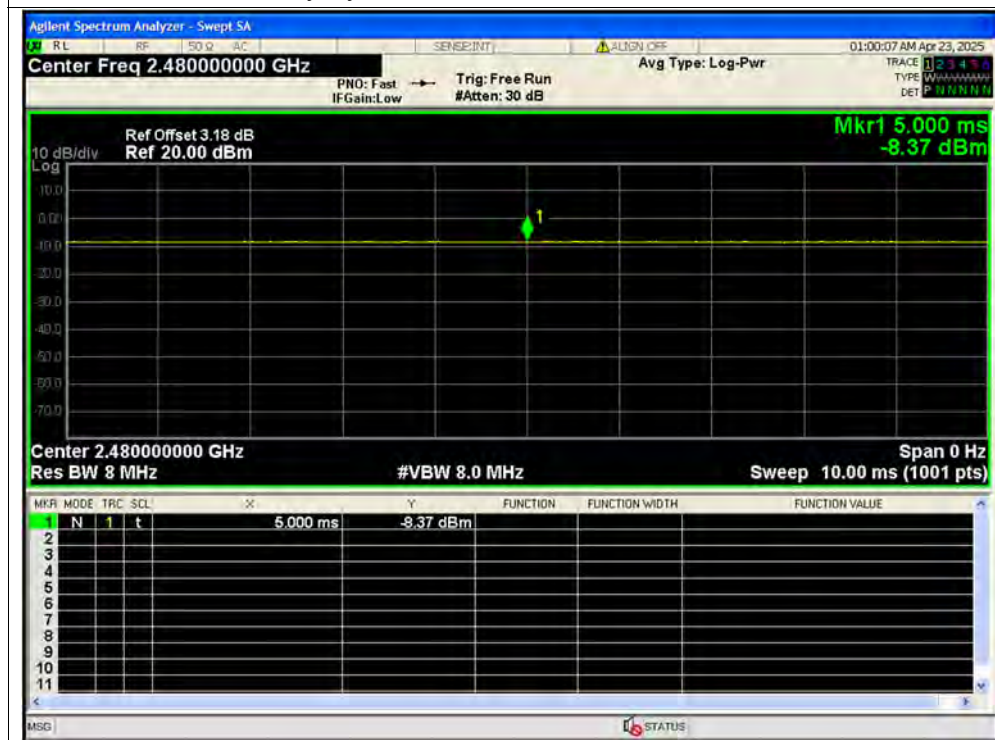


Duty Cycle NVNT BLE 2M 2402MHz Ant1

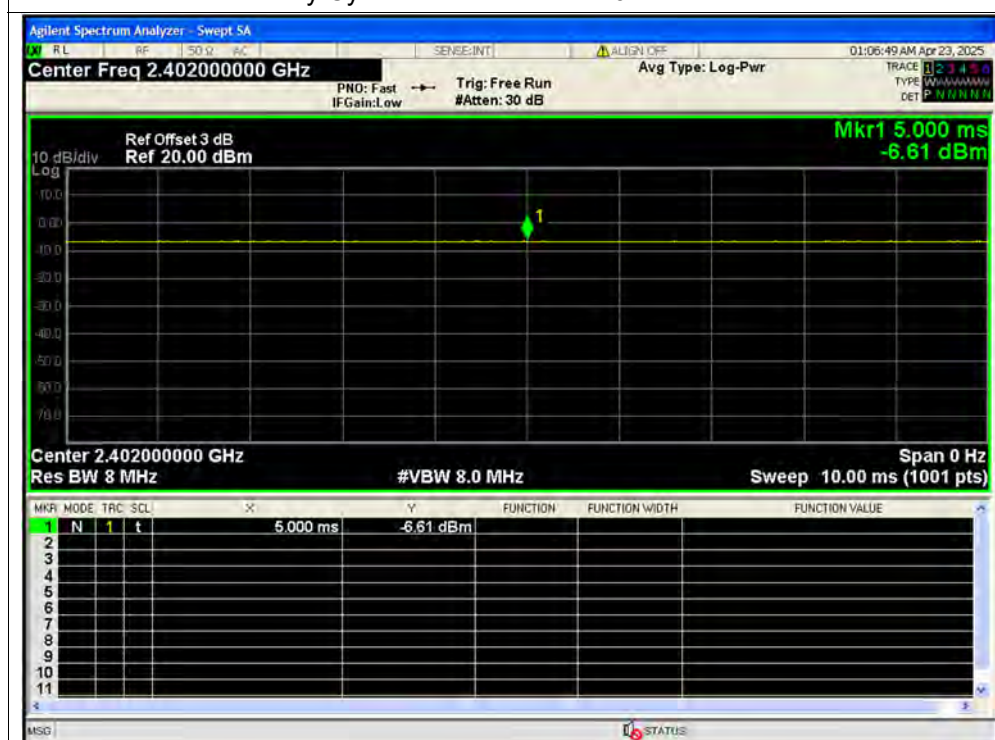



Duty Cycle NVNT BLE 2M 2440MHz Ant1

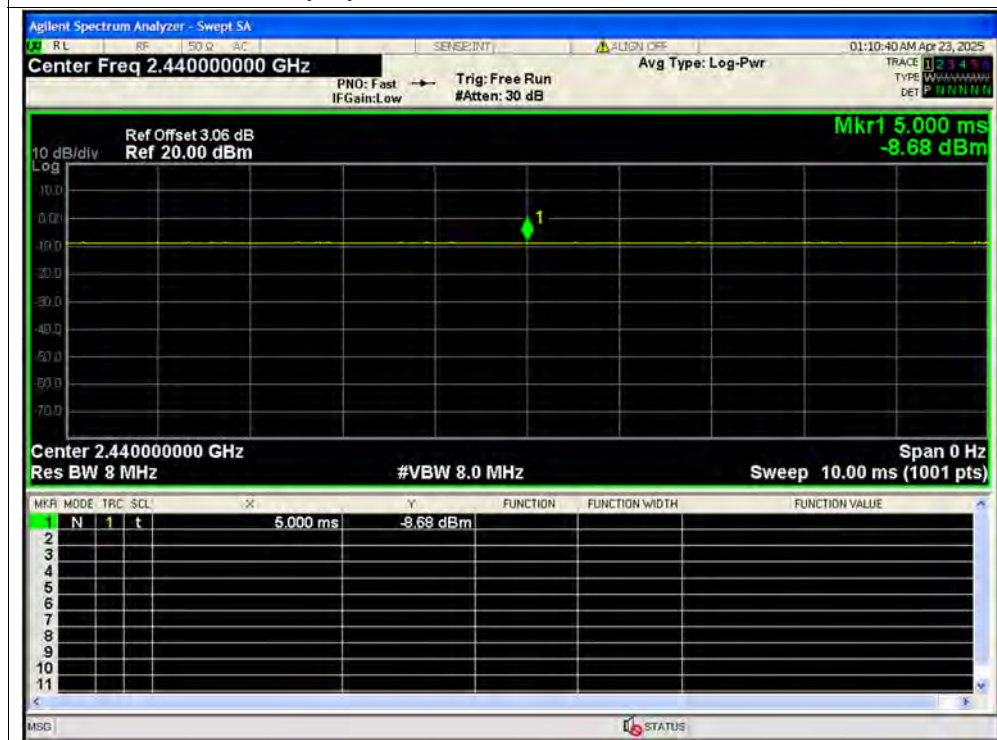

Duty Cycle NVNT BLE 2M 2480MHz Ant1




**A.2. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.59	0	-6.59	0.00022	30	Pass
NVNT	BLE 1M	2440	Ant1	-9.63	0	-9.63	0.00011	30	Pass
NVNT	BLE 1M	2480	Ant1	-8.32	0	-8.32	0.00015	30	Pass
NVNT	BLE 2M	2402	Ant1	-6.57	0	-6.57	0.00022	30	Pass
NVNT	BLE 2M	2440	Ant1	-8.72	0	-8.72	0.00013	30	Pass
NVNT	BLE 2M	2480	Ant1	-7.96	0	-7.96	0.00016	30	Pass

Test Graphs

Peak Power NVNT BLE 1M 2402MHz Ant1

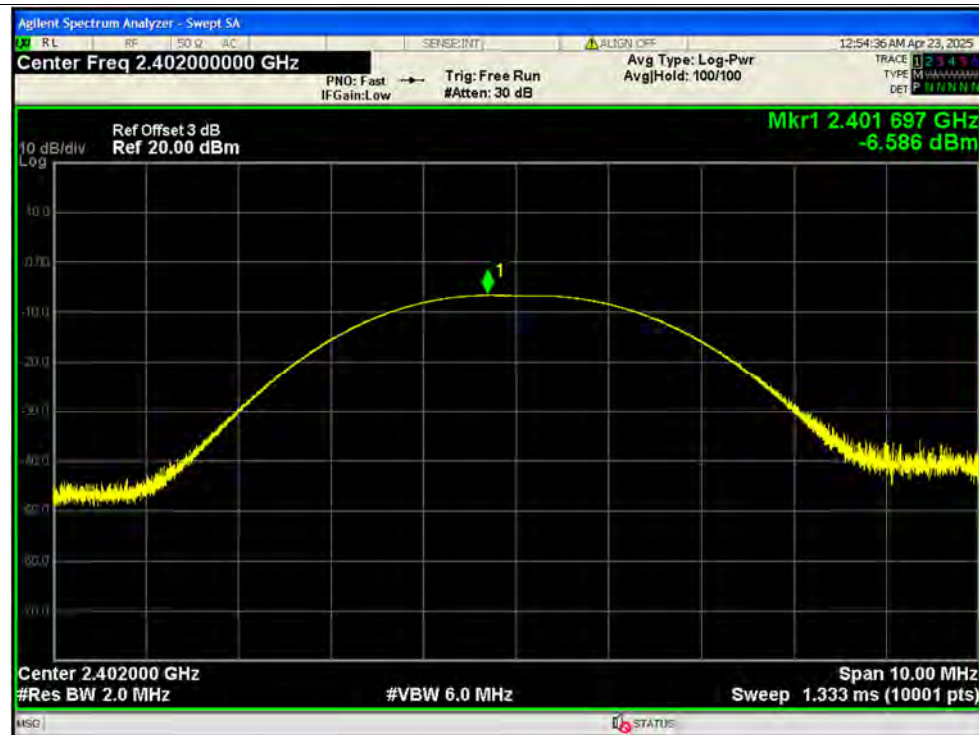


Peak Power NVNT BLE 1M 2440MHz Ant1




Peak Power NVNT BLE 1M 2480MHz Ant1




Peak Power NVNT BLE 2M 2402MHz Ant1

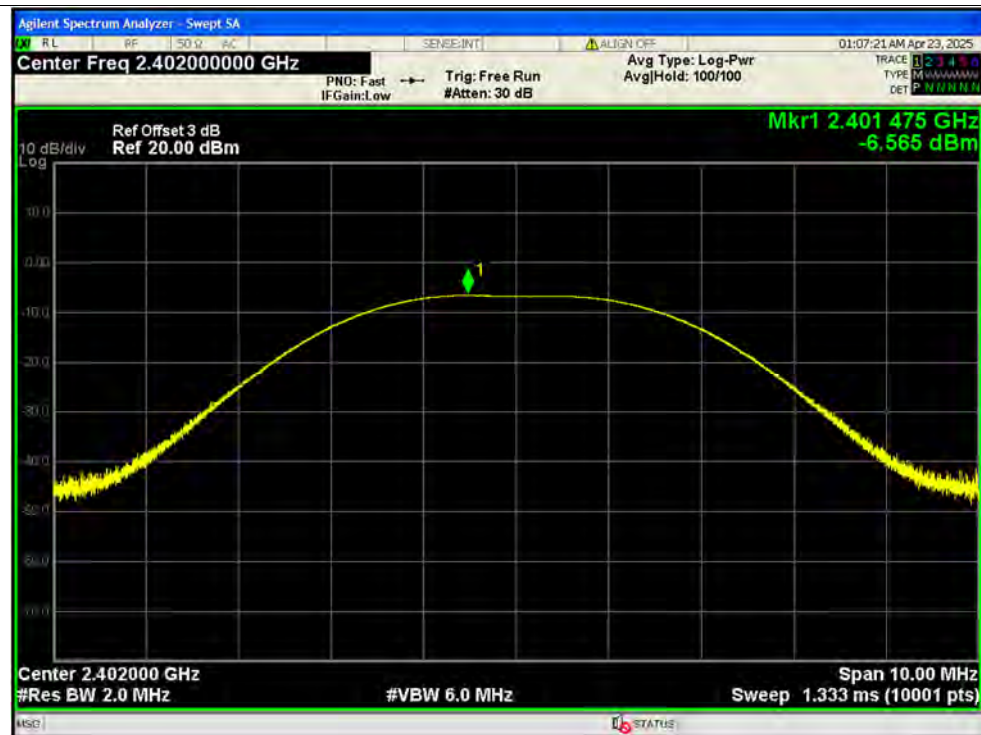

Peak Power NVNT BLE 2M 2440MHz Ant1

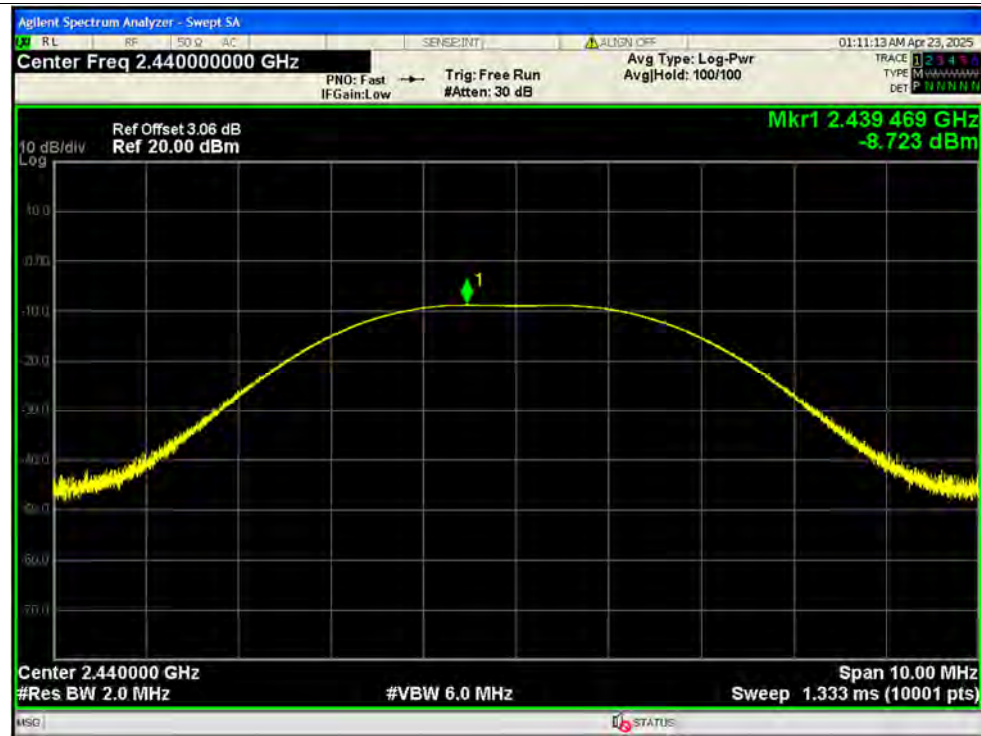

Peak Power NVNT BLE 2M 2480MHz Ant1

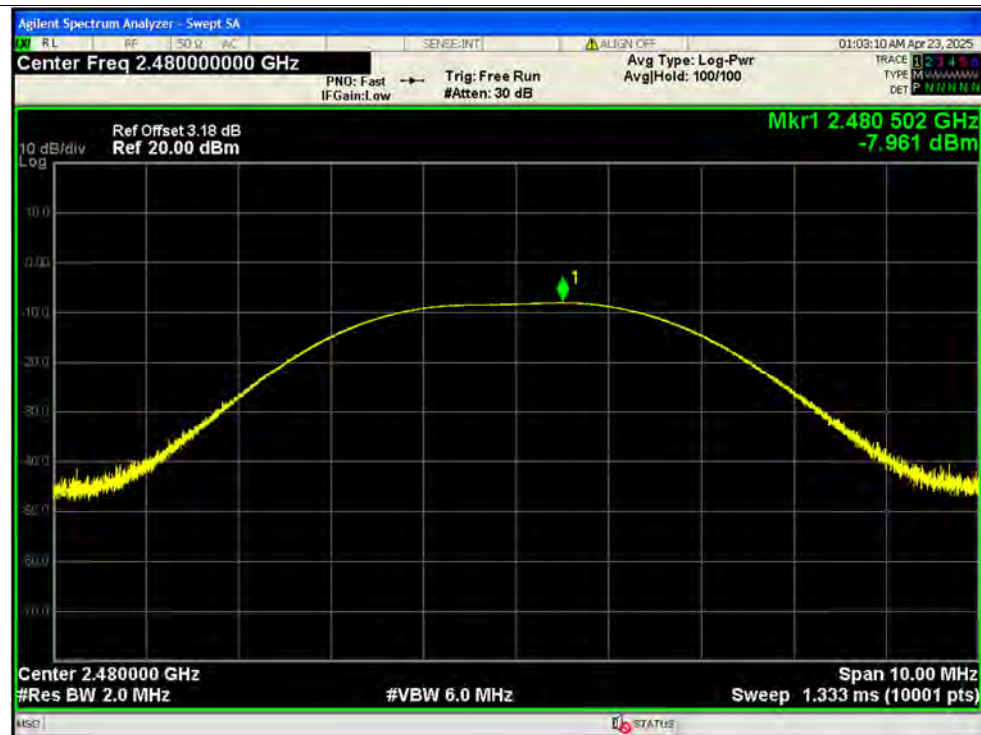


**A.3. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.8	0	-6.8	0.00021	30	Pass
NVNT	BLE 1M	2440	Ant1	-9.97	0	-9.97	0.0001	30	Pass
NVNT	BLE 1M	2480	Ant1	-8.66	0	-8.66	0.00014	30	Pass
NVNT	BLE 2M	2402	Ant1	-6.83	0	-6.83	0.00021	30	Pass
NVNT	BLE 2M	2440	Ant1	-9.12	0	-9.12	0.00012	30	Pass
NVNT	BLE 2M	2480	Ant1	-8.4	0	-8.4	0.00014	30	Pass




Test Graphs

Average Power NVNT BLE 1M 2402MHz Ant1

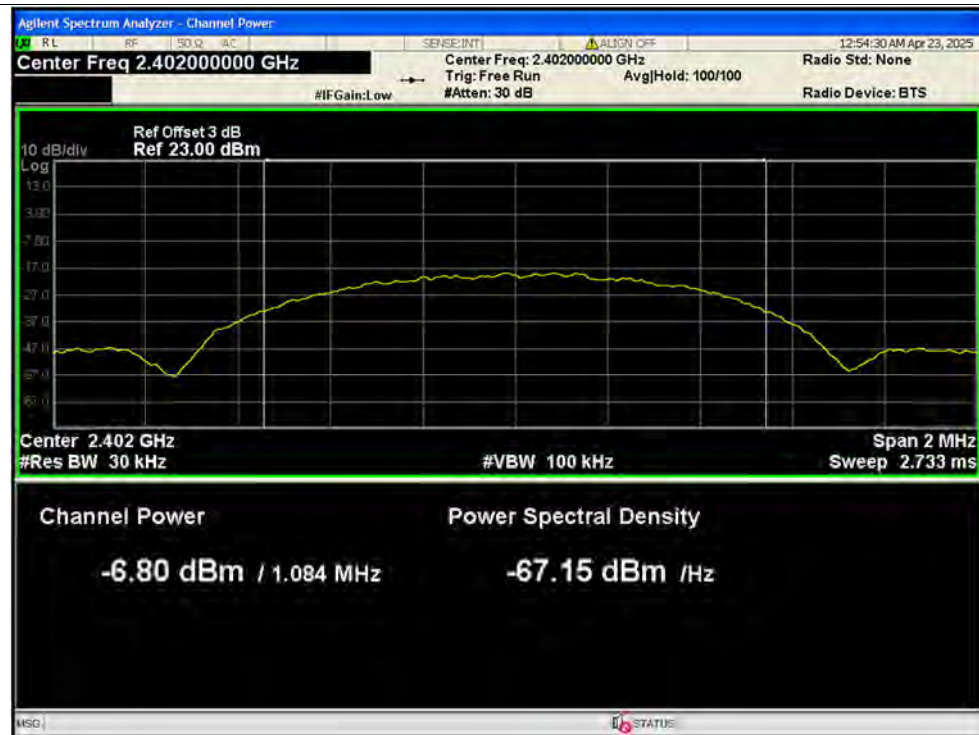

Average Power NVNT BLE 1M 2440MHz Ant1

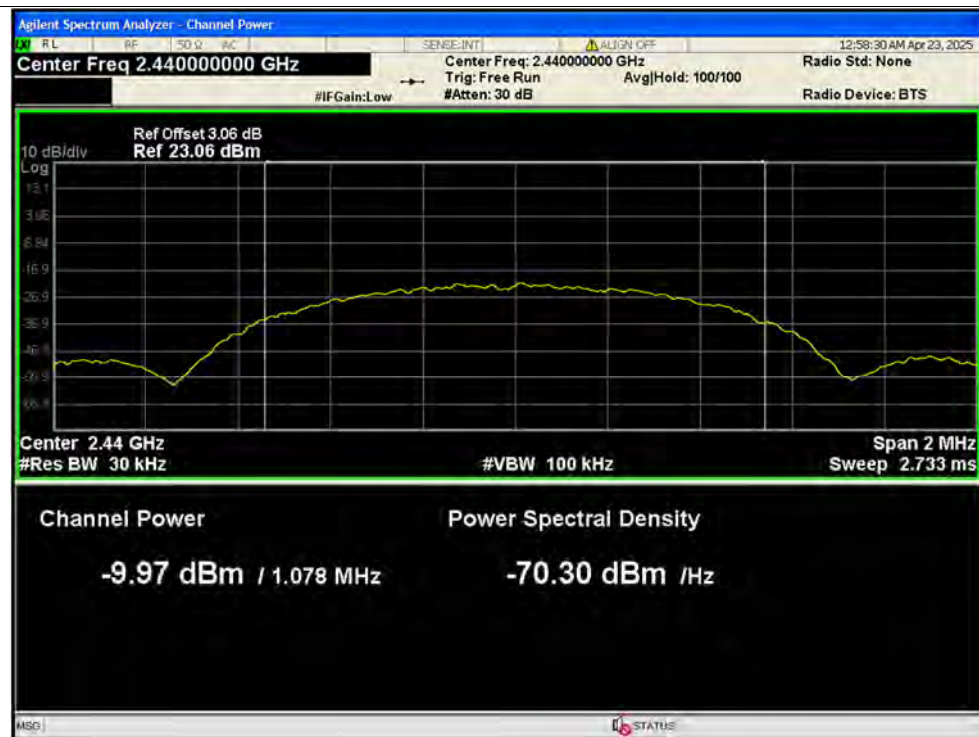



Average Power NVNT BLE 1M 2480MHz Ant1



Average Power NVNT BLE 2M 2402MHz Ant1



Average Power NVNT BLE 2M 2440MHz Ant1



Average Power NVNT BLE 2M 2480MHz Ant1



**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.7398	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.7504	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.6988	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.281	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.259	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.444	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1



-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1



-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1



-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1



-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1



-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1



**A.5. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-31.42	-20	Pass
NVNT	BLE 1M	2440	Ant1	-28.76	-20	Pass
NVNT	BLE 1M	2480	Ant1	-30.65	-20	Pass
NVNT	BLE 2M	2402	Ant1	-30.56	-20	Pass
NVNT	BLE 2M	2440	Ant1	-28.88	-20	Pass
NVNT	BLE 2M	2480	Ant1	-28.55	-20	Pass

Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

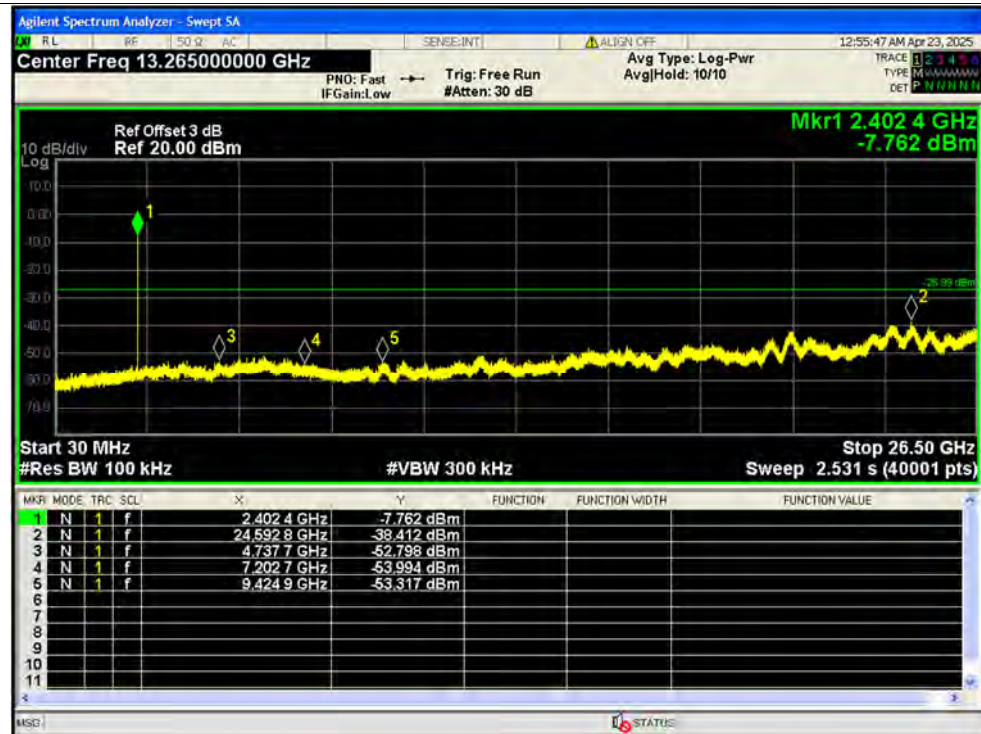

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

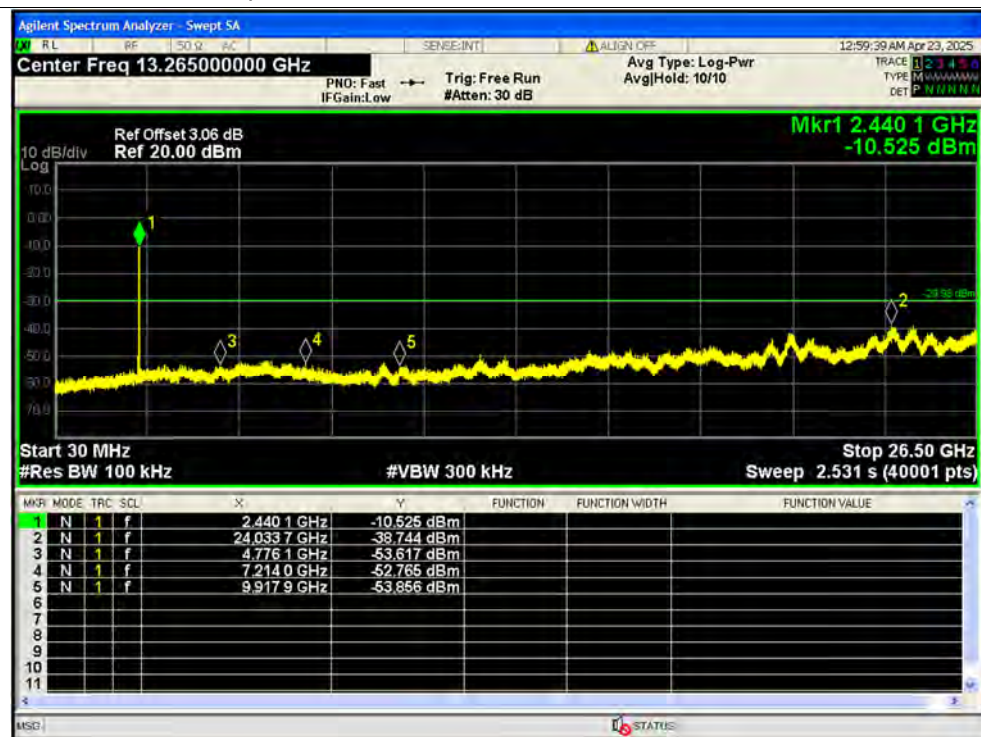

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

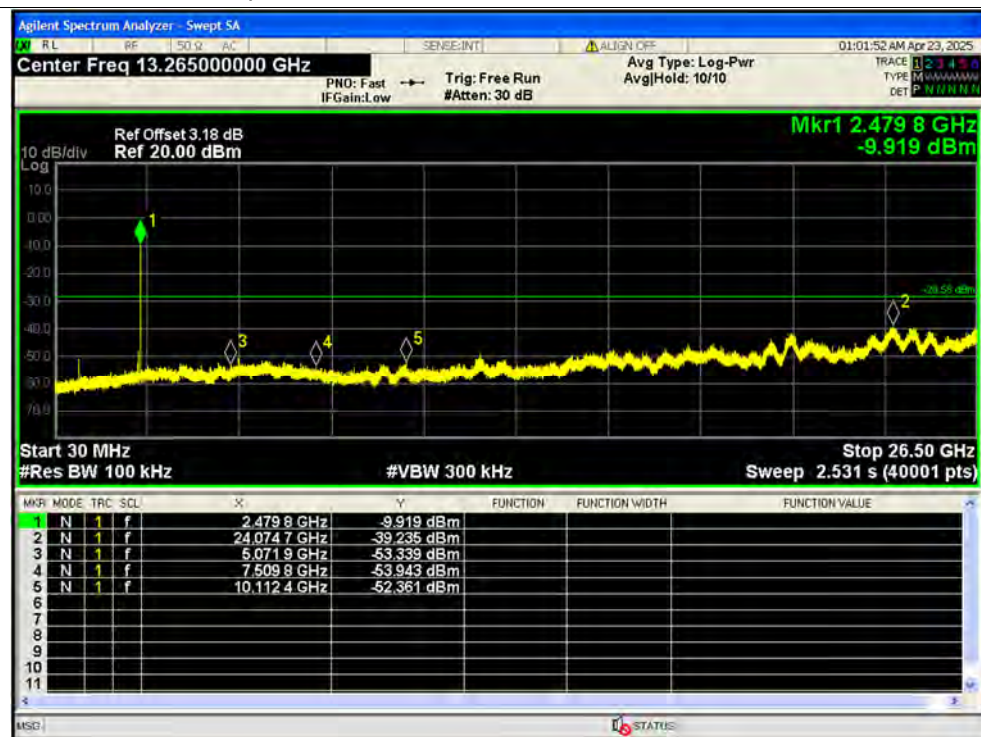

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

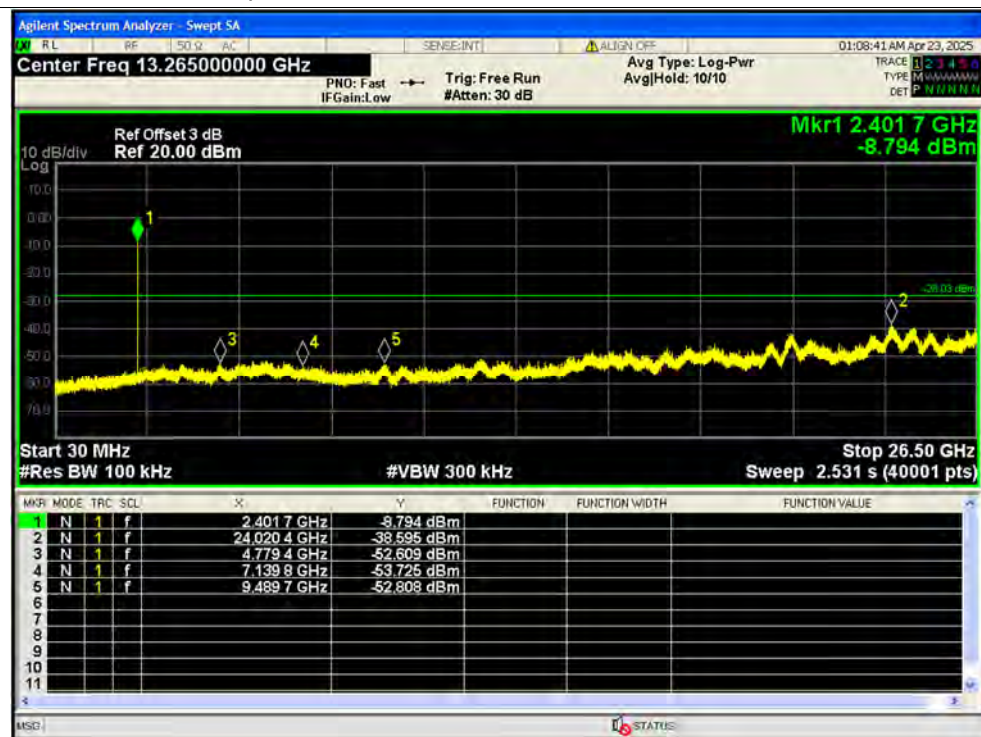

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

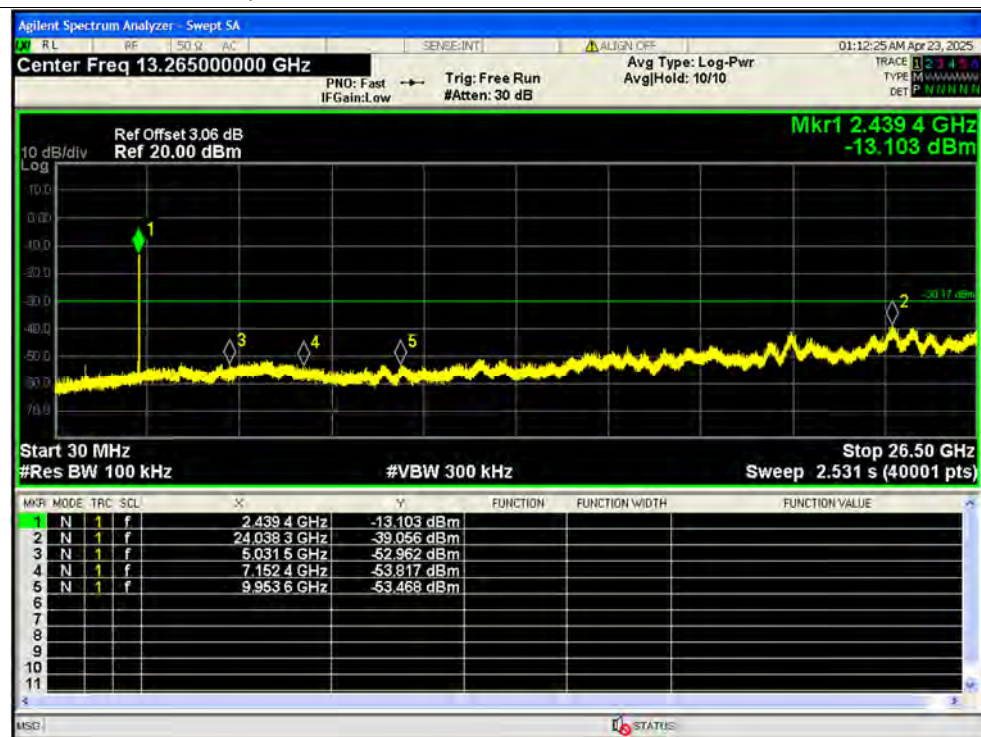

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref



Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

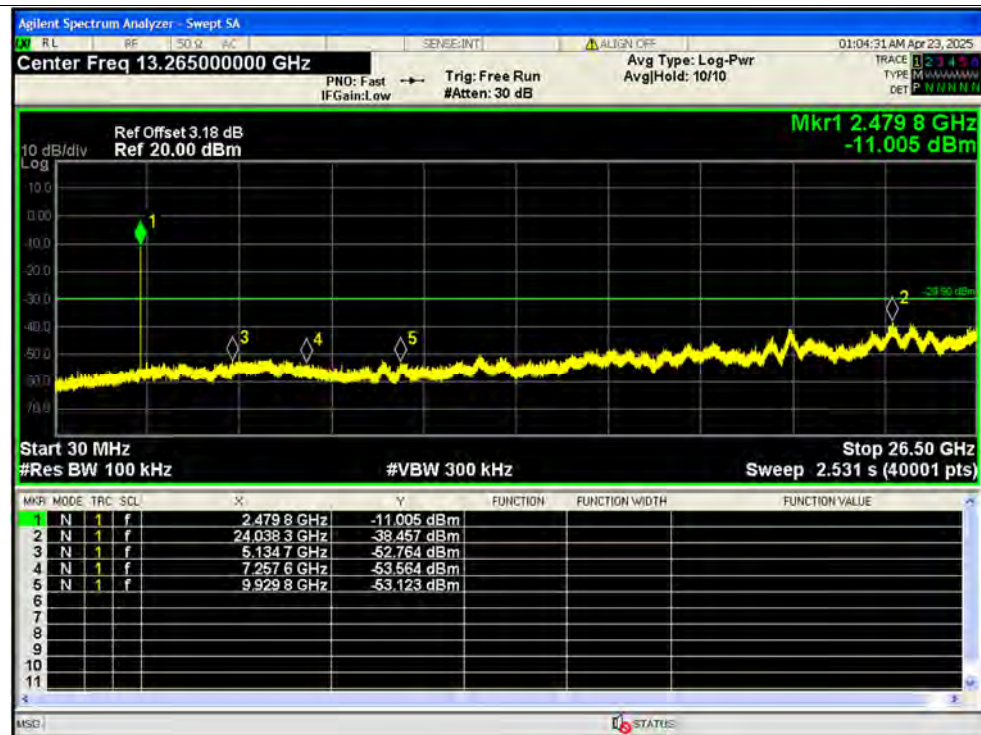



REPORT No.: SZ25030399W01

A.6. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-49.15	-20	Pass
NVNT	BLE 1M	2480	Ant1	-46.68	-20	Pass
NVNT	BLE 2M	2402	Ant1	-30.88	-20	Pass
NVNT	BLE 2M	2480	Ant1	-44.2	-20	Pass

Test Graphs


Band Edge NVNT BLE 1M 2402MHz Ant1 Ref




Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

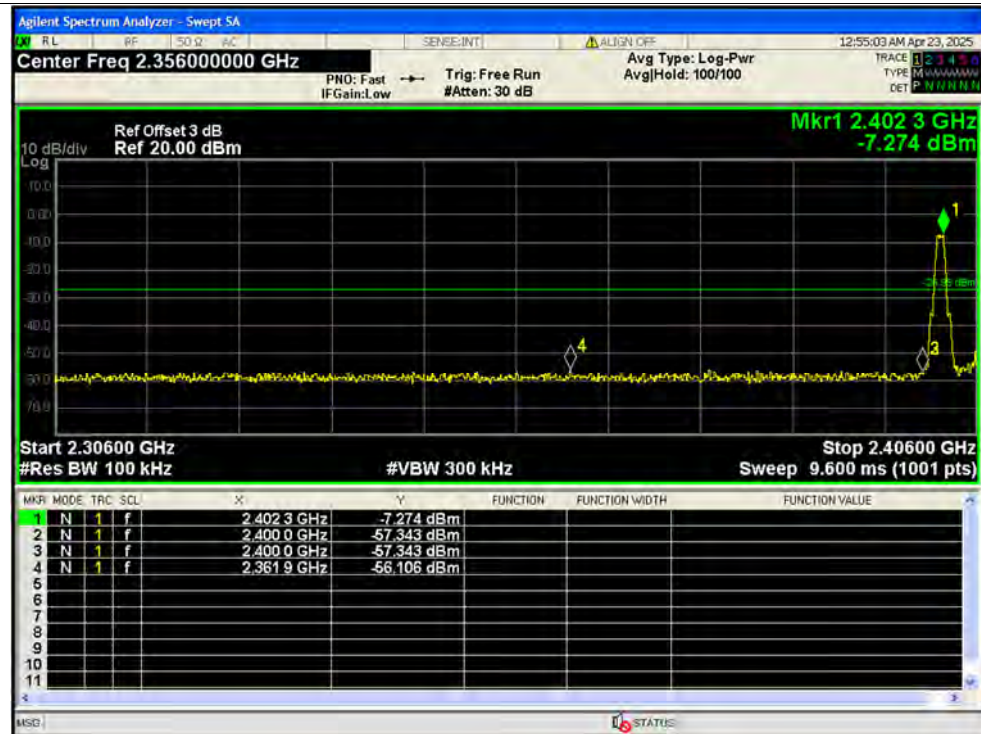

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

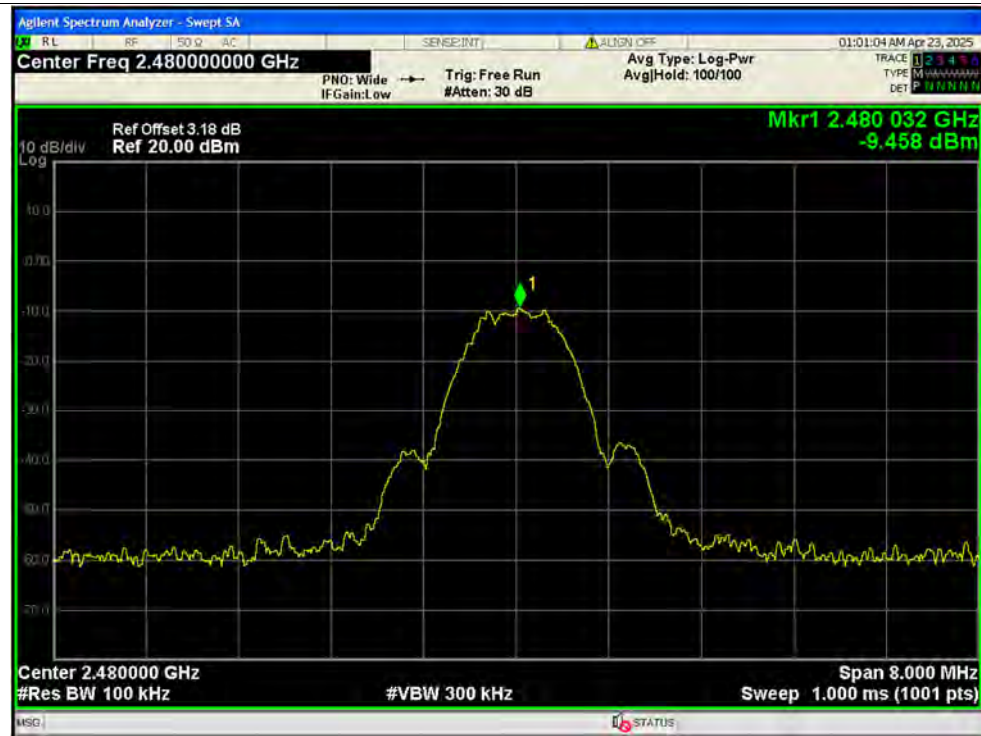


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

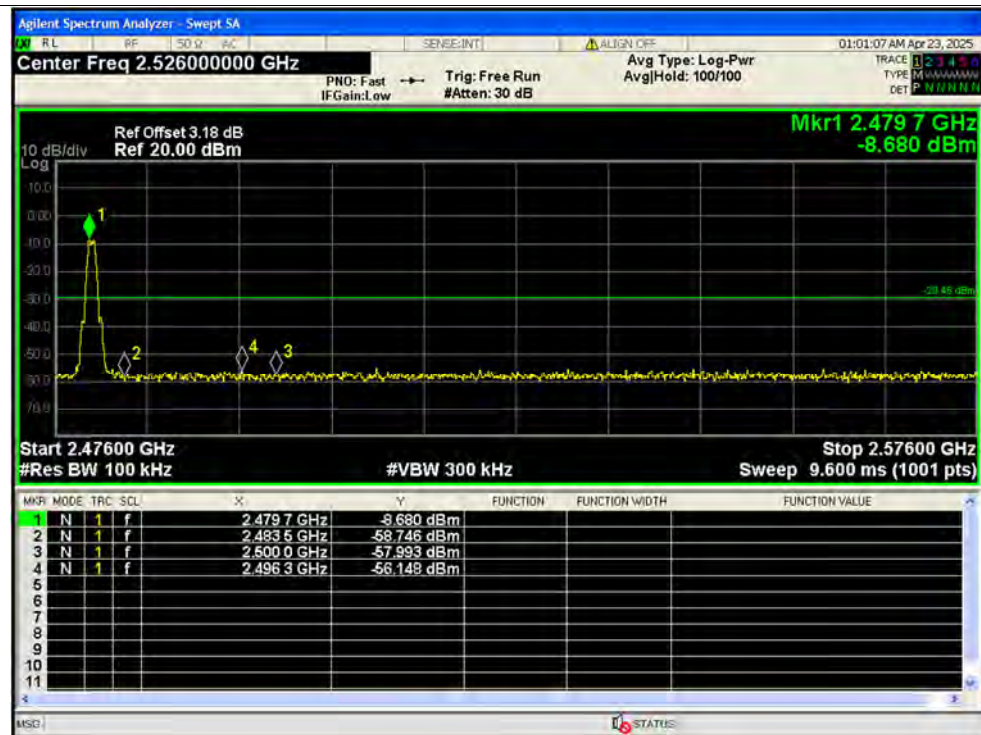

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref




Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

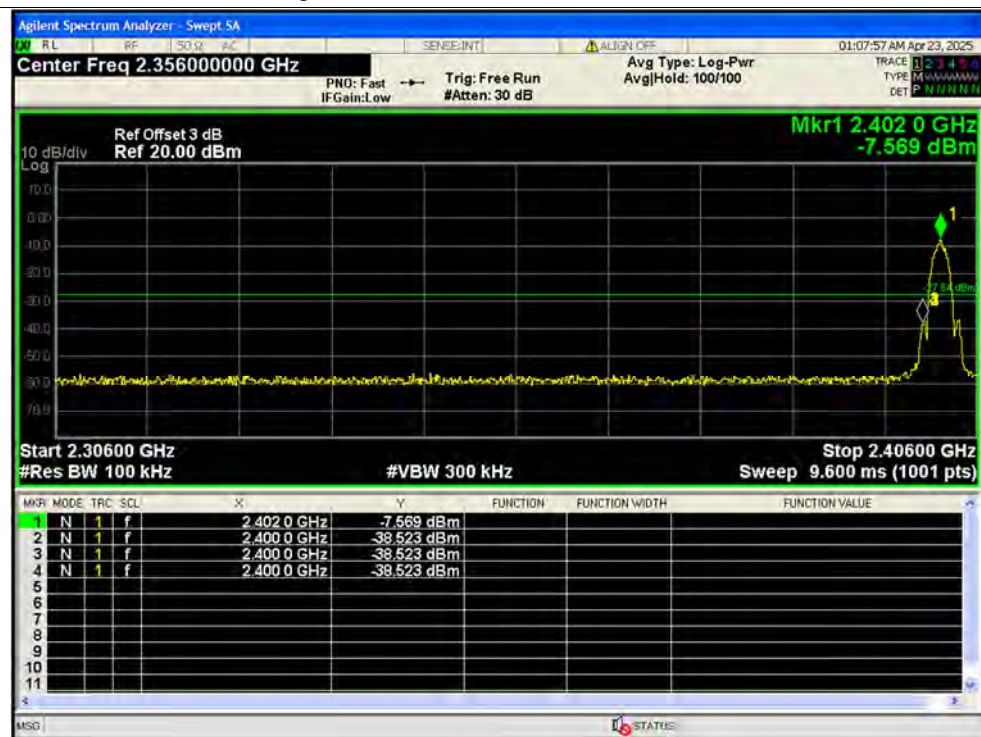

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref



Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

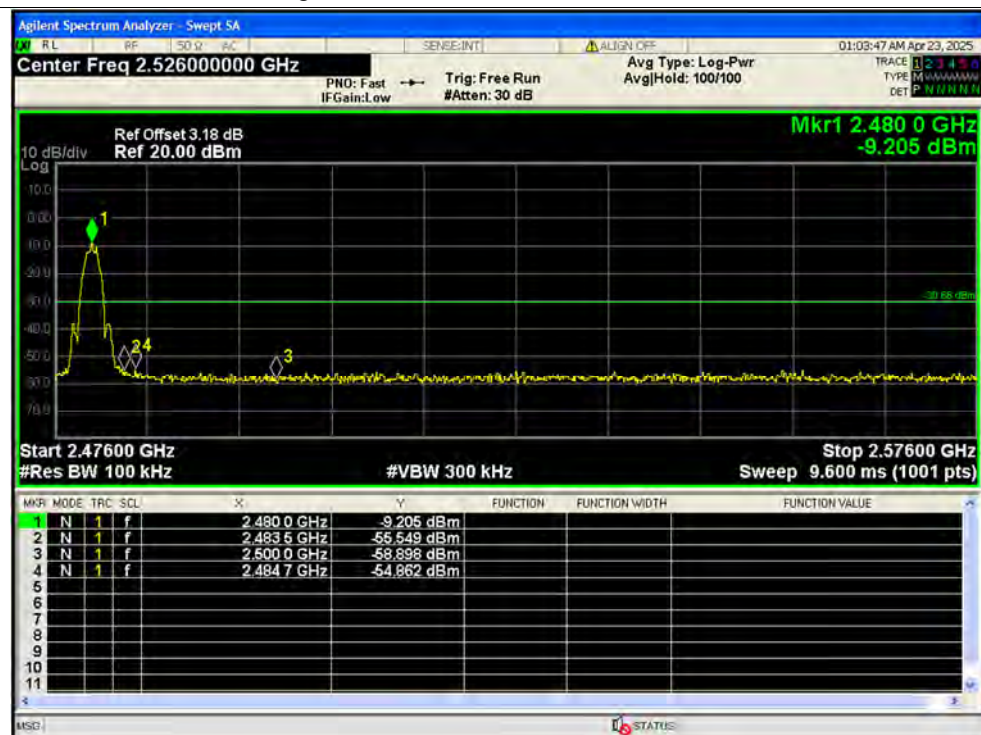


**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-19.08	0	-19.08	8	Pass
NVNT	BLE 1M	2440	Ant1	-22.32	0	-22.32	8	Pass
NVNT	BLE 1M	2480	Ant1	-21.84	0	-21.84	8	Pass
NVNT	BLE 2M	2402	Ant1	-22.61	0	-22.61	8	Pass
NVNT	BLE 2M	2440	Ant1	-25.05	0	-25.05	8	Pass
NVNT	BLE 2M	2480	Ant1	-24.32	0	-24.32	8	Pass

Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

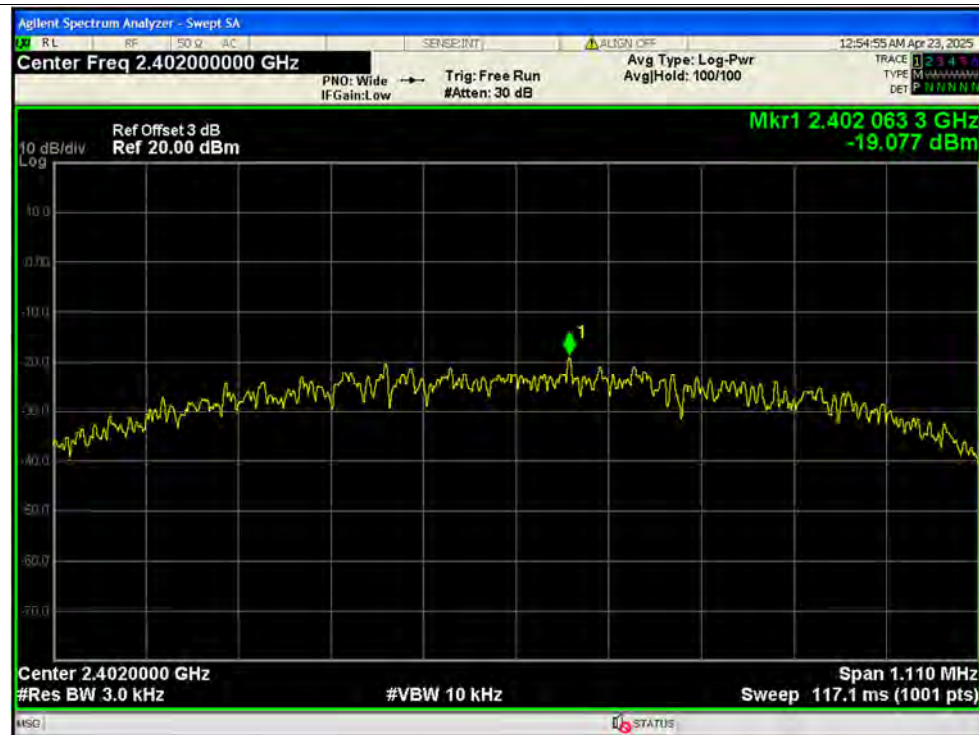


PSD NVNT BLE 1M 2440MHz Ant1




PSD NVNT BLE 1M 2480MHz Ant1



PSD NVNT BLE 2M 2402MHz Ant1

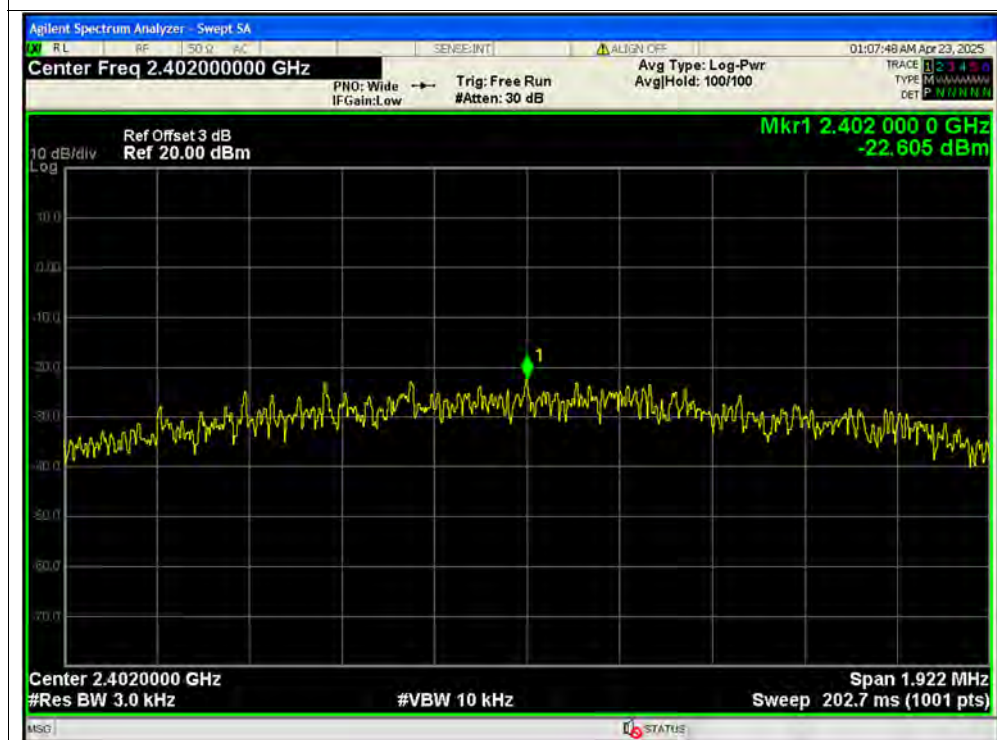

PSD NVNT BLE 2M 2440MHz Ant1

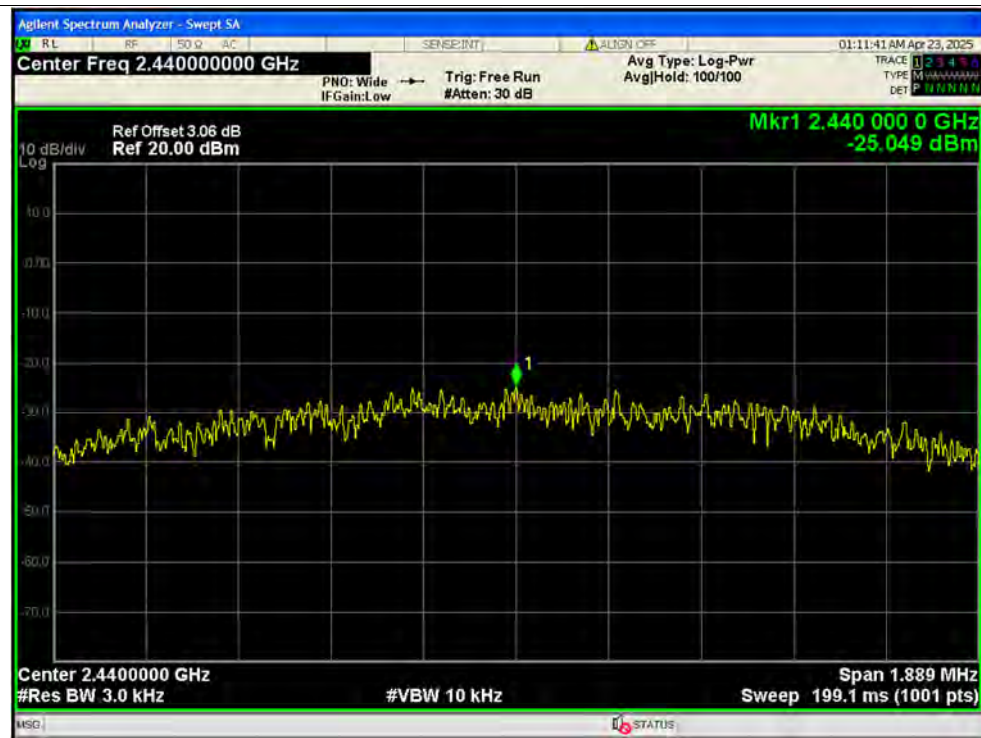

PSD NVNT BLE 2M 2480MHz Ant1





A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+Adapter+Charging base+Mobile phone+BLE TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

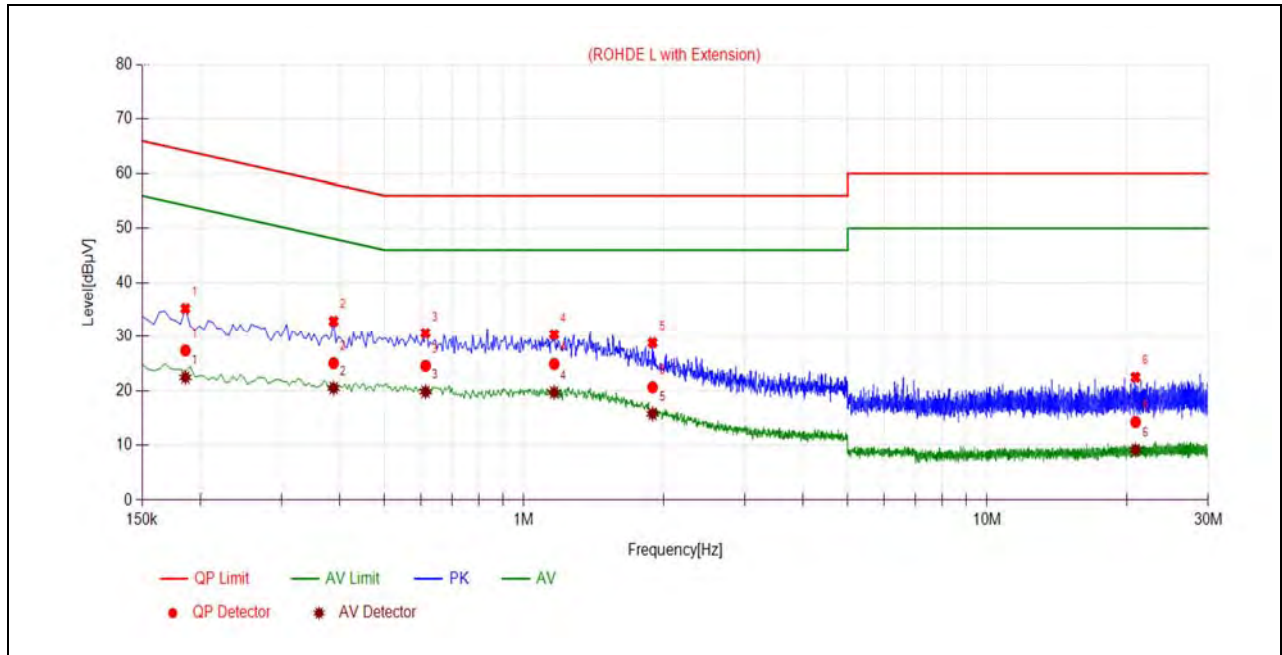

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1860	27.37	22.43	64.21	54.21	Line	PASS
2	0.3885	25.03	20.46	58.10	48.10		PASS
3	0.6136	24.54	19.79	56.00	46.00		PASS
4	1.1625	24.88	19.67	56.00	46.00		PASS
5	1.8960	20.60	15.72	56.00	46.00		PASS
6	20.9052	14.23	9.12	60.00	50.00		PASS

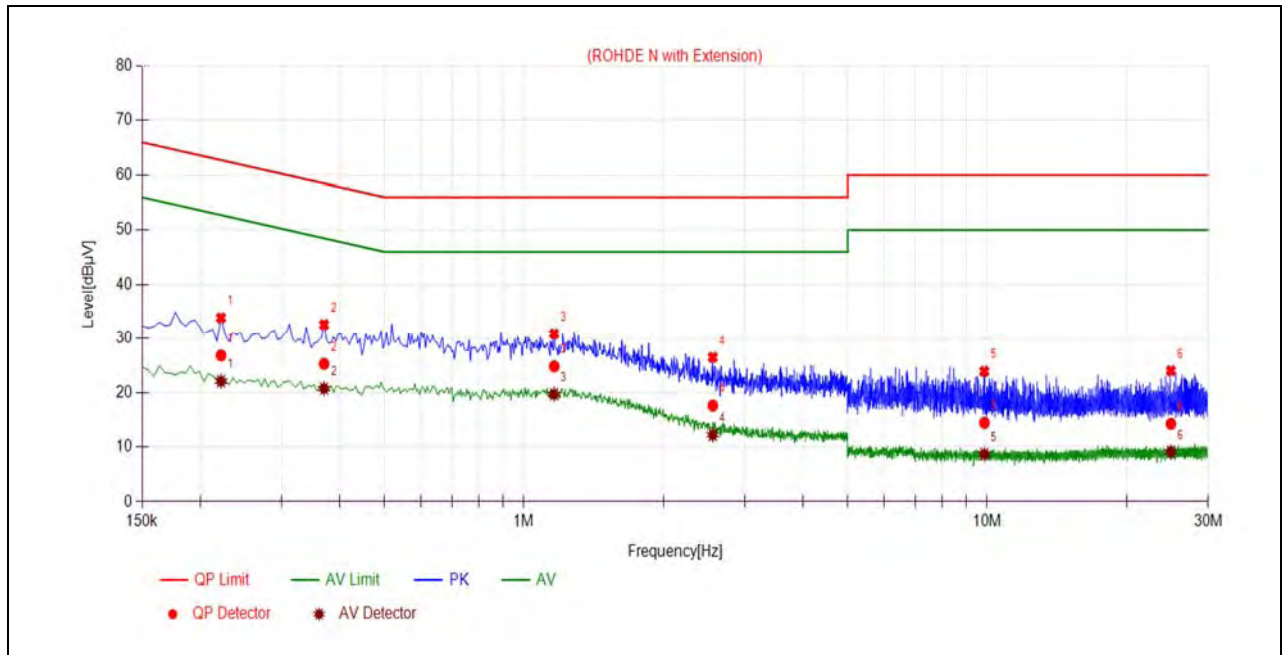

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2220	26.84	22.07	62.74	52.74	Neutral	PASS
2	0.3705	25.29	20.71	58.49	48.49		PASS
3	1.1626	24.81	19.67	56.00	46.00		PASS
4	2.5577	17.59	12.19	56.00	46.00		PASS
5	9.8608	14.41	8.65	60.00	50.00		PASS
6	24.9214	14.22	9.05	60.00	50.00		PASS




A.9. Restricted Frequency Bands

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (Vertical) was recorded in this test report.

1Mbps


Plot for Channel 0

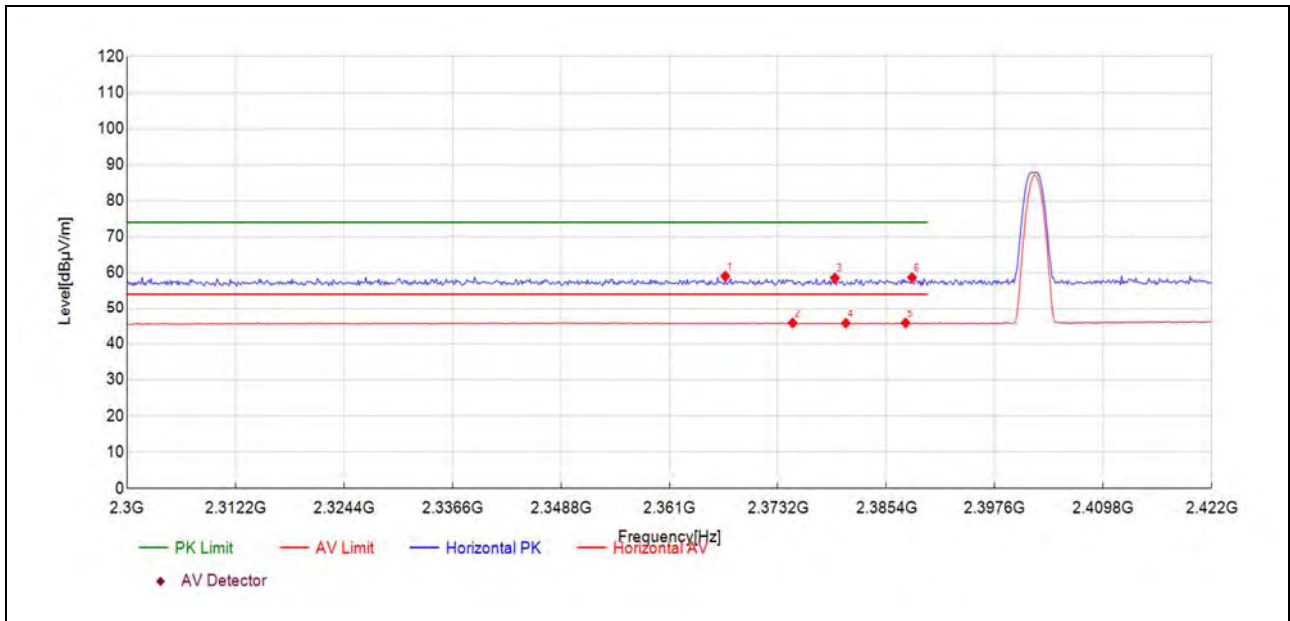

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2367.29	21.6	59.04	37.470	74.00	14.96	150	91	PK	PASS
2374.86	8.3	45.78	37.480	54.00	8.22	150	157	AV	PASS
2379.62	21.1	58.56	37.480	74.00	15.44	150	91	PK	PASS
2380.84	8.2	45.72	37.480	54.00	8.28	150	244	AV	PASS
2387.56	8.3	45.78	37.490	54.00	8.22	150	183	AV	PASS
2388.29	21.2	58.67	37.490	74.00	15.33	150	157	PK	PASS




Plot for Channel 39

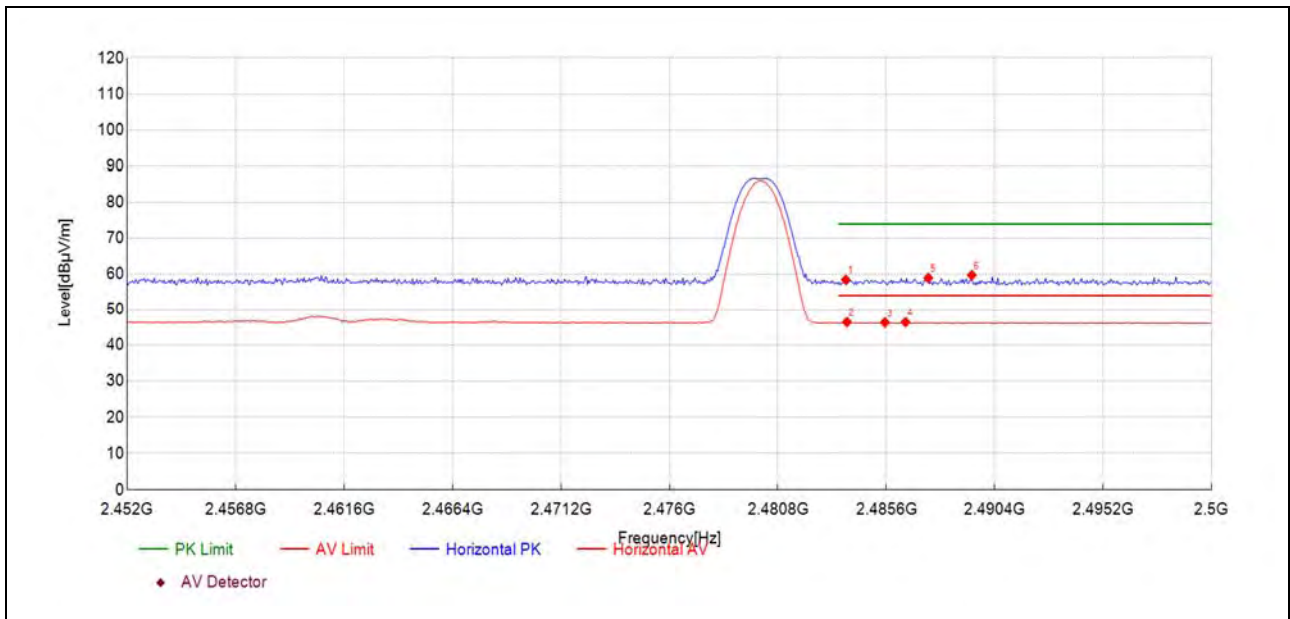

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.81	20.2	58.46	38.270	74.00	15.54	150	168	PK	PASS
2483.86	8.2	46.42	38.270	54.00	7.58	150	283	AV	PASS
2485.54	8.1	46.32	38.270	54.00	7.68	150	347	AV	PASS
2486.45	8.2	46.42	38.270	54.00	7.58	150	230	AV	PASS
2487.46	20.7	58.95	38.270	74.00	15.05	150	328	PK	PASS
2489.38	21.5	59.72	38.260	74.00	14.28	150	13	PK	PASS

**2Mbps**


Plot for Channel 0

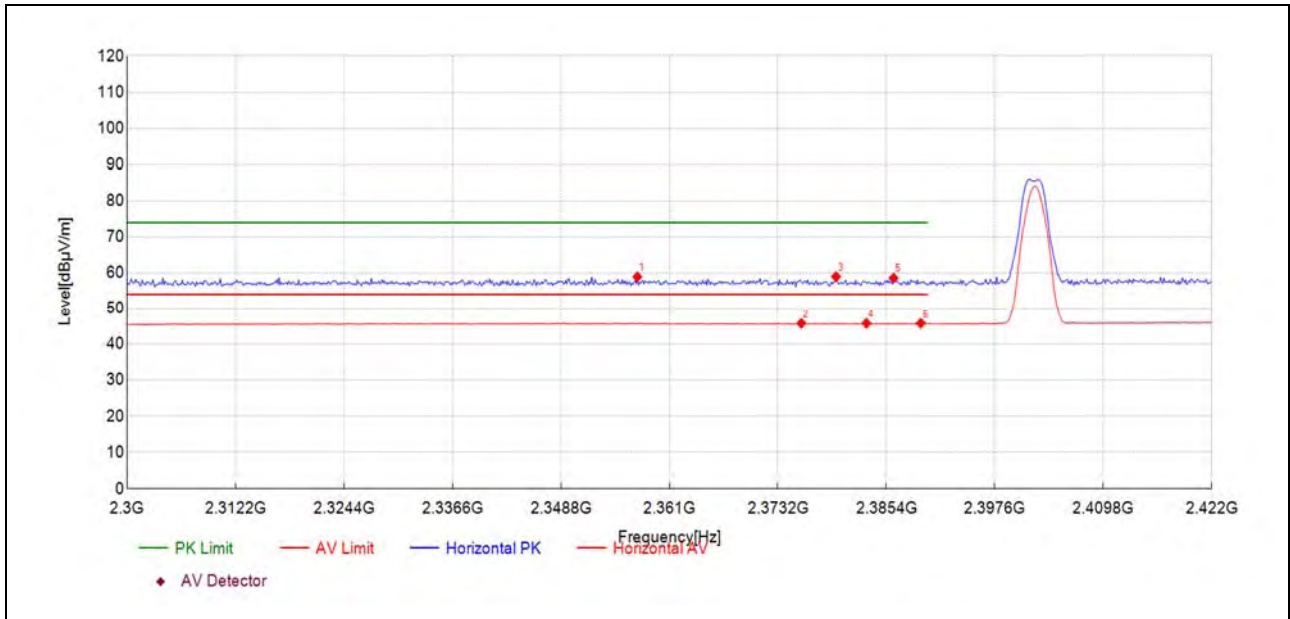

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2357.40	21.5	58.94	37.460	74.00	15.06	150	99	PK	PASS
2375.84	8.3	45.80	37.480	54.00	8.20	150	196	AV	PASS
2379.75	21.5	59.02	37.480	74.00	14.98	150	289	PK	PASS
2383.17	8.3	45.77	37.480	54.00	8.23	150	37	AV	PASS
2386.22	21.1	58.60	37.490	74.00	15.40	150	285	PK	PASS
2389.27	8.3	45.82	37.490	54.00	8.18	150	33	AV	PASS



Plot for Channel 39

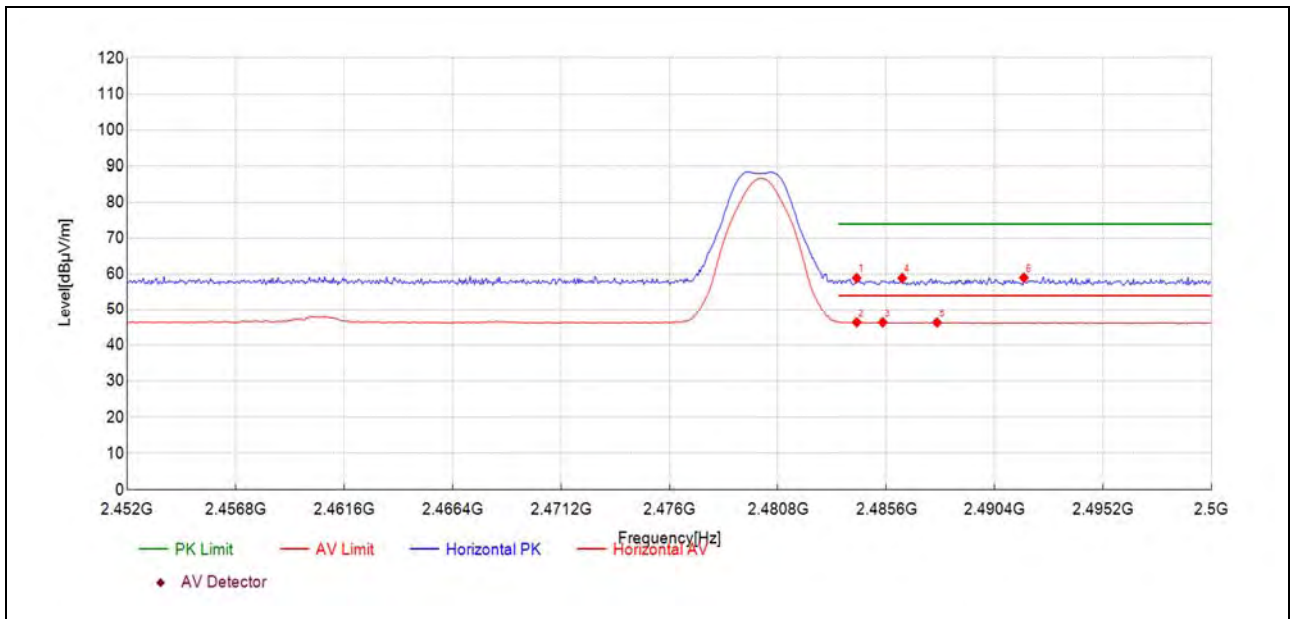

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2484.29	20.7	58.93	38.270	74.00	15.07	150	314	PK	PASS
2484.29	8.1	46.36	38.270	54.00	7.64	150	115	AV	PASS
2485.44	8.1	46.32	38.270	54.00	7.68	150	300	AV	PASS
2486.31	20.7	58.93	38.270	74.00	15.07	150	111	PK	PASS
2487.84	8.0	46.28	38.270	54.00	7.72	150	44	AV	PASS
2491.69	20.8	59.02	38.260	74.00	14.98	150	71	PK	PASS



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.




1Mbps

Plot for Channel 0

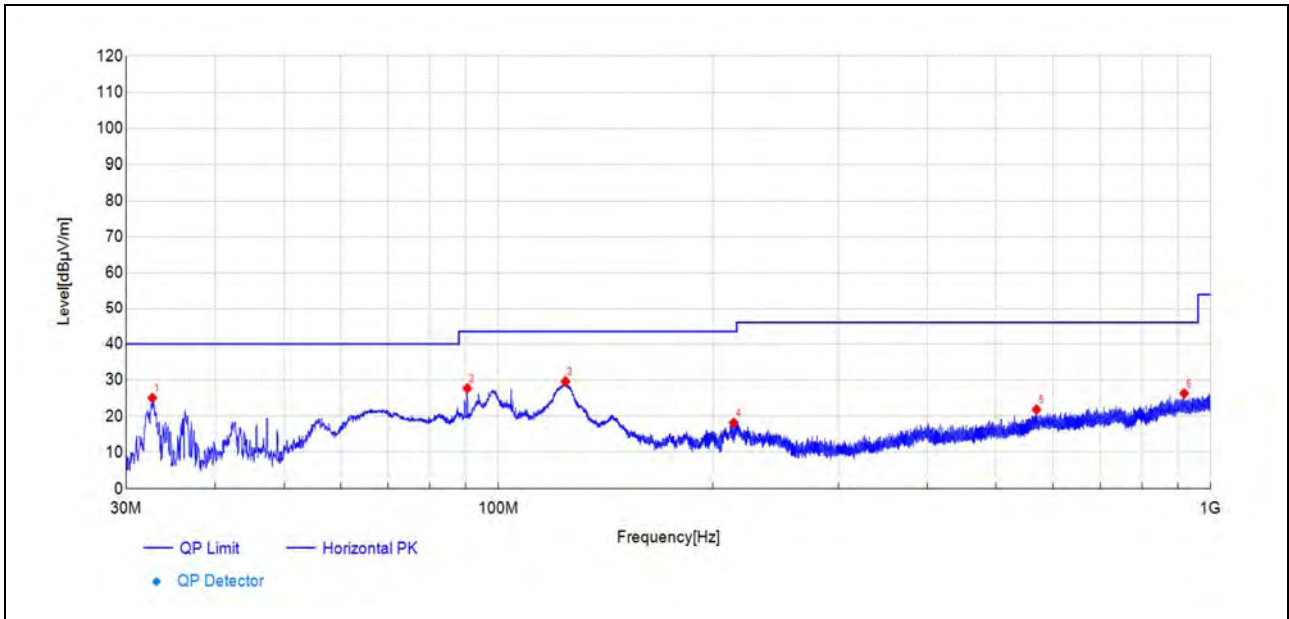


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
32.67	55.5	25.03	-30.470	40.00	14.97	150	162	PK	PASS
90.43	59.2	27.71	-31.480	43.50	15.79	150	330	PK	PASS
124.19	60.5	29.64	-30.860	43.50	13.86	150	162	PK	PASS
213.92	47.2	18.19	-28.990	43.50	25.31	150	239	PK	PASS
569.49	40.1	21.81	-18.290	46.00	24.19	150	295	PK	PASS
917.93	38.1	26.31	-11.760	46.00	19.69	150	176	PK	PASS

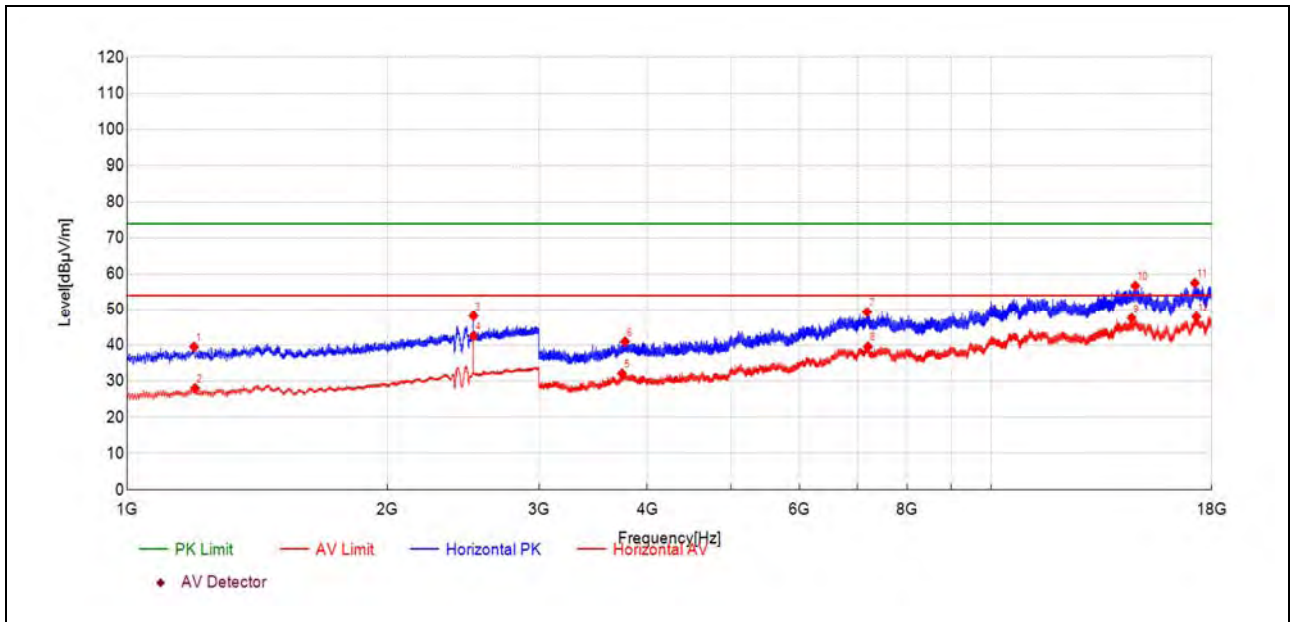


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1195.64	40.7	39.55	-1.160	74.00	34.45	150	205	PK	PASS
1198.84	29.2	28.06	-1.110	54.00	25.94	150	4	AV	PASS
2517.50	42.5	48.23	5.720	74.00	25.77	150	38	PK	PASS
2517.90	36.8	42.54	5.720	54.00	11.46	150	38	AV	PASS
3739.74	40.8	32.13	-8.660	54.00	21.87	150	228	AV	PASS
3769.74	49.4	40.99	-8.360	74.00	33.01	150	264	PK	PASS
7184.26	44.4	49.34	4.950	74.00	24.66	150	301	PK	PASS
7201.83	34.5	39.63	5.090	54.00	14.37	150	64	AV	PASS
14542.62	27.5	47.57	20.030	54.00	6.43	150	360	AV	PASS
14683.62	36.2	56.73	20.560	74.00	17.27	150	176	PK	PASS
17210.12	37.7	57.51	19.830	74.00	16.49	150	247	PK	PASS
17276.55	28.9	47.99	19.140	54.00	6.01	150	338	AV	PASS

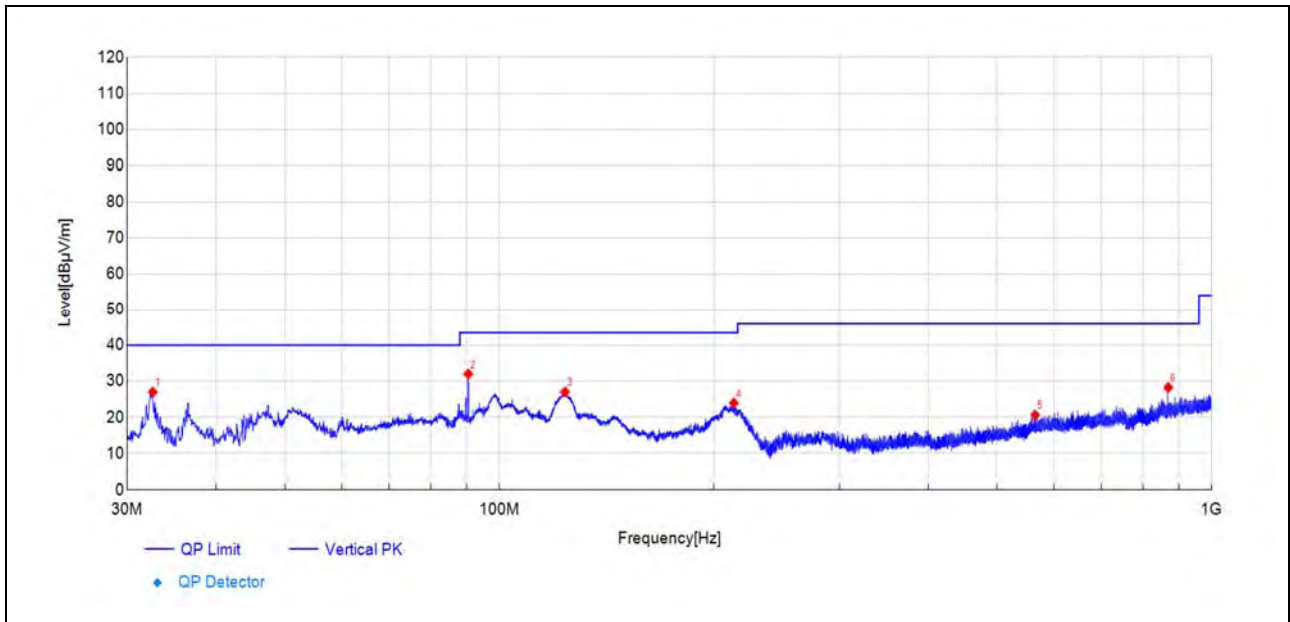

(Antenna Vertical, 30MHz to 1GHz)


Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
32.62	57.5	26.99	-30.470	40.00	13.01	150	17	PK	PASS
90.43	63.5	31.99	-31.480	43.50	11.51	150	9	PK	PASS
123.61	58.0	27.03	-30.950	43.50	16.47	150	129	PK	PASS
213.39	53.0	23.94	-29.070	43.50	19.56	150	213	PK	PASS
564.98	39.0	20.62	-18.390	46.00	25.38	150	79	PK	PASS
869.09	40.7	28.27	-12.430	46.00	17.73	150	178	PK	PASS

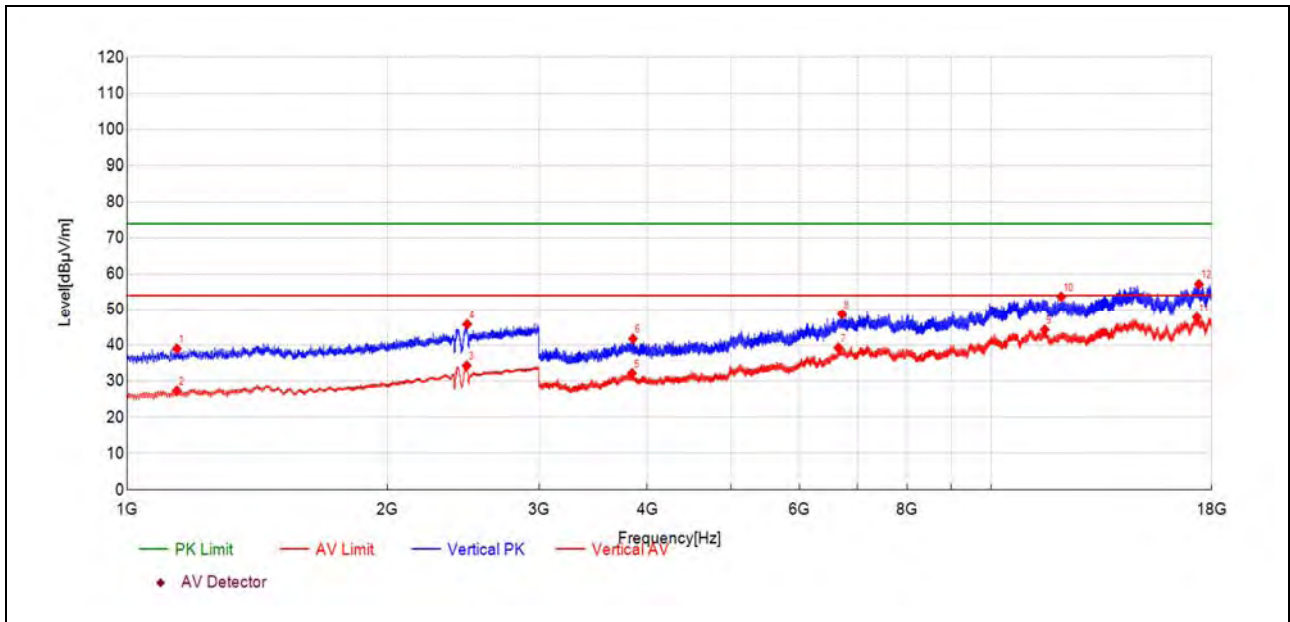

(Antenna Vertical, 1GHz to 18GHz)


Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1142.03	41.1	39.02	-2.030	74.00	34.98	150	205	PK	PASS
1142.03	29.4	27.36	-2.030	54.00	26.64	150	205	AV	PASS
2472.29	28.4	34.31	5.910	54.00	19.69	150	351	AV	PASS
2475.10	39.9	45.85	5.910	74.00	28.15	150	0	PK	PASS
3840.45	40.5	32.19	-8.310	54.00	21.81	150	9	AV	PASS
3849.88	50.1	41.78	-8.360	74.00	32.22	150	9	PK	PASS
6658.82	35.5	39.28	3.750	54.00	14.72	150	158	AV	PASS
6720.53	44.7	48.71	4.050	74.00	25.29	150	44	PK	PASS
11533.53	30.0	44.33	14.350	54.00	9.67	150	288	AV	PASS
12051.69	39.2	53.67	14.430	74.00	20.33	150	360	PK	PASS
17302.69	28.9	47.79	18.920	54.00	6.21	150	66	AV	PASS
17398.70	37.0	57.16	20.140	74.00	16.84	150	139	PK	PASS

Plot for Channel 19

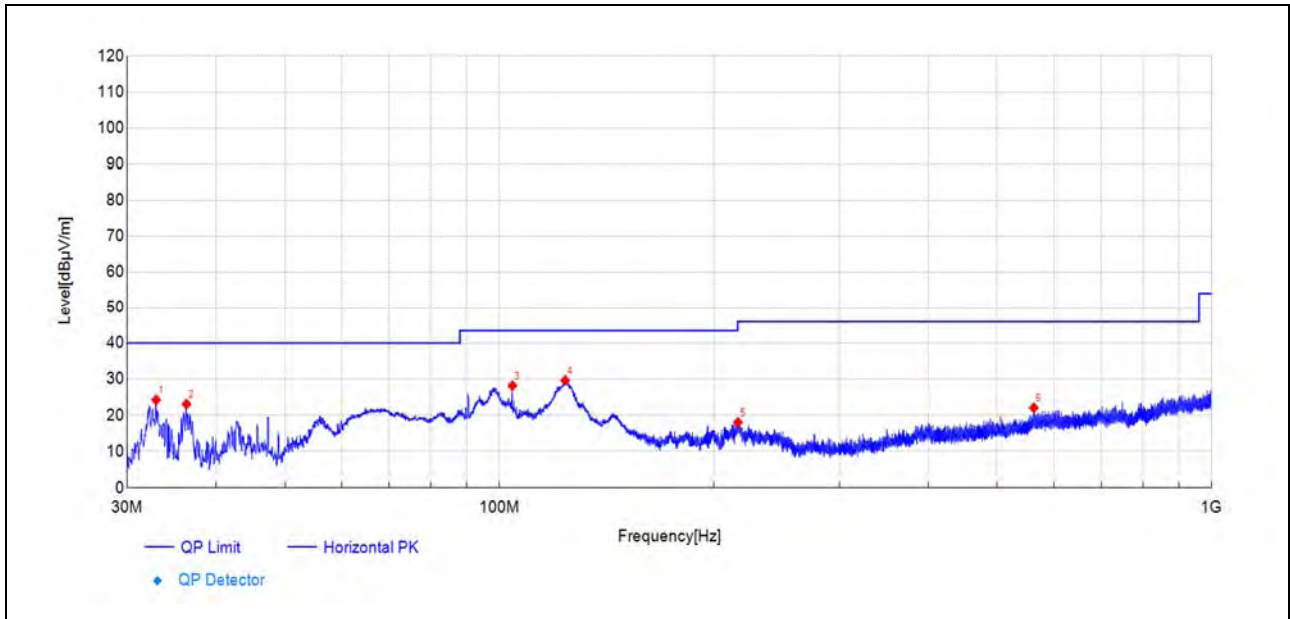


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
32.96	54.7	24.23	-30.460	40.00	15.77	150	142	PK	PASS
36.35	52.6	23.09	-29.480	40.00	16.91	150	197	PK	PASS
104.31	57.7	28.21	-29.520	43.50	15.29	150	266	PK	PASS
123.71	60.6	29.66	-30.910	43.50	13.84	150	176	PK	PASS
216.20	46.8	17.97	-28.850	46.00	28.03	150	79	PK	PASS
562.61	40.5	22.03	-18.500	46.00	23.97	150	309	PK	PASS

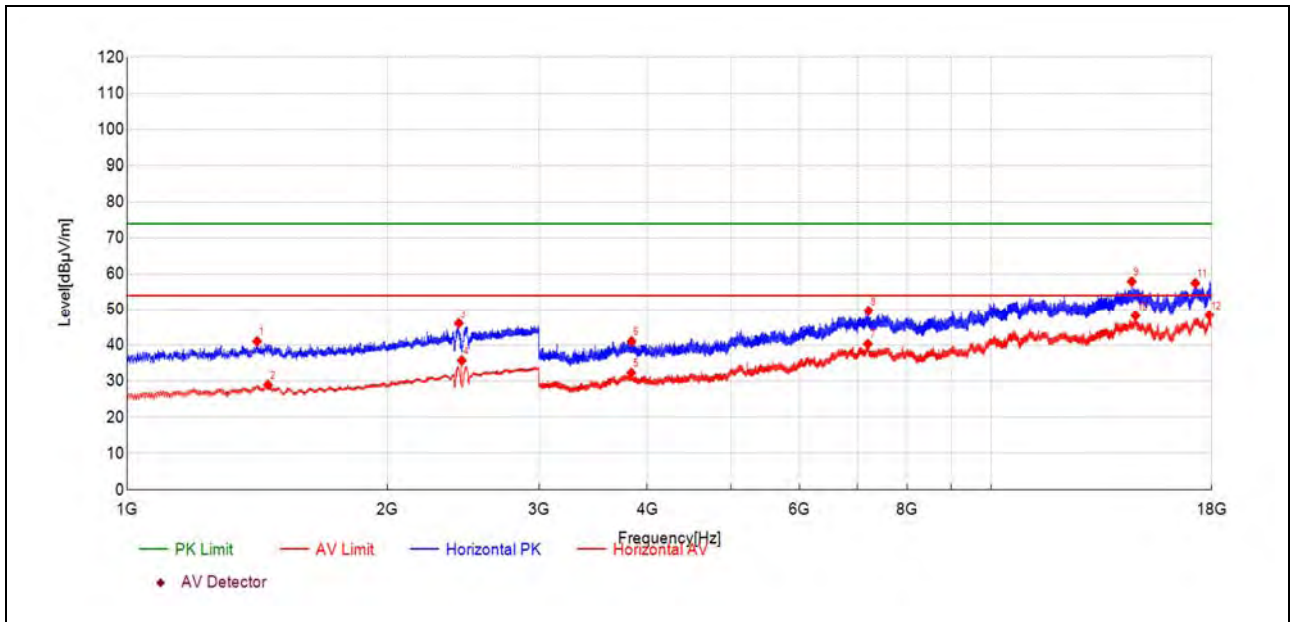


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1414.08	41.2	41.07	-0.090	74.00	32.93	150	315	PK	PASS
1455.69	28.9	29.01	0.140	54.00	24.99	150	193	AV	PASS
2420.68	40.6	46.11	5.530	74.00	27.89	150	207	PK	PASS
2440.29	29.9	35.73	5.820	54.00	18.27	150	128	AV	PASS
3833.17	40.6	32.32	-8.280	54.00	21.68	150	44	AV	PASS
3836.60	49.4	41.08	-8.300	74.00	32.92	150	228	PK	PASS
7199.26	35.2	40.34	5.110	54.00	13.66	150	360	AV	PASS
7216.41	44.8	49.70	4.870	74.00	24.30	150	65	PK	PASS
14545.19	37.9	57.92	20.040	74.00	16.08	150	102	PK	PASS
14690.05	27.7	48.26	20.570	54.00	5.74	150	82	AV	PASS
17229.84	37.9	57.48	19.620	74.00	16.52	150	118	PK	PASS
17889.85	28.9	48.36	19.480	54.00	5.64	150	228	AV	PASS

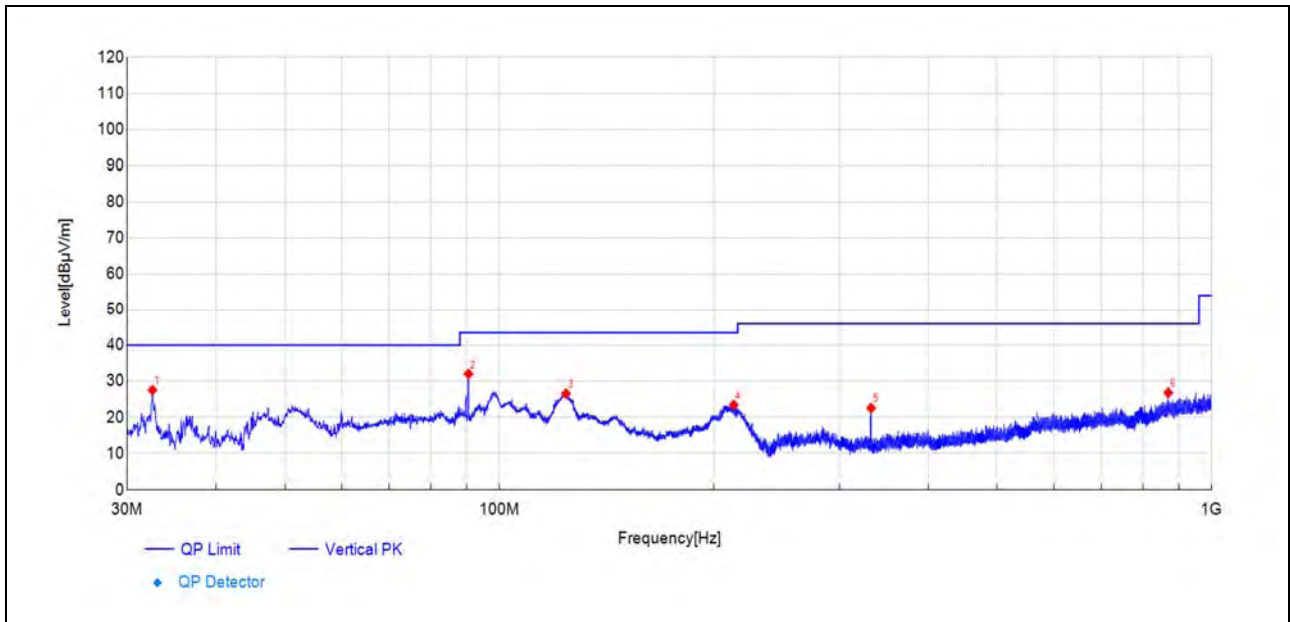

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
32.57	58.0	27.55	-30.470	40.00	12.45	150	338	PK	PASS
90.48	63.5	32.01	-31.470	43.50	11.49	150	227	PK	PASS
124.00	57.3	26.56	-30.780	43.50	16.94	150	164	PK	PASS
213.29	52.5	23.42	-29.080	43.50	20.08	150	219	PK	PASS
332.56	47.0	22.55	-24.460	46.00	23.45	150	219	PK	PASS
869.04	39.3	26.83	-12.430	46.00	19.17	150	344	PK	PASS

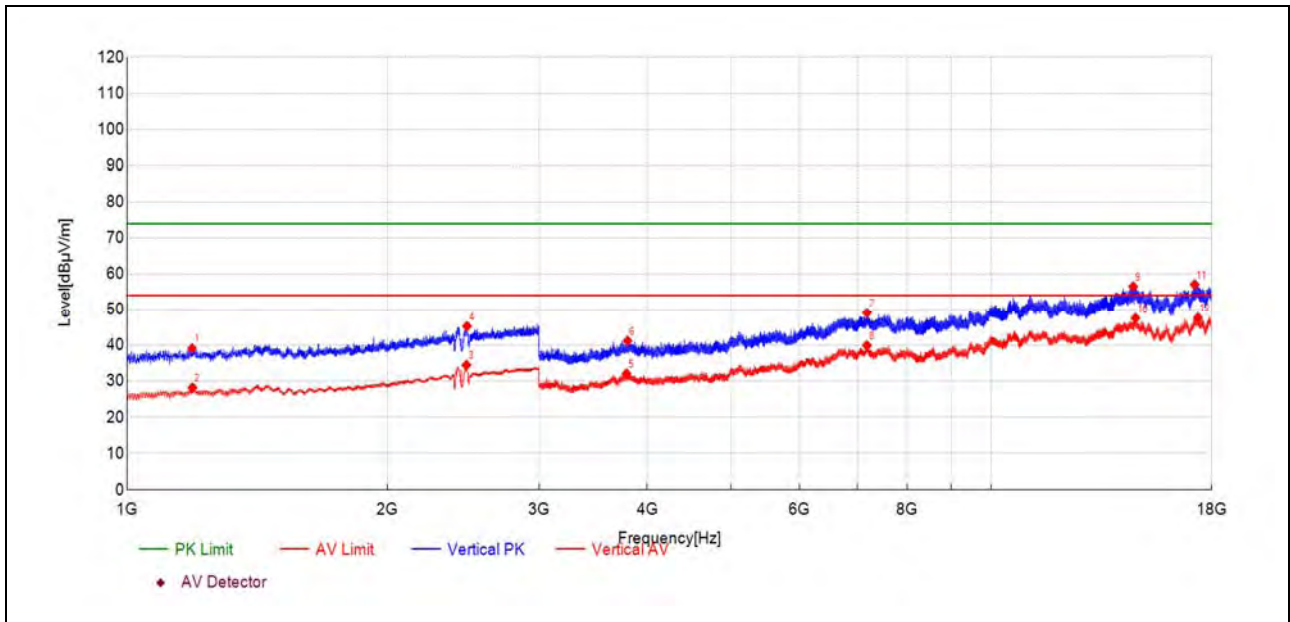


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1189.24	40.4	39.10	-1.280	74.00	34.90	150	351	PK	PASS
1190.44	29.5	28.21	-1.250	54.00	25.79	150	81	AV	PASS
2470.29	28.6	34.49	5.920	54.00	19.51	150	24	AV	PASS
2474.69	39.4	45.32	5.900	74.00	28.68	150	191	PK	PASS
3785.59	40.4	32.11	-8.240	54.00	21.89	150	154	AV	PASS
3795.45	49.4	41.21	-8.180	74.00	32.79	150	360	PK	PASS
7182.55	44.2	49.10	4.940	74.00	24.90	150	100	PK	PASS
7182.98	35.0	39.94	4.940	54.00	14.06	150	100	AV	PASS
14603.47	36.2	56.51	20.350	74.00	17.49	150	46	PK	PASS
14693.05	27.0	47.58	20.590	54.00	6.42	150	154	AV	PASS
17202.41	37.2	57.08	19.910	74.00	16.92	150	229	PK	PASS
17349.84	28.2	47.69	19.520	54.00	6.31	150	9	AV	PASS




Plot for Channel 39

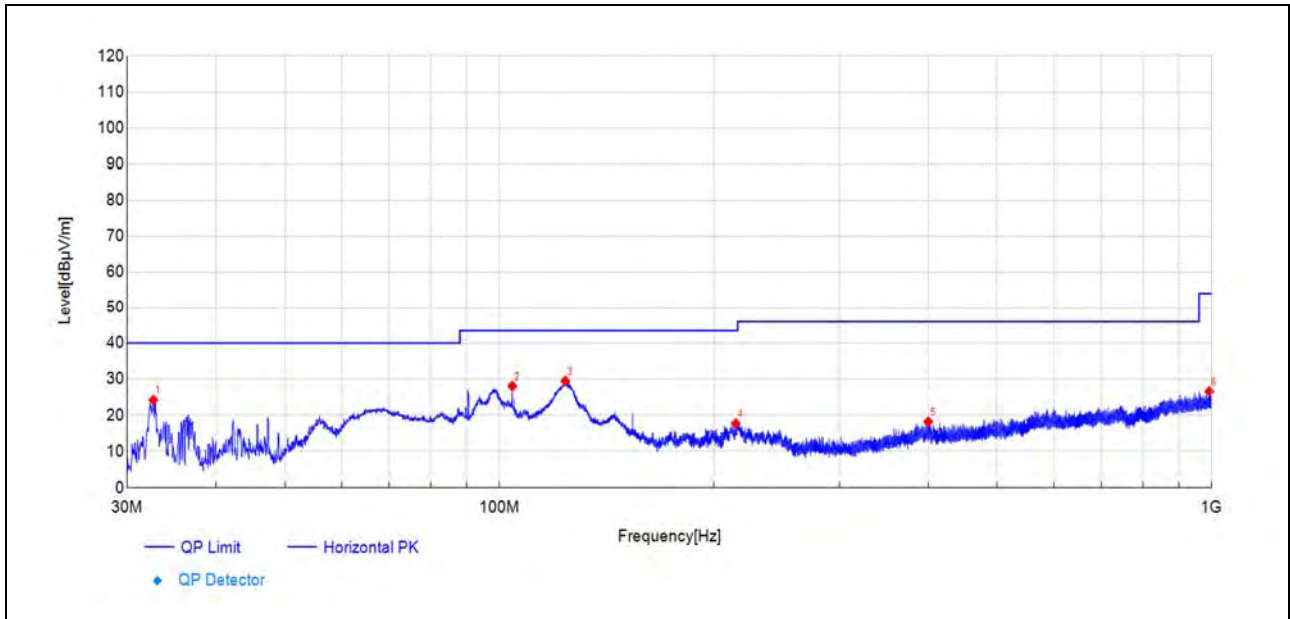


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
32.67	54.7	24.23	-30.470	40.00	15.77	150	127	PK	PASS
104.26	57.6	28.06	-29.540	43.50	15.44	150	90	PK	PASS
123.71	60.4	29.53	-30.910	43.50	13.97	150	168	PK	PASS
214.65	46.6	17.69	-28.880	43.50	25.81	150	83	PK	PASS
399.98	40.4	18.17	-22.250	46.00	27.83	150	113	PK	PASS
992.53	37.1	26.62	-10.480	54.00	27.38	150	294	PK	PASS

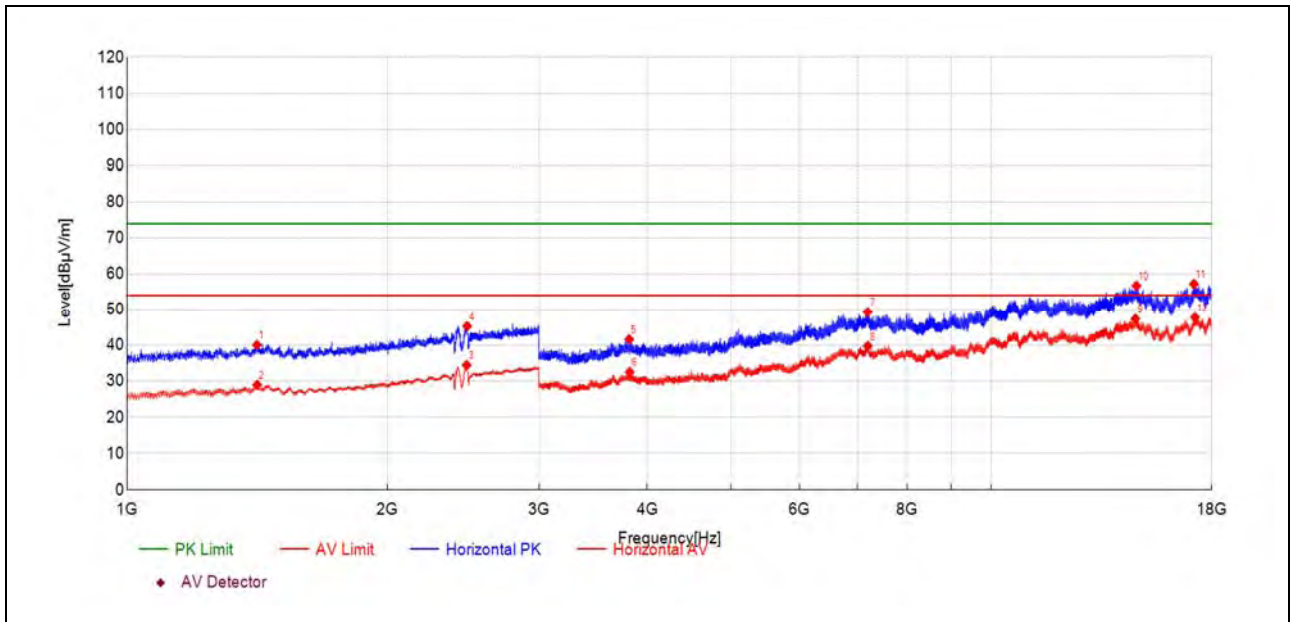


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1413.68	40.2	40.09	-0.090	74.00	33.91	150	255	PK	PASS
1414.48	29.1	28.98	-0.080	54.00	25.02	150	314	AV	PASS
2472.29	28.6	34.49	5.910	54.00	19.51	150	262	AV	PASS
2475.50	39.4	45.31	5.910	74.00	28.69	150	240	PK	PASS
3812.17	49.8	41.64	-8.190	74.00	32.36	150	357	PK	PASS
3816.88	40.7	32.52	-8.210	54.00	21.48	150	303	AV	PASS
7196.26	44.2	49.32	5.080	74.00	24.68	150	155	PK	PASS
7199.26	34.7	39.77	5.110	54.00	14.23	150	119	AV	PASS
14686.62	26.8	47.36	20.560	54.00	6.64	150	174	AV	PASS
14728.19	36.4	56.74	20.350	74.00	17.26	150	138	PK	PASS
17167.69	37.5	57.25	19.710	74.00	16.75	150	303	PK	PASS
17213.55	28.0	47.77	19.790	54.00	6.23	150	265	AV	PASS

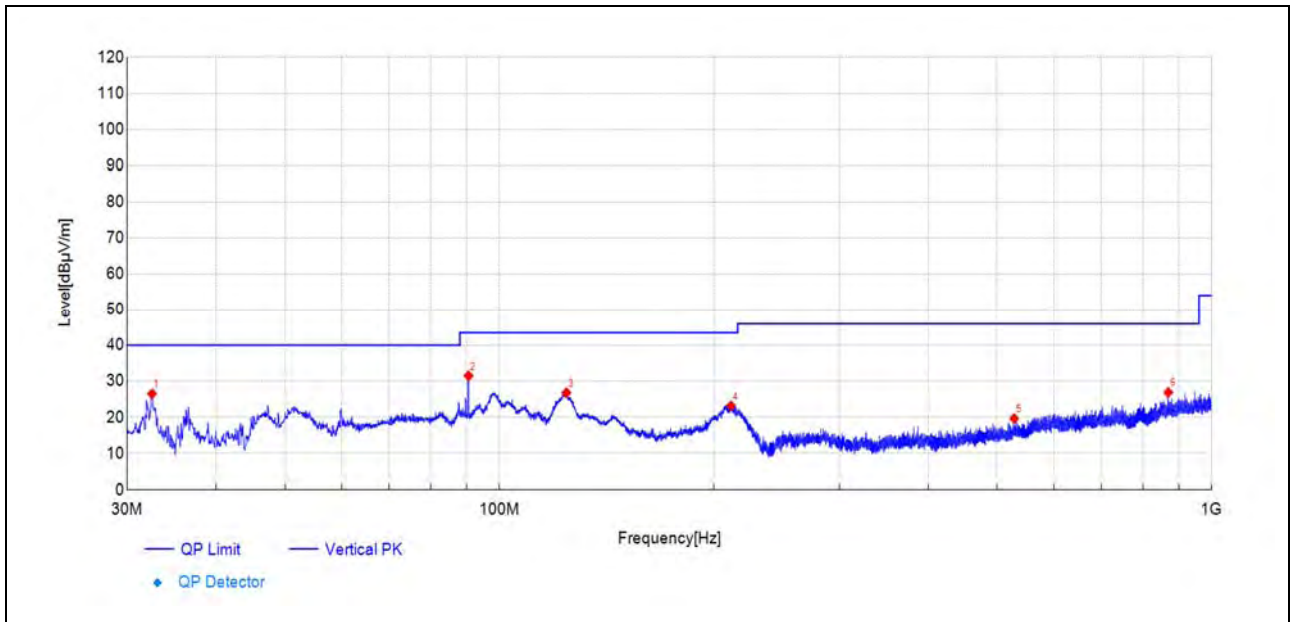

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
32.52	57.0	26.49	-30.470	40.00	13.51	150	106	PK	PASS
90.48	63.0	31.51	-31.470	43.50	11.99	150	23	PK	PASS
124.14	57.6	26.80	-30.840	43.50	16.70	150	141	PK	PASS
211.40	52.5	23.19	-29.340	43.50	20.31	150	205	PK	PASS
528.02	38.9	19.65	-19.280	46.00	26.35	150	9	PK	PASS
869.04	39.3	26.91	-12.430	46.00	19.09	150	44	PK	PASS

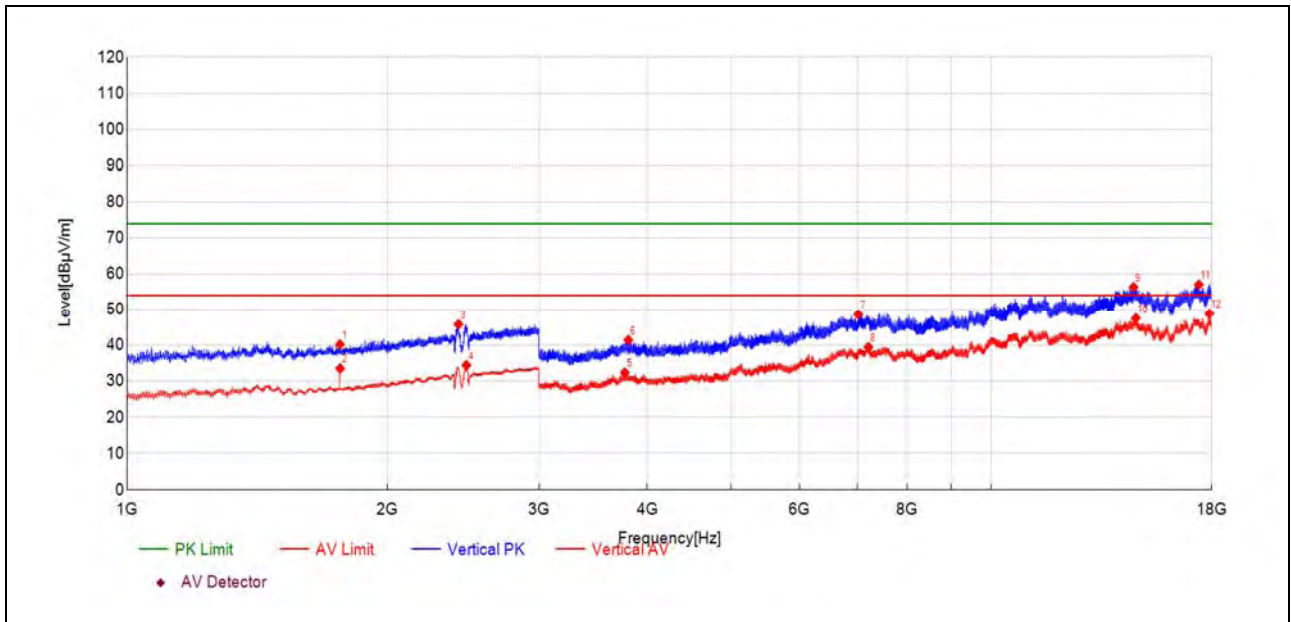

(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1763.35	39.4	40.19	0.770	74.00	33.81	150	59	PK	PASS
1764.15	32.8	33.52	0.770	54.00	20.48	150	59	AV	PASS
2418.68	40.3	45.82	5.500	74.00	28.18	150	206	PK	PASS
2470.29	28.5	34.42	5.920	54.00	19.58	150	307	AV	PASS
3767.59	40.8	32.42	-8.380	54.00	21.58	150	250	AV	PASS
3804.02	49.6	41.48	-8.150	74.00	32.52	150	360	PK	PASS
7017.97	45.2	48.60	3.410	74.00	25.40	150	82	PK	PASS
7210.41	34.5	39.47	4.970	54.00	14.53	150	340	AV	PASS
14616.33	36.0	56.36	20.380	74.00	17.64	150	64	PK	PASS
14708.48	27.1	47.58	20.530	54.00	6.42	150	9	AV	PASS
17393.98	37.0	57.03	20.080	74.00	16.97	150	323	PK	PASS
17890.71	29.3	48.82	19.490	54.00	5.18	150	323	AV	PASS

————— END OF REPORT —————