


RGA Top Race Us LLC
801 Barton Springs Road, Austin, Texas 78704, United States

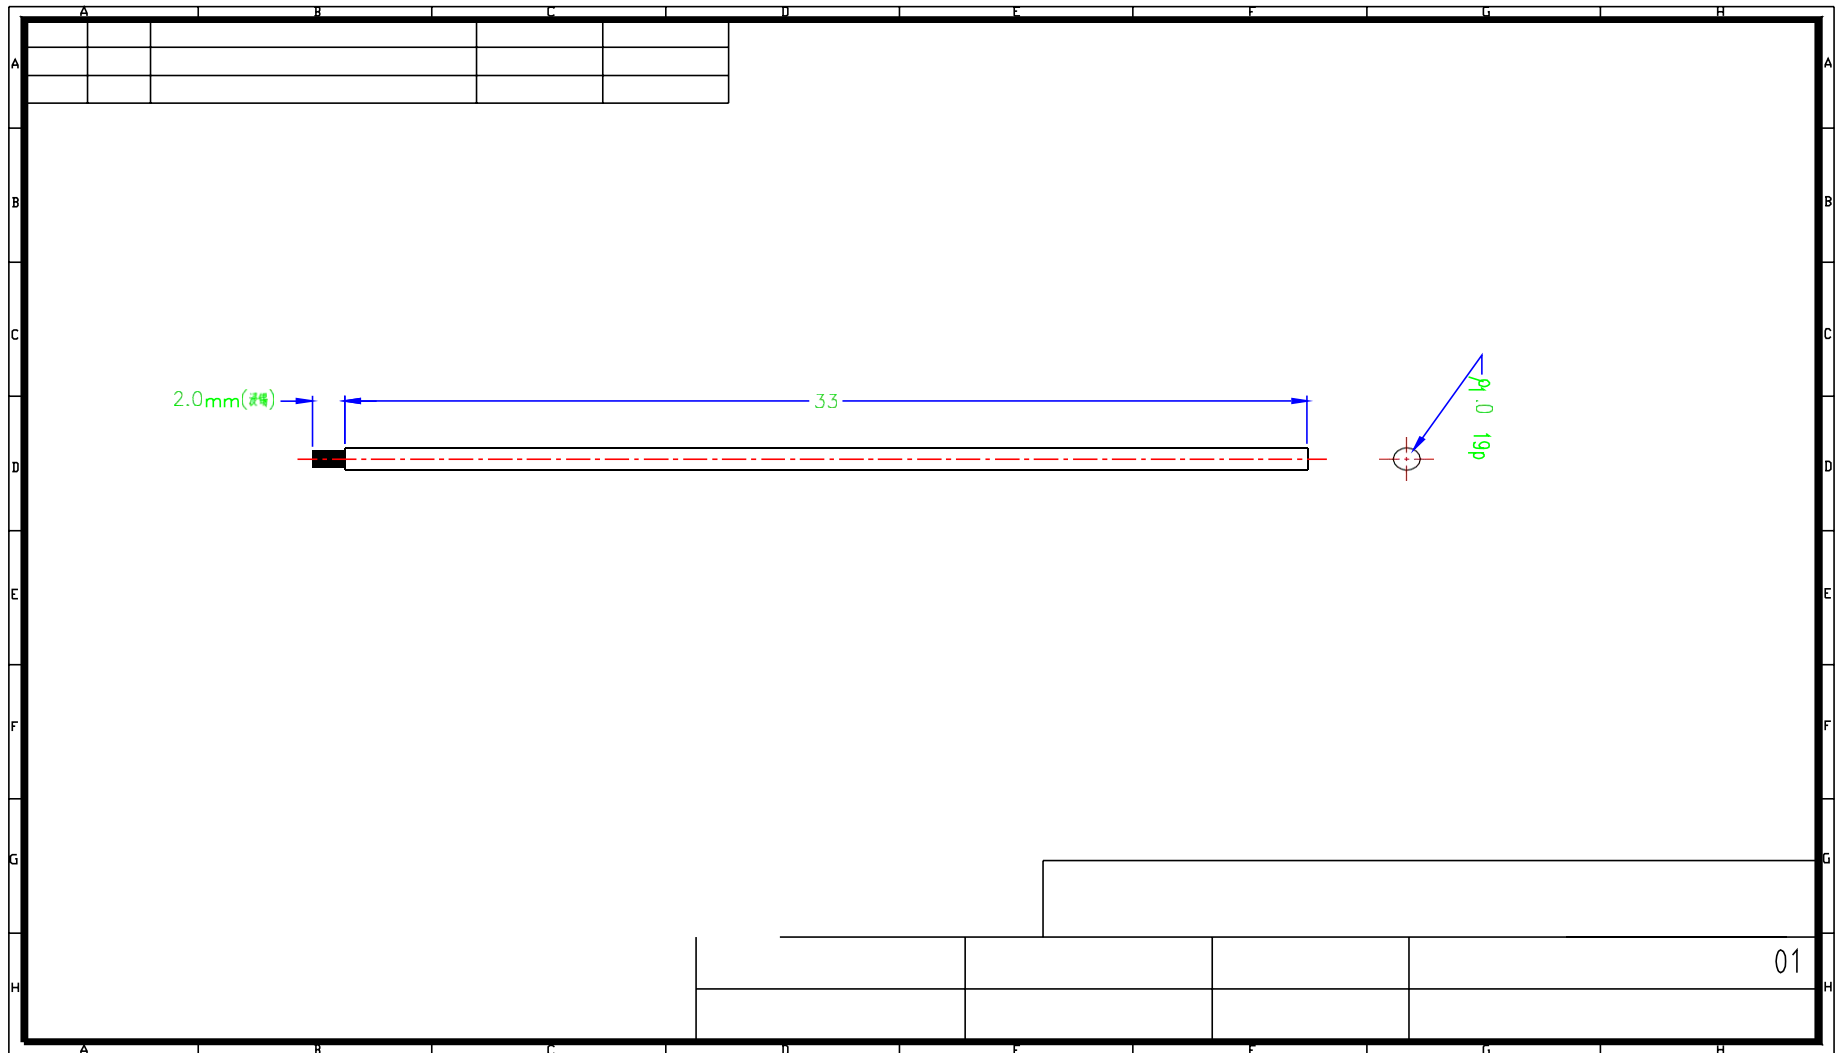

Product Specification

A. Electrical Characteristics Frequency

2400MHz ~2500MHz VSWR <3.0

Efficiency >30%

Impedance 50 Ohm

Polarization Line

Gain 0.17dBi

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.0 19P

Connector Type : NO

Dimension

C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C

Test Equipment & Conditions

1. Network Analyzers :


Agilent 8753D 5071B

2. Communications Test Set:


Agilent E5515C

3. 3D Chamber Test System


Efficiency & Gain

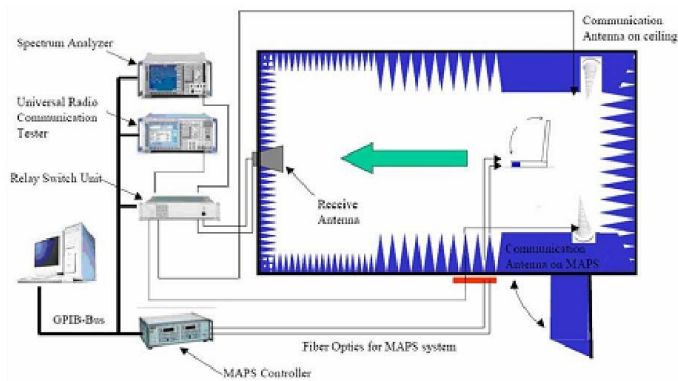

(Testing by 3D anechoic chamber)



Phi axis test



Theta axis test

Efficiency & Gain

2.40 -2.17

2.440 0.12

2.48 0.17

Radiation Pattern:

