



CERTIFICATE #5473.01

Test Report No.:
FCC2025-0024-RF

TEST REPORT


FCC ID : 2BBMK-SHB-TPMS-0002
Applicant : Zhejiang Shenghuabo Electric Appliance Corporation
Product Name : Bluetooth tire pressure sensor
Mode No. : SHB-TPMS-0002

CVC Testing Technology Co., Ltd.

| | | | | | | |
|--|---|------------------------|---|--|--|--|
| Product Name | Bluetooth tire pressure sensor | | | | | |
| Type/Model | SHB-TPMS-0002 | Trade Mark |  | | | |
| Applicant | Zhejiang Shenghuabo Electric Appliance Corporation | | | | | |
| Applicant Address | Ruian International Auto&Parts industry Park, Wenzhou, Zhejiang, China | | | | | |
| Manufacturer | Shanghai Shenghuabo Auto Electric Co.,Ltd | | | | | |
| Manufacturer Address | No.898, Baian Road, Anting Town, Jiading District Shanghai City, P.R. China | | | | | |
| Factory | Shanghai Shenghuabo Auto Electric Co.,Ltd | | | | | |
| Factory Address | No.898, Baian Road, Anting Town, Jiading District Shanghai City, P.R. China | | | | | |
| Sample Identification | 1-1 | Test Item | See page 9 | | | |
| Tested According To | FCC CFR47 Part 15C Radio Frequency Devices ANSI C63.10-2020 | | | | | |
| Receiving Date | June.20,2025 | Completing Date | June.24,2025~June.30,2025 | | | |
| Test conclusion | <p>The equipment under test was found to comply with the requirements of the standards applied.</p> <p>Final Verdict: Pass.</p> | | | | | |
| | Seal of CVC | | | | | |
| | Date of issue: July.03,2025 | | | | | |
| Abbreviations: / Pass= passed Fail = failed N/A= not applicable | | | | | | |
| This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC . | | | | | | |


Approved by:

Chen Huawen



Reviewed by:

Xu Zhenfei



Tested by:

Li Yueao




TABLE OF CONTENTS

| | |
|---|-----------|
| RELEASE CONTROL RECORD | 4 |
| 1. GENERAL PRODUCT INFORMATION | 5 |
| 1.1 GENERAL INFORMATION | 5 |
| 2. TEST SITES | 6 |
| 2.1 TEST FACILITIES | 6 |
| 2.2 DESCRIPTION OF NON-STANDARD METHOD AND DEVIATIONS | 6 |
| 2.3 LIST OF TEST AND MEASUREMENT INSTRUMENTS | 6 |
| 3. TEST CONFIGURATION | 7 |
| 3.1 TEST MODE | 7 |
| 3.2 DUTY CYCLE | 8 |
| 4. SUMMARY OF MEASUREMENT RESULTS | 11 |
| 5. MEASUREMENT PROCEDURE | 12 |
| 5.1 CONDUCTED EMISSION | 12 |
| 5.2 RADIATED EMISSION | 15 |
| 5.3 OCCUPIED CHANNEL BANDWIDTH | 29 |
| 5.4 ANTENNA MEASUREMENT | 32 |
| 6. APPENDIX A | 33 |

RELEASE CONTROL RECORD

| ISSUE NO. | REASON FOR CHANGE | DATE ISSUED |
|------------------|--------------------------|--------------------|
| FCC2025-0024-RF | Original release | July.03,2025 |

1. General Product Information

1.1 General information

| | |
|--|----------------------------------|
| Product Name | Bluetooth tire pressure sensor |
| Model No. | SHB-TPMS-0002 |
| Additional model | N/A |
| Power Supply | DC 3V |
| Serial Number(SN) | 3112F1D7 |
| HVIN | SHB-TPMS-0002 |
| Firmware | V1.2 |
| Software | V1.0 |
| Antenna Type | PCB Antenna |
| Antenna Connector | A permanently attached antenna |
| Antenna Gain | 1.45 dBi (provided by client) |
| Beamforming gain | Unsupported (provided by client) |
| Frequency Range | 2400~2483.5 MHz |
| Channel Number | 3 Channel |
| Type of Modulation | GFSK |
| Max. Conducted Power | Custom technology 2.4G: -7.40dBm |
| Operate Temp. Range | -40°C~+125°C |
| Note: | |
| 1. The information of the EUT is declared by the manufacturer. | |
| 2. The laboratory is not responsible for the product technical specification provided by the client. | |
| 3. Transmitter part is located in the controller, and Receiver is located in the Complete Equipment. | |
| 4. EUT photo refer to report (Report NO.: FCC2025-0024-EUT). | |
| 5. The EUT have SISO function, provides 1 completed transmitter and 1 receiver. | |

2. Test Sites

2.1 Test Facilities

The tests and measurements refer to this report were performed by RF testing Lab. of CVC Testing Technology Co., Ltd.

Add.: No.3, Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou, Guangdong, 510663, People's Republic of China

Telephone : +86-20-32293888

Fax : +86-20-32293889

FCC(Test firm designation number: CN1282)

IC(Test firm CAB identifier number: CN0103)

CNAS(Test firm designation number: L0095)

2.2 Description of Non-standard Method and Deviations

The testing and measurement methods used in this report are applied by all standard methods. Not any non-standard method or deviation from the used standards was used.

2.3 List of Test and Measurement Instruments

Refer to **Appendix A**.

3. Test Configuration

3.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

| Test Mode | Antenna Delivery | Test Channel [MHz] |
|------------------------|------------------|--------------------|
| Custom technology 2.4G | 1TX / 1RX | 2402 |
| | 1TX / 1RX | 2426 |
| | 1TX / 1RX | 2480 |

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate and different channels. Preliminary tests have been done on all the configuration for confirming worst case.

Data rate below means worst-case rate of each test item.

Worst-case Antenna and channels are shown as following table.

| Test Mode | Antenna 1 | Antenna 2 | MIMO |
|------------------------|-----------|-----------|------|
| Custom technology 2.4G | ✓ | / | / |


| Test Items | Test Antennas | Test Modes | Test Frequency [MHz] |
|----------------------------|---------------|------------------------|----------------------|
| Conducted Emissions | Antenna 1 | / | / |
| Radiated Emissions | Antenna 1 | Custom technology 2.4G | 2402, 2426, 2480 |
| Occupied Channel Bandwidth | Antenna 1 | Custom technology 2.4G | 2402, 2426, 2480 |
| Antenna Requirement | Antenna 1 | / | / |


3.2 Duty cycle


Test Results:

| TestMode | Antenna | Channel [MHz] | Transmission Duration [ms] | Transmission Period [ms] | Duty Cycle [%] | Limit | Verdict |
|------------------------|---------|---------------|----------------------------|--------------------------|----------------|-------|---------|
| Custom technology 2.4G | Ant1 | 2402 | 518.24 | 1.68 | 0.32 | --- | PASS |
| | Ant1 | 2426 | 513.48 | 1.68 | 0.33 | --- | PASS |
| | Ant1 | 2480 | 519.88 | 1.56 | 0.30 | --- | PASS |


Test Graphs:

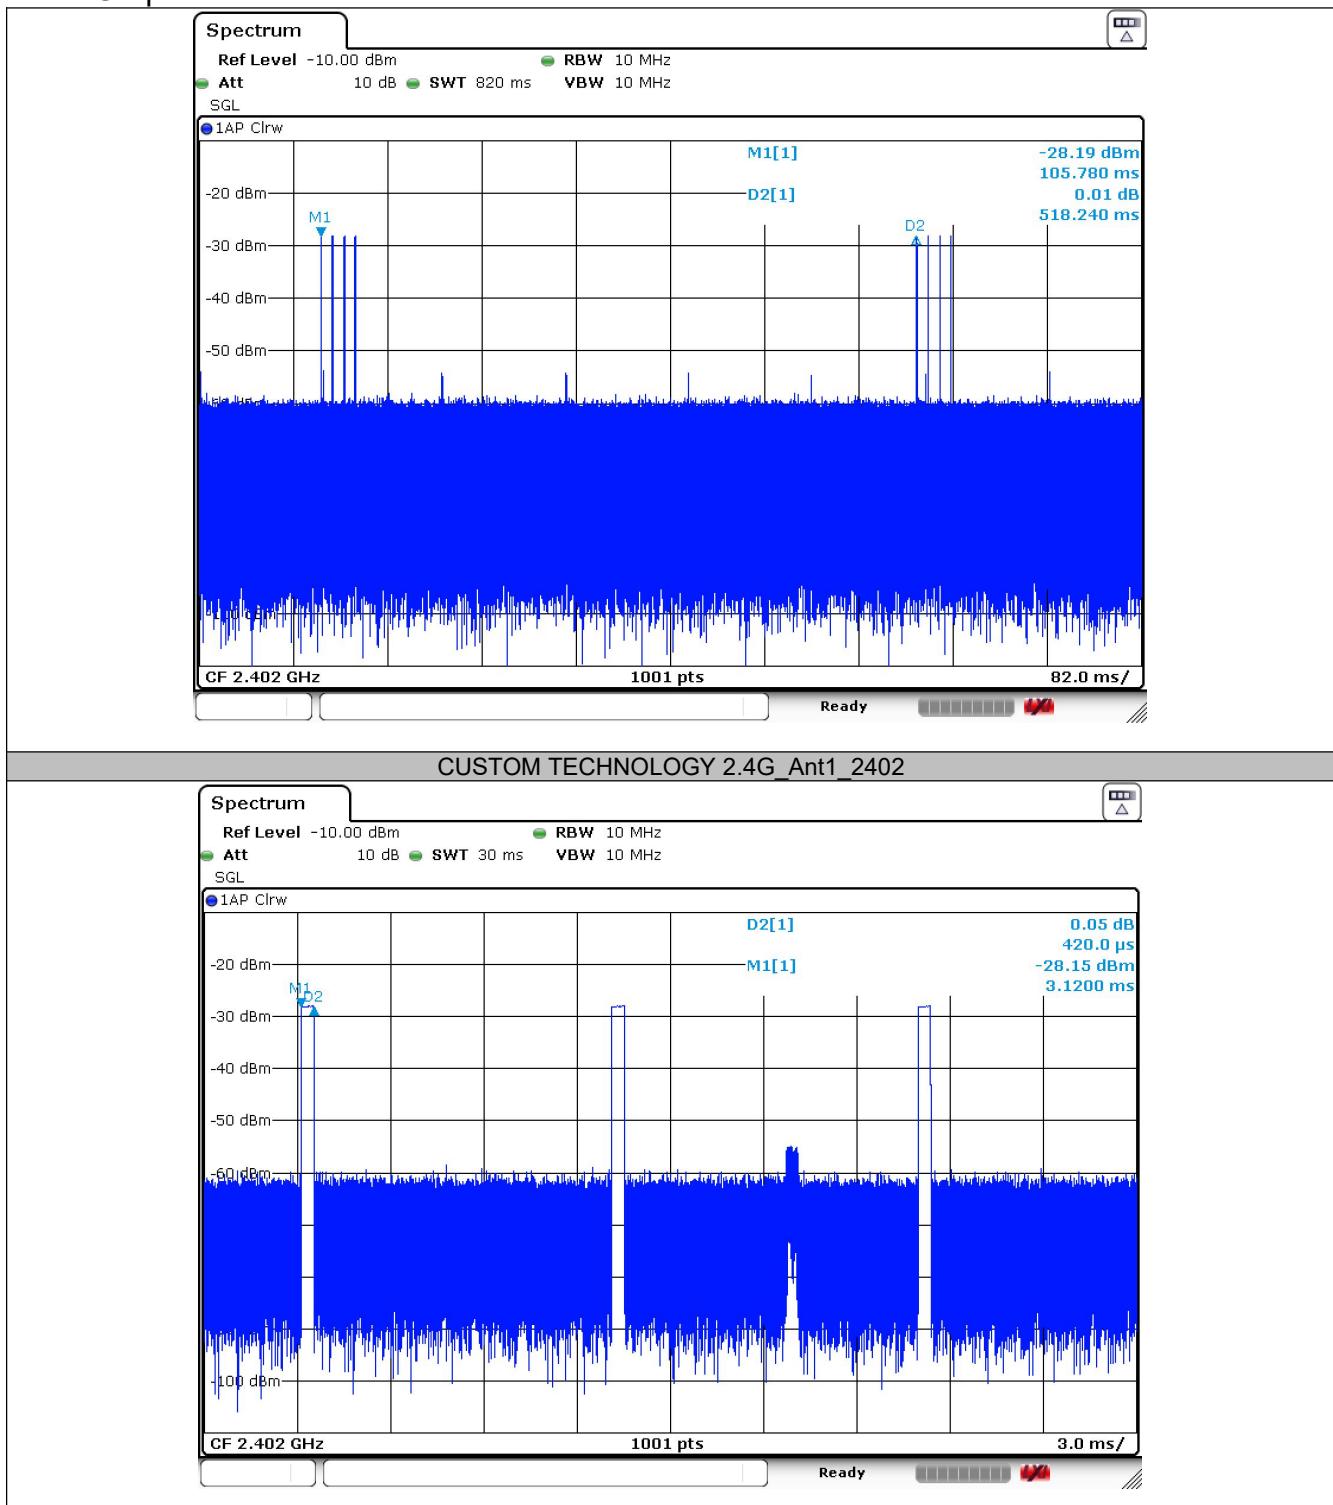

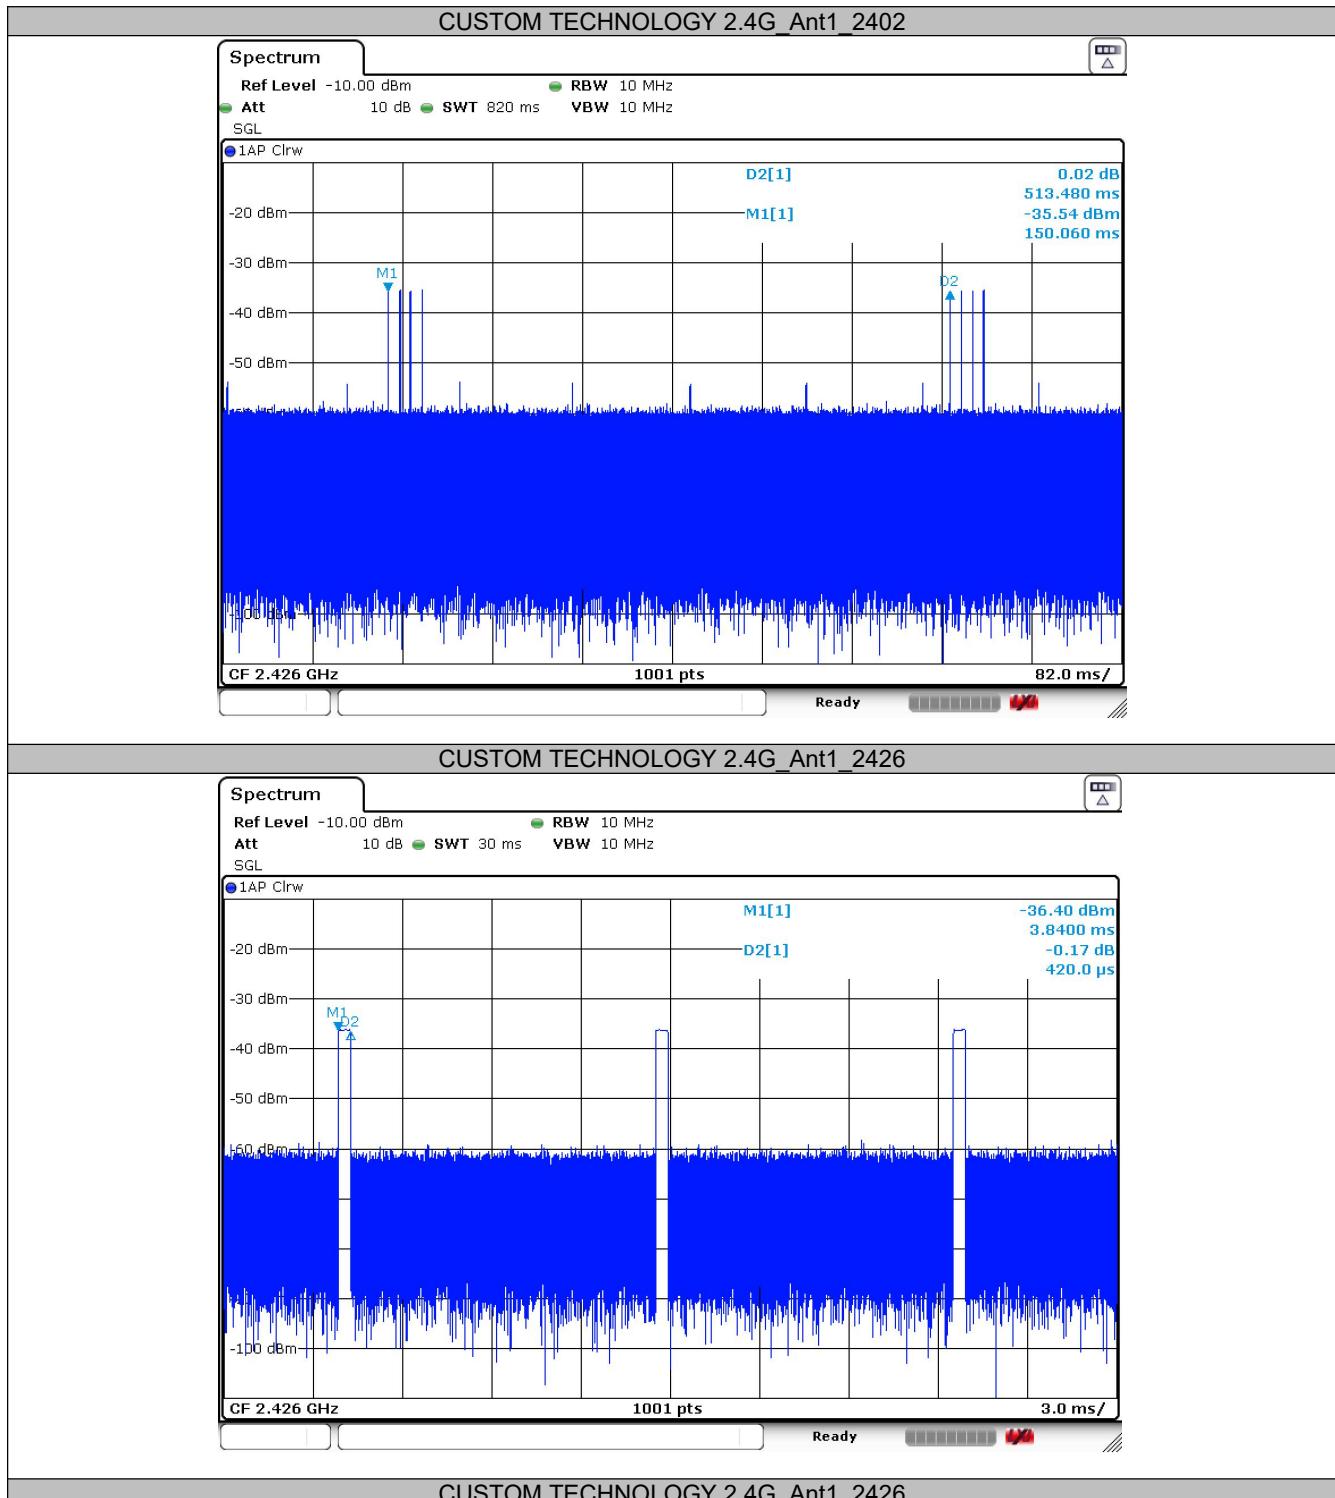

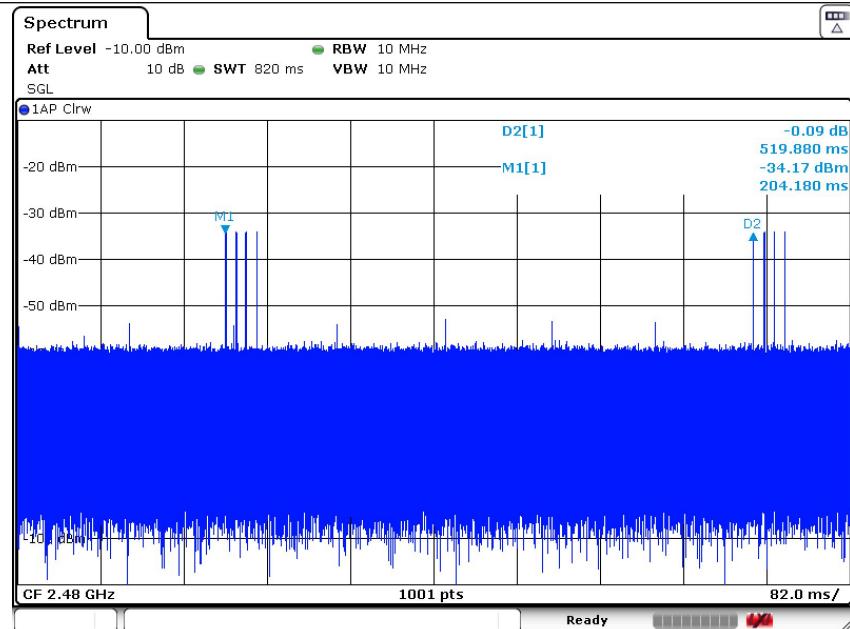

CUSTOM TECHNOLOGY 2.4G_Ant1_2480

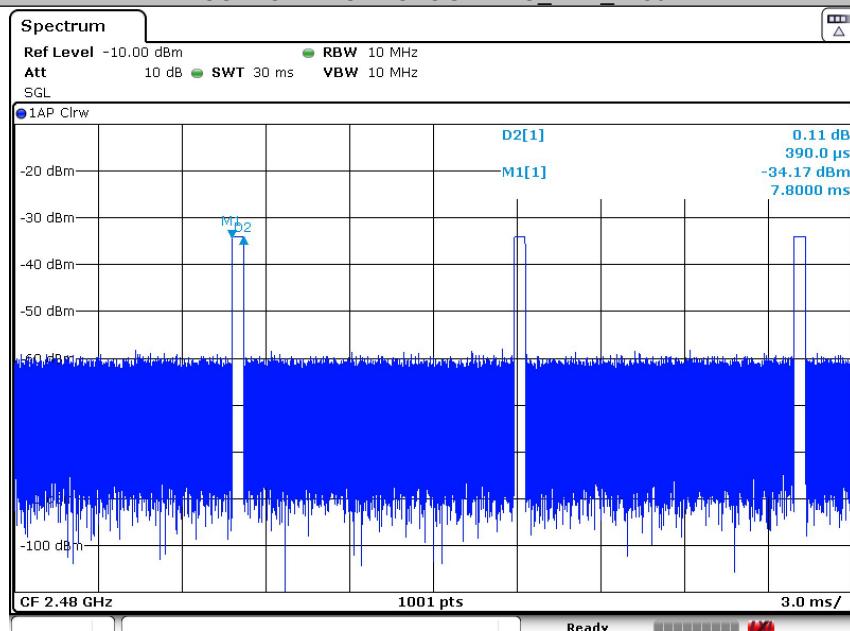

CUSTOM TECHNOLOGY 2.4G_Ant1_2480

4. Summary of measurement results

| Summary of measurements of results | Clause in FCC rules | Verdict | Note |
|------------------------------------|-------------------------------|----------------|-----------|
| Conducted Emissions | 15.207 | Not Applicable | See Note1 |
| Radiated Emissions | 15.249(a)(d)(e),15.205,15.209 | PASS | / |
| Occupied Channel Bandwidth | 15.215(c) | PASS | / |
| Antenna Requirement | 15.203 | PASS | / |

Note1: Battery powered, conducted emissions Not applicable.

5. Measurement procedure

5.1 Conducted Emission

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.2kPa |

Method of Measurement:

The EUT was setup according to ANSI C63.10, 2020 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.


Limits:

| Frequency (MHz) | Conducted Limits(dB μ V) | |
|--------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 to 56 * | 56 to 46* |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Test Setup:

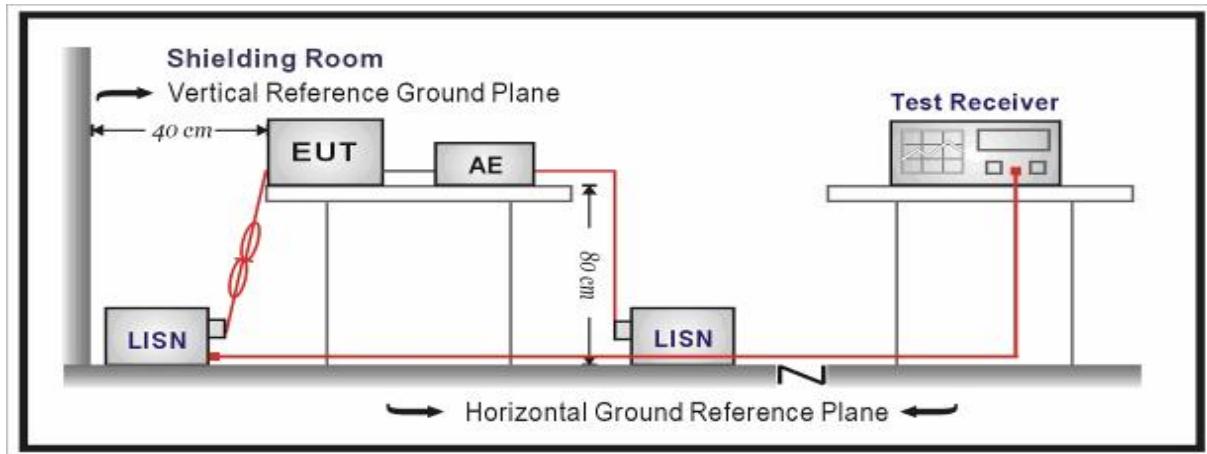

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Level =Reading + Factor.

Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.12$ dB.

Test Results:

Battery powered, conducted emissions Not applicable.

5.2 Radiated Emission

Ambient condition:

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.2kPa |

Method of Measurement:

The EUT was setup and tested according to ANSI C63.10, 2020.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from Antenna to the EUT was 3 meters.

The Antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the Antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2020 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn Antenna will be bended down a little (as horn

Antenna has the narrow beamwidth) in order to keeping the Antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

Limits:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

| Frequency | Limit (μ V/m) | Limit (dB μ V/m @3m) | Remark |
|-------------------|---------------------|--------------------------|------------------|
| 0.009MHz-0.490MHz | 2400/F(kHz)@300m | 20lg(24000000/F(kHz)) | Quasi-peak Level |
| 0.490MHz~1.705MHz | 24000/F(kHz)@30m | 20lg(2400000/F(kHz)) | Quasi-peak Level |
| 1.705MHz~30.0MHz | 30@30m | 69.54 | Quasi-peak Level |
| 30MHz-88MHz | 100@3m | 40.0 | Quasi-peak Level |
| 88MHz-216MHz | 150@3m | 43.5 | Quasi-peak Level |
| 216MHz-960MHz | 200@3m | 46.0 | Quasi-peak Level |
| 960MHz-1GHz | 500@3m | 54.0 | Quasi-peak Level |


| | | | |
|------------|---------|------|---------------|
| Above 1GHz | 500@3m | 54.0 | Average Level |
| | 5000@3m | 74.0 | Peak Level |

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:


| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36. |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | / |
| 13.36-13.41 | / | / | / |

Test Setup:


Below 30MHz Test Setup:

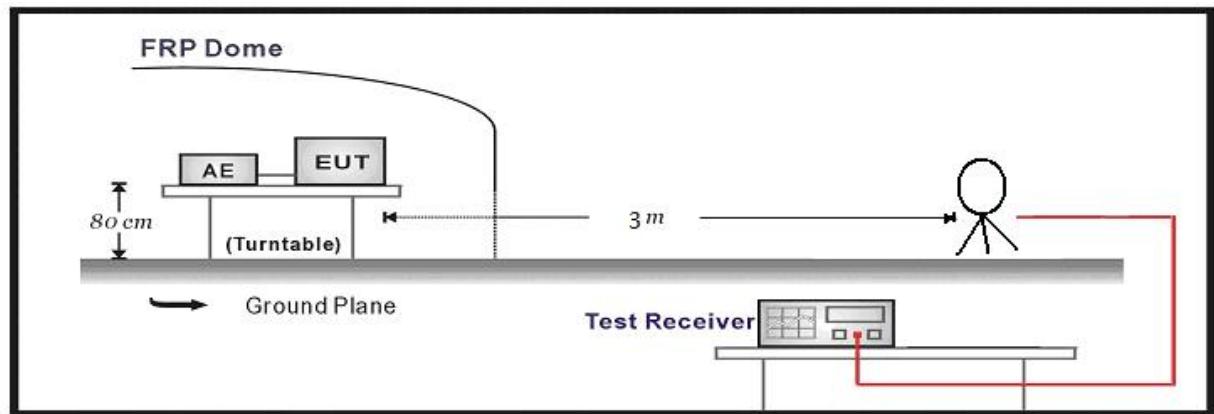

Below 1GHz Test Setup:

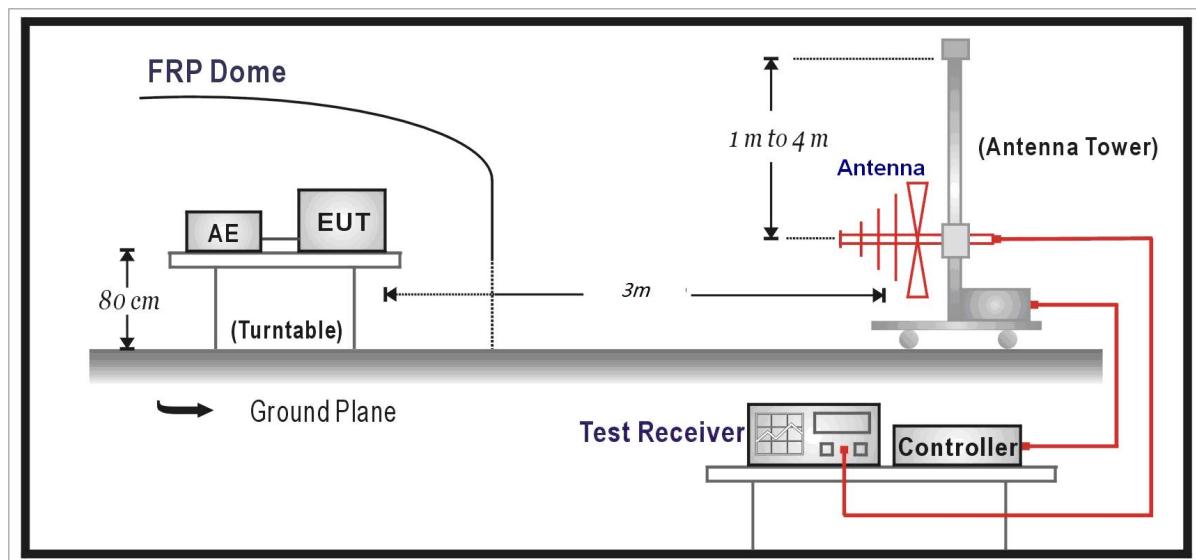

Above 1GHz Test Setup:

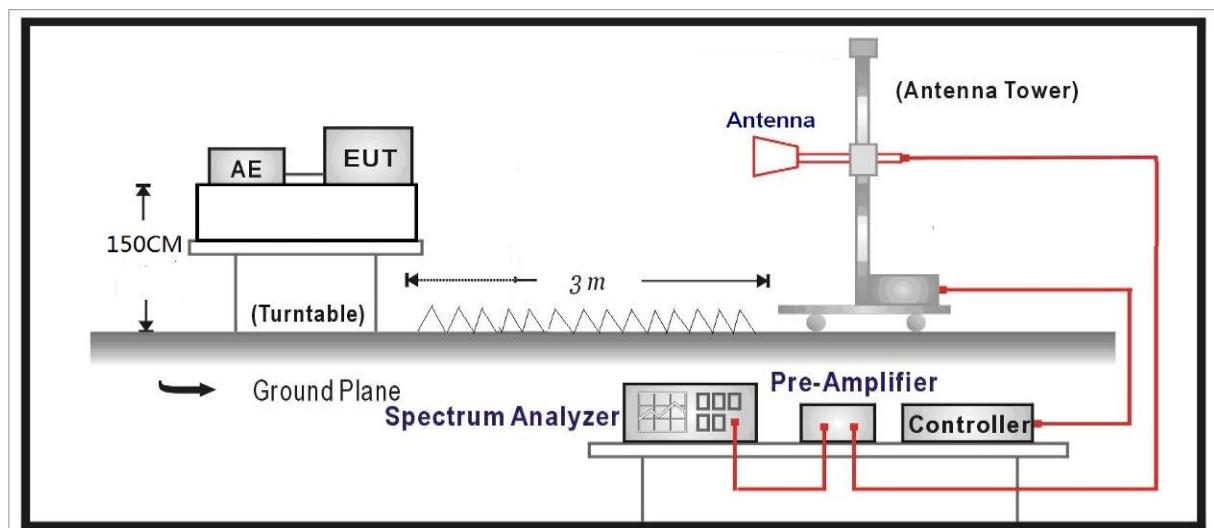

Measurement Data:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Level =Reading - Factor

Factor = Preamplifier Factor – Antenna Factor–Cable Loss

Measurement Uncertainty:


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


| Frequency | Uncertainty |
|--------------|-------------|
| 9KHz-30MHz | 3.55 dB |
| 30MHz-200MHz | 4.19 dB |
| 200MHz-1GHz | 3.63 dB |
| Above 1GHz | 3.68 dB |

Test Results:

Fundamental Field Strength:

| Test Carrier frequency (MHz) | | 2402 | | | | | | | | | |
|------------------------------|------------|-------------|------------------|----------------|----------------|-------------|----------|-------------|-----------|-----------|--|
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| Suspected List | | | | | | | | | | | |
| Frequency [MHz] | Polarity | Factor [dB] | Reading [dBμV/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Height [cm] | Angle deg | Pass/Fail | |
| 2402.340234 | Horizontal | -4.53 | 91.34 | 86.81 | 94.00 | 7.19 | PK | 150 | 328 | PASS | |
| 2402.140214 | Horizontal | -4.53 | 44.93 | 40.40 | 94.00 | 53.60 | AV | 150 | 350 | PASS | |
| | | | | | | | | | | | |
| Suspected List | | | | | | | | | | | |
| Frequency [MHz] | Polarity | Factor [dB] | Reading [dBμV/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Height [cm] | Angle deg | Pass/Fail | |
| 2402.140214 | Vertical | -4.53 | 78.40 | 73.87 | 94.00 | 20.13 | PK | 150 | 296 | PASS | |
| 2402.140214 | Vertical | -4.53 | 41.91 | 37.38 | 94.00 | 56.62 | AV | 150 | 318 | PASS | |

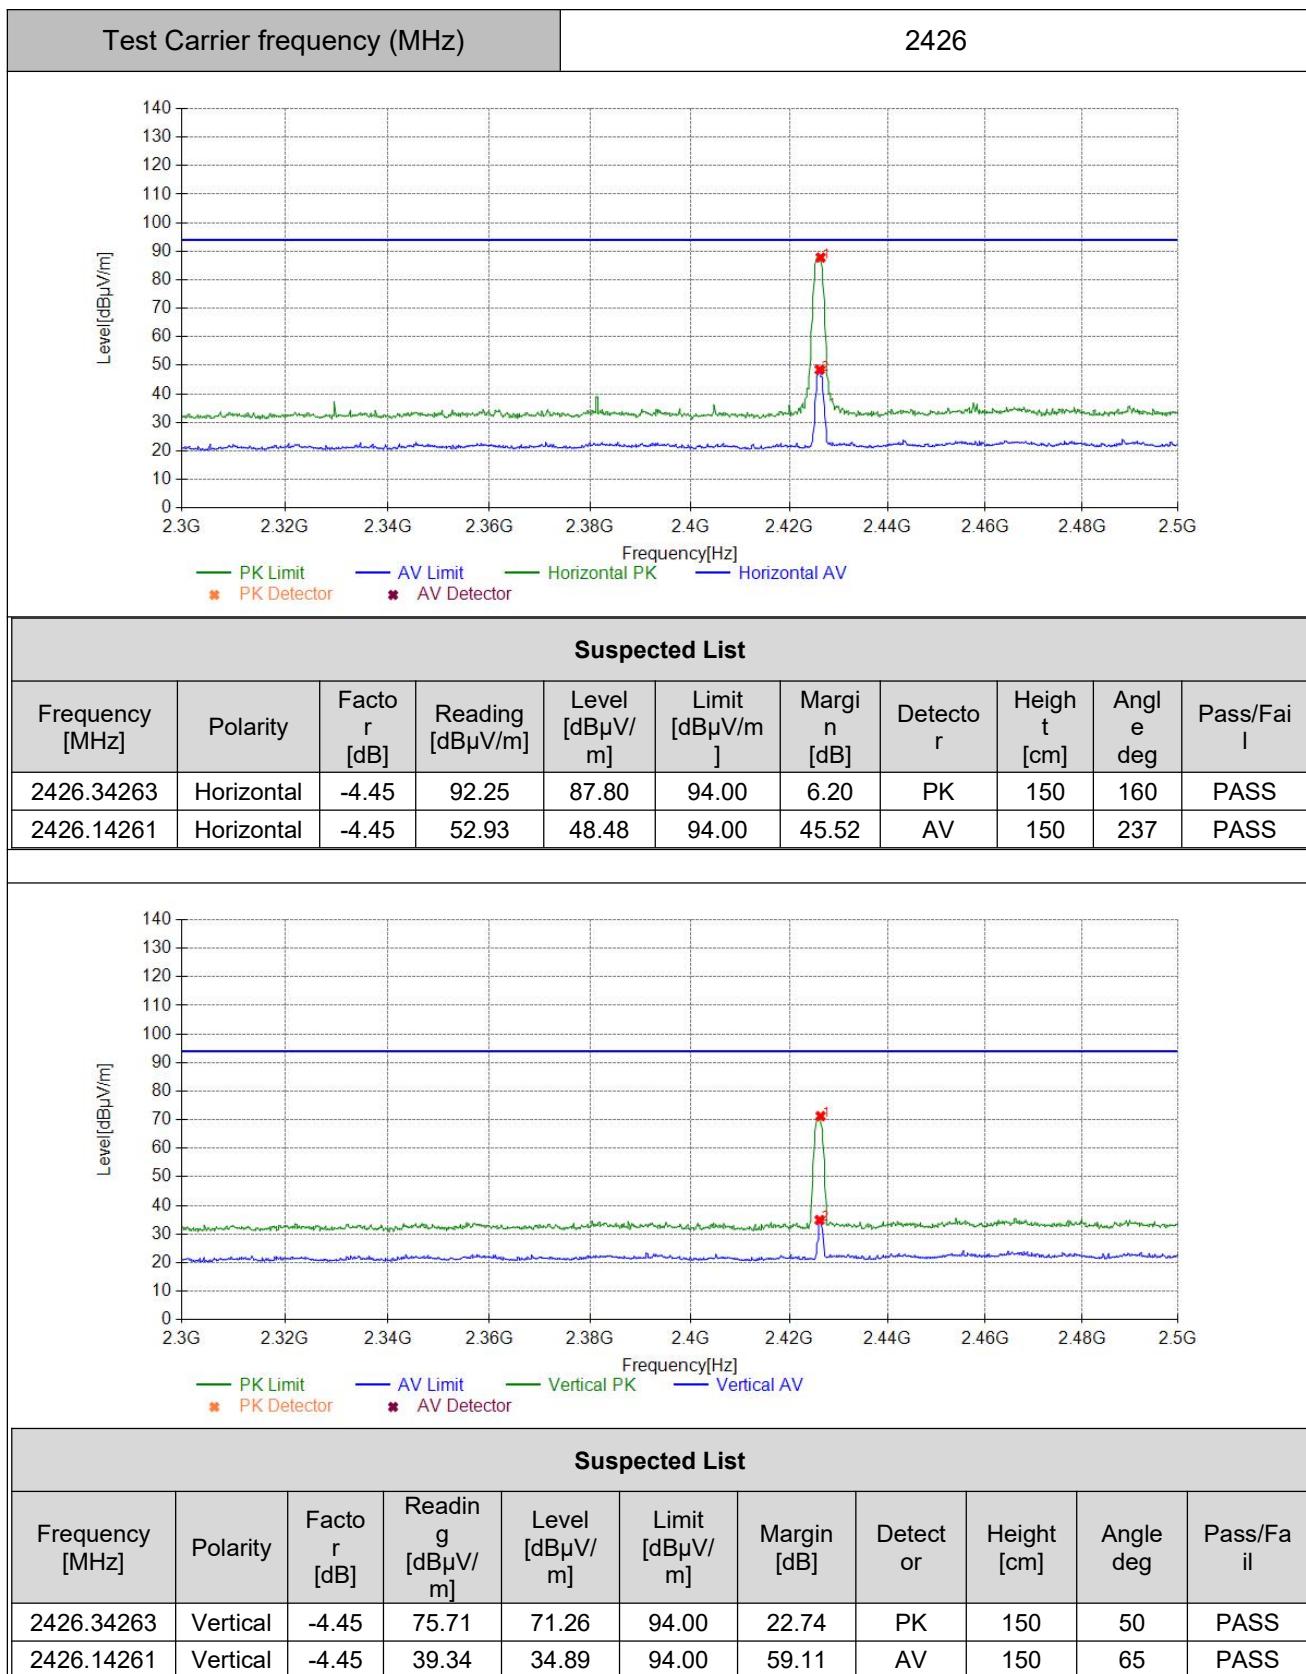

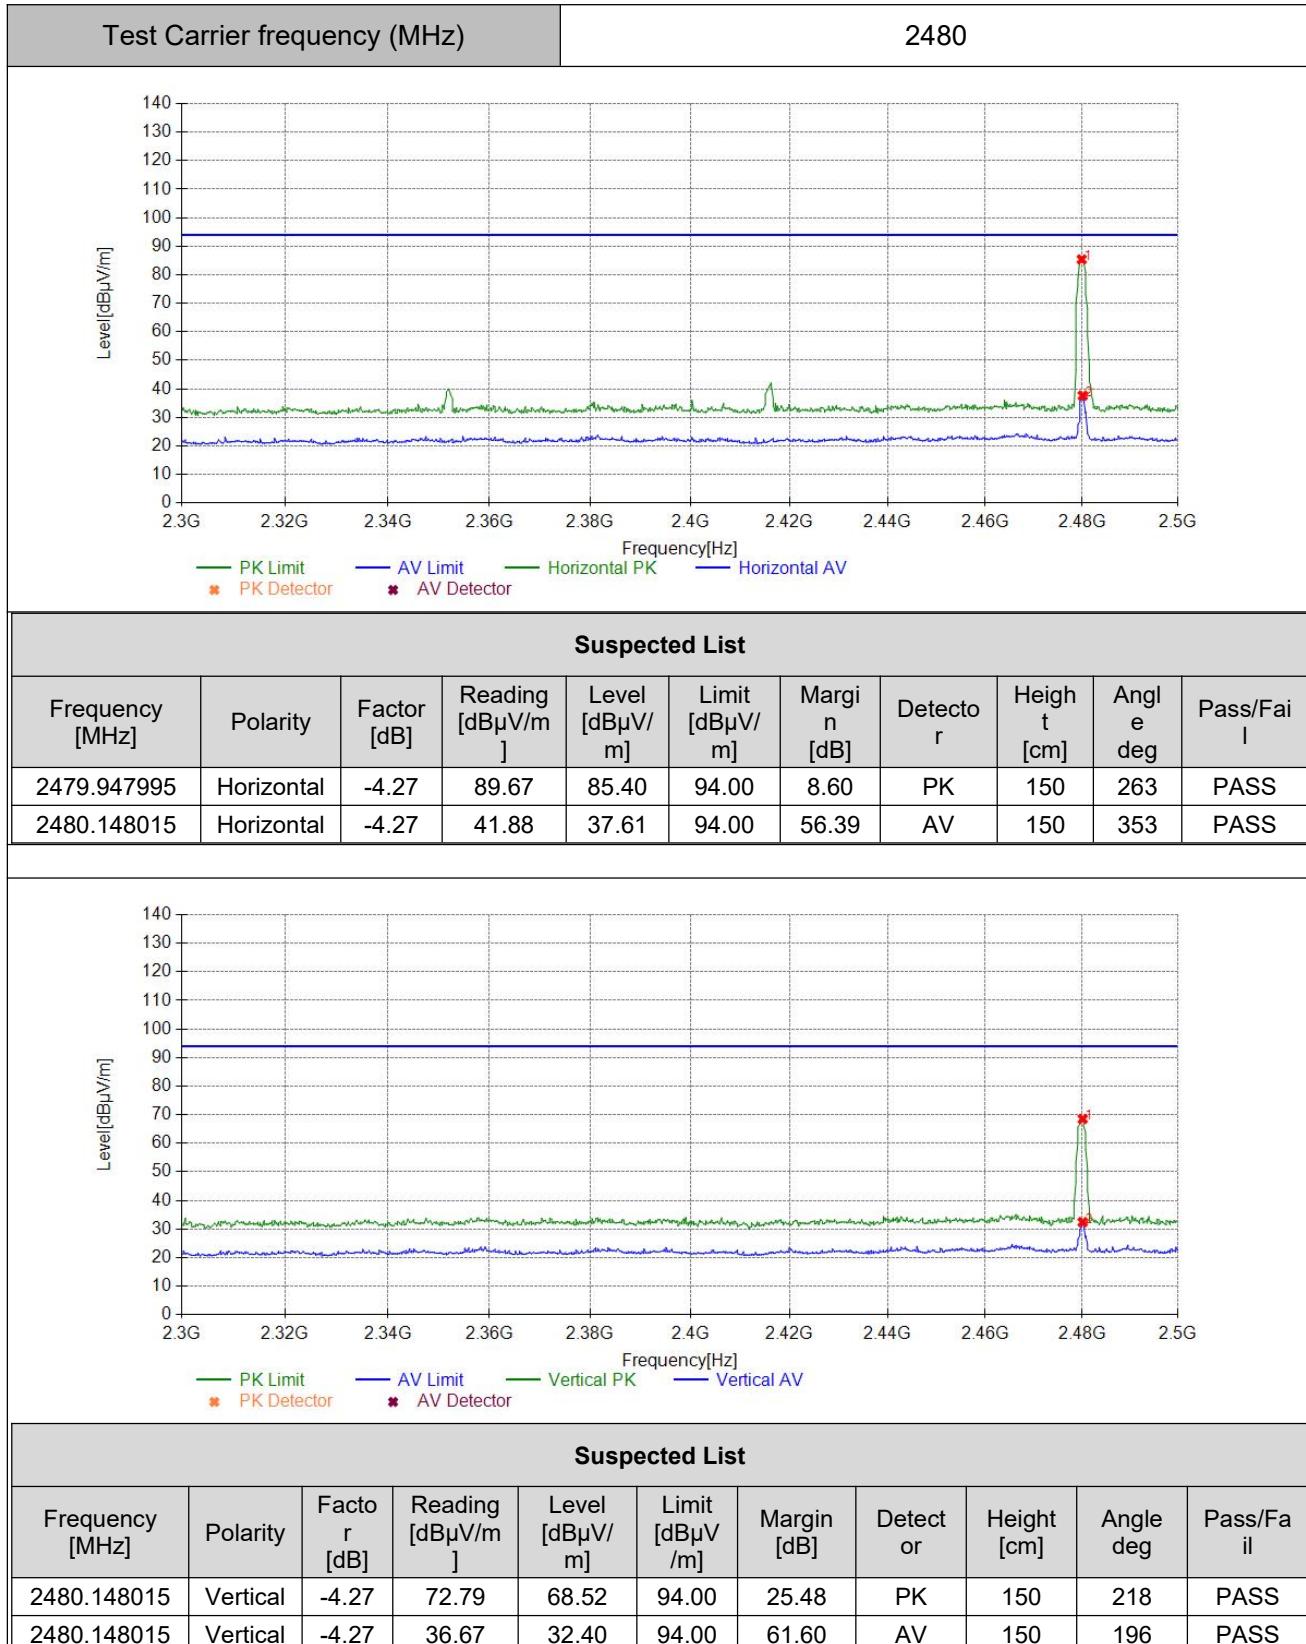


SPURIOUS EMISSIONS:

During the test, the Radiates Emission from 9kHz to 1GHz was performed in all modes with all channels and all antenna. Custom technology 2.4G, Channel 1, Antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


| Radiates Emission | | 9k~1G | | | | | | | | | |
|-----------------------|------------|-------------|------------------------|----------------------|----------------------|-------------|-----------|-------------|-----------|-----------|--|
| Test channel | | Worst-Case | | | | | | | | | |
| Suspected List | | | | | | | | | | | |
| Frequency [MHz] | Polarity | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detect or | Height [cm] | Angle deg | Pass/Fail | |
| 223.73 | Horizontal | 13.51 | 9.78 | 23.29 | 46.00 | 22.71 | PK | 100 | 40 | PASS | |
| 498.46 | Horizontal | 19.68 | 9.75 | 29.43 | 46.00 | 16.57 | PK | 100 | 200 | PASS | |
| 800.06 | Horizontal | 24.58 | 9.78 | 34.36 | 46.00 | 11.64 | PK | 100 | 320 | PASS | |

| Final Data List | | | | | | | | | |
|------------------------|------------|-------------|-------------------------|-------------------------|----------------|-------------|-----------|-----------|--|
| Frequency [MHz] | Polarity | Factor [dB] | QP Value [dB μ V/m] | QP Limit [dB μ V/m] | QP Margin [dB] | Height [cm] | Angle [°] | Pass/Fail | |
| 223.728373 | Horizontal | 13.51 | 20.37 | 46.00 | 25.63 | 130 | 40 | PASS | |
| 498.459846 | Horizontal | 19.68 | 26.51 | 46.00 | 19.49 | 125 | 200 | PASS | |
| 800.063006 | Horizontal | 24.58 | 33.12 | 46.00 | 12.88 | 110 | 320 | PASS | |

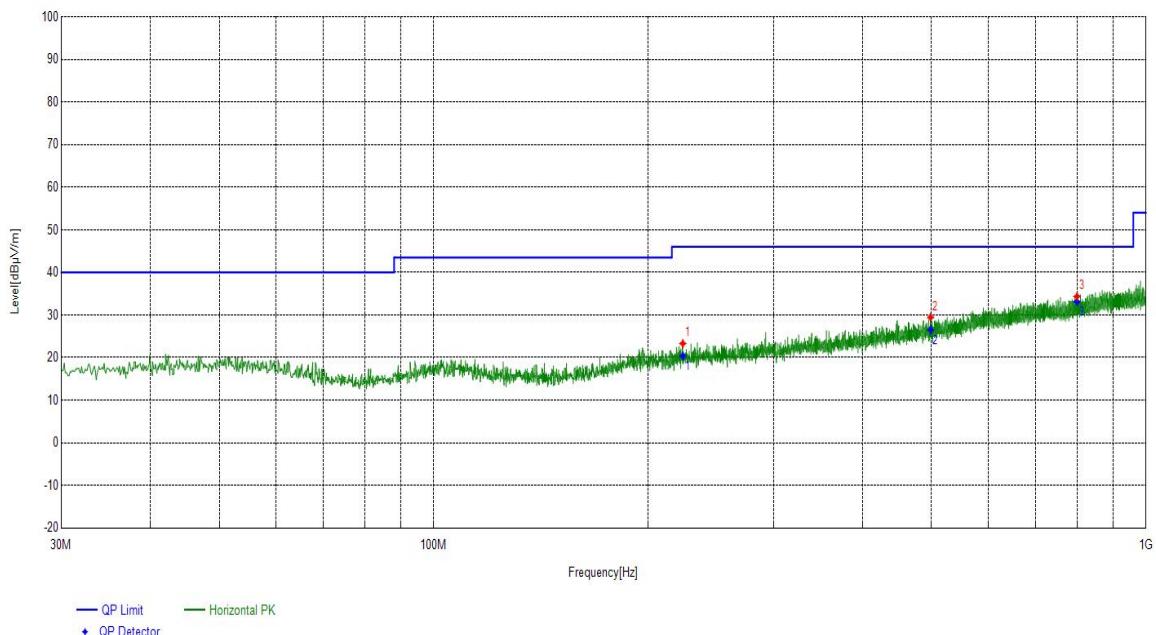

| Radiates Emission | | 9k~1G | | | | | | | | | |
|-----------------------|----------|-------------|------------------------|----------------------|----------------------|-------------|----------|-------------|-----------|-----------|--|
| Test channel | | Worst-Case | | | | | | | | | |
| Suspected List | | | | | | | | | | | |
| Frequency [MHz] | Polarity | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detector | Height [cm] | Angle deg | Pass/Fail | |
| 184.25 | Vertical | 12.19 | 9.81 | 22.00 | 43.50 | 21.50 | PK | 100 | 130 | PASS | |
| 473.14 | Vertical | 19.22 | 9.12 | 28.34 | 46.00 | 17.66 | PK | 100 | 60 | PASS | |
| 911.43 | Vertical | 25.95 | 10.32 | 36.27 | 46.00 | 9.73 | PK | 100 | 290 | PASS | |

| Final Data List | | | | | | | | | | | |
|------------------------|----------|-------------|-------------------------|-------------------------|----------------|-------------|-----------|-----------|--|--|--|
| Frequency [MHz] | Polarity | Factor [dB] | QP Value [dB μ V/m] | QP Limit [dB μ V/m] | QP Margin [dB] | Height [cm] | Angle [°] | Pass/Fail | | | |
| 184.245425 | Vertical | 12.19 | 20.67 | 43.50 | 22.83 | 135 | 130 | PASS | | | |
| 473.140314 | Vertical | 19.22 | 25.73 | 46.00 | 20.27 | 120 | 60 | PASS | | | |
| 911.430143 | Vertical | 25.95 | 33.66 | 46.00 | 12.34 | 130 | 290 | PASS | | | |

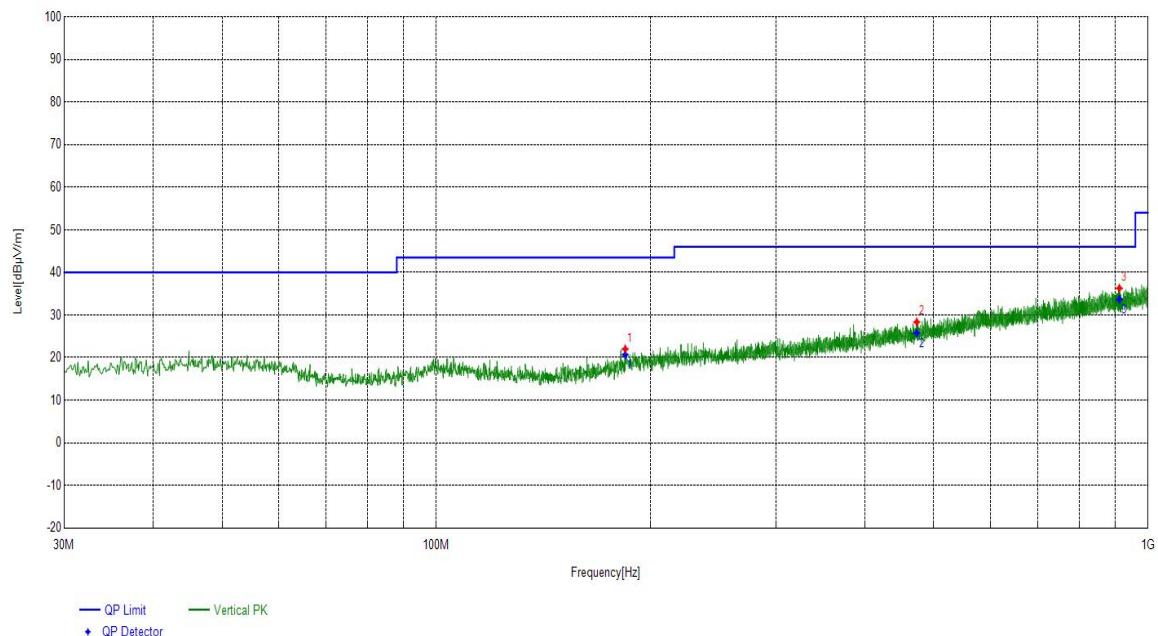

During the test, the Radiates Emission from 1GHz to 40GHz was performed in all modes with all channels and all antenna. Custom technology 2.4G, Highest, medium, lowest channels are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

| Radiates Emission | | Above 1G | | | | | | | |
|-----------------------|-------------|------------------------|----------------------|----------------------|-------------|----------|-------------|-----------|-----------|
| Test channel | | Lowest | | | | | | | |
| polarization | | Horizontal | | | | | | | |
| Suspected List | | | | | | | | | |
| Frequency [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detector | Height [cm] | Angle deg | Pass/Fail |
| 4323.132313 | 0.19 | 37.54 | 37.73 | 74.00 | 36.27 | PK | 150 | 290 | PASS |
| 6061.806181 | 5.77 | 34.32 | 40.09 | 74.00 | 33.91 | PK | 150 | 200 | PASS |
| 9593.159316 | 12.39 | 32.07 | 44.46 | 74.00 | 29.54 | PK | 150 | 30 | PASS |
| 4191.119112 | 0.44 | 27.88 | 28.32 | 54.00 | 25.68 | AV | 150 | 50 | PASS |
| 6288.328833 | 5.97 | 24.18 | 30.15 | 54.00 | 23.85 | AV | 150 | 180 | PASS |
| 9563.156316 | 12.36 | 22.03 | 34.39 | 54.00 | 19.61 | AV | 150 | 90 | PASS |
| Radiates Emission | | Above 1G | | | | | | | |
| Test channel | | Lowest | | | | | | | |
| polarization | | Vertical | | | | | | | |
| Suspected List | | | | | | | | | |
| Frequency [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detector | Height [cm] | Angle deg | Pass/Fail |
| 4093.609361 | 0.50 | 38.53 | 39.03 | 74.00 | 34.97 | PK | 150 | 180 | PASS |
| 5715.271527 | 4.37 | 34.15 | 38.52 | 74.00 | 35.48 | PK | 150 | 50 | PASS |
| 7833.483348 | 9.23 | 33.81 | 43.04 | 74.00 | 30.96 | PK | 150 | 300 | PASS |
| 4003.60036 | 0.54 | 28.39 | 28.93 | 54.00 | 25.07 | AV | 150 | 260 | PASS |
| 5752.775278 | 4.51 | 24.60 | 29.11 | 54.00 | 24.89 | AV | 150 | 170 | PASS |
| 8438.043804 | 9.91 | 24.02 | 33.93 | 54.00 | 20.07 | AV | 150 | 130 | PASS |

Note: The emission levels of other frequencies were greater than 20dB margin.

| | | | | | | | | |
|-------------------|------------|--|--|--|--|--|--|--|
| Radiates Emission | Above 1G | | | | | | | |
| Test channel | Medium | | | | | | | |
| polarization | Horizontal | | | | | | | |

Suspected List

| Frequency [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detect or | Height [cm] | Angle deg | Pass/ Fail |
|-----------------|-------------|------------------------|----------------------|----------------------|-------------|-----------|-------------|-----------|------------|
| 4602.160216 | 0.37 | 37.91 | 38.28 | 74.00 | 35.72 | PK | 150 | 290 | PASS |
| 7276.927693 | 9.00 | 34.58 | 43.58 | 74.00 | 30.42 | PK | 150 | 310 | PASS |
| 9734.173417 | 12.39 | 32.56 | 44.95 | 74.00 | 29.05 | PK | 150 | 130 | PASS |
| 4086.108611 | 0.50 | 29.41 | 29.91 | 54.00 | 24.09 | AV | 150 | 220 | PASS |
| 7011.40114 | 8.95 | 23.97 | 32.92 | 54.00 | 21.08 | AV | 150 | 110 | PASS |
| 8556.555656 | 10.05 | 23.72 | 33.77 | 54.00 | 20.23 | AV | 150 | 310 | PASS |

| | | | | | | | | |
|-------------------|----------|--|--|--|--|--|--|--|
| Radiates Emission | Above 1G | | | | | | | |
| Test channel | Medium | | | | | | | |
| polarization | Vertical | | | | | | | |

Suspected List

| Frequency [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detect or | Height [cm] | Angle deg | Pass/ Fail |
|-----------------|-------------|------------------------|----------------------|----------------------|-------------|-----------|-------------|-----------|------------|
| 4773.177318 | 1.11 | 36.76 | 37.87 | 74.00 | 36.13 | PK | 150 | 50 | PASS |
| 6180.318032 | 5.93 | 34.77 | 40.70 | 74.00 | 33.30 | PK | 150 | 130 | PASS |
| 8612.061206 | 10.11 | 34.23 | 44.34 | 74.00 | 29.66 | PK | 150 | 160 | PASS |
| 4396.639664 | 0.04 | 28.46 | 28.50 | 54.00 | 25.50 | AV | 150 | 60 | PASS |
| 6033.30333 | 5.73 | 24.50 | 30.23 | 54.00 | 23.77 | AV | 150 | 110 | PASS |
| 8597.059706 | 10.11 | 24.20 | 34.31 | 54.00 | 19.69 | AV | 150 | 210 | PASS |

Note: The emission levels of other frequencies were greater than 20dB margin.

| | | | | | | | | |
|-------------------|------------|--|--|--|--|--|--|--|
| Radiates Emission | Above 1G | | | | | | | |
| Test channel | Highest | | | | | | | |
| polarization | Horizontal | | | | | | | |

Suspected List

| Frequency [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detect or | Height [cm] | Angle deg | Pass/ Fail |
|-----------------|-------------|------------------------|----------------------|----------------------|-------------|-----------|-------------|-----------|------------|
| 4630.663066 | 0.49 | 39.00 | 39.49 | 74.00 | 34.51 | PK | 150 | 120 | PASS |
| 7039.90399 | 8.95 | 34.16 | 43.11 | 74.00 | 30.89 | PK | 150 | 10 | PASS |
| 8537.053705 | 10.03 | 33.23 | 43.26 | 74.00 | 30.74 | PK | 150 | 160 | PASS |
| 4609.660966 | 0.40 | 27.38 | 27.78 | 54.00 | 26.22 | AV | 150 | 110 | PASS |
| 6853.885389 | 8.21 | 22.66 | 30.87 | 54.00 | 23.13 | AV | 150 | 320 | PASS |
| 8408.040804 | 9.85 | 24.01 | 33.86 | 54.00 | 20.14 | AV | 150 | 140 | PASS |

| | | | | | | | | |
|-------------------|----------|--|--|--|--|--|--|--|
| Radiates Emission | Above 1G | | | | | | | |
| Test channel | Highest | | | | | | | |
| polarization | Vertical | | | | | | | |

Suspected List

| Frequency [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detect or | Height [cm] | Angle deg | Pass/ Fail |
|-----------------|-------------|------------------------|----------------------|----------------------|-------------|-----------|-------------|-----------|------------|
| 4938.193819 | 1.83 | 36.64 | 38.47 | 74.00 | 35.53 | PK | 150 | 120 | PASS |
| 7632.463246 | 9.11 | 34.37 | 43.48 | 74.00 | 30.52 | PK | 150 | 150 | PASS |
| 9668.166817 | 12.40 | 32.63 | 45.03 | 74.00 | 28.97 | PK | 150 | 350 | PASS |
| 4735.673567 | 0.96 | 26.69 | 27.65 | 54.00 | 26.35 | AV | 150 | 120 | PASS |
| 7027.90279 | 8.95 | 23.64 | 32.59 | 54.00 | 21.41 | AV | 150 | 30 | PASS |
| 9249.624963 | 11.27 | 22.08 | 33.35 | 54.00 | 20.65 | AV | 150 | 140 | PASS |

Note: The emission levels of other frequencies were greater than 20dB margin.

Fundamental Field Strength and Band Edge:

During the test, the Band Edge was performed in Custom technology 2.4G all modes with all channels and all antenna. Custom technology 2.4G, Antenna 1, highest and lowest channels are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

| | | | | | | | | | |
|--------------|------------------------|--|--|--|--|--|--|--|--|
| Test mode | Custom technology 2.4G | | | | | | | | |
| Test channel | Lowest channel | | | | | | | | |
| polarization | Horizontal | | | | | | | | |

Suspected List

| Frequency [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detect or | Height [cm] | Angle deg | Pass/ Fail |
|-----------------|-------------|------------------------|----------------------|----------------------|-------------|-----------|-------------|-----------|------------|
| 2390.1390 | -4.57 | 36.90 | 32.33 | 74.00 | 41.67 | PK | 150 | 350 | PASS |
| 2400.1400 | -4.54 | 37.46 | 32.92 | 74.00 | 41.08 | PK | 150 | 350 | PASS |
| 2402.3402 | -4.53 | 91.34 | 86.81 | 94.00 | 7.19 | PK | 150 | 350 | PASS |
| 2390.1390 | -4.57 | 26.17 | 21.60 | 54.00 | 32.40 | AV | 150 | 40 | PASS |
| 2400.1400 | -4.54 | 26.32 | 21.78 | 54.00 | 32.22 | AV | 150 | 50 | PASS |
| 2402.1402 | -4.53 | 44.93 | 40.40 | 94.00 | 53.60 | AV | 150 | 350 | PASS |

| | | | | | | | | | |
|--------------|------------------------|--|--|--|--|--|--|--|--|
| Test mode | Custom technology 2.4G | | | | | | | | |
| Test channel | Lowest channel | | | | | | | | |
| polarization | Vertical | | | | | | | | |

Suspected List

| Frequency [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detect or | Height [cm] | Angle deg | Pass/ Fail |
|-----------------|-------------|------------------------|----------------------|----------------------|-------------|-----------|-------------|-----------|------------|
| 2390.1390 | -4.57 | 37.08 | 32.51 | 74.00 | 41.49 | PK | 150 | 340 | PASS |
| 2400.1400 | -4.54 | 37.58 | 33.04 | 74.00 | 40.96 | PK | 150 | 340 | PASS |
| 2402.1402 | -4.53 | 78.40 | 73.87 | 94.00 | 20.13 | PK | 150 | 340 | PASS |
| 2390.1390 | -4.57 | 26.28 | 21.71 | 54.00 | 32.29 | AV | 150 | 30 | PASS |
| 2400.1400 | -4.54 | 26.72 | 22.18 | 54.00 | 31.82 | AV | 150 | 30 | PASS |
| 2402.1402 | -4.53 | 41.91 | 37.38 | 94.00 | 56.62 | AV | 150 | 340 | PASS |

| | | | | | | | | | |
|--------------|------------------------|--|--|--|--|--|--|--|--|
| Test mode | Custom technology 2.4G | | | | | | | | |
| Test channel | Highest channel | | | | | | | | |
| polarization | Horizontal | | | | | | | | |

Suspected List

| Frequency [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detector | Height [cm] | Angle deg | Pass/ Fail |
|-----------------|-------------|------------------------|----------------------|----------------------|-------------|----------|-------------|-----------|------------|
| 2479.9479 | -4.27 | 89.67 | 85.40 | 94.00 | 8.60 | PK | 150 | 340 | PASS |
| 2483.5483 | -4.26 | 37.82 | 33.56 | 74.00 | 40.44 | PK | 150 | 340 | PASS |
| 2490.1490 | -4.23 | 38.34 | 34.11 | 74.00 | 39.89 | PK | 150 | 250 | PASS |
| 2480.1480 | -4.27 | 41.88 | 37.61 | 94.00 | 56.39 | AV | 150 | 340 | PASS |
| 2483.5483 | -4.26 | 26.58 | 22.32 | 54.00 | 31.68 | AV | 150 | 20 | PASS |
| 2490.1490 | -4.23 | 26.92 | 22.69 | 54.00 | 31.31 | AV | 150 | 10 | PASS |

| | | | | | | | | | |
|--------------|------------------------|--|--|--|--|--|--|--|--|
| Test mode | Custom technology 2.4G | | | | | | | | |
| Test channel | Highest channel | | | | | | | | |
| polarization | Vertical | | | | | | | | |

Suspected List

| Frequency [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Detector | Height [cm] | Angle deg | Pass/ Fail |
|-----------------|-------------|------------------------|----------------------|----------------------|-------------|----------|-------------|-----------|------------|
| 2480.1480 | -4.27 | 72.79 | 68.52 | 94.00 | 25.48 | PK | 150 | 340 | PASS |
| 2483.5483 | -4.26 | 36.16 | 31.90 | 74.00 | 42.10 | PK | 150 | 90 | PASS |
| 2504.9504 | -4.18 | 36.57 | 32.39 | 74.00 | 41.61 | PK | 150 | 350 | PASS |
| 2480.1480 | -4.27 | 36.67 | 32.40 | 94.00 | 61.60 | AV | 150 | 340 | PASS |
| 2483.5483 | -4.26 | 26.48 | 22.22 | 54.00 | 31.78 | AV | 150 | 10 | PASS |
| 2504.9504 | -4.18 | 26.58 | 22.40 | 54.00 | 31.60 | AV | 150 | 320 | PASS |

5.3 Occupied Channel Bandwidth

Ambient condition:


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.2kPa |

Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 50 kHz; VBW is set to 200 kHz on spectrum analyzer.

Detector=Peak, Trace mode=Max hold.

Test Setup:




Measurement Uncertainty:


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:

| TestMode | Antenna | Channel | OCB [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|------------------------|---------|---------|-----------|---------|---------|------------|---------|
| CUSTOM TECHNOLOGY 2.4G | Ant1 | 2402 | 1.07 | 2401.49 | 2402.56 | --- | PASS |
| | Ant1 | 2426 | 1.06 | 2425.49 | 2426.55 | --- | PASS |
| | Ant1 | 2480 | 1.05 | 2479.48 | 2480.53 | --- | PASS |

Test Graphs:

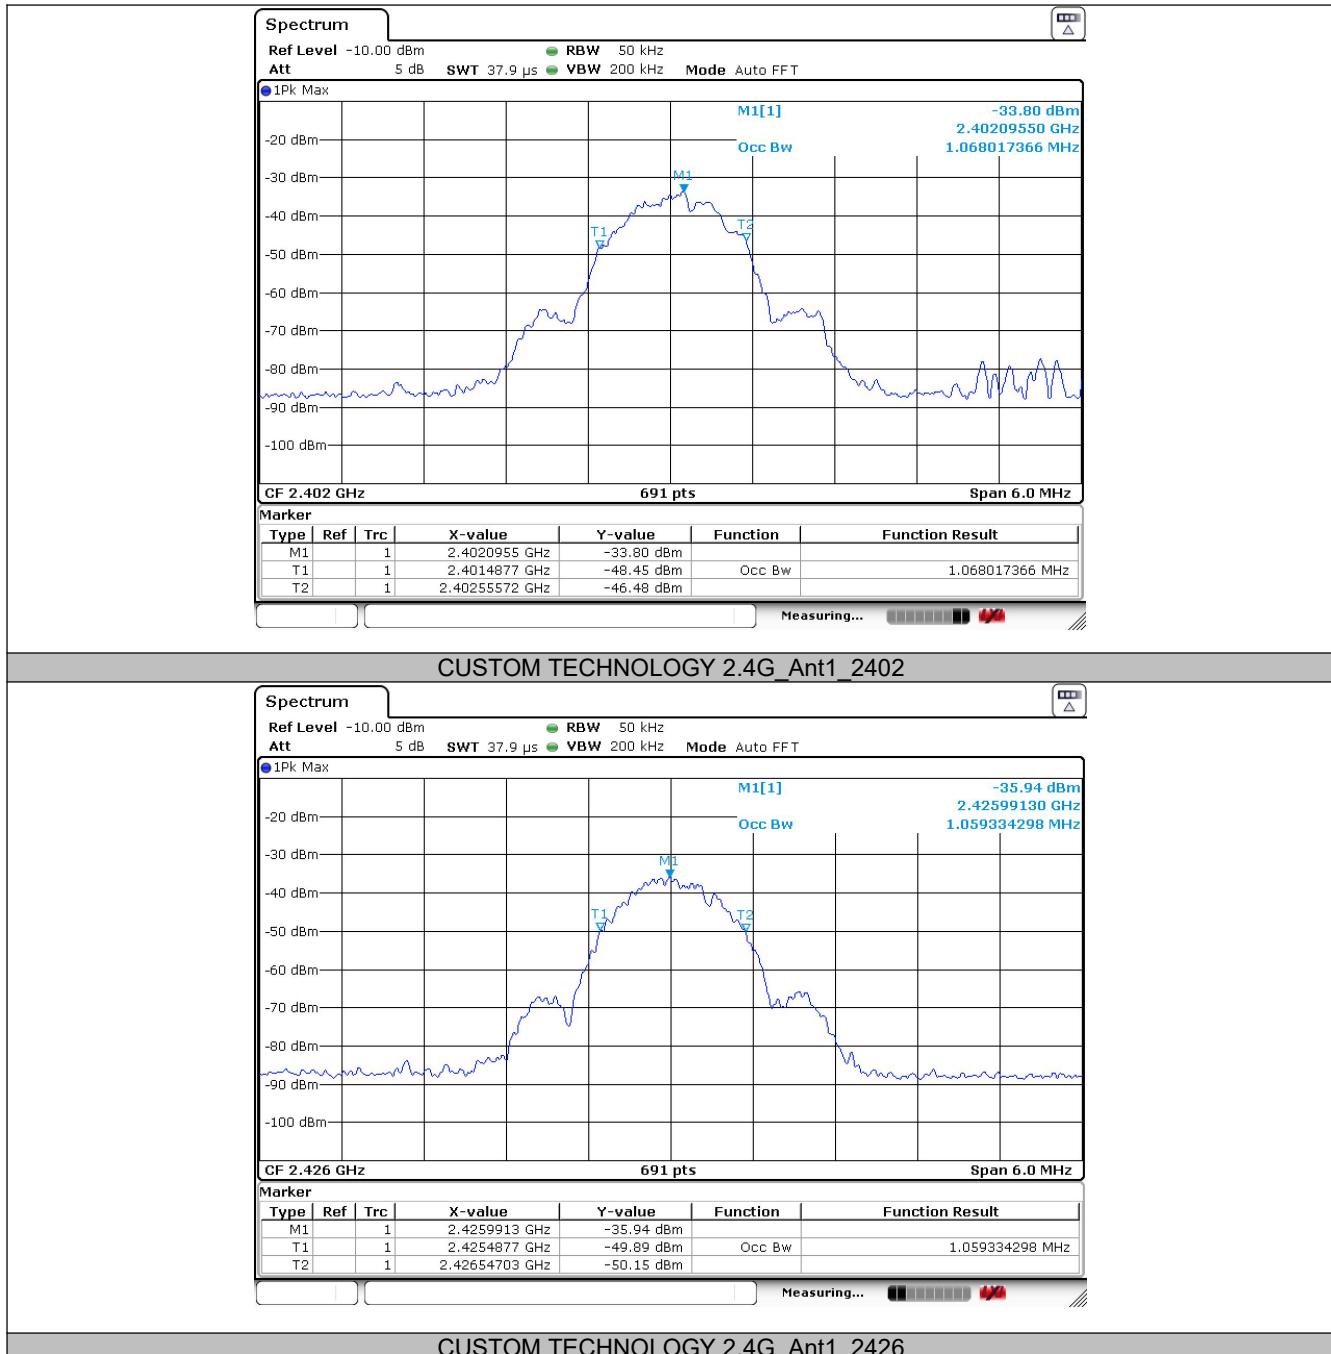

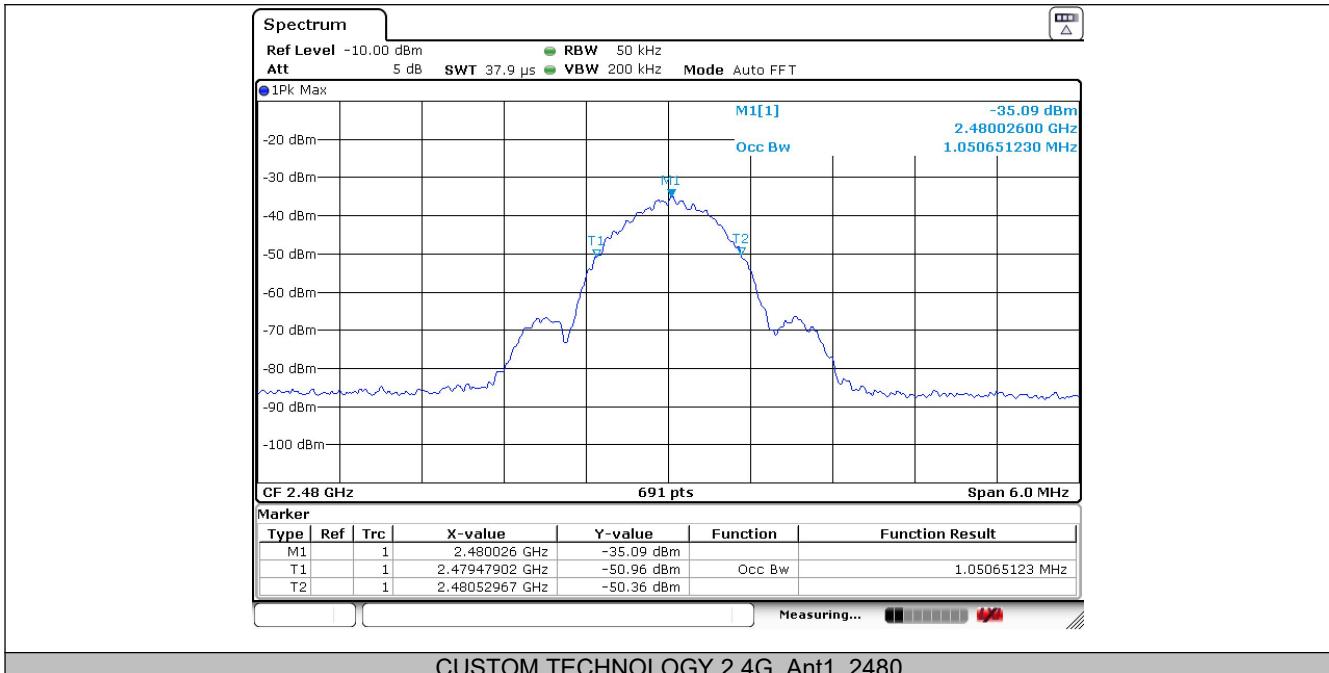

5.4 Antenna Measurement

Limits:

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

Antenna Description:

PCB antenna, without antenna connector. According to 15.203, it is considered sufficient to comply with the provisions of this section.

6. Appendix A

| Test Equipment | Type/Mode | SERIAL NO. | Equipment No. | Manufacturer | Cal. Due |
|-----------------------------------|--------------------------|-------------|---------------|--------------|------------|
| 5m Semi-Anechoic Chamber | SAC-5 | SAC-5-2.0 | EM-000557 | COMTEST | 2027/04/22 |
| Spectrum Analyzer | N9010B | MY57470323 | DZ-000174 | KEYSIGHT | 2026/01/01 |
| EMI Test Receiver | N9038A-508 | MY532290079 | EM-000397 | Agilent | 2025/12/26 |
| EMI Test Receiver | ESR7 | 102235 | VGDY-0956 | R&S | 2026/01/05 |
| loop antenna | HLA 6121 | 540046 | EM-000546 | TESEQ | 2026/06/03 |
| Broadband Antenna | VULB 9163 | 9163-530 | EM-000342 | SCHWARZBECK | 2026/06/08 |
| Waveguide Horn Antenna | HF906 | 360306/008 | EM-000093 | R&S | 2025/12/26 |
| Waveguide Horn Antenna | BBHA9170 | 00949 | DZ-000209-2 | SCHWARZBECK | 2025/08/03 |
| Bandstop Filters | SW-BSF-2400-100 -7-A1 | / | EM-000495 | / | 2025/08/29 |
| Preamplifier | BBV 9721 | 9721-050 | DZ-000209-1 | SCHWARZBECK | 2026/06/02 |
| Temperature and humidity meter | MHO-C201 | C231446122 | DZ-000249-2 | Seconds test | 2025/07/28 |

| Dynacomm | Software Release | Software Developer |
|-------------------------|------------------|--------------------|
| TS+ (5m,Radiation test) | JS32-RE 5.0.0 | Tonscend |

————— No Body Text Below —————

Important

1. The test report is invalid without the official stamp of CVC;
2. Any part photocopies of the test report are forbidden without the written permission from CVC;
3. The test report is invalid without the signatures of Author and Reviewer;
4. The test report is invalid if altered;
5. Objections to the test report must be submitted to CVC within 15 days;
6. Generally, commission test is responsible for the tested samples only;
7. As for the test result, “—” or “N/A” means “not applicable”, “/” means “not testing”, “P” means “pass” and “F” means “fail”.

Address: No.3,Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou, China (Test location)

Post Code: 510663 Tel: 020-32293888

FAX: 020 32293889 E-mail: office@cvc.org.cn