




线性尺寸的极限偏差数值mm(GB/T 1804-2000)									角度尺寸的极限偏差数值				
公差等级	基本尺寸分段,mm								角度短边长度尺寸分段,mm				
	0.5~3	>3~6	>6~30	>30~120	>120~400	>400~1000	>1000~3000	>2000~4000	~10	>10~50	>50~120	>120~400	>400
精密f	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5		±1°	±30′	±20′	±10′	±5′
中等m	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2						
粗糙C	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4	±1°30′	±1°	±20′	±15′	±10′
最粗V		±0.5	±1	±1.5	±2.5	±4	±6	±8	±3°	±2°	±1°	±30′	±20′

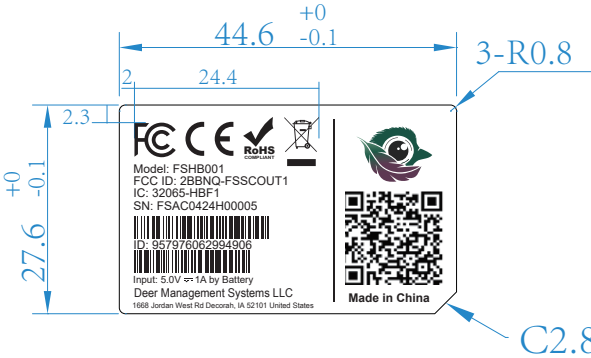

Size: 44.6x27.6mm, tolerance: 0~-0.1mm
Material: PET50#+Matte Lamination
尺寸: 44.6x27.6mm,,公差: 0~-0.1mm
印刷内容公差: ±0.2mm
材质: PET50#+哑膜



仅限于注塑件

(Max) D=2.5L/1000 仅限于注塑件																																		
					序号					名称					图号					材料基色					涂覆颜色					备注				
					BC20-label					TZ-XX-XXXXXX					版本					V1.0														
更改标记															数量					更改单号					签名					日期				
设计															重 量					比 例														
审核															1:1																			
工艺																																		
										第 1 张					共 1 张																			
标准 化					材料					ATEL™ 德明通讯 (上海) 股份有限公司																								
批 准																																		