

FCC PART 15 SUBPART C TEST REPORT**FCC PART 15.247****Report Reference No.**..... : **BSL24120041P05-R01****FCC ID**..... : **2BBNW-XG16**Compiled by
(position+printed name+signature)..: Engineer/ Cindy Zheng

Cindy zheng

Supervised by
(position+printed name+signature)..: Manager/Haley Wen

Haley wen

Approved by
(position+printed name+signature)..: RF Manager/ Vivian Jiang

Vivian Jiang

Date of issue.....: December 31, 2024

Testing Laboratory Name.....: **BSL Testing Co., Ltd.**

Address.....: 1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

Applicant's name.....: **ShenZhen XinTu Century Technology Co.,Ltd.**

Address.....: No. 5/FA, Building A1, Anle Industrial Zone, 172 Hangcheng Avenue, Hangcheng Street, Baoan District, Shenzhen

Test specification.....:**FCC Part 15.247:**Standard.....: **ANSI C63.10-2013****KDB558074 D01 V05r02: April 2, 2019****BSL Testing Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the BSL Testing Co., Ltd. is acknowledged as copyright owner and source of the material. BSL Testing Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: **Bluetooth headset**

Trade Mark.....: N/A

Manufacturer.....: ShenZhen XinTu Century Technology Co.,Ltd.

Model/Type reference.....: XG16

Listed Models: N/A

Modulation: GFSK, $\pi/4$ DQPSK, 8DPSK

Frequency.....: From 2402MHz to 2480MHz

Rating.....: DC 3.7V From Battery

Result.....: **PASS**

TEST REPORT

Equipment under Test : **Bluetooth headset**

Model /Type : XG16

Listed Models : N/A

Model Declaration : N/A

Applicant : **ShenZhen XinTu Century Technology Co.,Ltd.**

Address : No. 5/FA, Building A1, Anle Industrial Zone,172 Hangcheng Avenue, Hangcheng Street, Baoan District, Shenzhen

Manufacturer : **ShenZhen XinTu Century Technology Co.,Ltd.**

Address : No. 5/FA, Building A1, Anle Industrial Zone,172 Hangcheng Avenue, Hangcheng Street, Baoan District, Shenzhen

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	4
2 SUMMARY	5
2.1 General Remarks	5
2.2 Product Description	5
2.3 Equipment Under Test	5
2.4 Short description of the Equipment under Test (EUT)	5
2.5 EUT operation mode	6
2.6 Block Diagram of Test Setup	6
2.7 Related Submittal(s) / Grant (s)	6
2.8 Modifications	6
3 TEST ENVIRONMENT	7
3.1 Address of the test laboratory	7
3.2 Test Facility	7
3.3 Environmental conditions	7
3.4 Summary of measurement results	8
3.5 Statement of the measurement uncertainty	8
3.6 Equipments Used during the Test	9
4 TEST CONDITIONS AND RESULTS	11
4.1 AC Power Conducted Emission	11
4.2 Radiated Emission	14
4.3 Maximum Peak Output Power	20
4.4 20dB Bandwidth	24
4.5 Frequency Separation	28
4.6 Number of hopping frequency	30
4.7 Time of Occupancy (Dwell Time)	32
4.8 Out-of-band Emissions	42
4.9 Pseudorandom Frequency Hopping Sequence	60
4.10 Antenna Requirement	61
5 TEST SETUP PHOTOS OF THE EUT	62
6 PHOTOS OF THE EUT	64



1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2020: American National Standard for Testing Unlicensed Wireless Devices

KDB558074 D01 V05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	December 20, 2024
Testing commenced on	:	December 20, 2024
Testing concluded on	:	December 30, 2024

2.2 Product Description

Product Name:	Bluetooth headset
Model/Type reference:	XG16
Power supply:	DC 3.7V from battery
Adapter information (Auxiliary test supplied by testing Lab)	Model: EP-TA20CBC Input: AC 100-240V 50/60Hz Output: DC 5V 2A Firmware Version: EPTA5.14.2 Manufacture: Huizhou Dongyang Yienbi Electronics Co., Ltd
Hardware version:	/
Software version:	/
Testing sample ID:	BSL24120041P03-R01-1# (Engineer sample) BSL24120041P03-R01-2# (Normal sample)
Bluetooth :	
Supported Type:	Bluetooth BR/EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	-1.2dBi

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.7V From Battery

2.4 Short description of the Equipment under Test (EUT)

This is a Bluetooth headset.

There are 1 pairs of headphones inside the headphone charging case. The left and right ears are consistent and tested on the right ear.

For more details, refer to the user's manual of the EUT.


2.5 EUT operation mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

Operation Frequency:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

2.6 Block Diagram of Test Setup

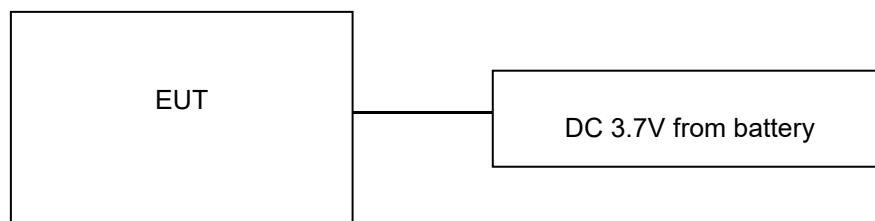

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

BSL Testing Co., Ltd.

1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

3.2 Test Facility

FCC-Registration No.: 562200 Designation Number: CN1338

BSL Testing Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

Industry Canada Registration Number. Is: 11093A CAB identifier: CN0019

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

A2LA-Lab Cert. No.: 4707.01

BSL Testing Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

AC Power Conducted Emission:

Temperature:	25 ° C
Humidity:	46 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	25 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

3.4 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(a)(1)	Carrier Frequency separation	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Middle	Compliant
§15.247(a)(1)	Number of Hopping channels	GFSK Π/4DQPSK 8DPSK	☒ Full	GFSK	☒ Full	Compliant
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Middle	Compliant
§15.247(a)(1)	Spectrum bandwidth of aFHSS system 20dB bandwidth	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(b)(1)	Maximum output peak power	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(d)	Band edge compliance conducted	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	Compliant
§15.205	Band edge compliance radiated	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Highest	Compliant
§15.247(d)	TX spurious emissions conducted	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.247(d)	TX spurious emissions radiated	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	Compliant
§15.209(a)	TX spurious Emissions radiated Below 1GHz	GFSK Π/4DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Middle	Compliant
§15.107(a) §15.207	Conducted Emissions 9KHz-30 MHz	Charging	/	Charging	/	Compliant

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the BSL Testing Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Hereafter the best measurement capability for BSL Testing Co., Ltd.:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MHz	3.82 dB	(1)
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18~40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Transmitter power conducted	1~40GHz	0.57 dB	(1)
Conducted spurious emission	1~40GHz	1.60 dB	(1)
OBW	1~40GHz	25 Hz	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test

Conducted Emission					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	BSL252	2024-10-27	2025-10-26
EMI Test Receiver	R&S	ESCI 7	BSL552	2024-10-27	2025-10-26
Coaxial Switch	ANRITSU CORP	MP59B	BSL225	2024-10-27	2025-10-26
ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	BSL226	2024-10-27	2025-10-26
Coaxial Cable	BSL	N/A	BSL227	N/A	N/A
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Thermo meter	KTJ	TA328	BSL233	2024-10-27	2025-10-26
Absorbing clamp	Elektronik-Feinmechanik	MDS21	BSL229	2024-10-27	2025-10-26
LISN	R&S	ENV216	308	2024-10-27	2025-10-26
LISN	R&S	ENV216	314	2024-10-27	2025-10-26

Radiation Test equipment					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	BSL250	2024-10-27	2025-10-26
Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	BSL251	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	BSL203	2024-10-27	2025-10-26
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	BSL214	2024-10-27	2025-10-26
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	BSL208	2024-10-27	2025-10-26
Horn Antenna	ETS-LINDGREN	3160	BSL217	2024-10-27	2025-10-26
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Coaxial Cable	BSL	N/A	BSL213	2024-10-27	2025-10-26
Coaxial Cable	BSL	N/A	BSL211	2024-10-27	2025-10-26
Coaxial cable	BSL	N/A	BSL210	2024-10-27	2025-10-26
Coaxial Cable	BSL	N/A	BSL212	2024-10-27	2025-10-26
Amplifier(100kHz-3GHz)	HP	8347A	BSL204	2024-10-27	2025-10-26
Amplifier(2GHz-20GHz)	HP	84722A	BSL206	2024-10-27	2025-10-26
Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	BSL218	2024-10-27	2025-10-26
Band filter	Amindeon	82346	BSL219	2024-10-27	2025-10-26
Power Meter	Anritsu	ML2495A	BSL540	2024-10-27	2025-10-26
Power Sensor	Anritsu	MA2411B	BSL541	2024-10-27	2025-10-26
Wideband Radio Communication	Rohde & Schwarz	CMW500	BSL575	2024-10-27	2025-10-26




Tester					
Splitter	Agilent	11636B	BSL237	2024-10-27	2025-10-26
Loop Antenna	ZHINAN	ZN30900A	BSL534	2024-10-27	2025-10-26
Breitband hornantenne	SCHWARZBECK	BBHA 9170	BSL579	2024-10-27	2025-10-26
Amplifier	TDK	PA-02-02	BSL574	2024-10-27	2025-10-26
Amplifier	TDK	PA-02-03	BSL576	2024-10-27	2025-10-26
PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	BSL578	2024-10-27	2025-10-26

RF Conducted Test:					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
MXA Signal Analyzer	Agilent	N9020A	BSL566	2024-10-27	2025-10-26
EMI Test Receiver	R&S	ESCI 7	BSL552	2024-10-27	2025-10-26
Spectrum Analyzer	Agilent	E4440A	BSL533	2024-10-27	2025-10-26
MXG vector Signal Generator	Agilent	N5182A	BSL567	2024-10-27	2025-10-26
ESG Analog Signal Generator	Agilent	E4428C	BSL568	2024-10-27	2025-10-26
USB RF Power Sensor	DARE	RPR3006W	BSL569	2024-10-27	2025-10-26
RF Switch Box	Shongyi	RFSW3003328	BSL571	2024-10-27	2025-10-26
Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	BSL572	2024-10-27	2025-10-26

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

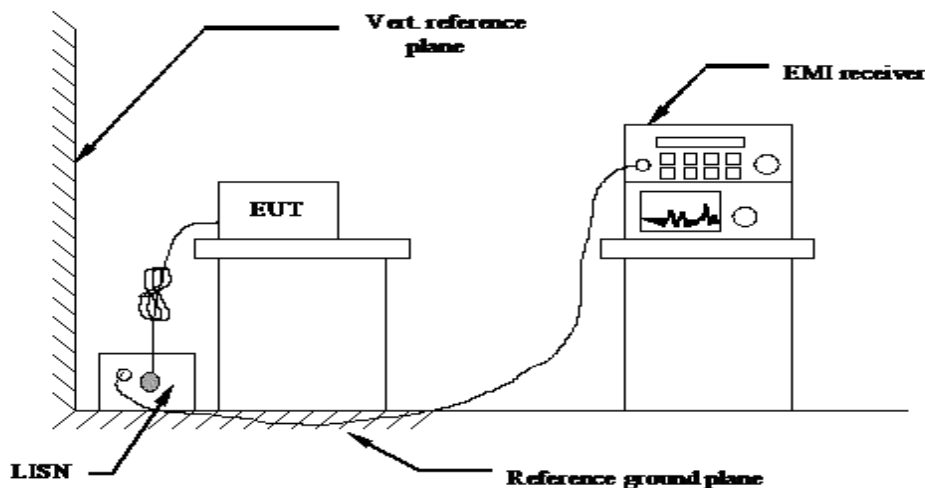

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark:


This mode is for testing data in the charging state.

Power supply:

DC 5V from Adapter AC
120V/60Hz

Polarization

L

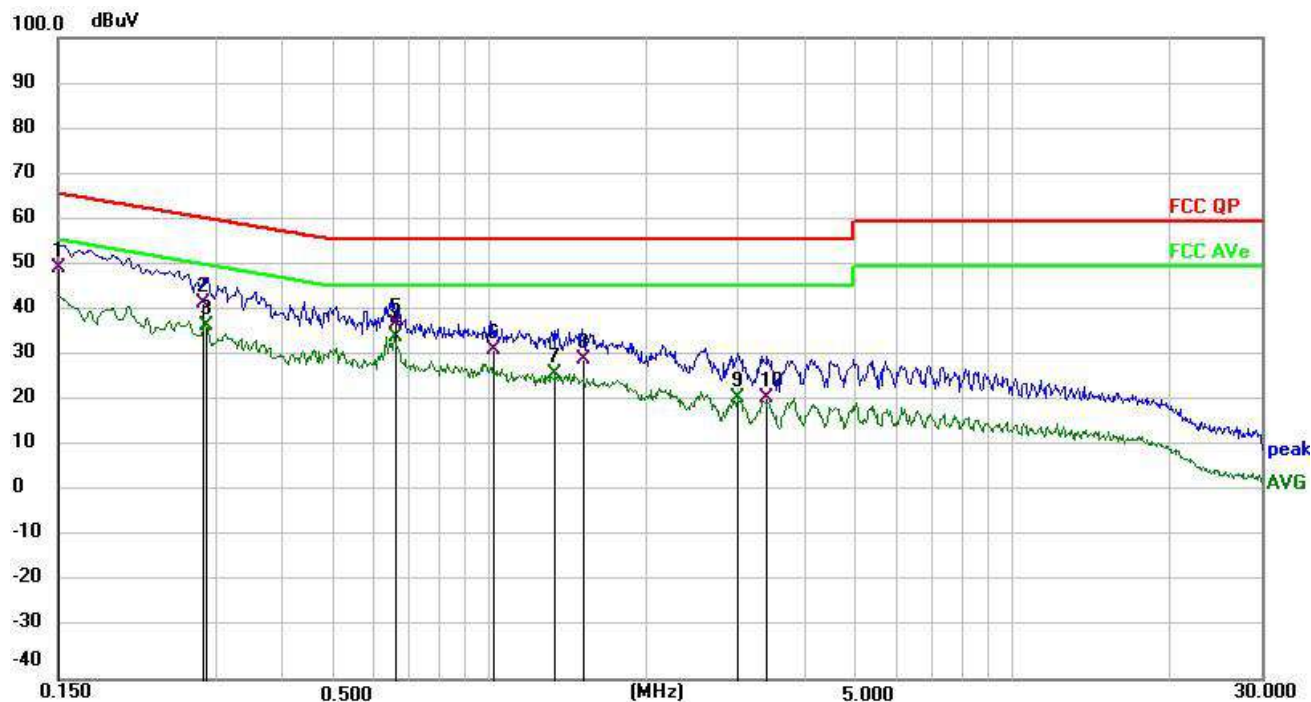

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1501	33.18	16.58	49.76	65.99	-16.23	QP	P	
2	0.2847	25.49	16.71	42.20	60.68	-18.48	QP	P	
3	0.2850	20.48	16.71	37.19	50.67	-13.48	AVG	P	
4 *	0.6585	18.20	16.66	34.86	46.00	-11.14	AVG	P	
5	0.6615	20.99	16.66	37.65	56.00	-18.35	QP	P	
6	1.0215	15.28	16.62	31.90	56.00	-24.10	QP	P	
7	1.3380	10.13	16.57	26.70	46.00	-19.30	AVG	P	
8	1.5122	13.24	16.56	29.80	56.00	-26.20	QP	P	
9	3.0030	5.02	16.34	21.36	46.00	-24.64	AVG	P	
10	3.4140	5.17	16.29	21.46	56.00	-34.54	QP	P	

Note:1). Level (dBuV)= Reading (dBuV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)


3). Margin(dB) = Limit (dBuV) - Level (dBuV)

Power supply:

DC 5V from Adapter AC
120V/60Hz

Polarization

N

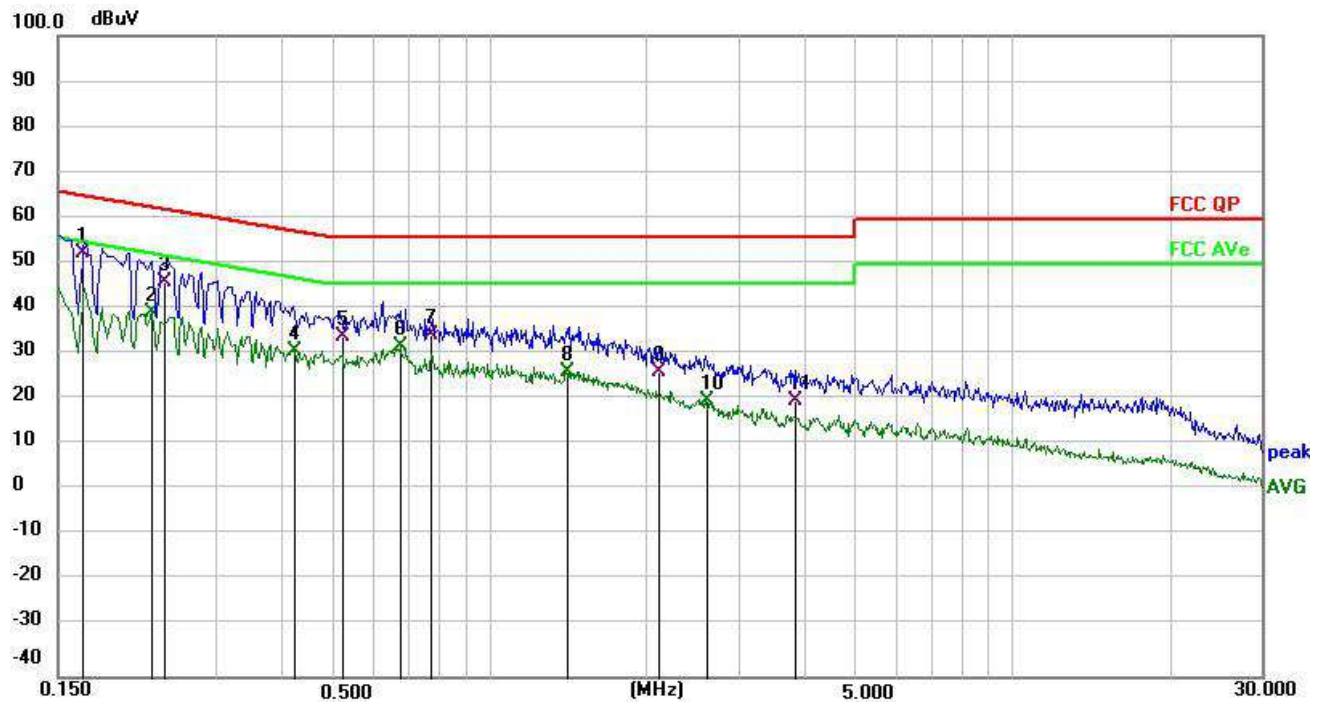

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1676	35.10	17.53	52.63	65.08	-12.45	QP	P	
2	0.2265	21.96	17.53	39.49	52.58	-13.09	AVG	P	
3	0.2388	28.88	17.53	46.41	62.14	-15.73	QP	P	
4	0.4245	13.77	17.52	31.29	47.36	-16.07	AVG	P	
5	0.5251	16.95	17.51	34.46	56.00	-21.54	QP	P	
6	0.6765	14.71	17.51	32.22	46.00	-13.78	AVG	P	
7	0.7740	17.20	17.51	34.71	56.00	-21.29	QP	P	
8	1.4055	9.36	17.49	26.85	46.00	-19.15	AVG	P	
9	2.1005	9.15	17.47	26.62	56.00	-29.38	QP	P	
10	2.6070	2.93	17.45	20.38	46.00	-25.62	AVG	P	
11	3.8602	3.11	17.43	20.54	56.00	-35.46	QP	P	

Note:1).Level (dBμV)= Reading (dBμV)+ Factor (dB)


2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)


4.2 Radiated Emission

TEST CONFIGURATION


Frequency range 9KHz – 30MHz

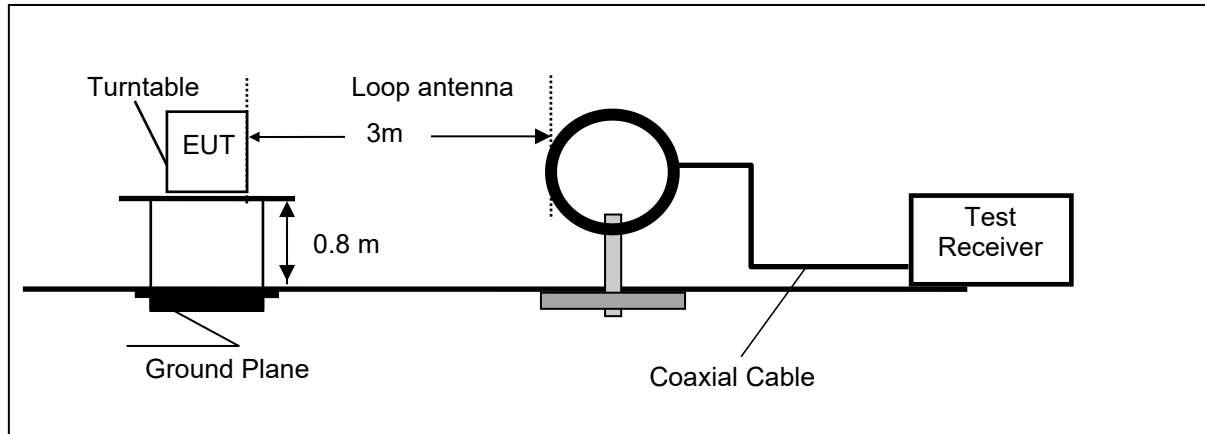

Frequency range 30MHz – 1000MHz

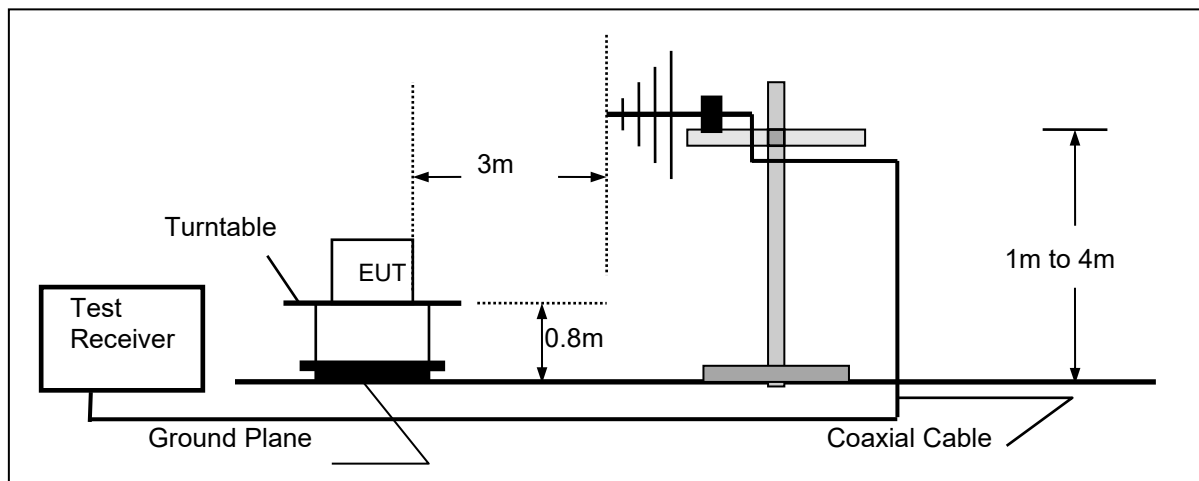

Frequency range above 1GHz-25GHz

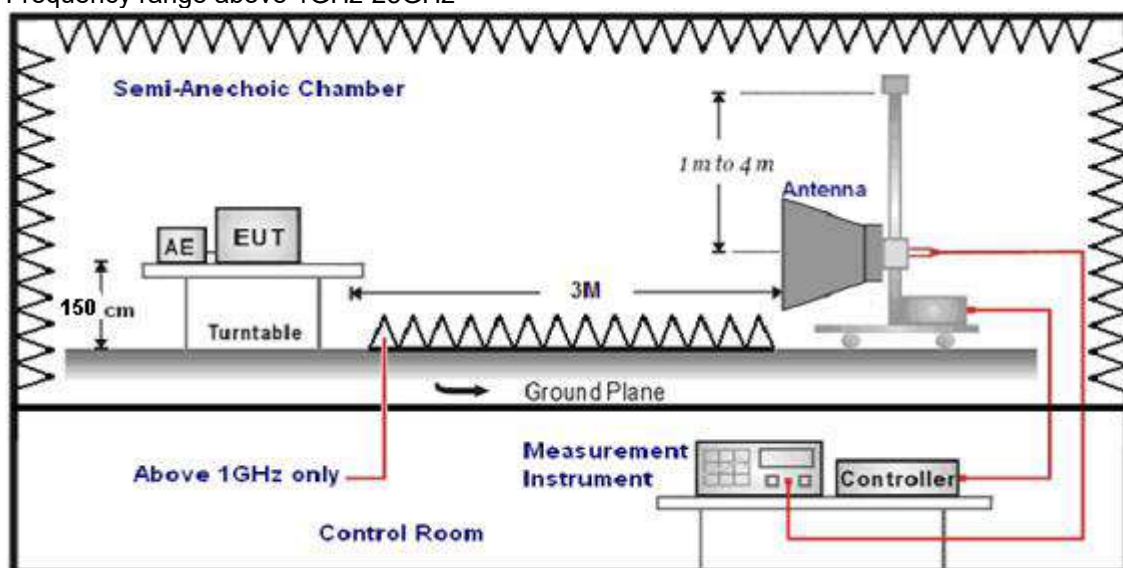

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = AF + CL - AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.


The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. We measured Radiated Emission at GFSK, $\pi/4$ DQPSK and 8-DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
3. For below 1GHz testing recorded worst at GFSK DH5 middle channel.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

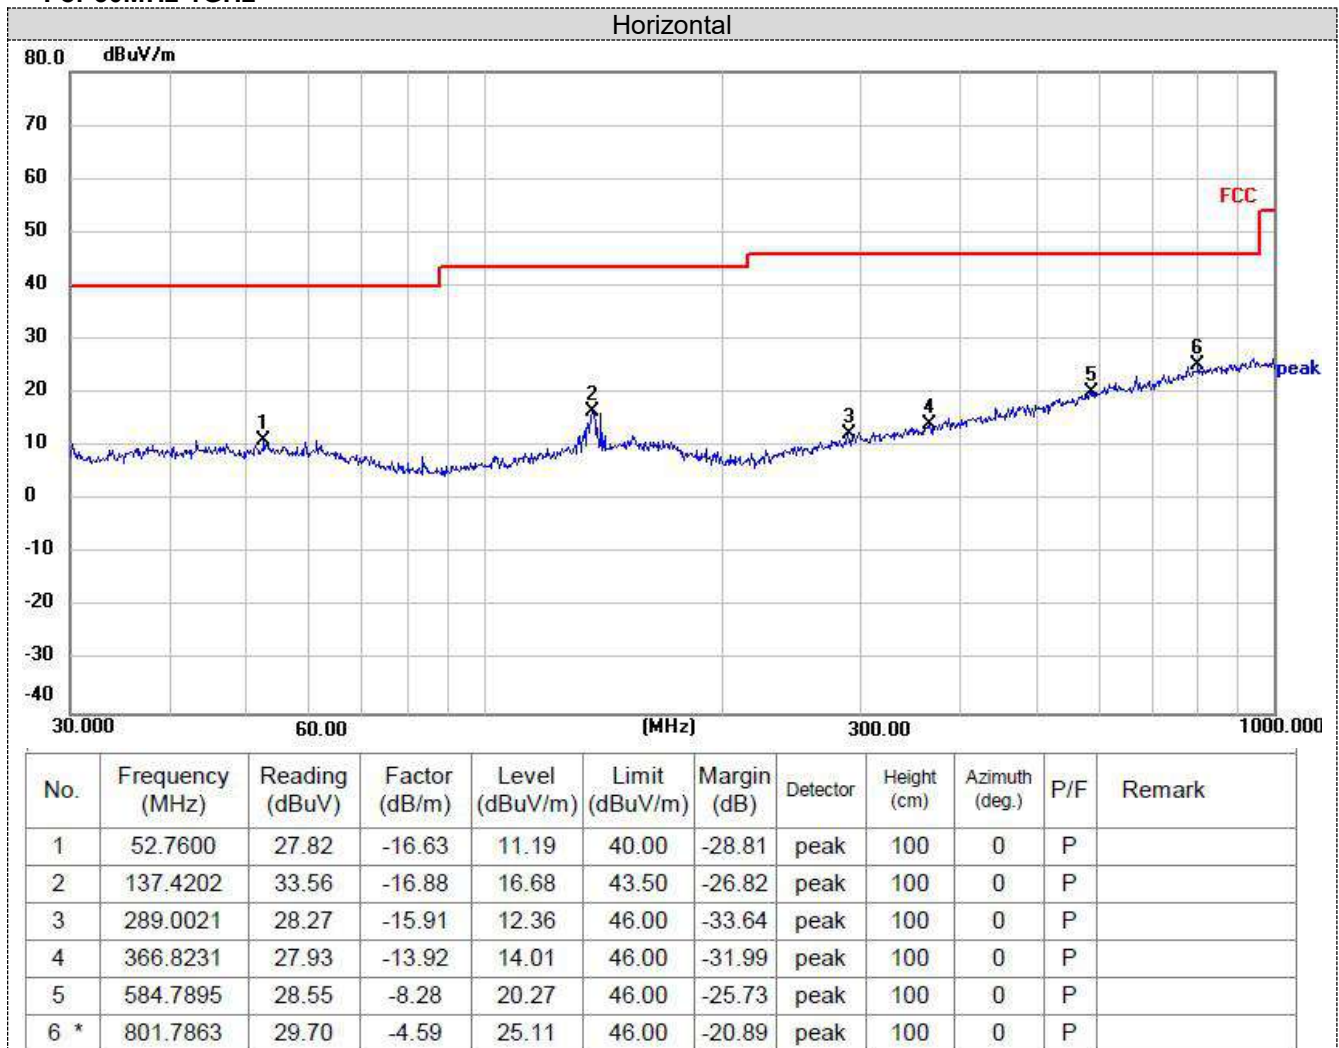
For 30MHz-1GHz

Note:1).Level (dBuV/m)= Reading (dBuV/m)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)

Vertical

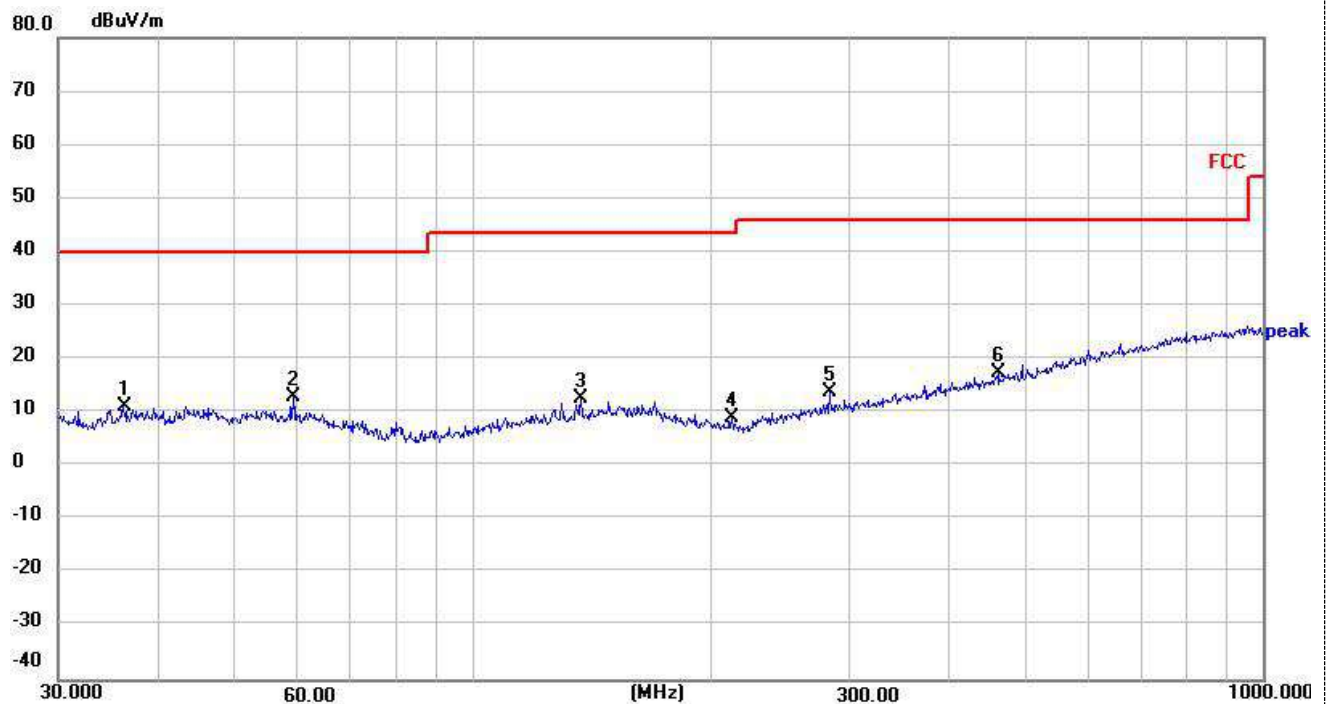

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	36.2541	28.11	-16.88	11.23	40.00	-28.77	peak	100	360	P	
2 *	59.4405	29.93	-17.01	12.92	40.00	-27.08	peak	100	360	P	
3	137.4202	29.59	-16.88	12.71	43.50	-30.79	peak	100	360	P	
4	213.0151	28.46	-19.34	9.12	43.50	-34.38	peak	100	360	P	
5	282.9852	29.99	-16.10	13.89	46.00	-32.11	peak	100	360	P	
6	462.3455	28.85	-11.41	17.44	46.00	-28.56	peak	100	360	P	

Note: 1). Level (dBuV/m) = Reading (dBuV/m) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBuV/m) - Level (dBuV/m)

For 1GHz to 25GHzNote: GFSK, $\pi/4$ DQPSK and 8-DPSK all have been tested, only worse case GFSK is reported.**GFSK (above 1GHz)**

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	55.89	PK	74	18.11	60.25	32.40	5.11	41.87	-4.36
4804.00	46.06	AV	54	7.94	50.42	32.40	5.11	41.87	-4.36
7206.00	54.73	PK	74	19.27	55.36	36.58	6.43	43.64	-0.63
7206.00	45.11	AV	54	8.89	45.74	36.58	6.43	43.64	-0.63

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	56.16	PK	74	17.84	60.52	32.40	5.11	41.87	-4.36
4804.00	46.06	AV	54	7.94	50.42	32.40	5.11	41.87	-4.36
7206.00	54.83	PK	74	19.17	55.46	36.58	6.43	43.64	-0.63
7206.00	44.71	AV	54	9.29	45.34	36.58	6.43	43.64	-0.63

Frequency(MHz):			2441		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.00	56.50	PK	74	17.50	60.45	32.56	5.34	41.85	-3.95
4882.00	46.41	AV	54	7.59	50.36	32.56	5.34	41.85	-3.95
7323.00	55.06	PK	74	18.94	55.42	36.54	6.81	43.71	-0.36
7323.00	45.01	AV	54	8.99	45.37	36.54	6.81	43.71	-0.36

Frequency(MHz):			2441		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.00	56.79	PK	74	17.21	60.74	32.56	5.34	41.85	-3.95
4882.00	46.50	AV	54	7.50	50.45	32.56	5.34	41.85	-3.95
7323.00	55.26	PK	74	18.74	55.62	36.54	6.81	43.71	-0.36
7323.00	45.10	AV	54	8.90	45.46	36.54	6.81	43.71	-0.36

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	57.29	PK	74	16.71	60.75	32.73	5.64	41.83	-3.46
4960.00	47.00	AV	54	7.00	50.46	32.73	5.64	41.83	-3.46
7440.00	55.36	PK	74	18.64	55.42	36.50	7.23	43.79	-0.06
7440.00	45.79	AV	54	8.21	45.85	36.50	7.23	43.79	-0.06

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	57.39	PK	74	16.61	60.85	32.73	5.64	41.83	-3.46
4960.00	46.98	AV	54	7.02	50.44	32.73	5.64	41.83	-3.46
7440.00	55.59	PK	74	18.41	55.65	36.50	7.23	43.79	-0.06
7440.00	45.42	AV	54	8.58	45.48	36.50	7.23	43.79	-0.06

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

Results of Band Edges Test (Radiated)

Note: GFSK, Pi/4 DQPSK and 8-DPSK all have been tested, only worse case GFSK is reported.

GFSK

Test Frequency(MHz):			Lowest channel		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2310.00	50.32	PK	74	23.68	60.74	27.42	4.31	42.15	-10.42
2310.00	40.14	AV	54	13.86	50.56	27.42	4.31	42.15	-10.42
2390.00	48.35	PK	74	25.65	58.64	27.55	4.35	42.19	-10.29
2390.00	38.45	AV	54	15.55	48.74	27.55	4.35	42.19	-10.29
2400.00	45.44	PK	74	28.56	55.63	27.70	4.39	42.28	-10.19
2400.00	35.34	AV	54	18.66	45.53	27.70	4.39	42.28	-10.19

Test Frequency(MHz):			Lowest channel		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2310.00	48.32	PK	74	25.68	58.74	27.42	4.31	42.15	-10.42
2310.00	38.44	AV	54	15.56	48.86	27.42	4.31	42.15	-10.42
2390.00	46.35	PK	74	27.65	56.64	27.55	4.35	42.19	-10.29
2390.00	36.56	AV	54	17.44	46.85	27.55	4.35	42.19	-10.29
2400.00	43.07	PK	74	30.93	53.26	27.70	4.39	42.28	-10.19
2400.00	33.05	AV	54	20.95	43.24	27.70	4.39	42.28	-10.19

Test Frequency(MHz):			Highest channel		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	44.86	PK	74	29.14	55.49	27.55	4.38	42.56	-10.63
2483.50	34.72	AV	54	19.28	45.35	27.55	4.38	42.56	-10.63
2500.00	42.53	PK	74	31.47	53.26	27.69	4.46	42.88	-10.73
2500.00	32.85	AV	54	21.15	43.58	27.69	4.46	42.88	-10.73

Test Frequency(MHz):			Highest channel		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	42.11	PK	74	31.89	52.74	27.55	4.38	42.56	-10.63
2483.50	31.93	AV	54	22.07	42.56	27.55	4.38	42.56	-10.63
2500.00	39.69	PK	74	34.31	50.42	27.69	4.46	42.88	-10.73
2500.00	29.46	AV	54	24.54	40.19	27.69	4.46	42.88	-10.73

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3 Maximum Peak Output Power

Limit

The Maximum Peak Output Power Measurement is 30dBm(for GFSK)/20.97dBm(for EDR)

Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 8MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

Test Configuration




Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	-13.28	30.00	Pass
	39	-12.49		
	78	-13.14		
π/4DQPSK	00	-11.04	20.97	Pass
	39	-10.15		
	78	-10.85		
8-DPSK	00	-10.60	20.97	Pass
	39	-9.76		
	78	-10.41		


Note: 1.The test results including the cable lose.

Test plots


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

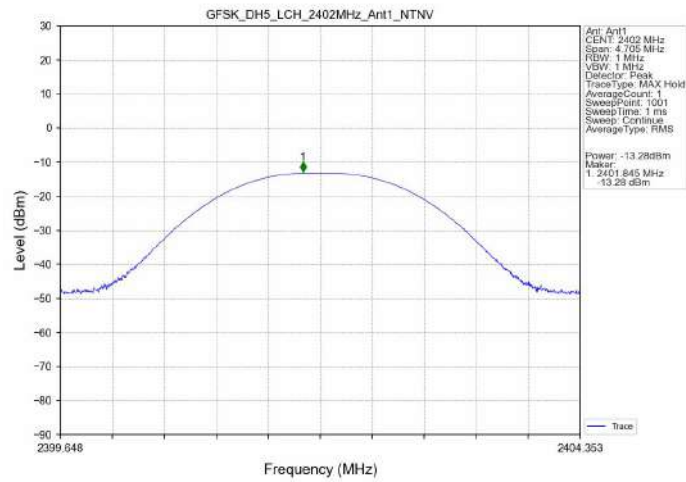


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

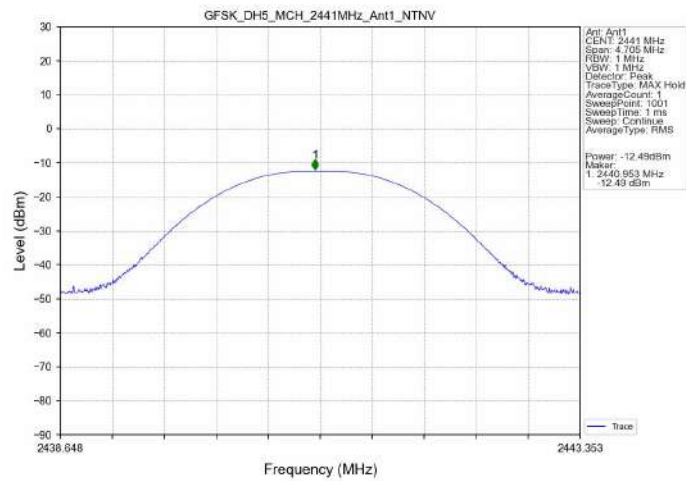


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

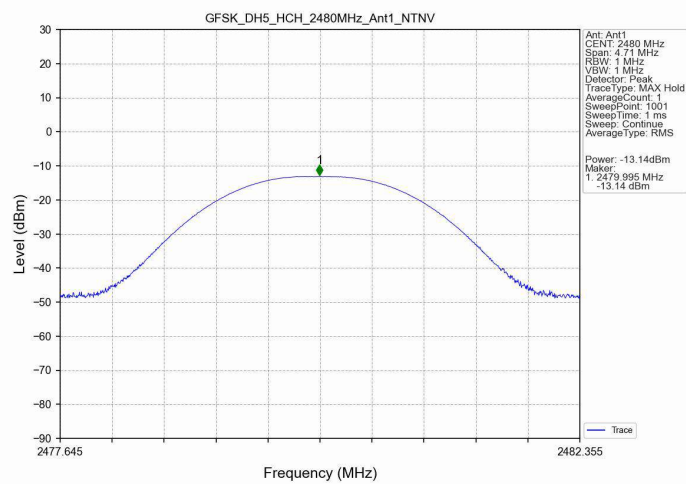


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

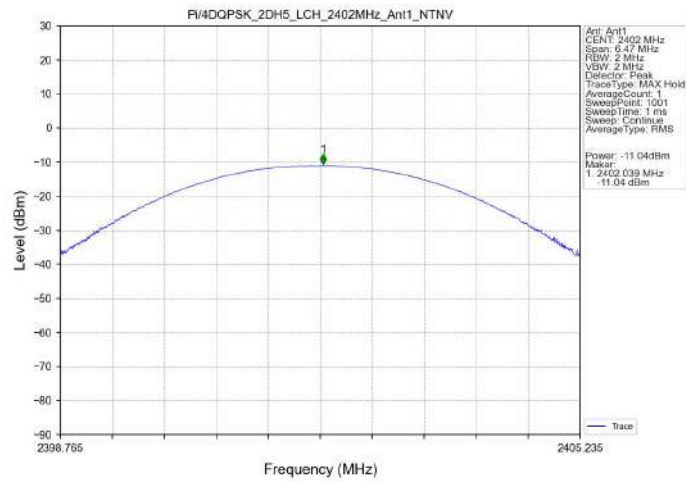


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

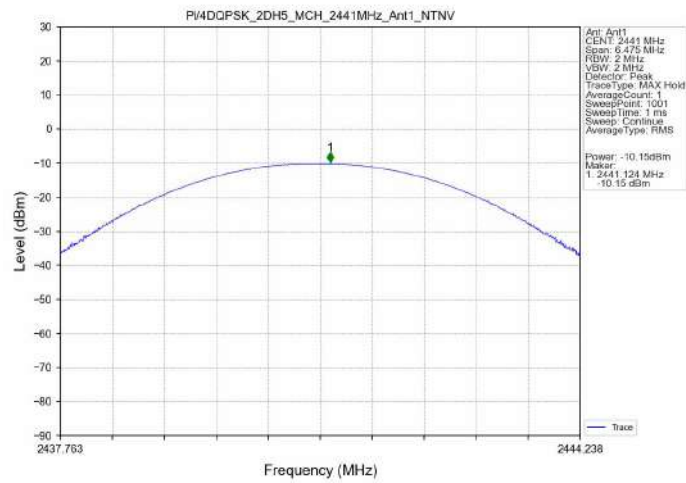


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

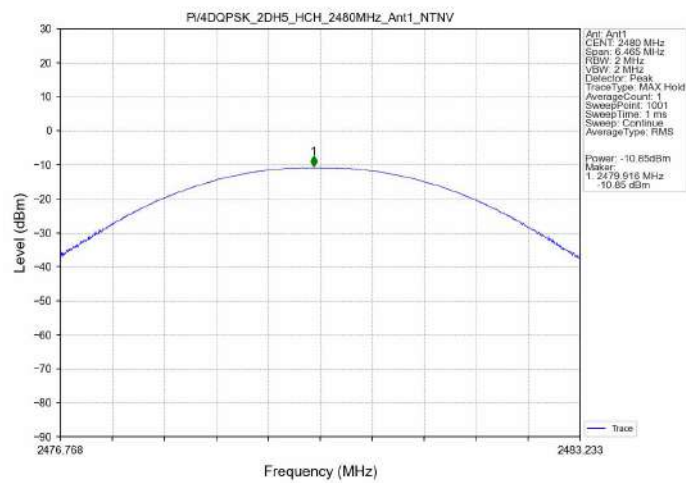


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

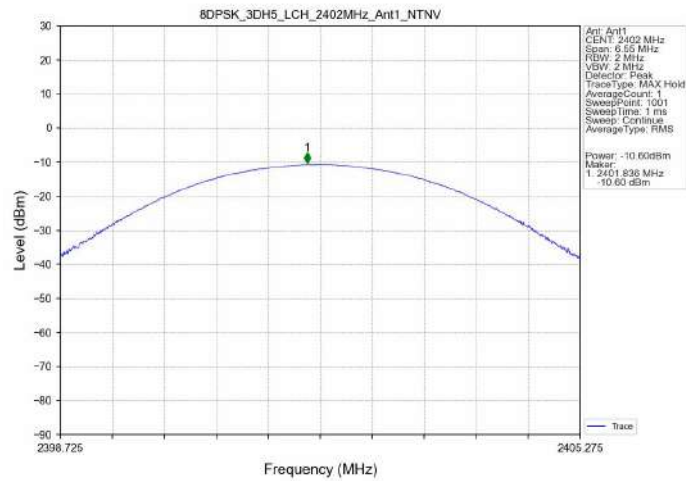

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

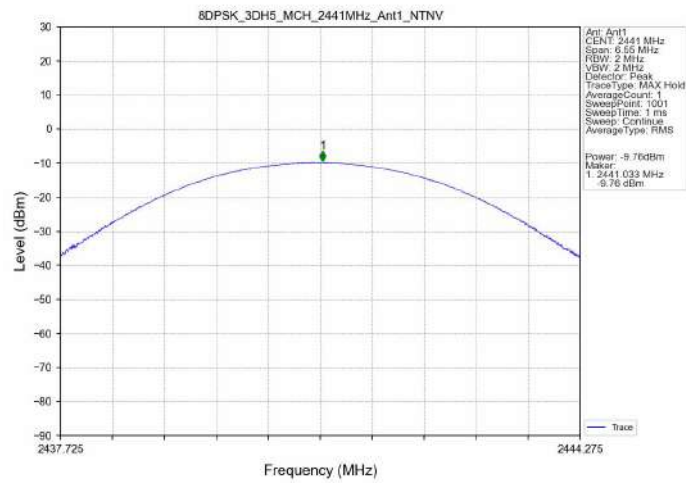

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

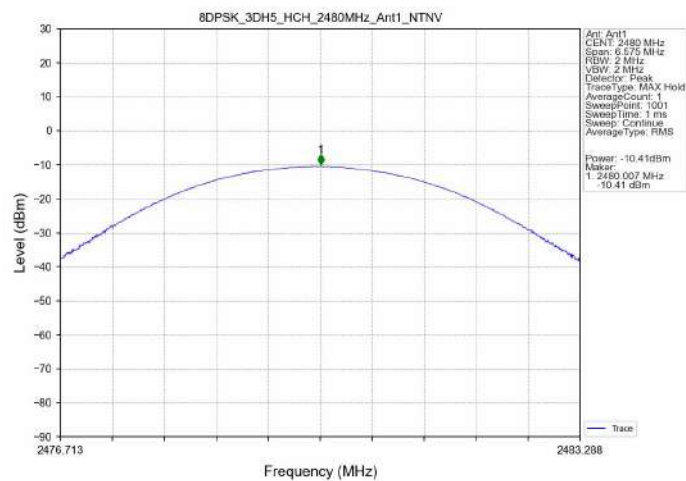

4.4 20dB Bandwidth

Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration




Test Results


Modulation	Channel	20dB bandwidth (MHz)	Result
GFSK	CH00	0.941	Pass
	CH39	0.941	
	CH78	0.942	
$\pi/4$ DQPSK	CH00	1.294	
	CH39	1.295	
	CH78	1.293	
8-DPSK	CH00	1.310	
	CH39	1.310	
	CH78	1.315	

Test plot as follows:


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

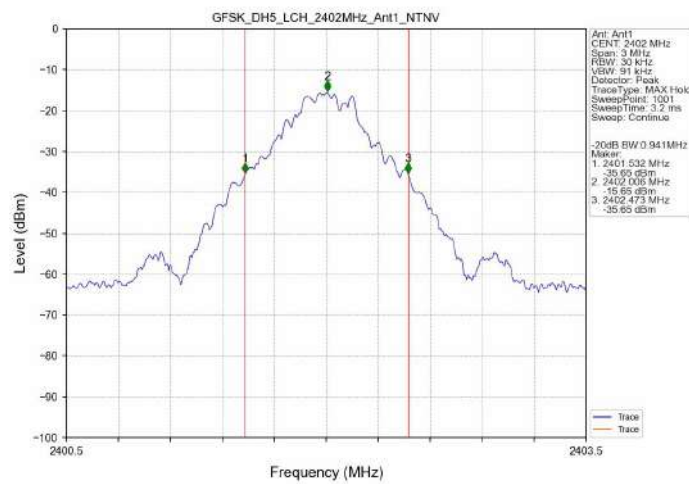


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

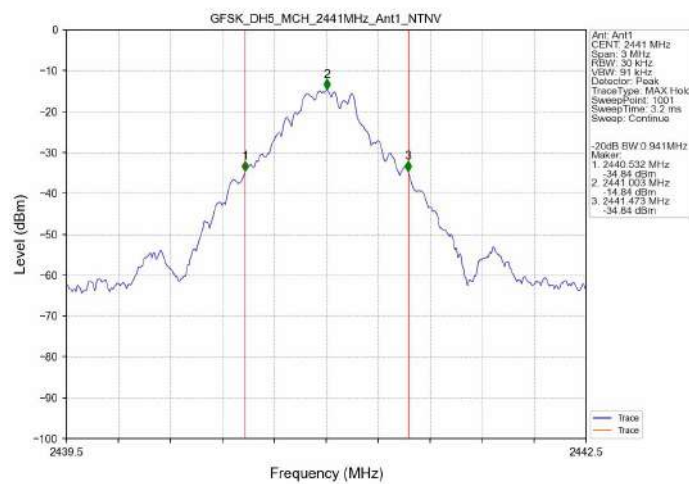


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

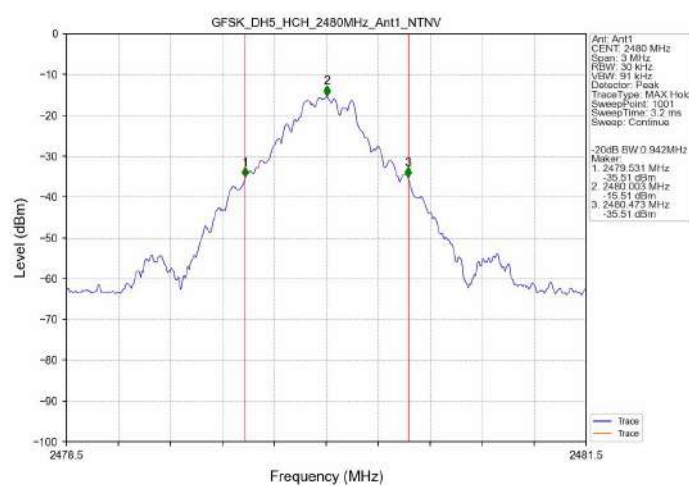


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

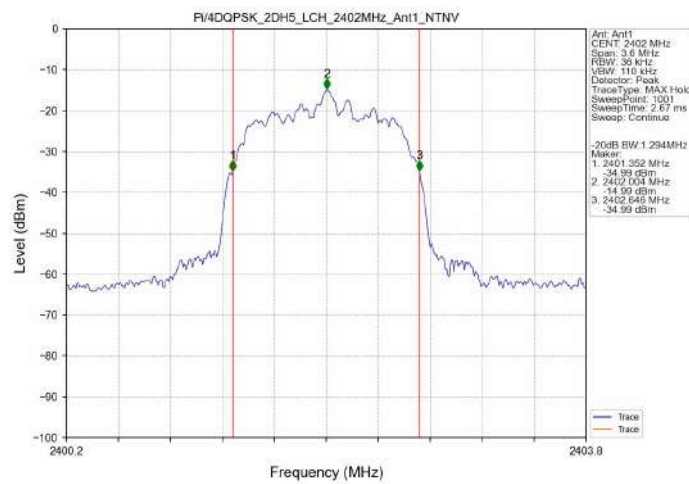


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

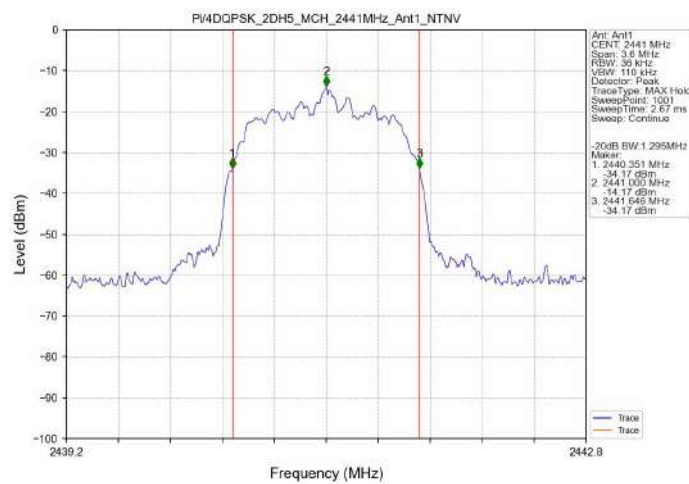


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

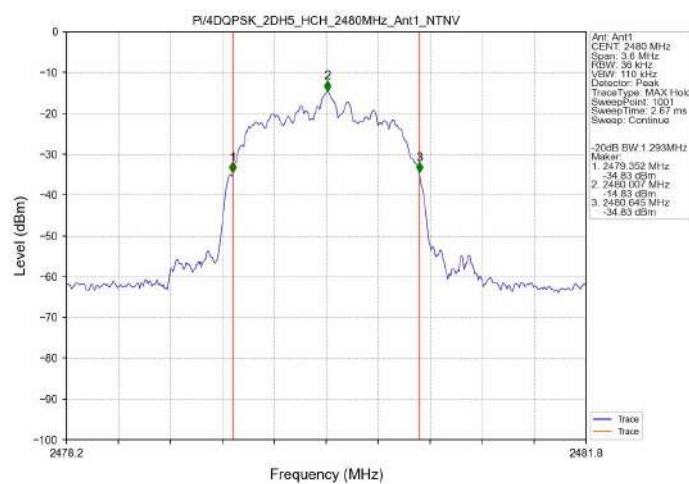


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

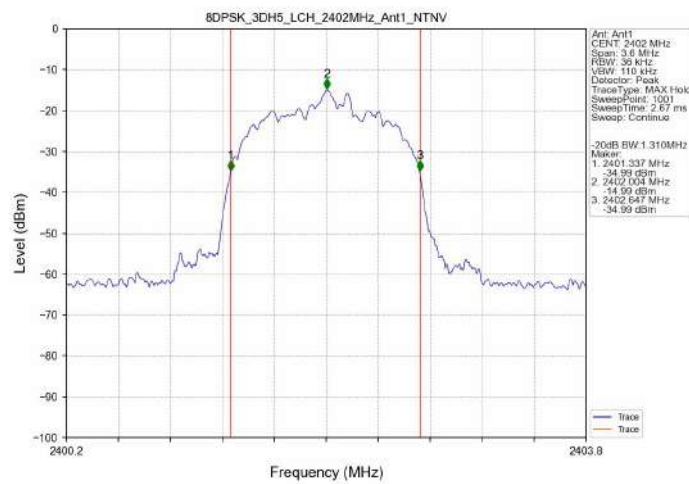

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

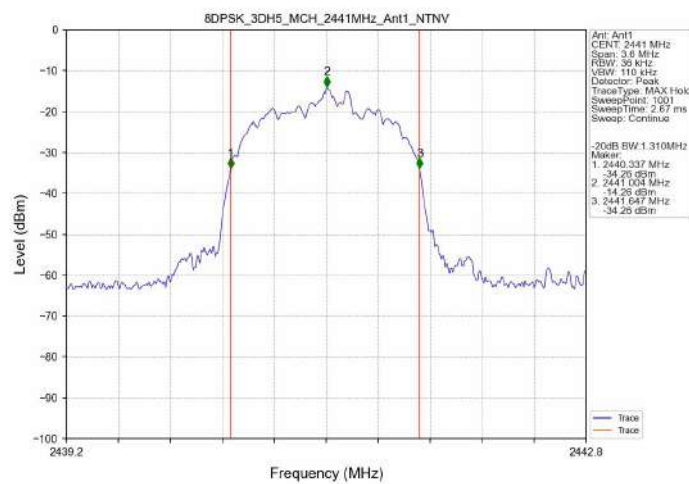

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

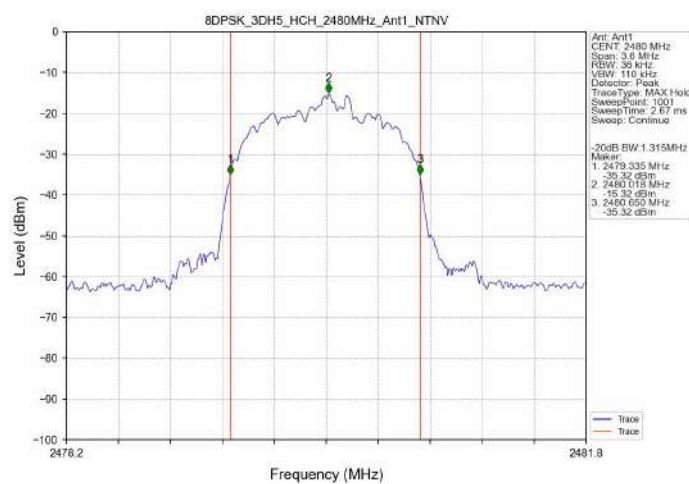

4.5 Frequency Separation

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $\frac{2}{3} \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

TEST CONFIGURATION




TEST RESULTS

Modulation	Channel	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	CH38	1.000	0.942	≥ 0.942	Pass
	CH39				
$\pi/4$ DQPSK	CH38	1.015	1.295	≥ 0.863	Pass
	CH39				
8-DPSK	CH38	1.001	1.315	≥ 0.877	Pass
	CH39				


Note:

We have tested all mode at high, middle and low channel, and recorded worst case at middle


Test plot as follows:

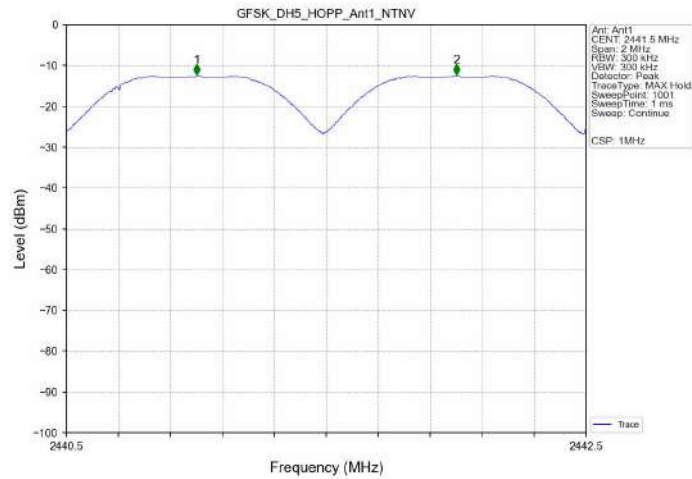

GFSK

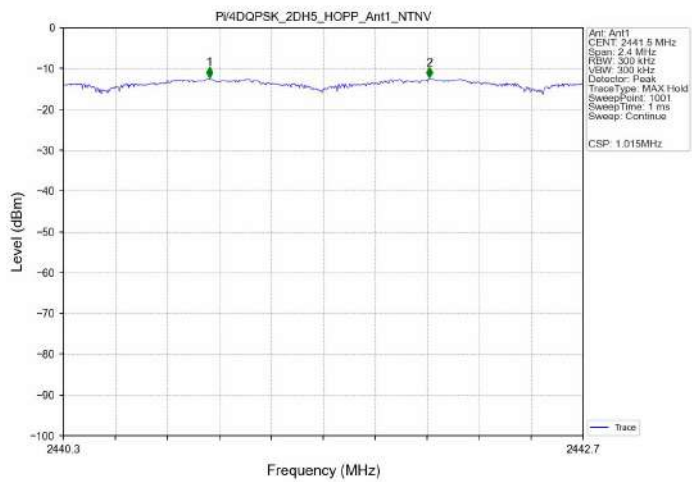

$\pi/4$ DQPSK

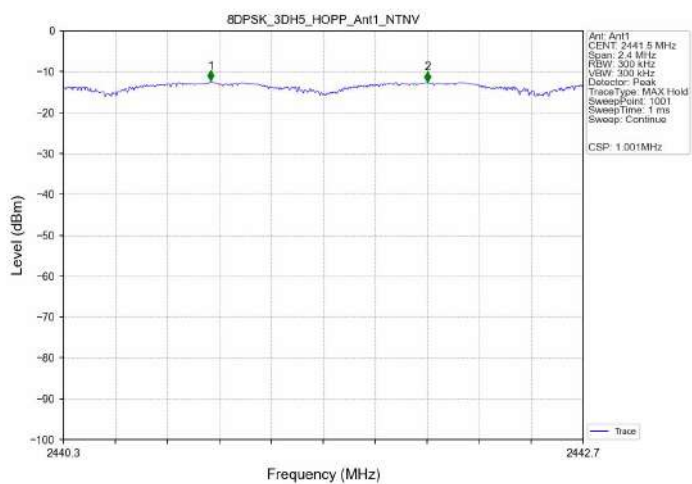

8-DPSK

4.6 Number of hopping frequency

Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.


Test Configuration




Test Results

Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
π/4DQPSK	79		
8-DPSK	79		


Test plot as follows:

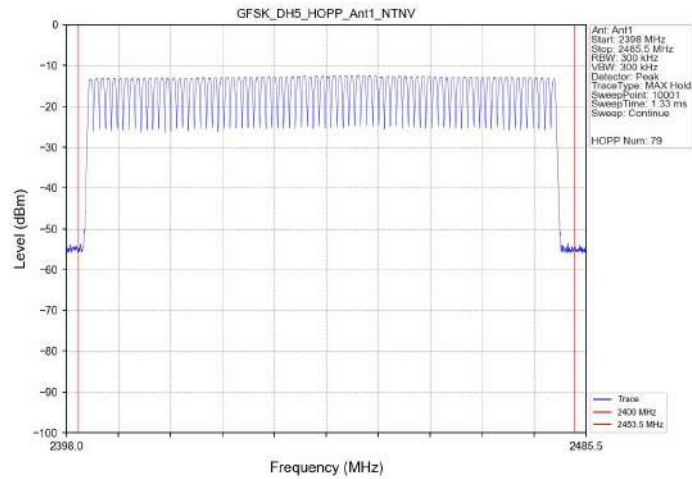

GFSK Modulation

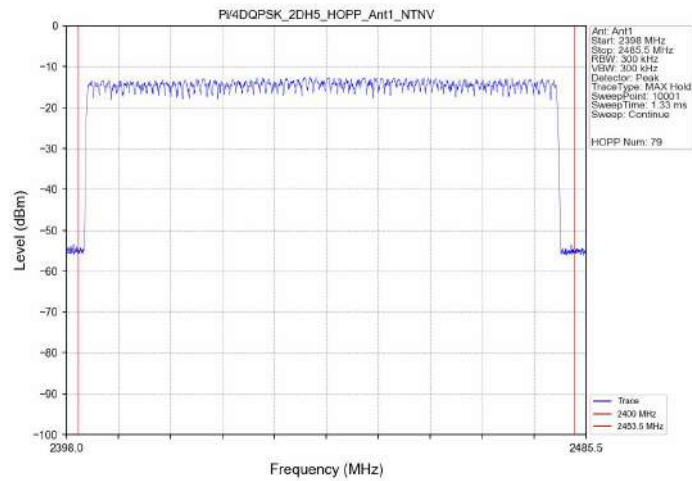

$\pi/4$ DQPSK Modulation

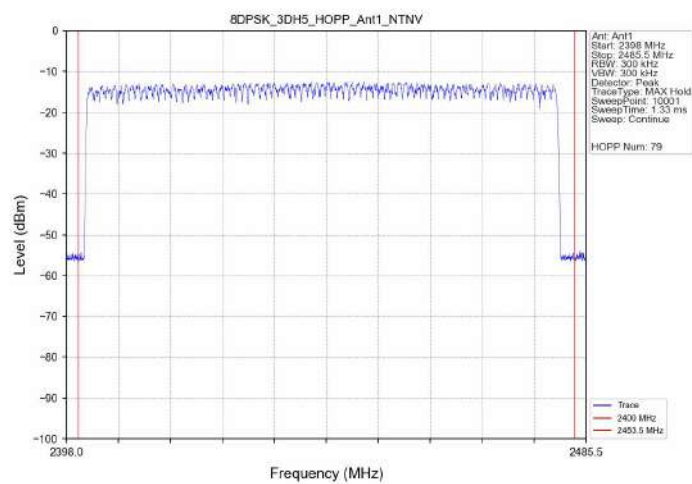

8-DPSK Modulation

4.7 Time of Occupancy (Dwell Time)

Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 3MHz VBW, Span 0Hz.

Test Configuration



Test Results


Modulation	Packet	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH1	0.382	31.600	320	122.240	<=400	Pass
	DH3	1.636	31.600	154	251.944		
	DH5	2.886	31.600	107	308.802		
$\pi/4$ DQPSK	2-DH1	0.394	31.600	319	125.686	<=400	Pass
	2-DH3	1.644	31.600	160	263.040		
	2-DH5	2.894	31.600	102	295.188		
8-DPSK	3-DH1	0.394	31.600	320	126.080	<=400	Pass
	3-DH3	1.644	31.600	156	256.464		
	3-DH5	2.896	31.600	102	295.392		


Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle channel.

Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 2 $\div$ 79) $\times$ 31.6 Second for DH1, 2-DH1, 3-DH1


Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 4 $\div$ 79) $\times$ 31.6 Second for DH3, 2-DH3, 3-DH2

Dwell time = Pulse time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6 Second for DH5, 2-DH5, 3-DH3

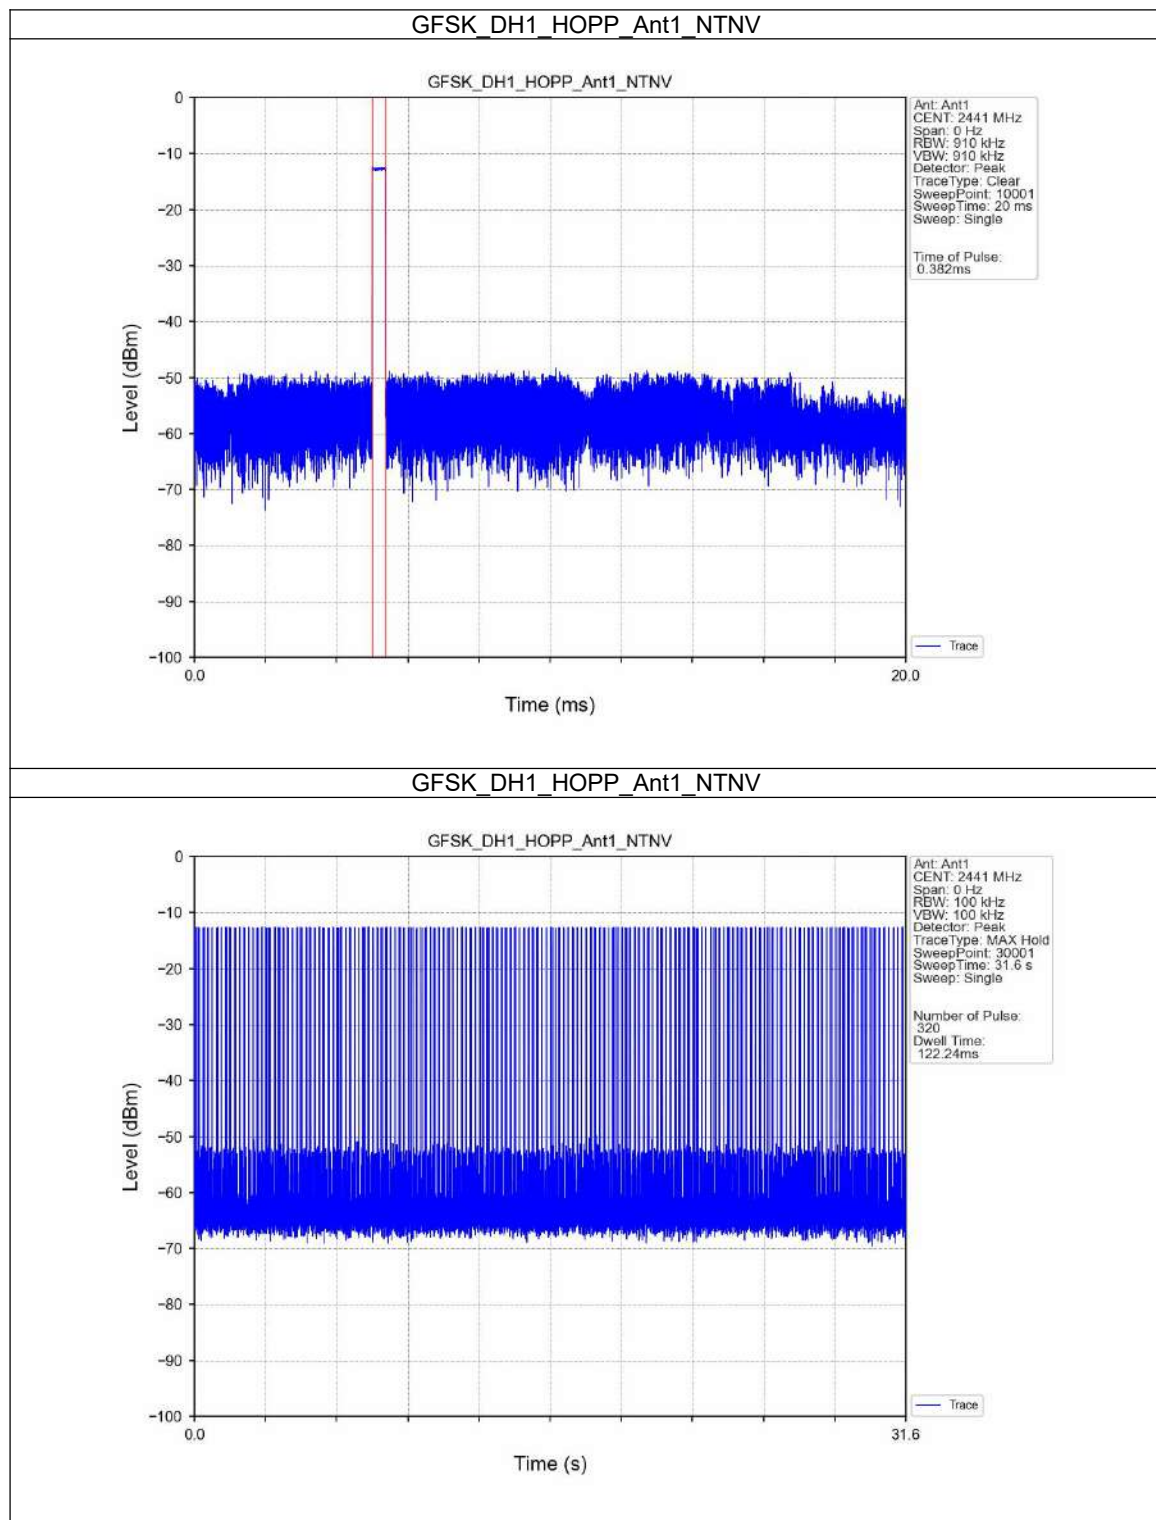
Test plot as follows:

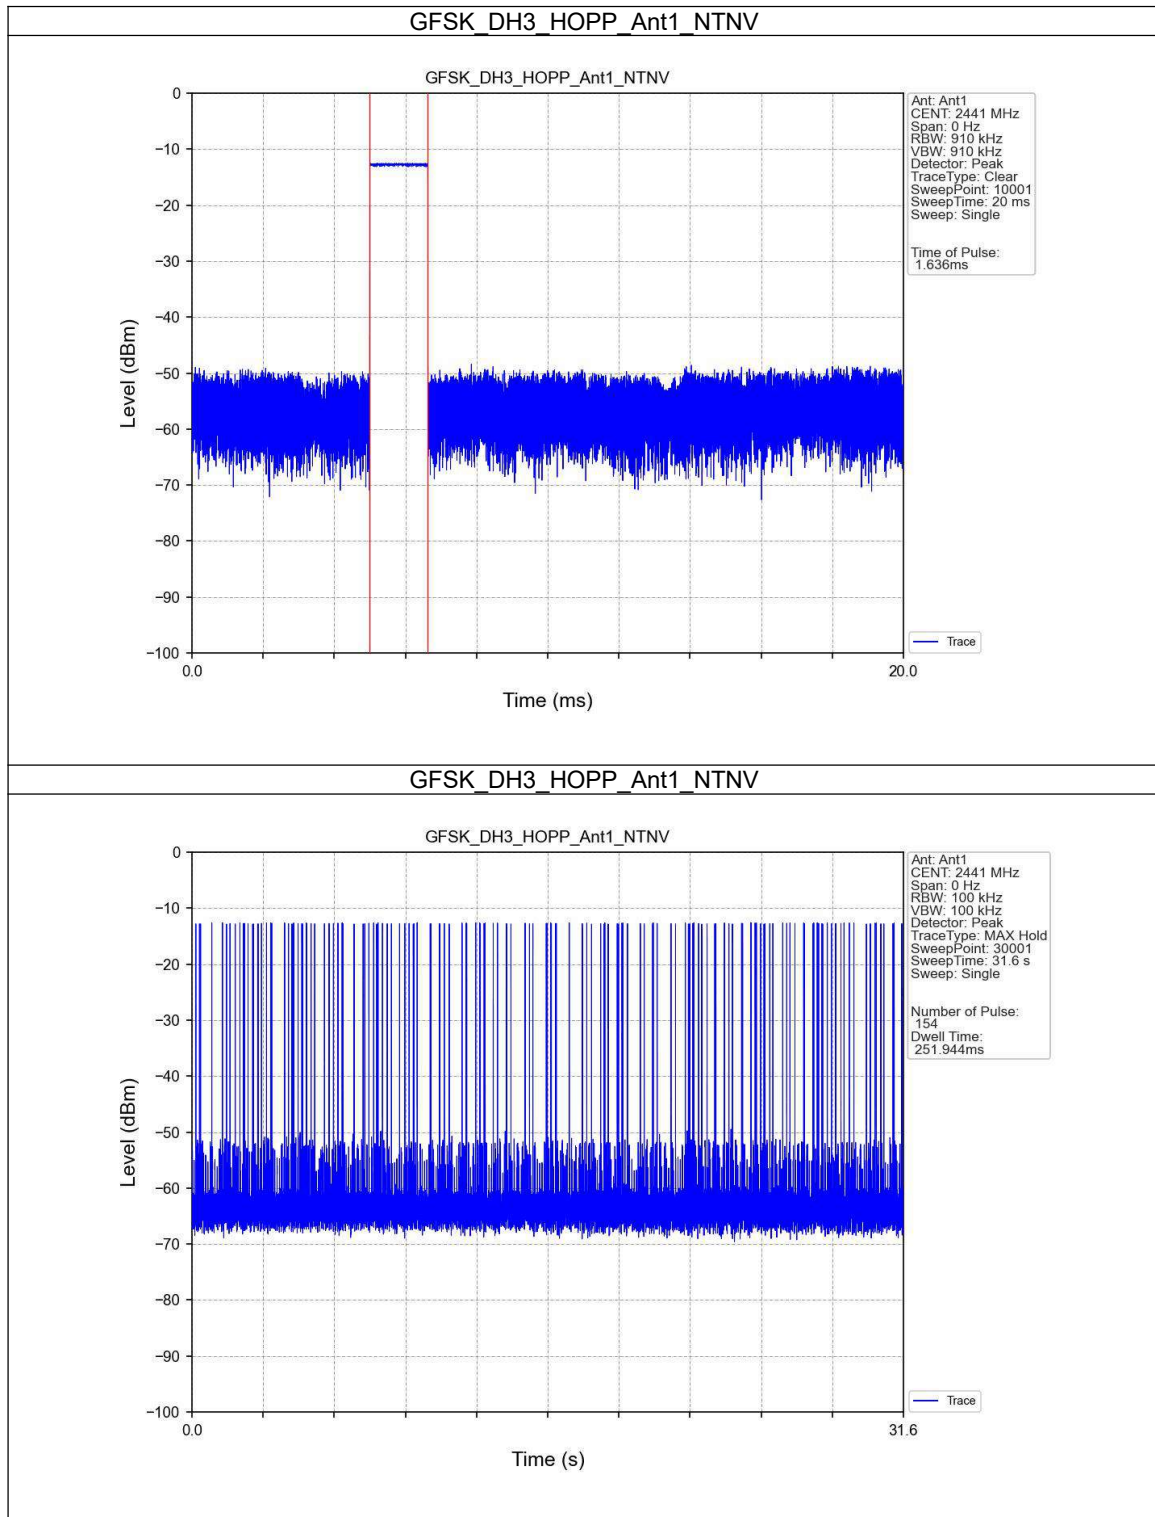



GFSK DH5_HOPP_Ant1_NTNV

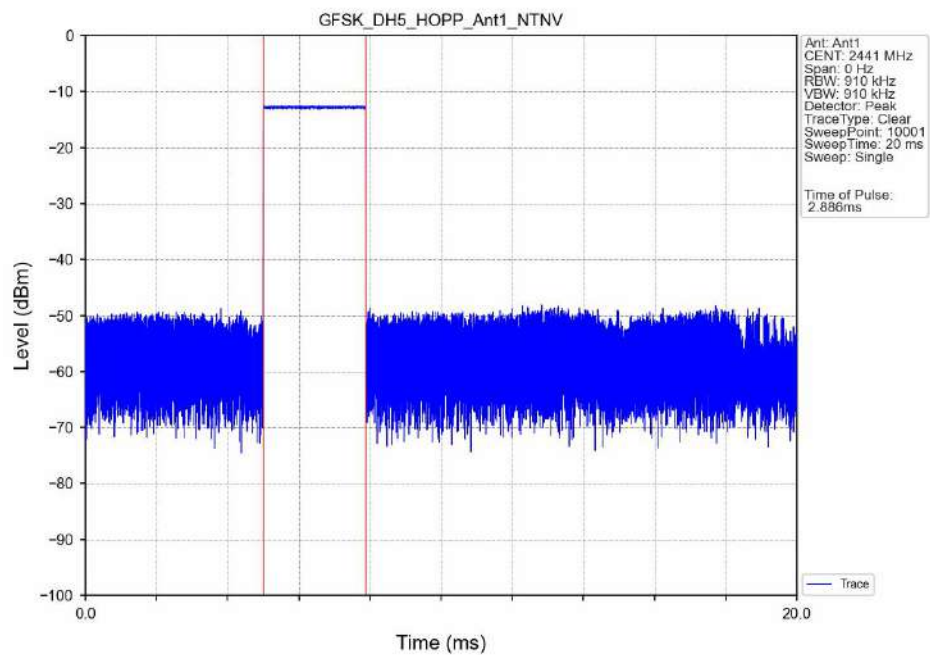


GFSK DH5_HOPP_Ant1_NTNV

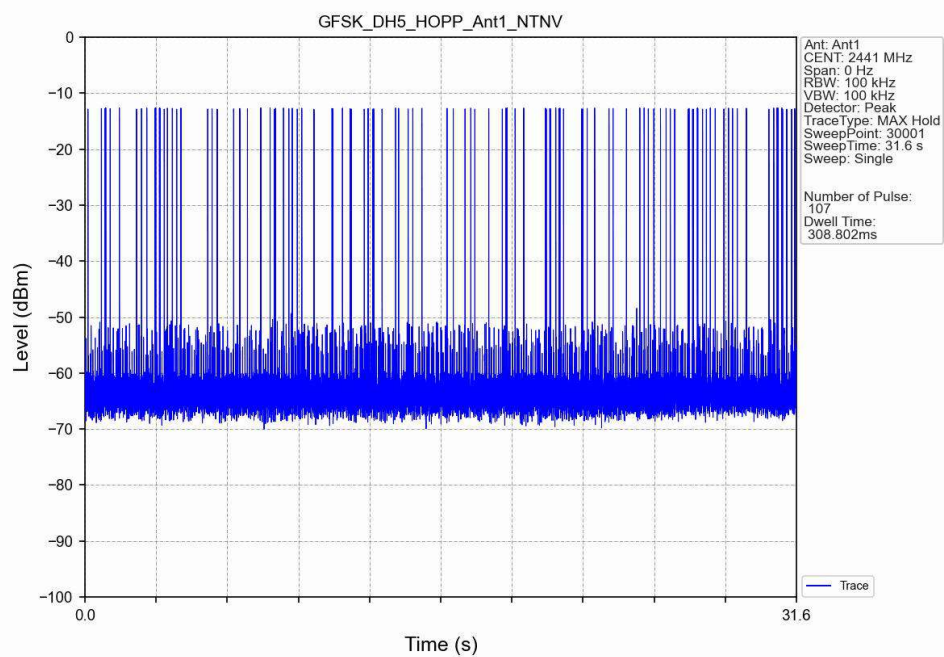


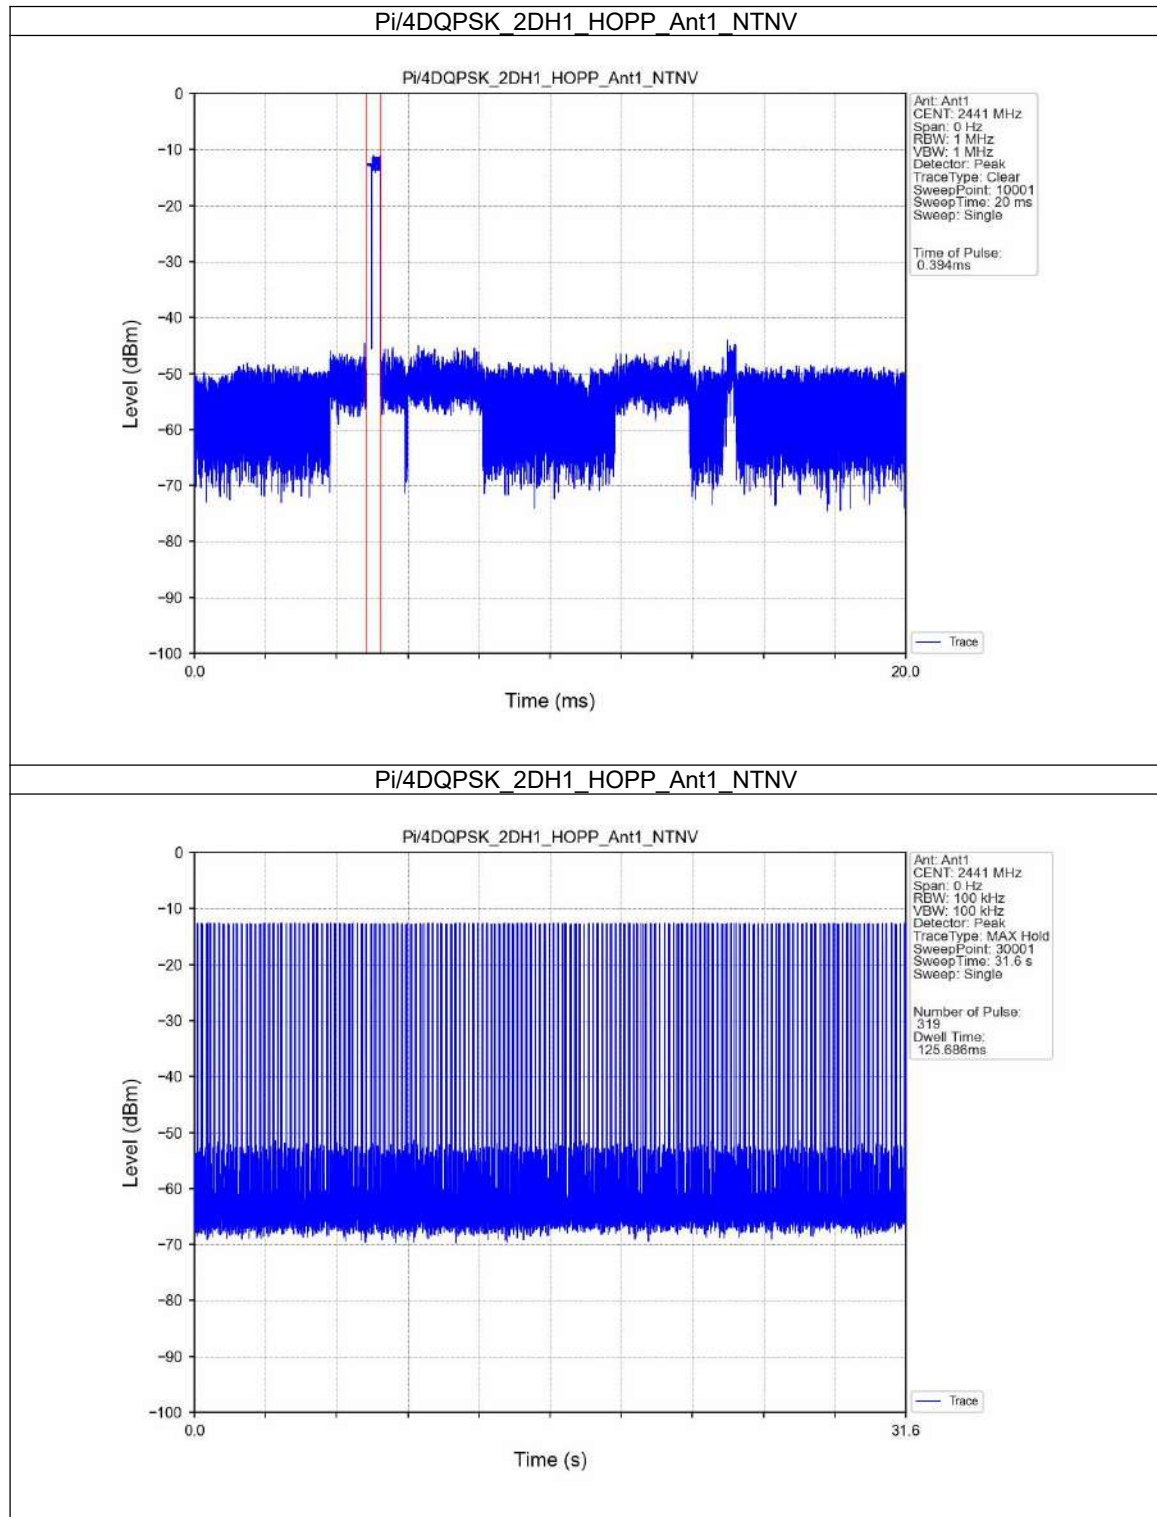

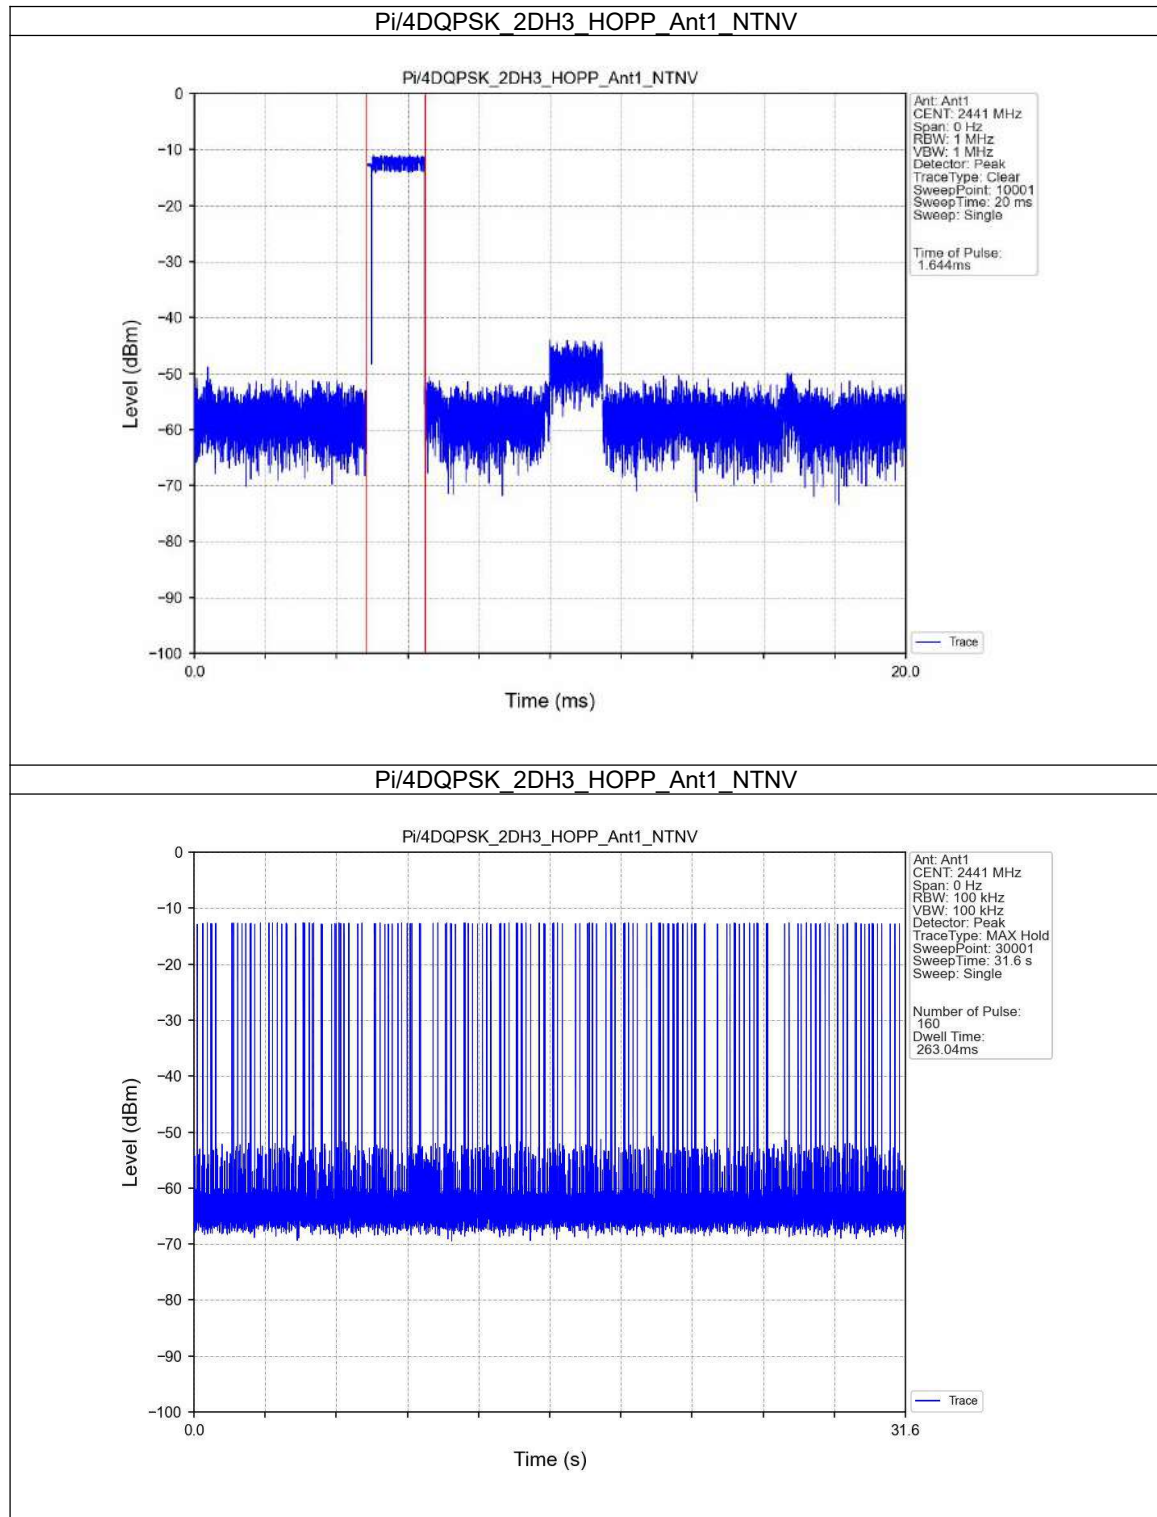


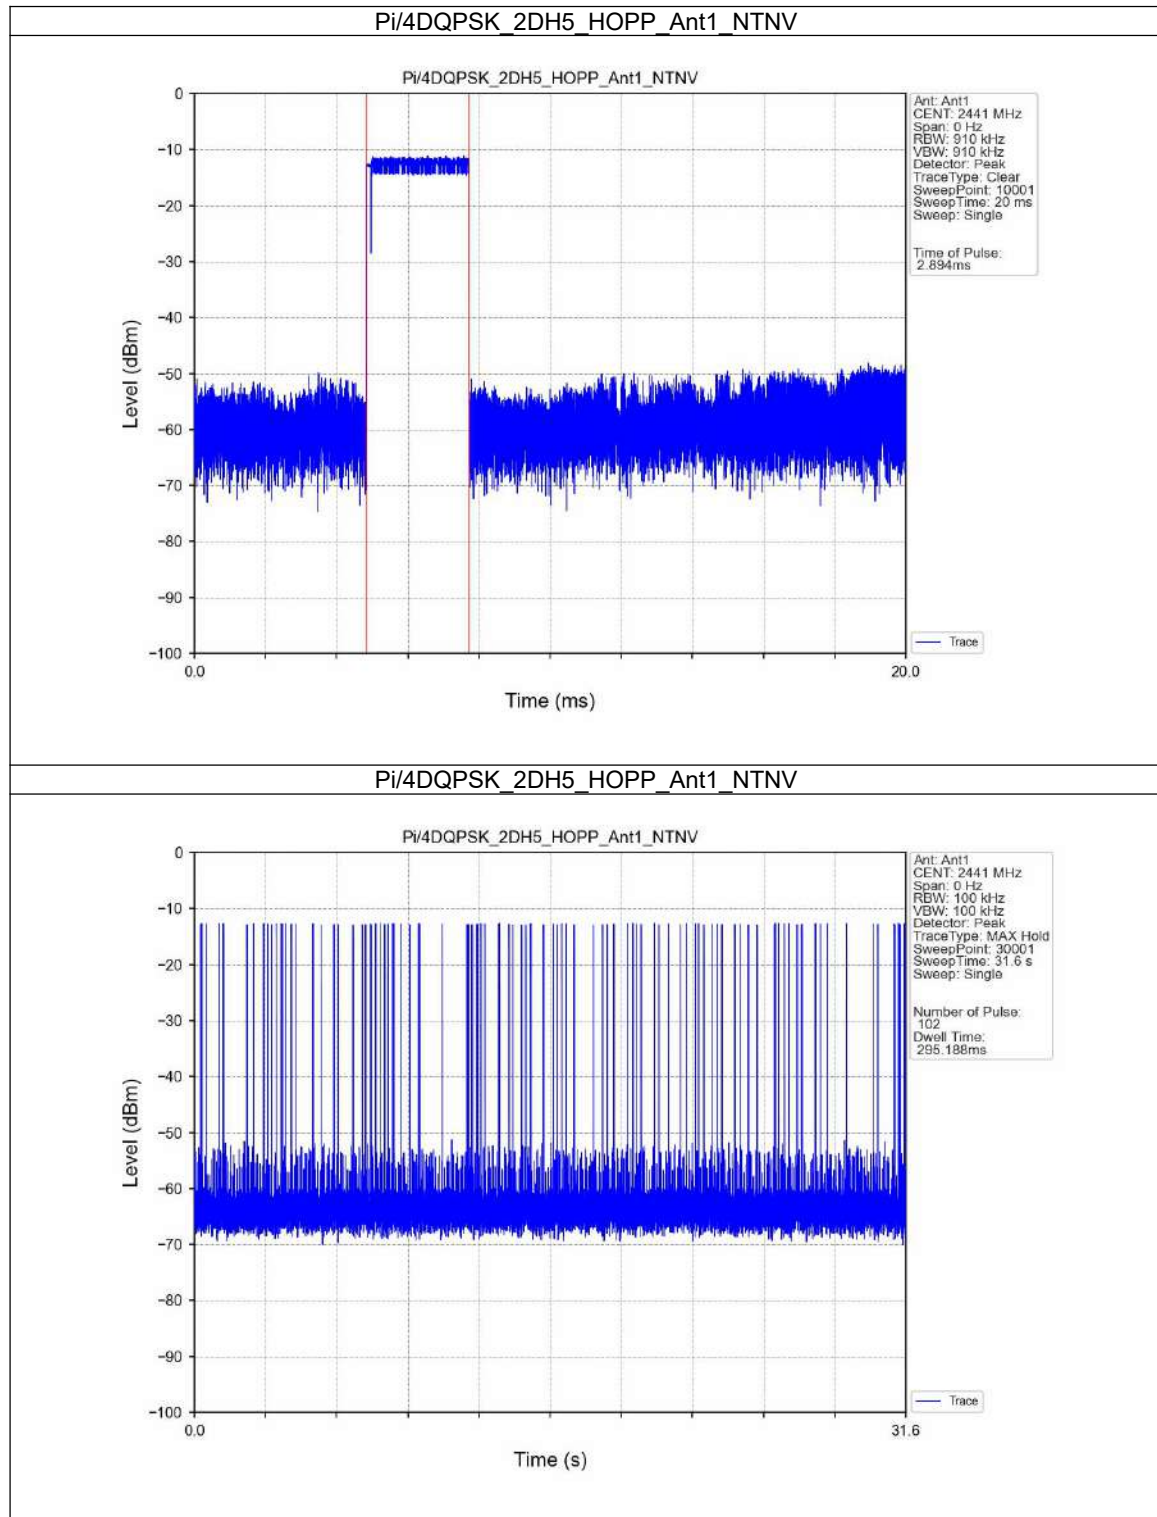



8DPSK_3DH1_HOPP_Ant1_NTNV

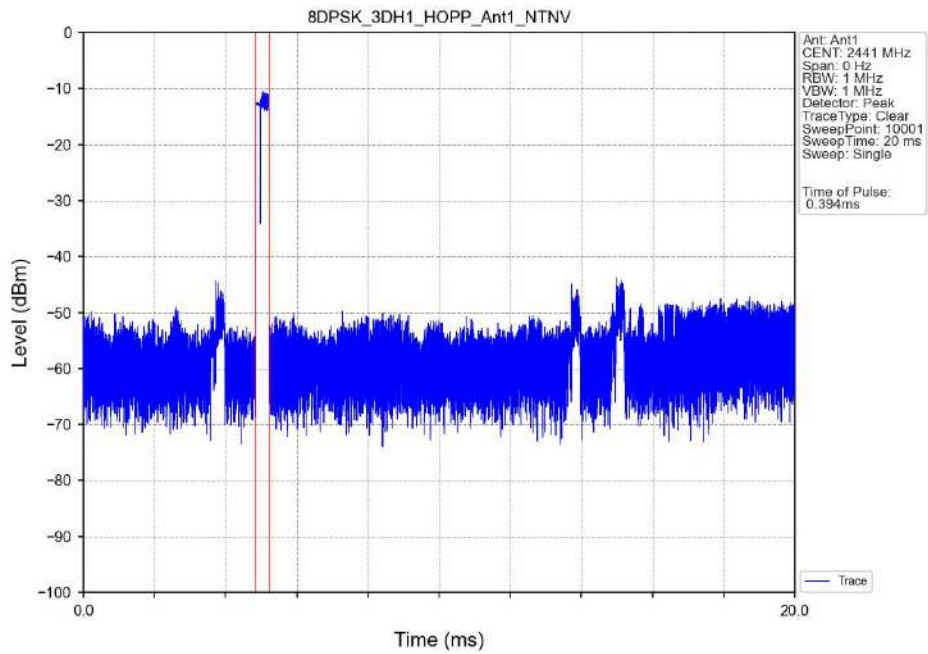

8DPSK_3DH1_HOPP_Ant1_NTNV

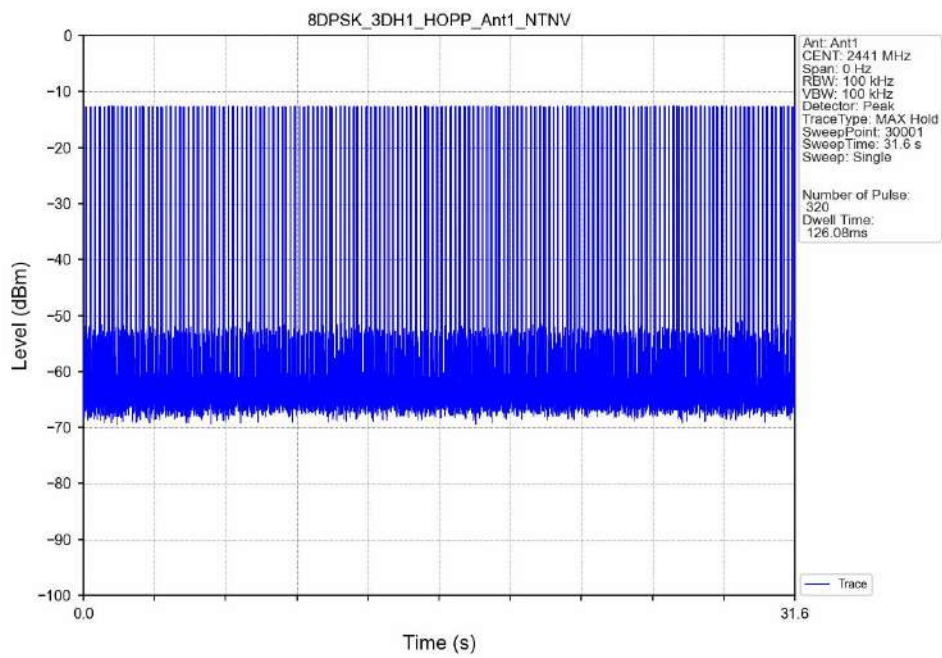

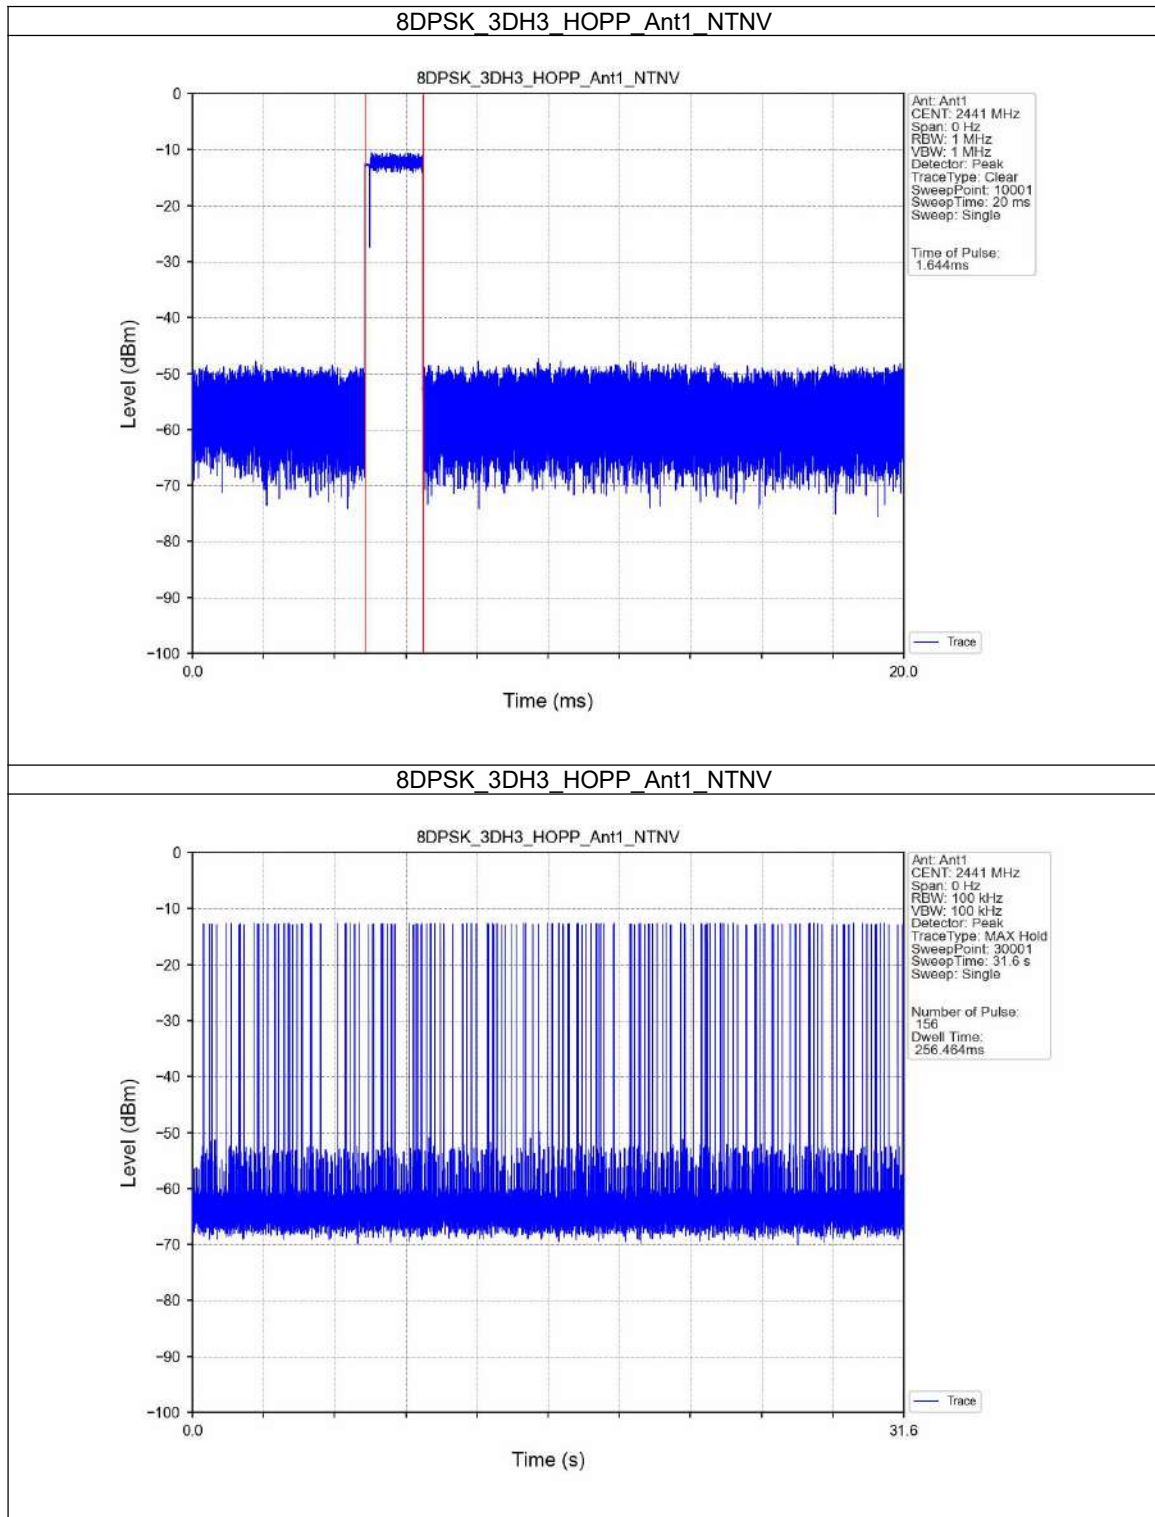

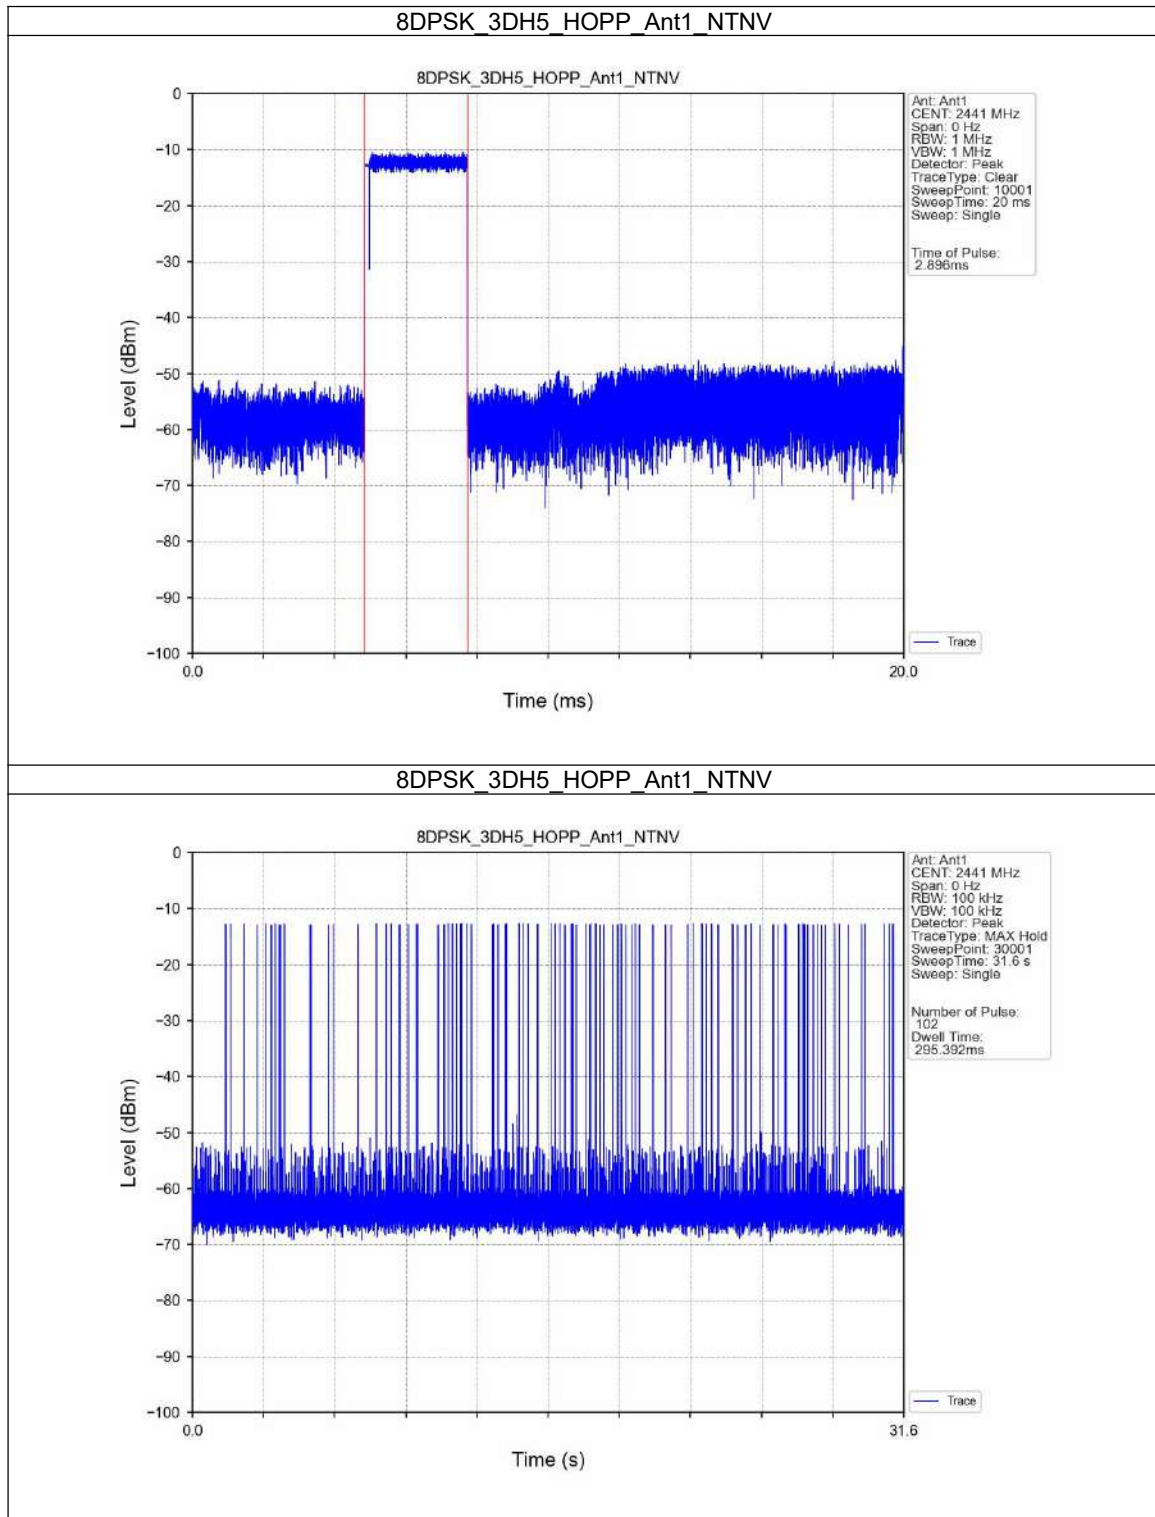

4.8 Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration



Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.


We measured all conditions (DH1, DH3, DH5) and recorded worst case at DH5

Test plot as follows:


Mode	TX Type	Frequency (MHz)	Packet Type	Level of Reference (dBm)
GFSK	SISO	2402	DH5	-13.54
		2441	DH5	-12.76
		2480	DH5	-13.30
Pi/4DQPSK	SISO	2402	2DH5	-13.38
		2441	2DH5	-12.62
		2480	2DH5	-13.22
8DPSK	SISO	2402	3DH5	-13.49
		2441	3DH5	-12.73
		2480	3DH5	-13.22
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.				

Mode	TX Type	Frequency (MHz)	Packet Type	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	-12.76	-32.76	Pass
		2441	DH5	-12.76	-32.76	Pass
		2480	DH5	-12.76	-32.76	Pass
		HOPP	DH5	-12.76	-32.76	Pass
				-12.76	-32.76	Pass
Pi/4DQPSK	SISO	2402	2DH5	-12.62	-32.62	Pass
		2441	2DH5	-12.62	-32.62	Pass
		2480	2DH5	-12.62	-32.62	Pass
		HOPP	2DH5	-12.62	-32.62	Pass
				-12.62	-32.62	Pass
8DPSK	SISO	2402	3DH5	-12.73	-32.73	Pass
		2441	3DH5	-12.73	-32.73	Pass
		2480	3DH5	-12.73	-32.73	Pass
		HOPP	3DH5	-12.73	-32.73	Pass
				-12.73	-32.73	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

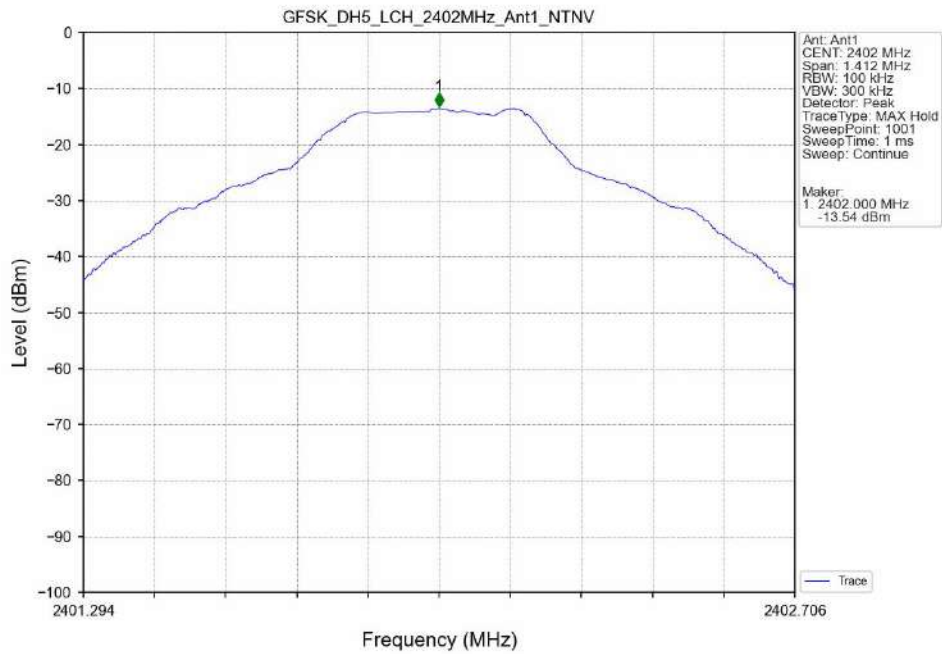


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

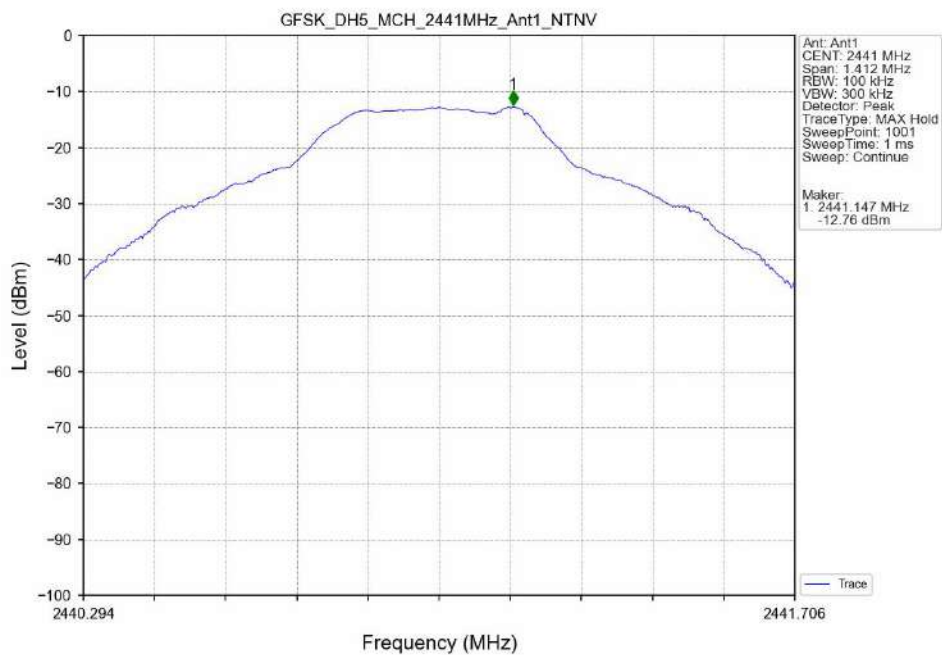


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

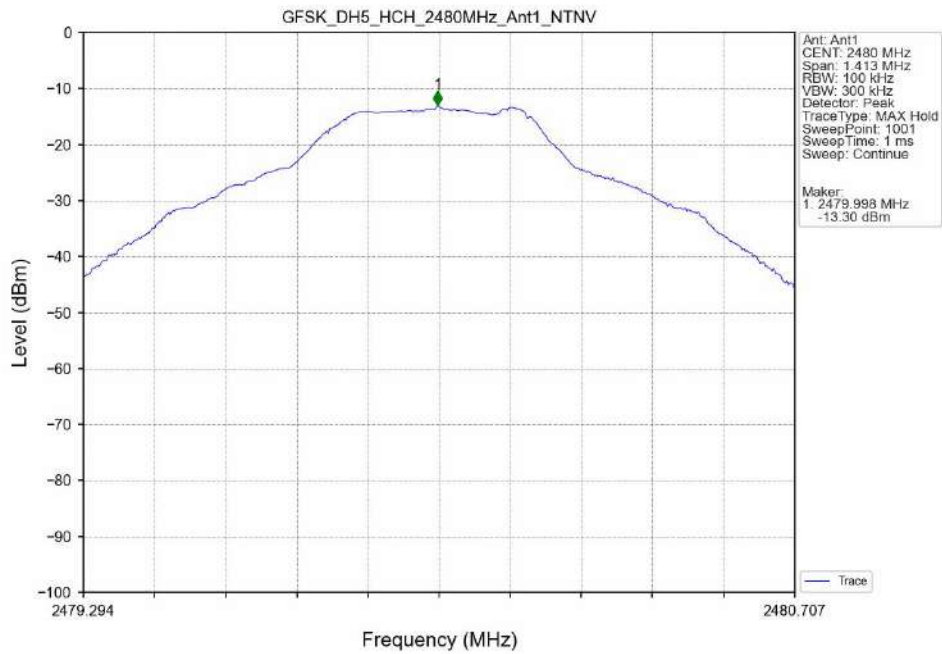


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

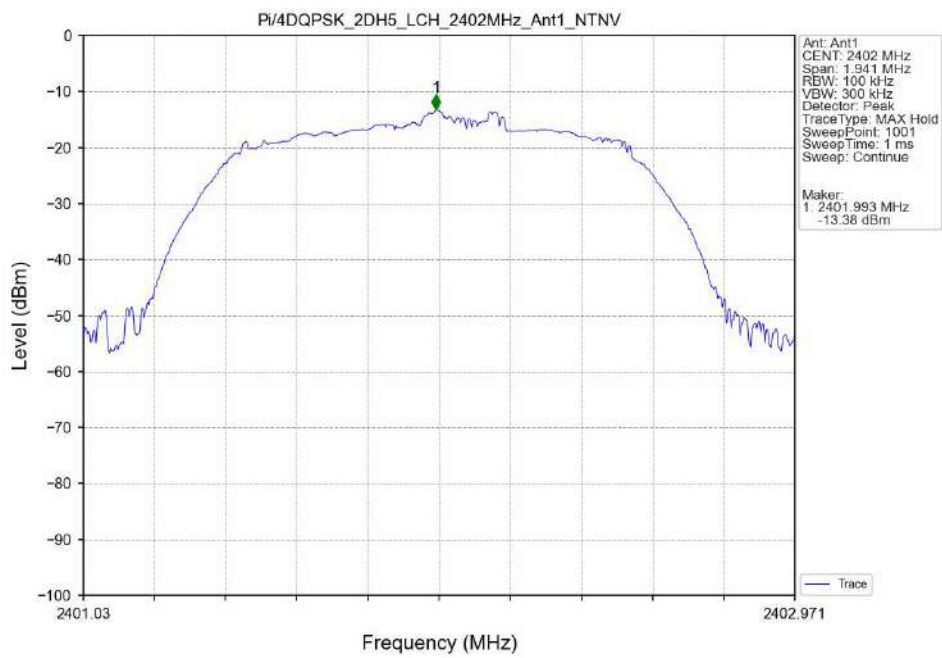


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

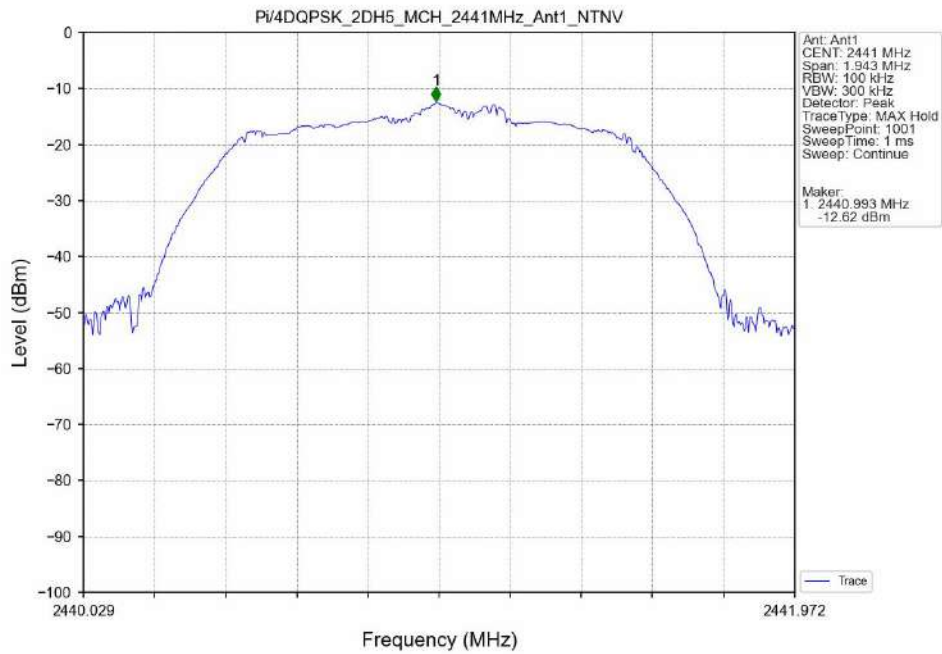


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

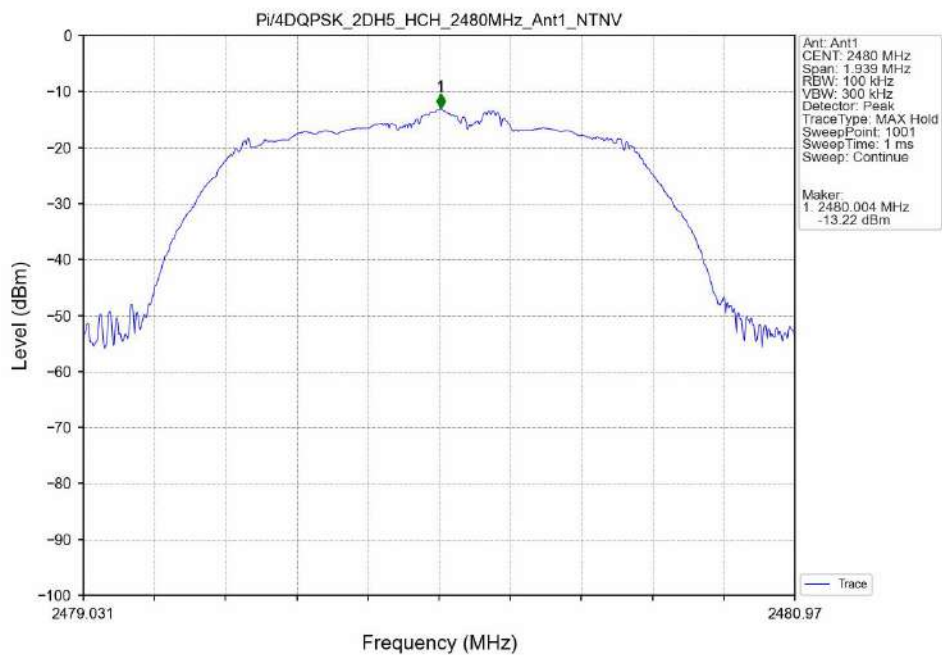


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

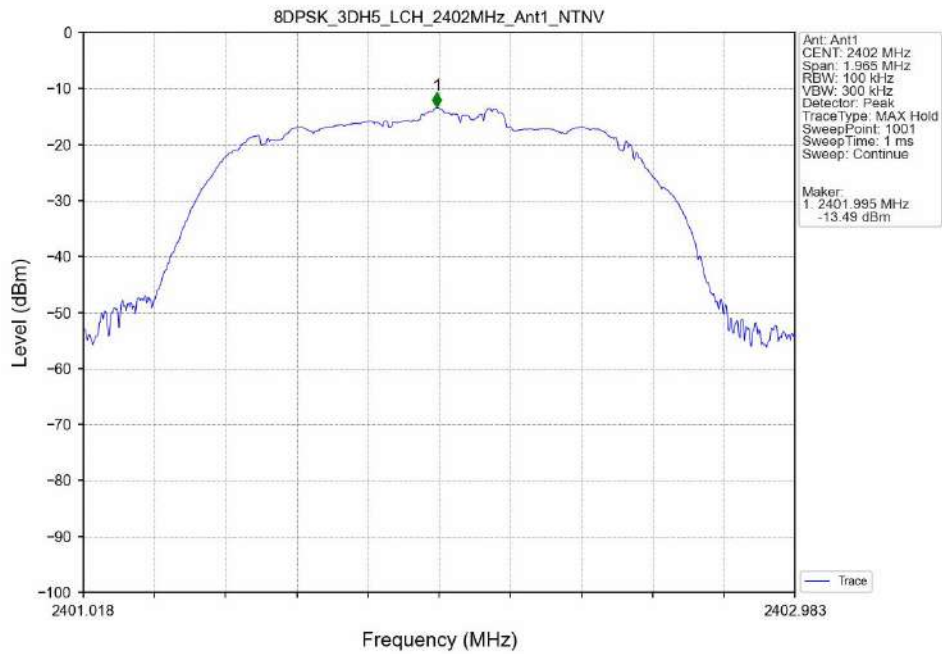


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

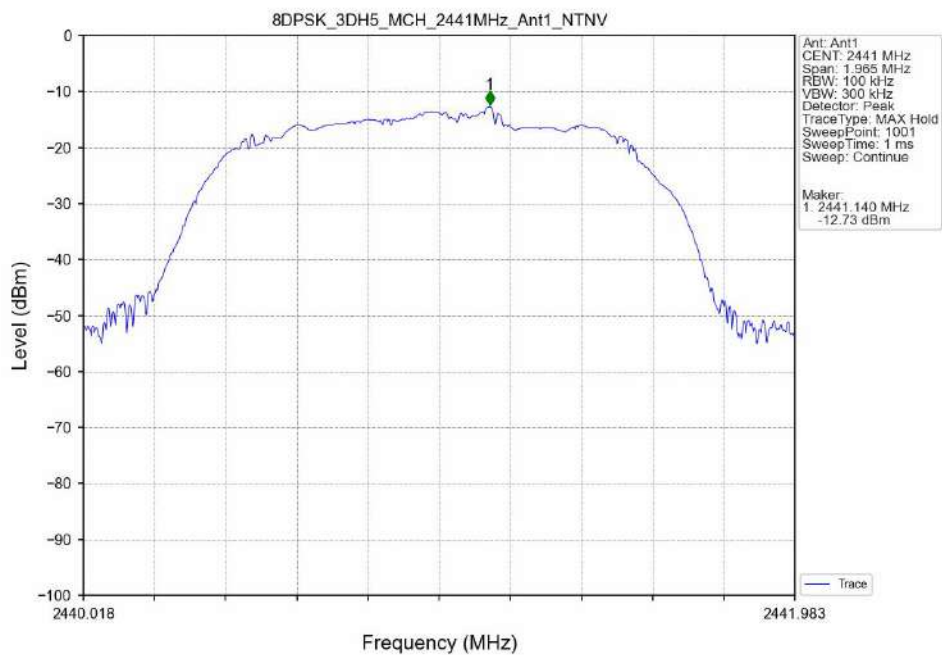


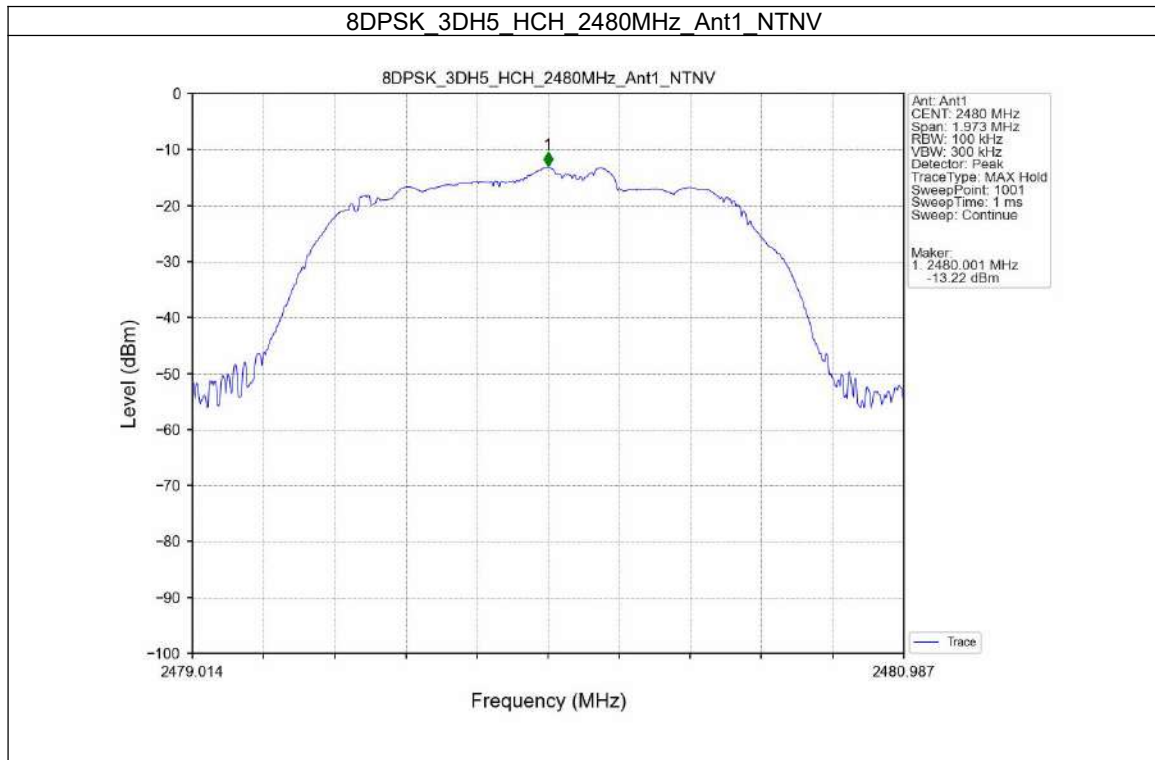


6.2.2 CSE

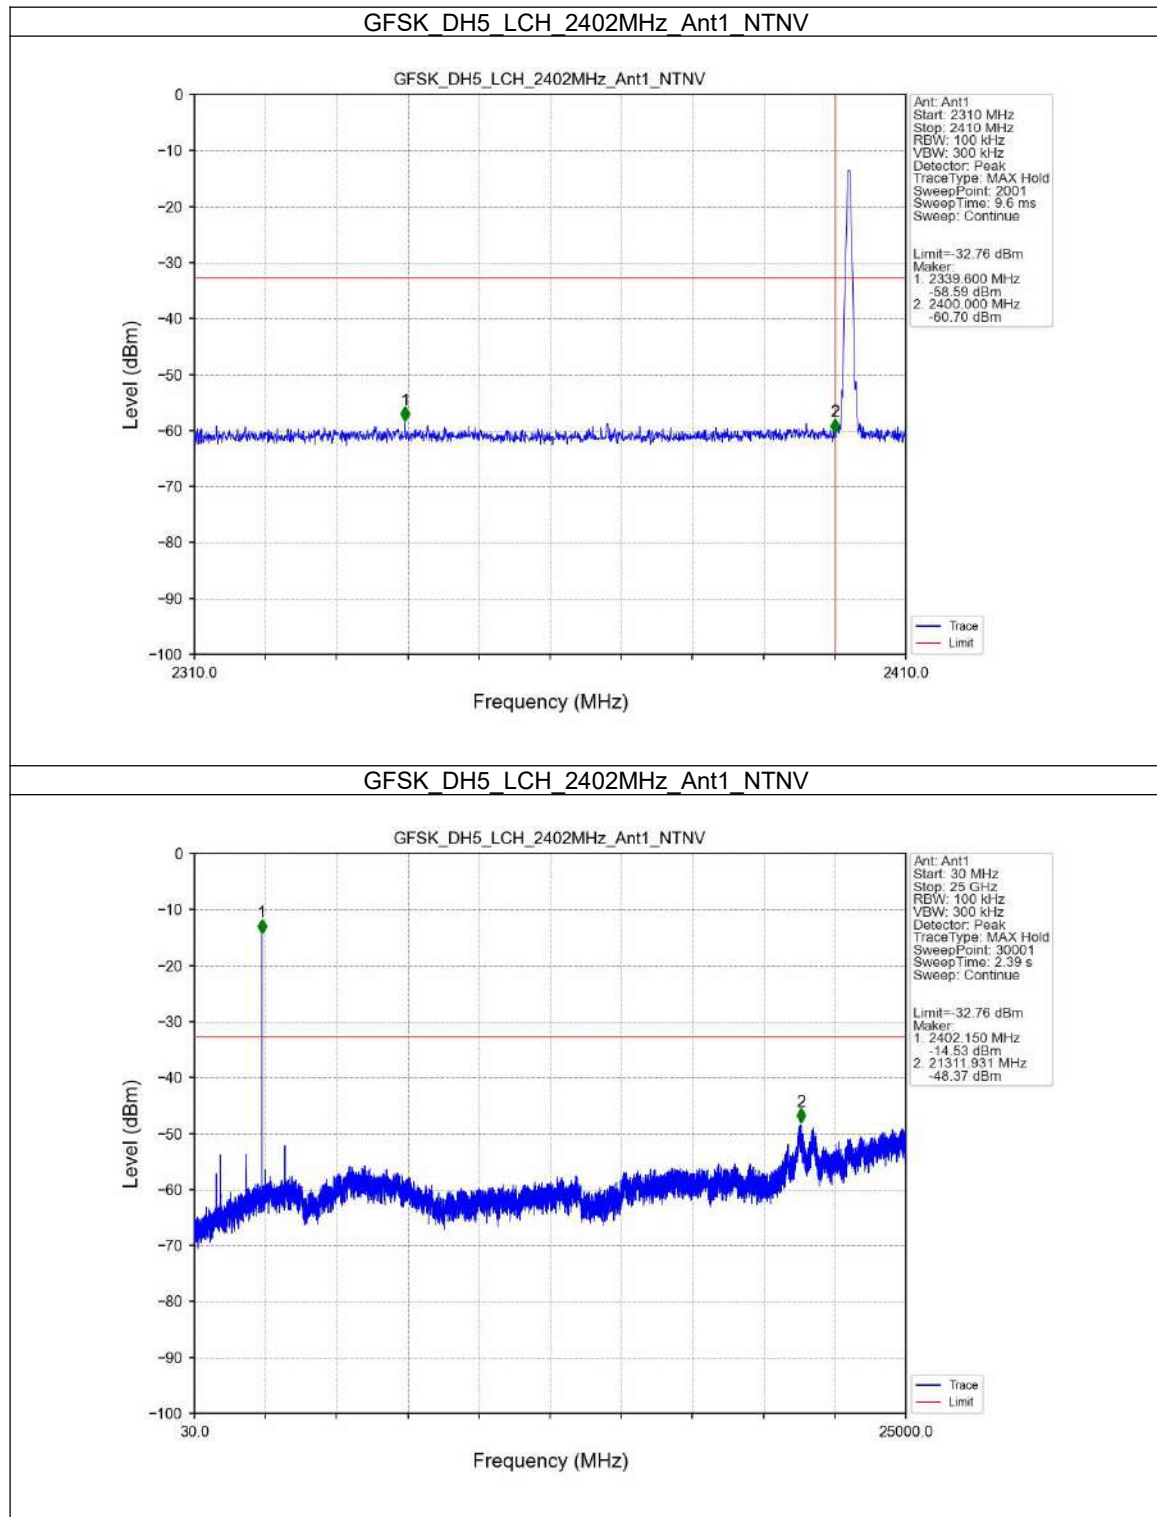


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

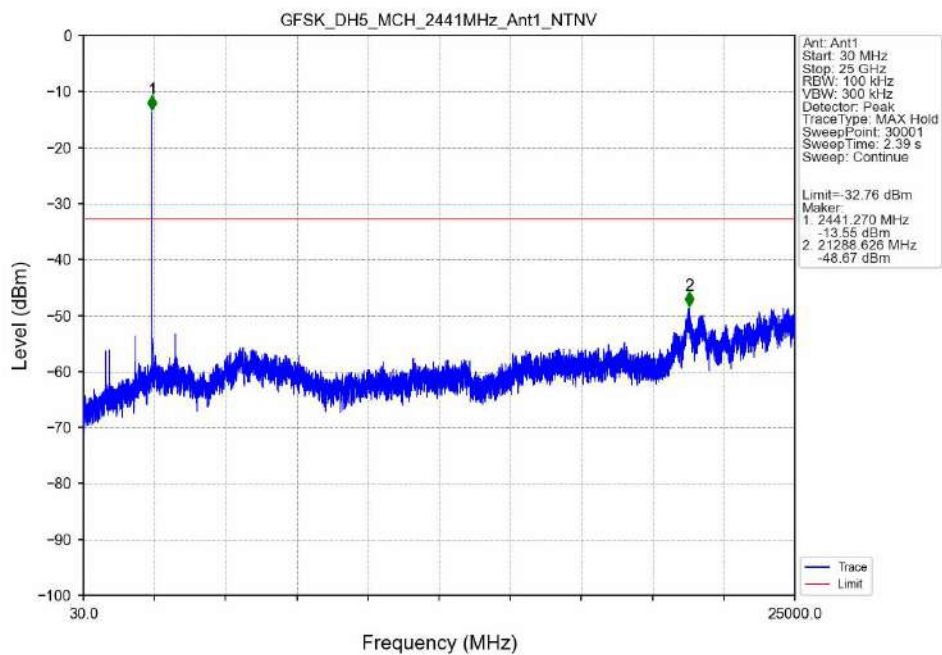


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

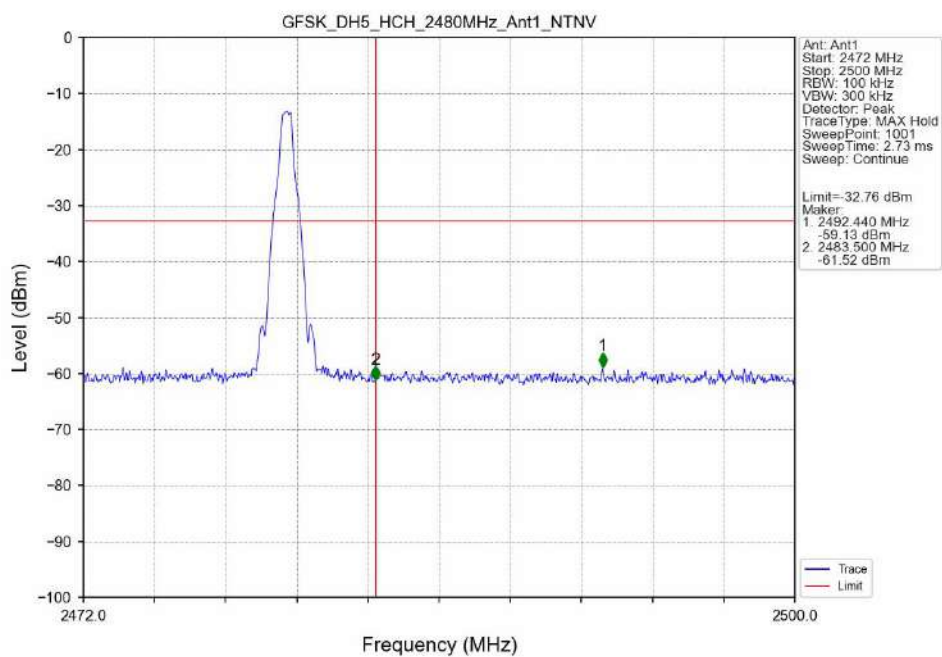


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

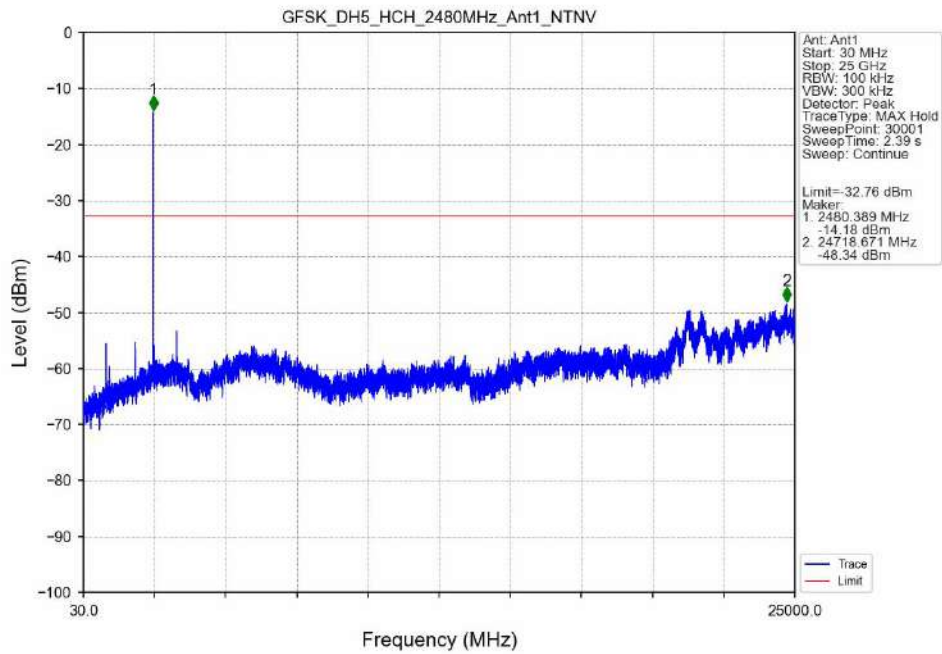


GFSK_DH5_HOPP_Ant1_NTNV

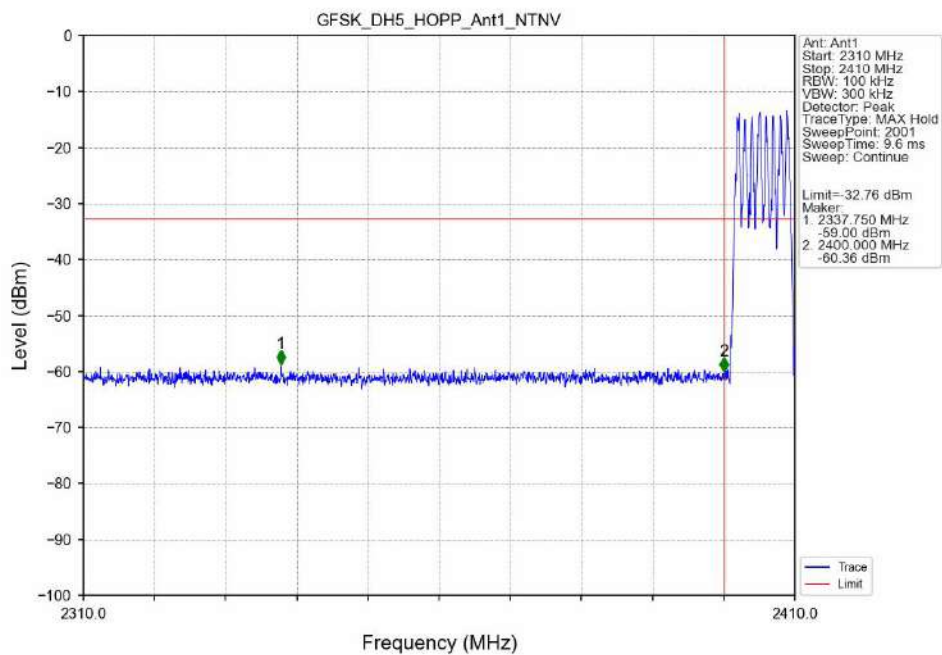


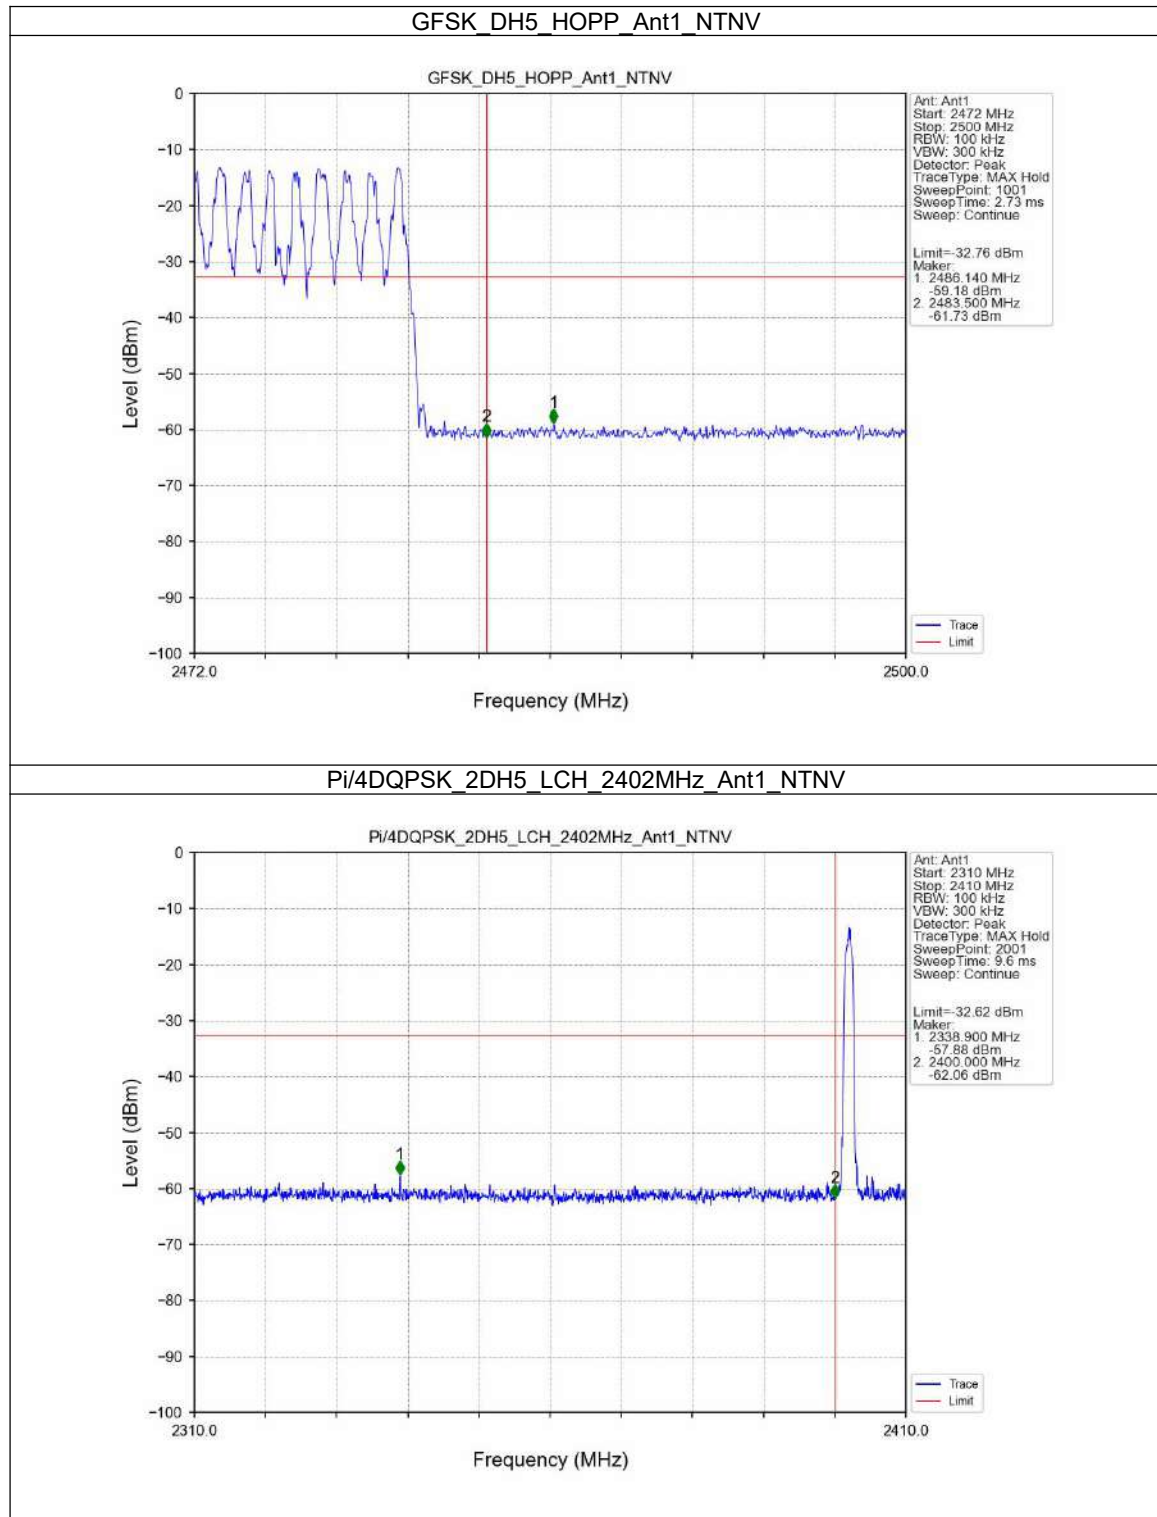


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

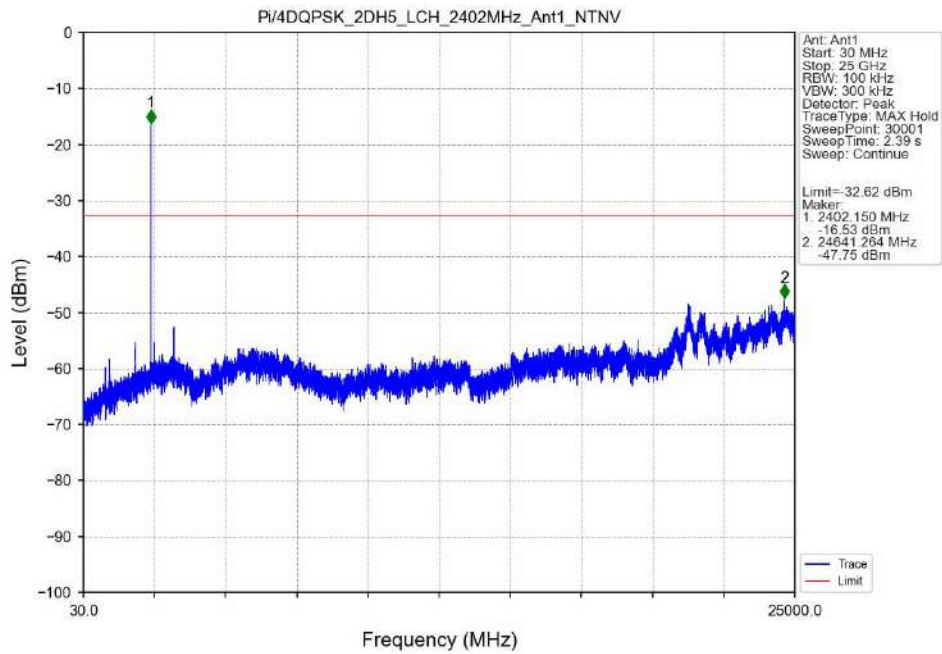


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

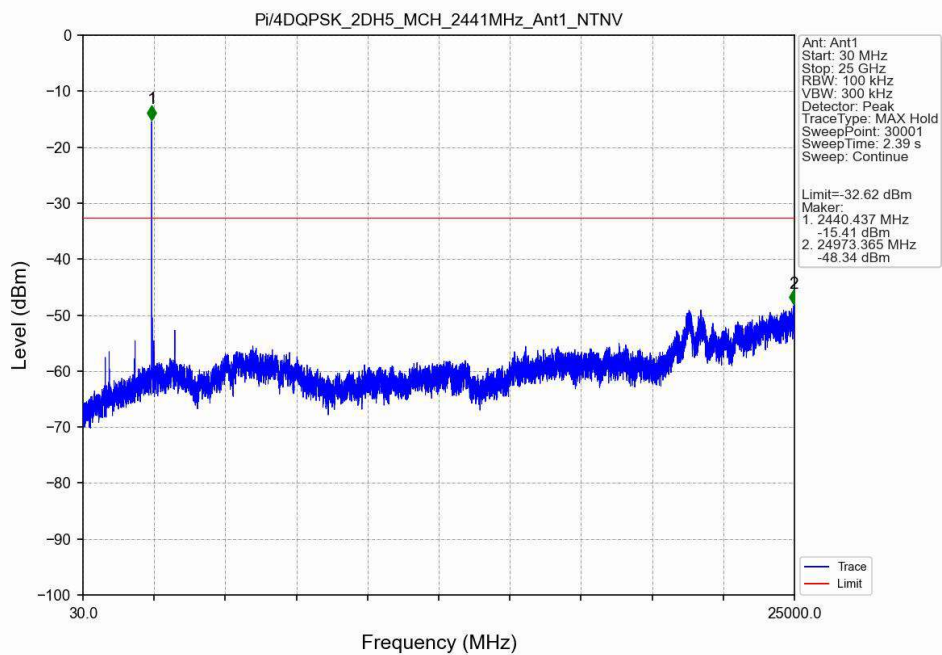


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

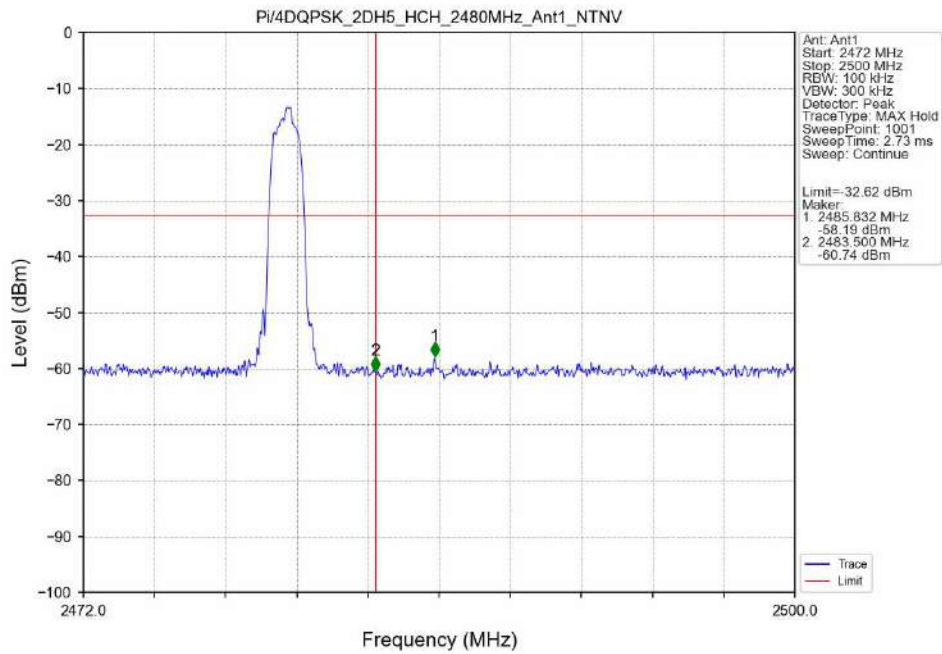


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

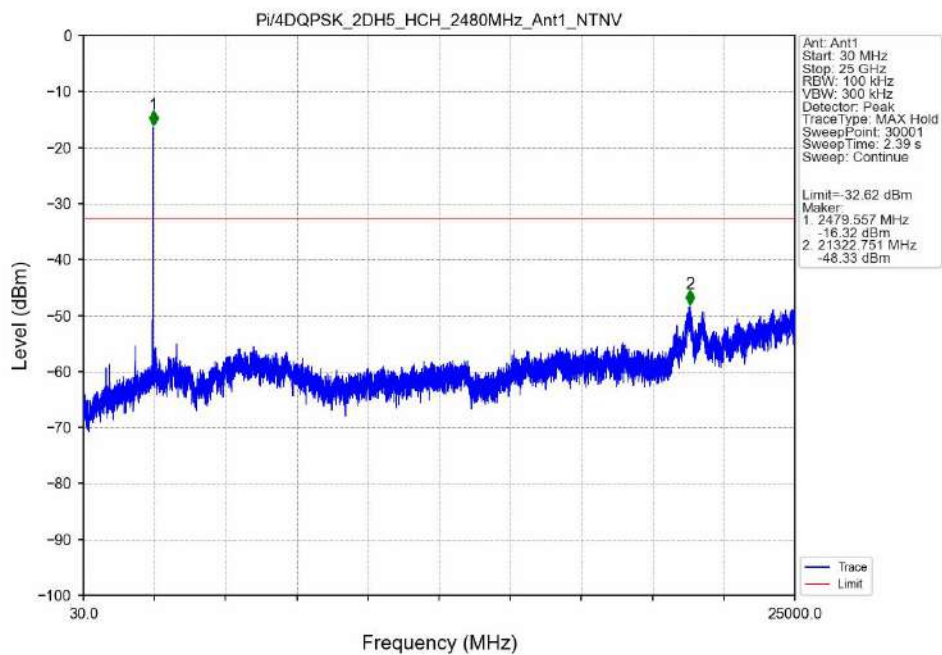


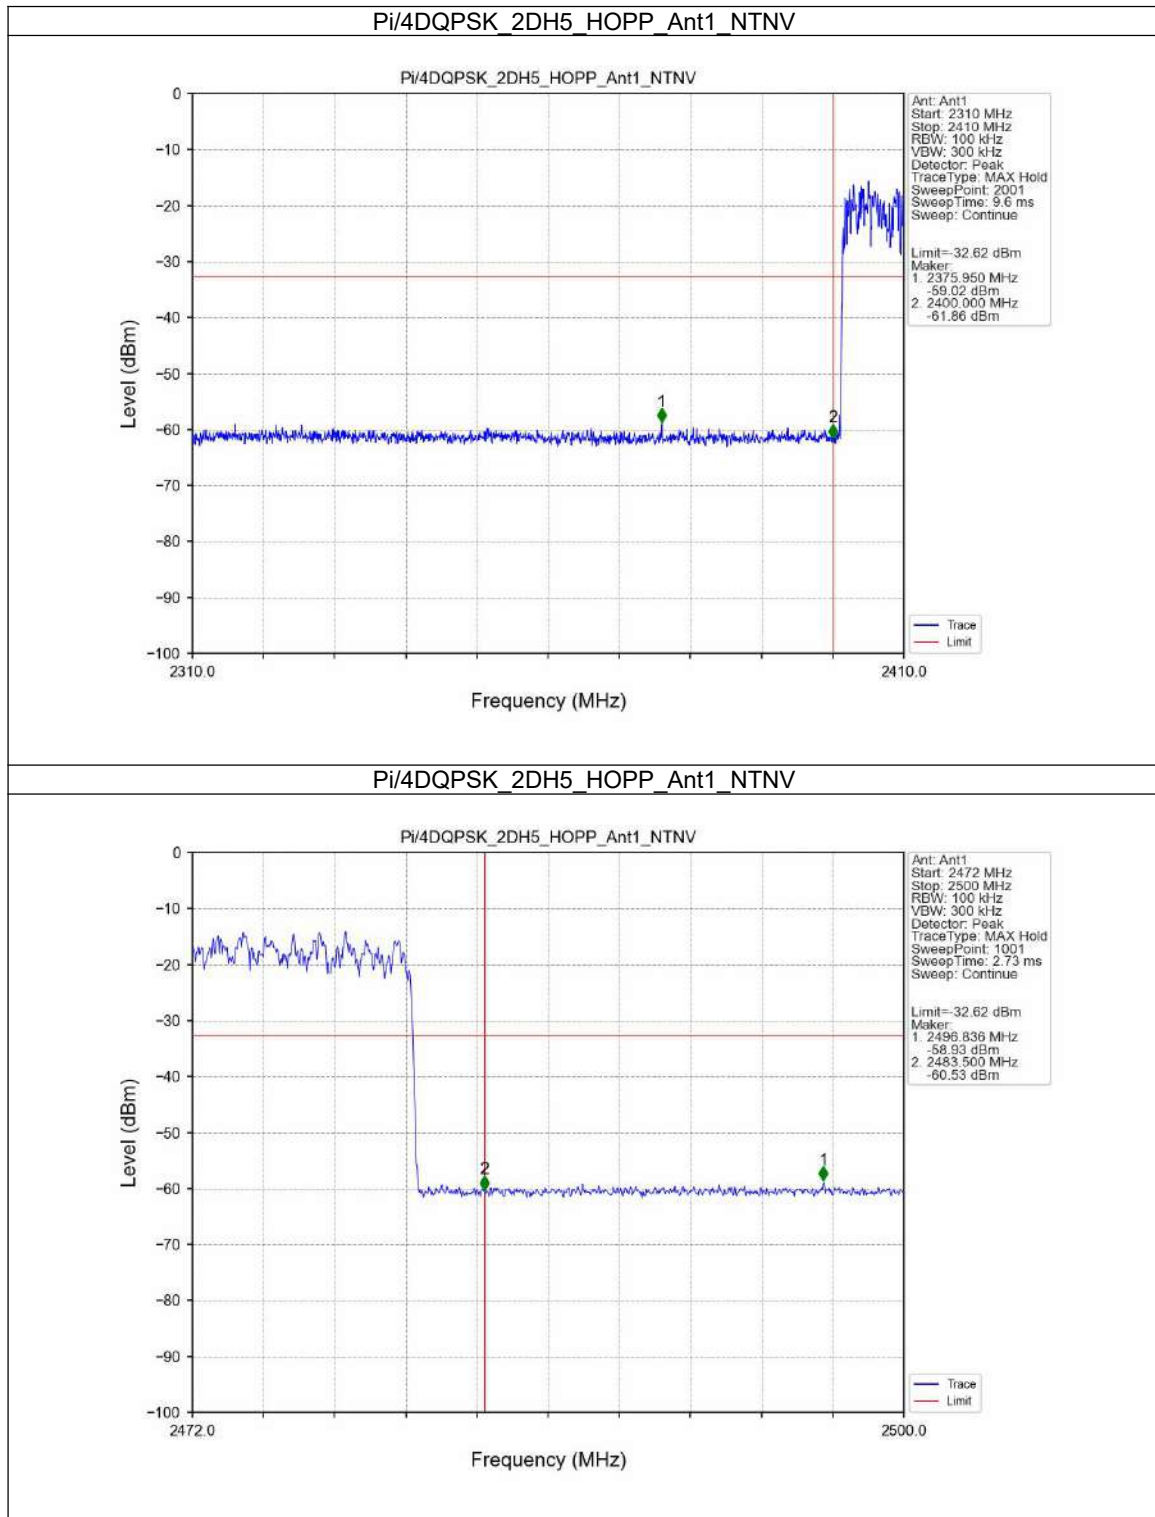


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

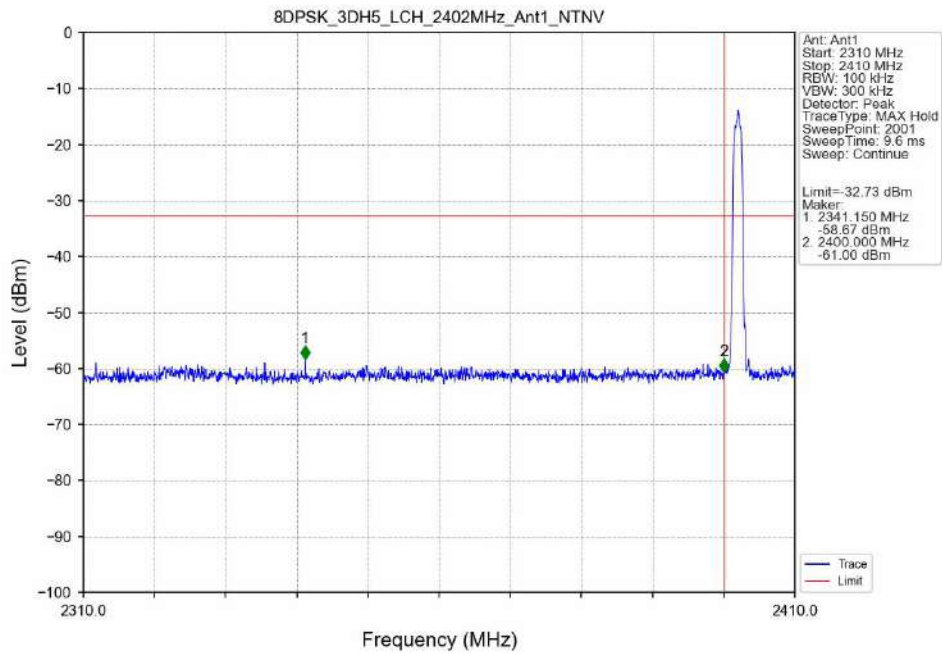


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

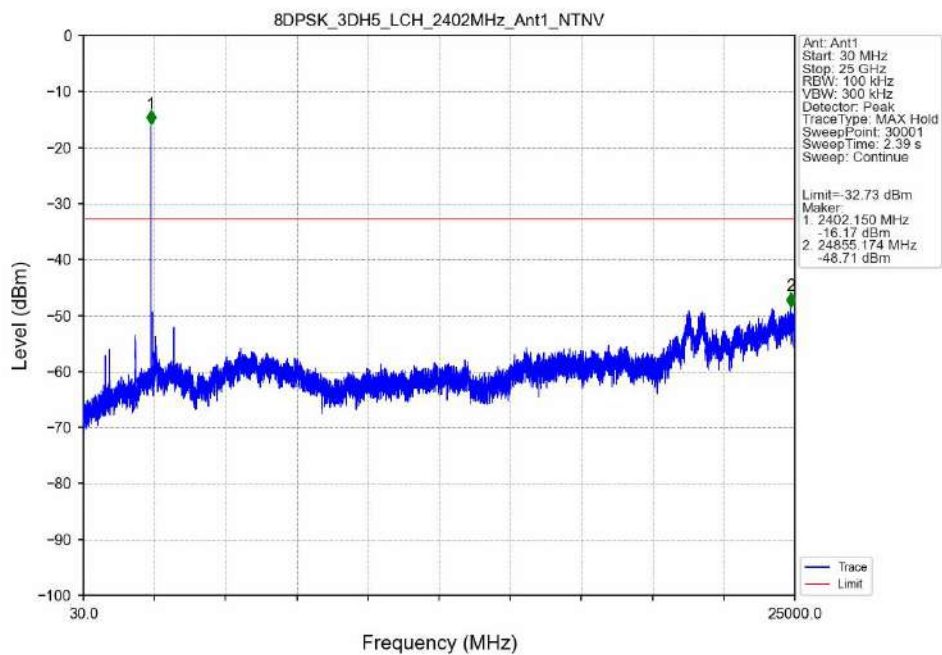


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

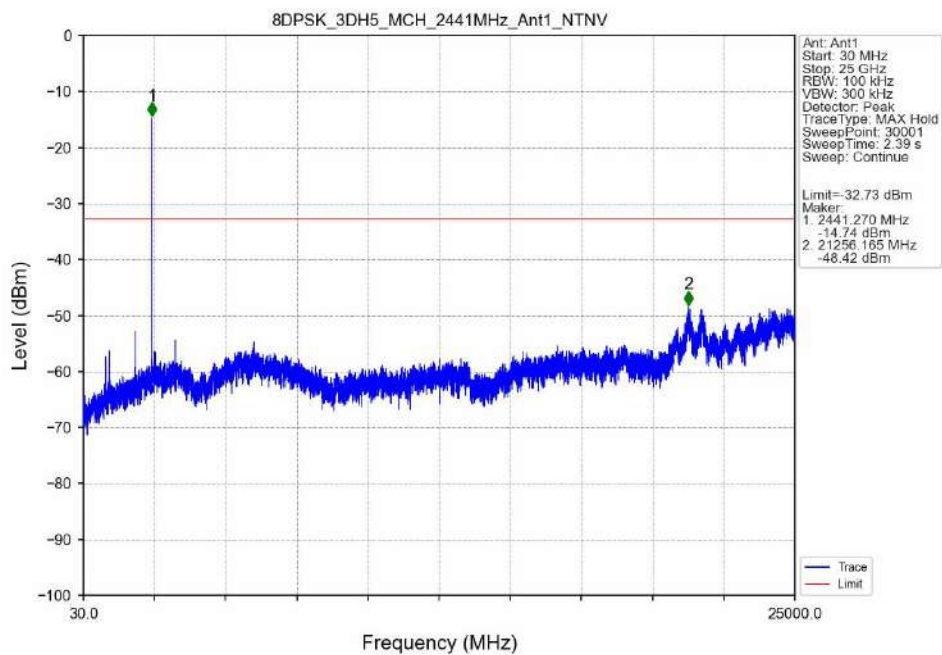


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

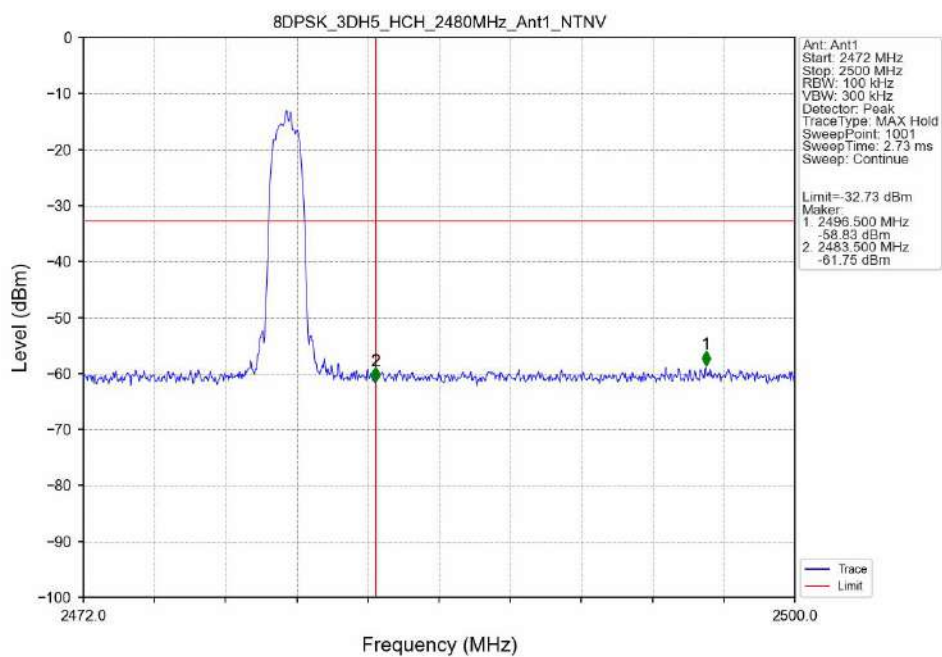


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

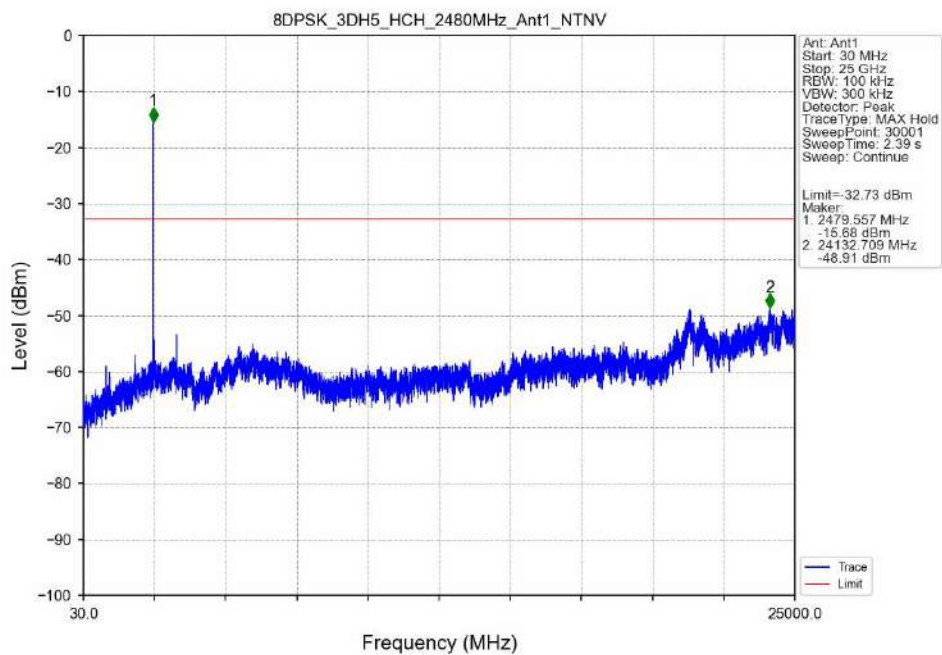

8DPSK_3DH5_HOPP_Ant1_NTNV

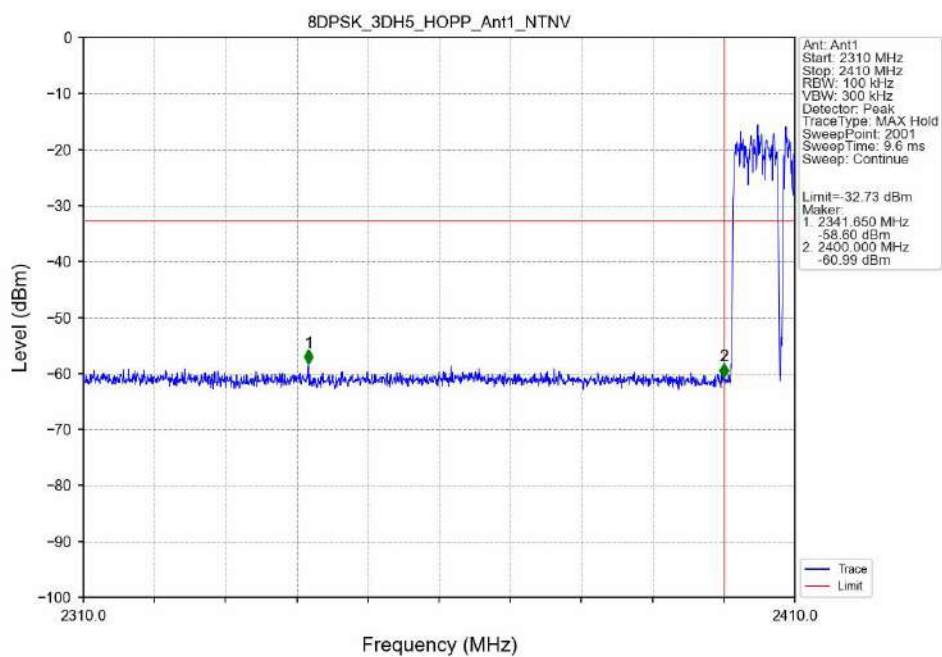

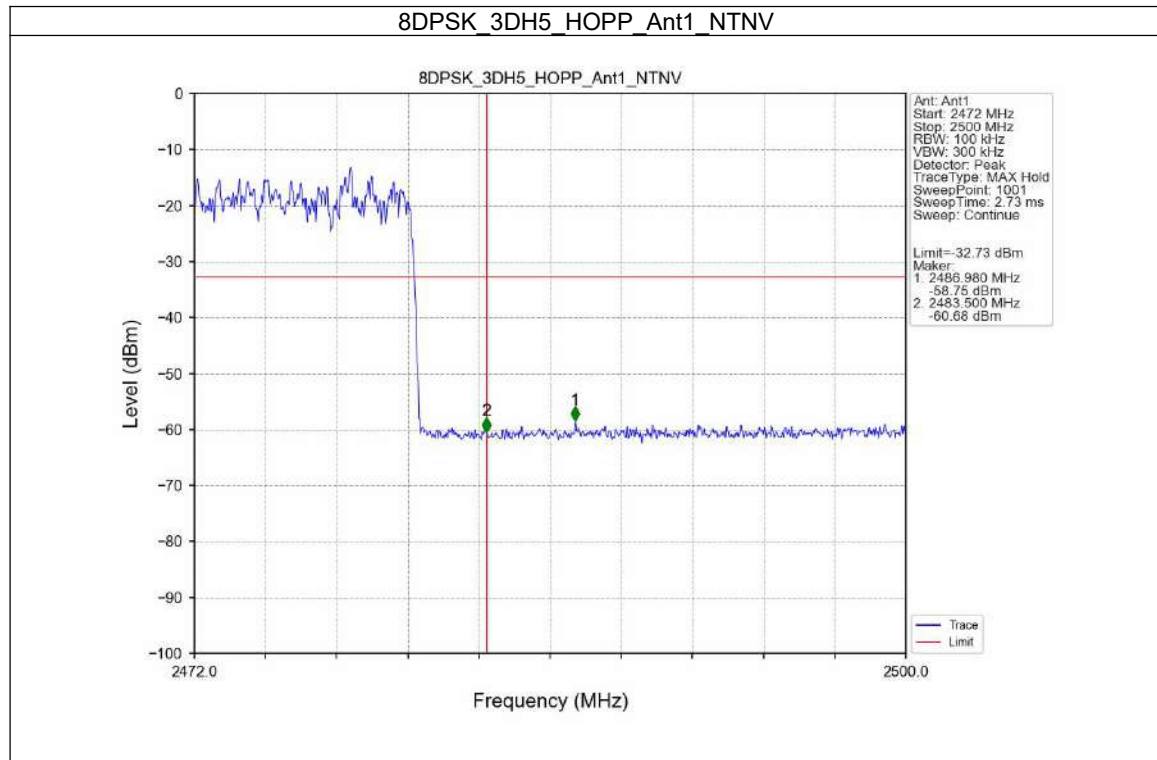

4.9 Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

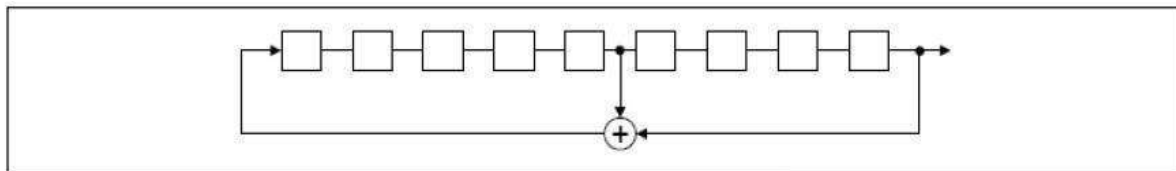

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

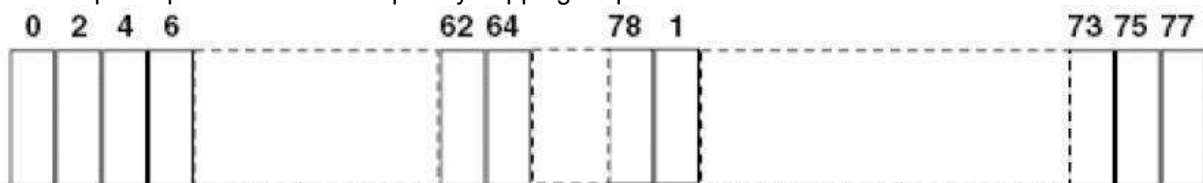

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

4.10 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The maximum gain of antenna was -1.2dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, BSL Testing Co., Ltd. does not assume any responsibility.

5 Test Setup Photos of the EUT

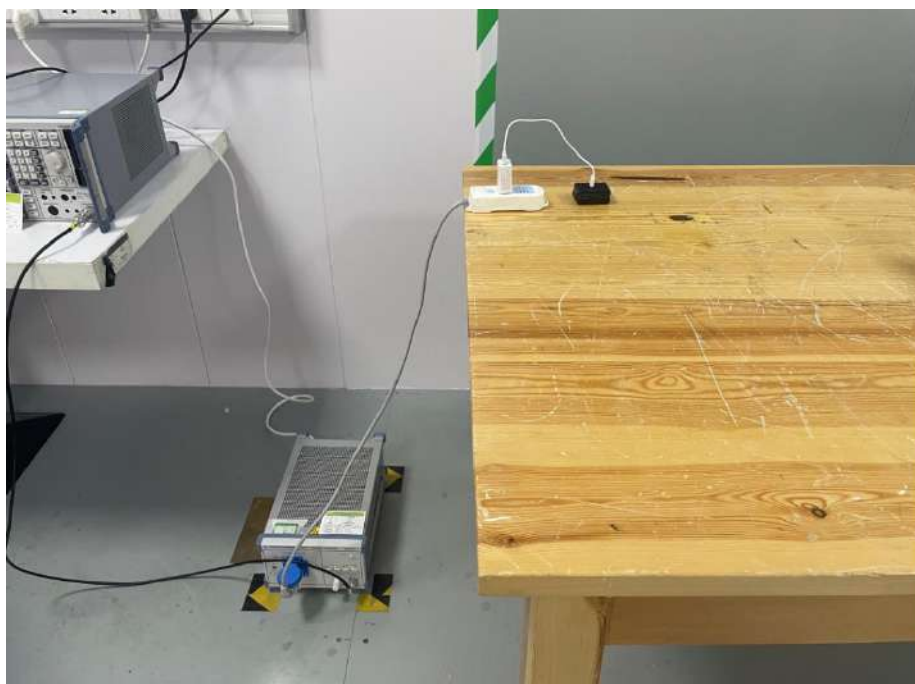



6 Photos of the EUT

Reference to the report ANNEX A of external photos and ANNEX B of internal photos.

***** End of Report *****