





Antenna1:




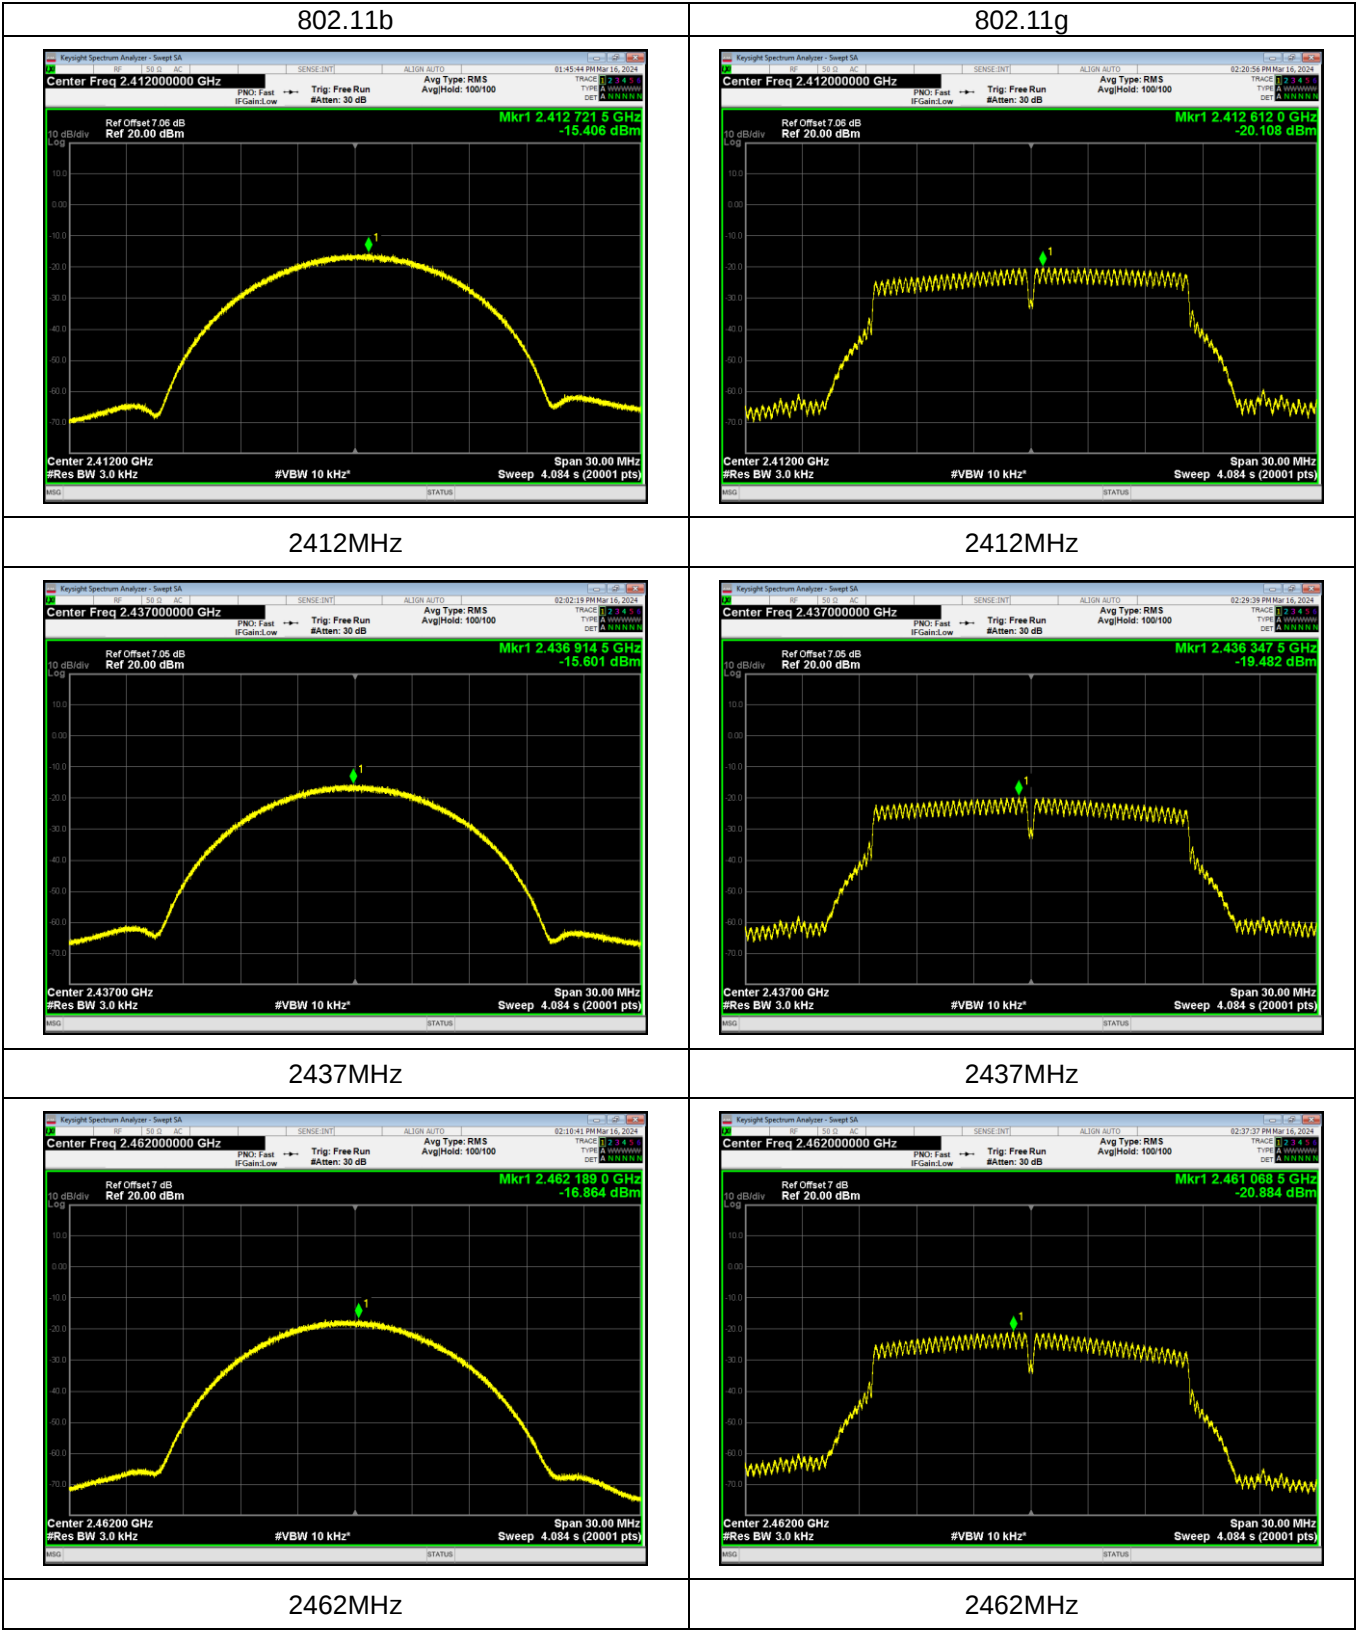


802.11n HT20

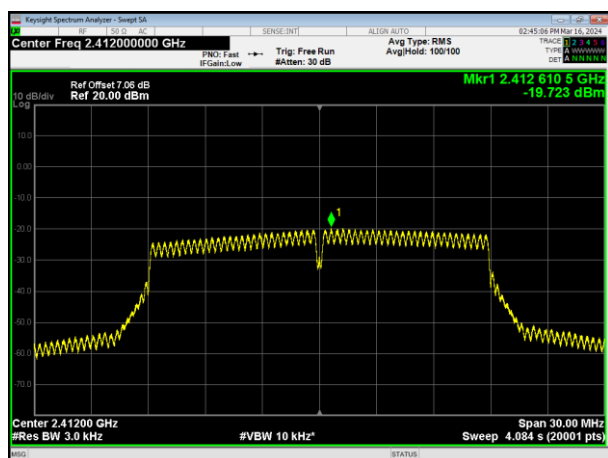


802.11n HT40

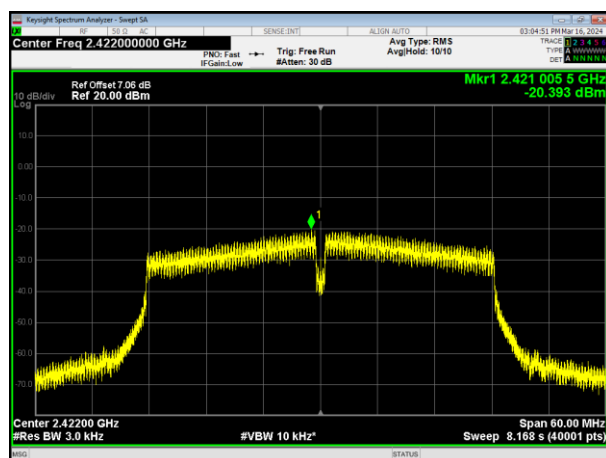


2412MHz

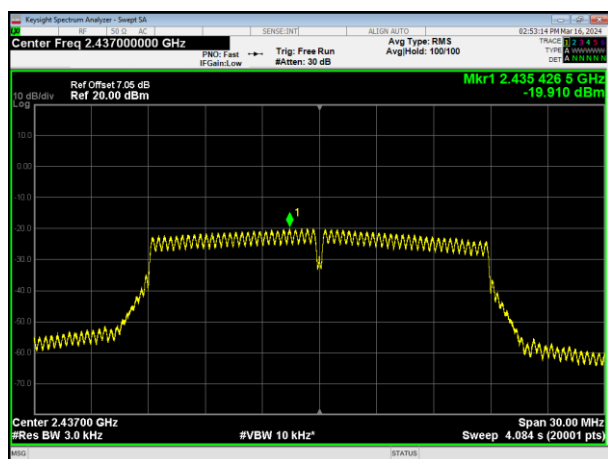


2422MHz

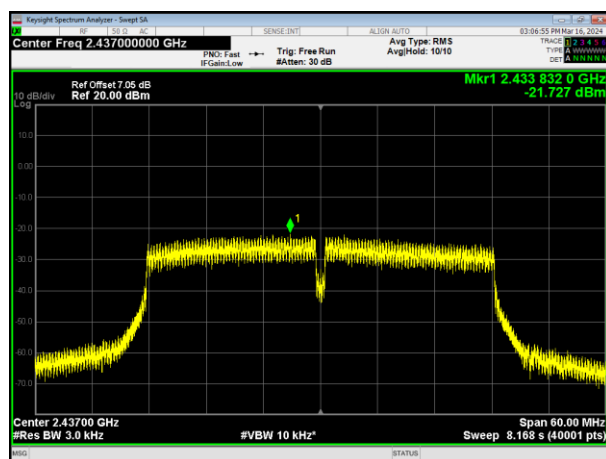

2437MHz

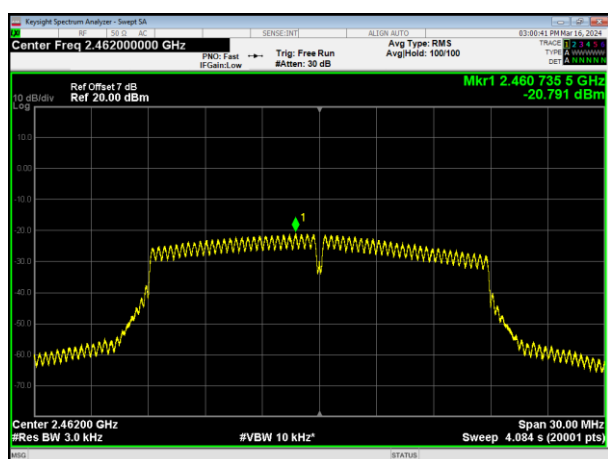

2437MHz

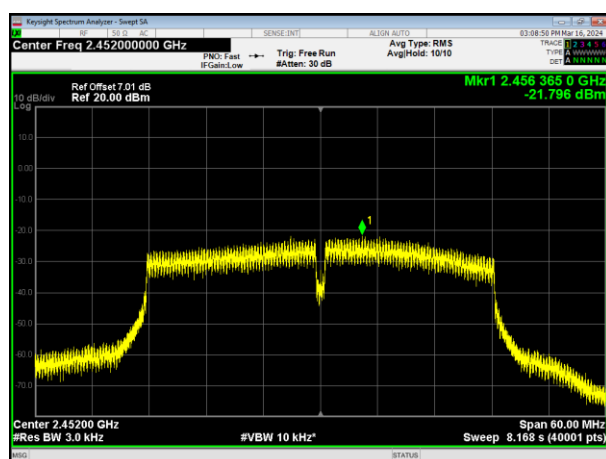


2462MHz

2452MHz




Antenna2:

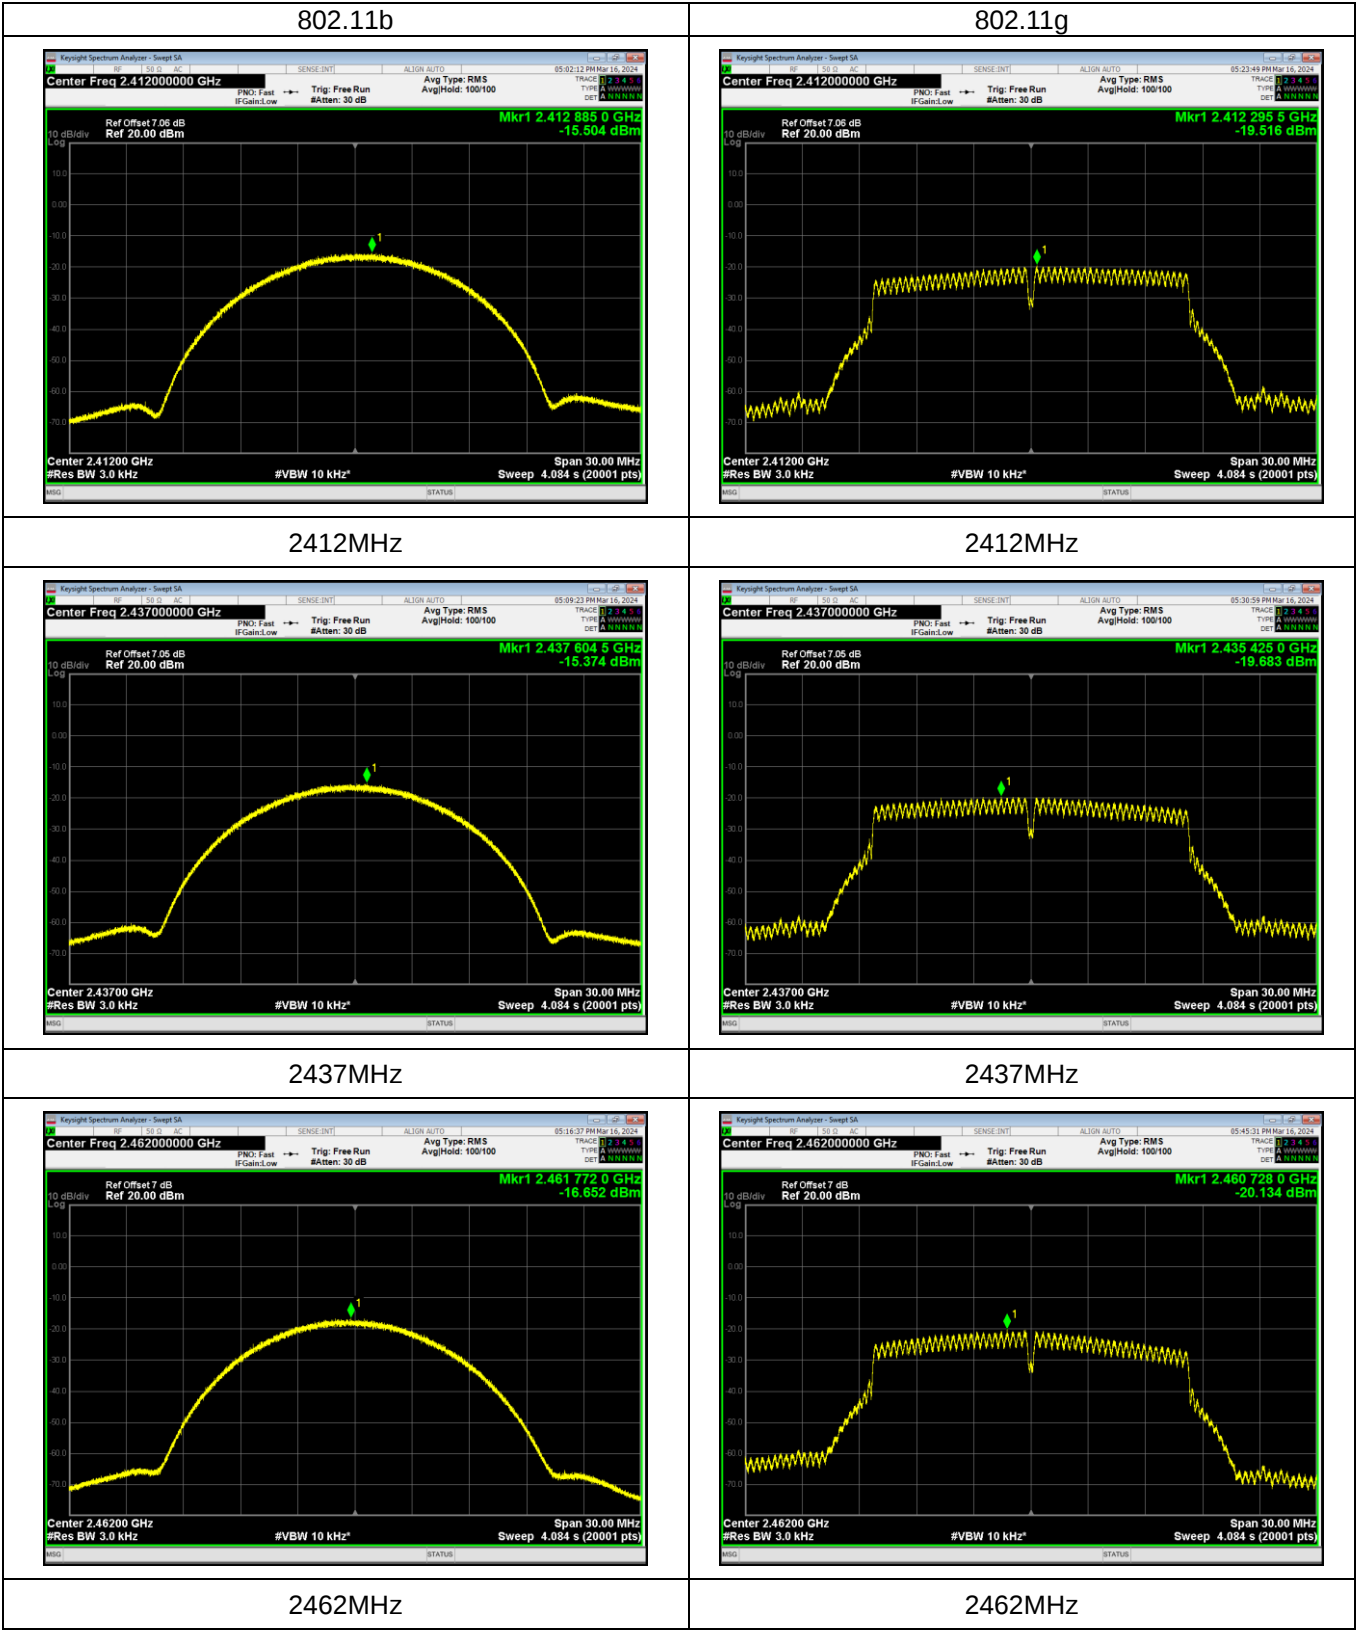





802.11n HT20

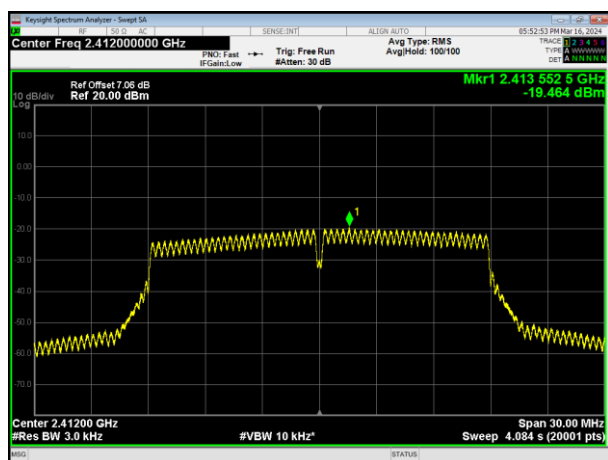


802.11n HT40

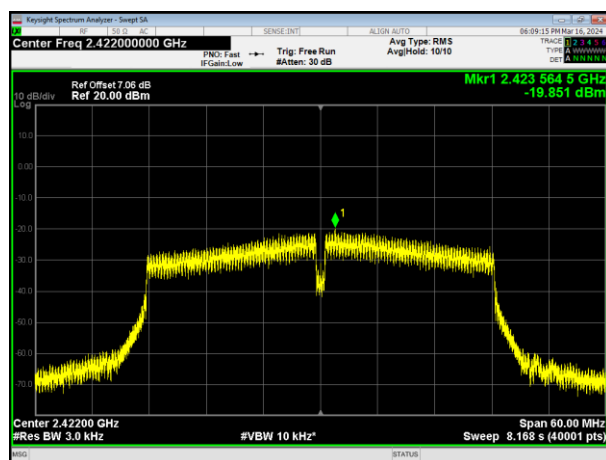


2412MHz

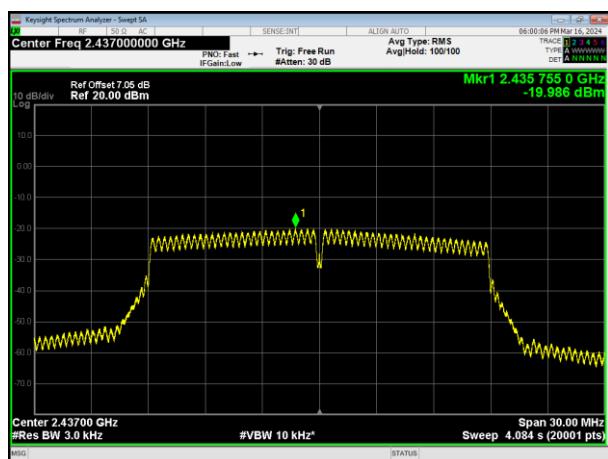


2422MHz

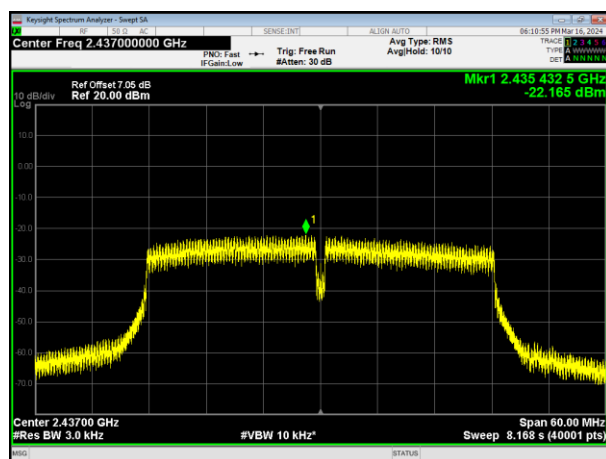

2437MHz

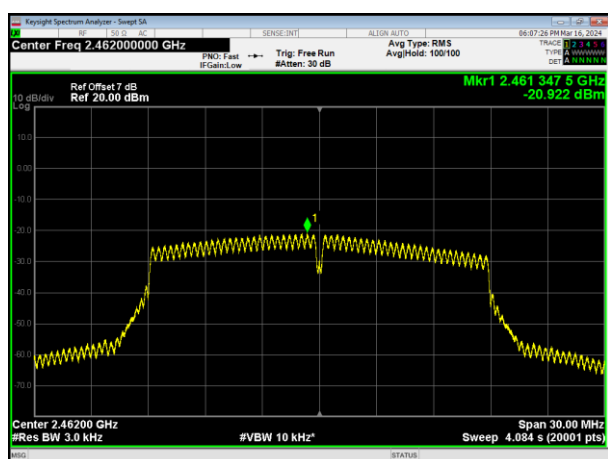

2437MHz

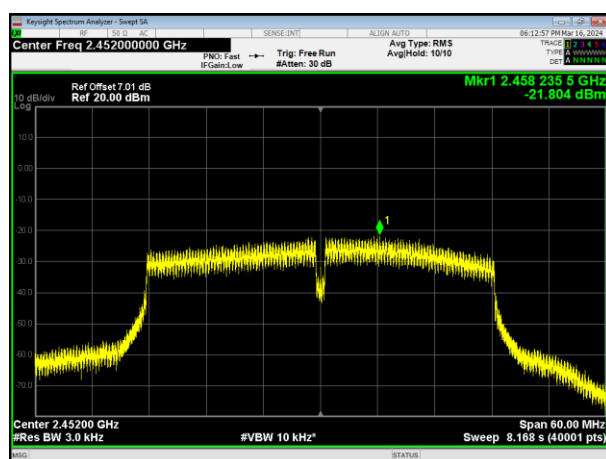

2462MHz

2452MHz



6. 6DB BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

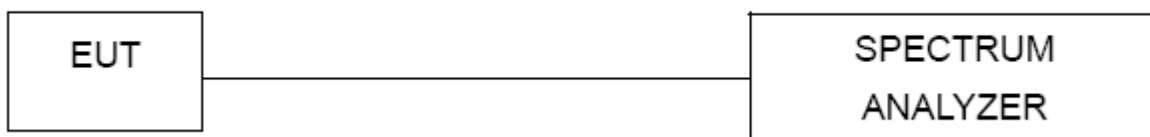

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


**6.1.5 TEST RESULTS**

Test CH		Channel Bandwidth (MHz)		Limit(KHz)	Result
		Ant1	Ant2		
802.11b	Lowest	8.039	8.386	>500	Pass
	Middle	8.255	8.506		
	Highest	7.637	7.907		
802.11g	Lowest	15.773	15.773		
	Middle	15.707	15.999		
	Highest	15.657	15.297		
802.11n (20MHz)	Lowest	14.839	16.306		
	Middle	15.962	16.136		
	Highest	13.769	15.028		
802.11n (40MHz)	Lowest	28.797	32.518		
	Middle	35.072	33.716		
	Highest	35.082	35.042		




Antenna1:


802.11b

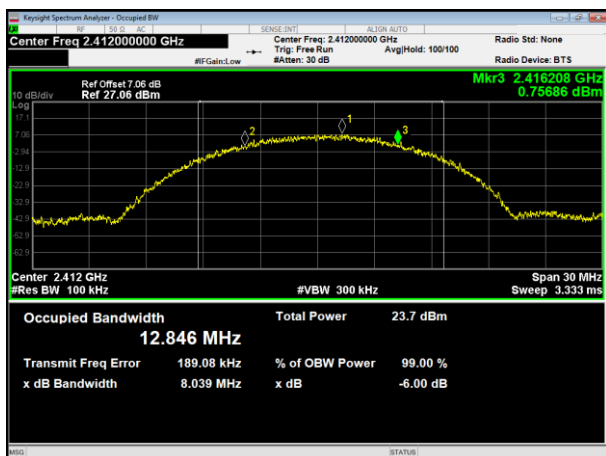


802.11g

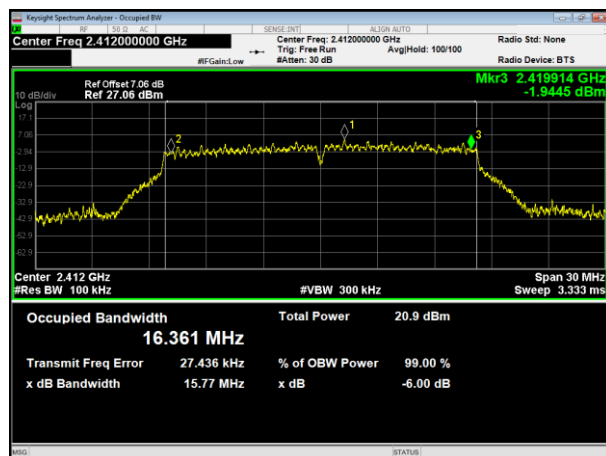


2412MHz

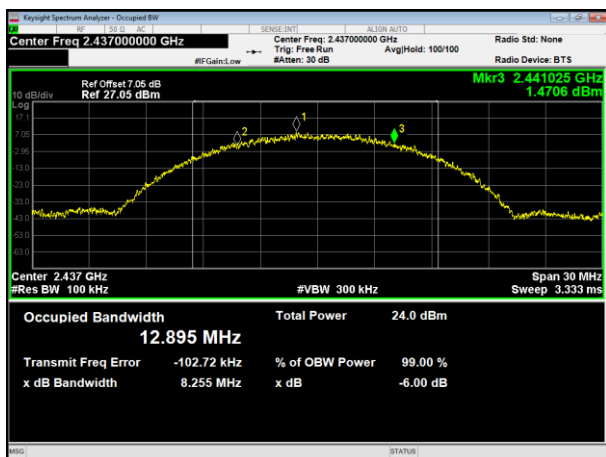


2412MHz

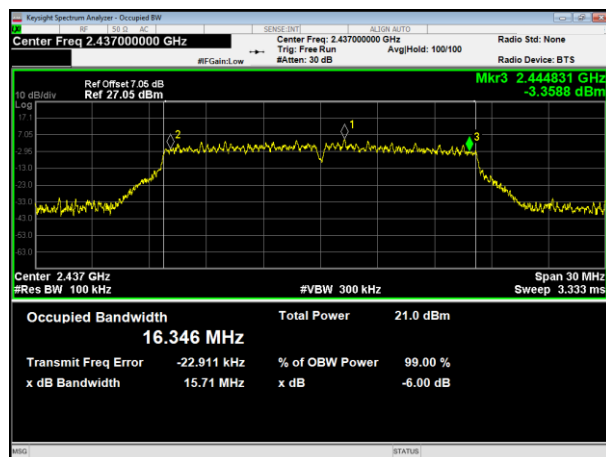

2437MHz

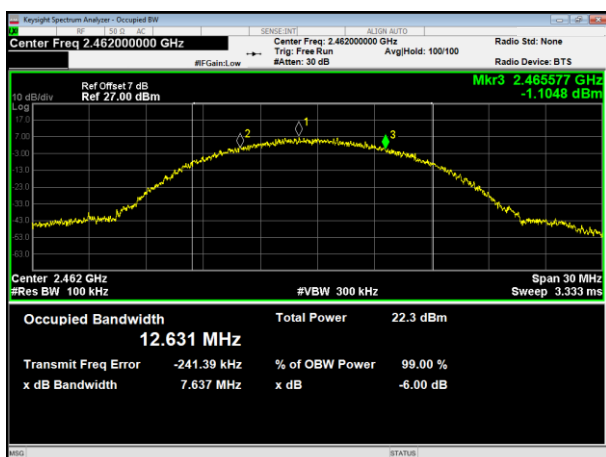

2437MHz

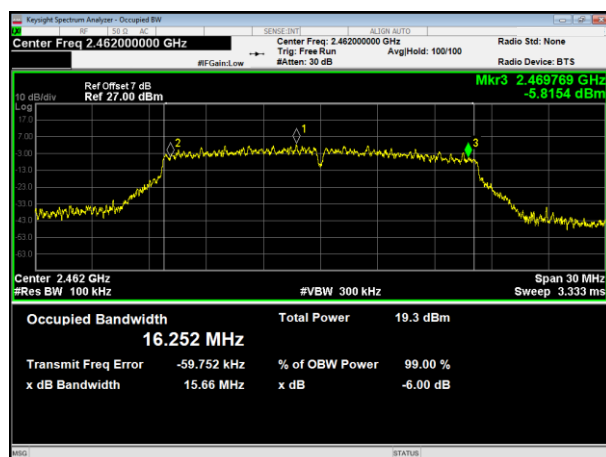


2462MHz


2462MHz




802.11n HT20

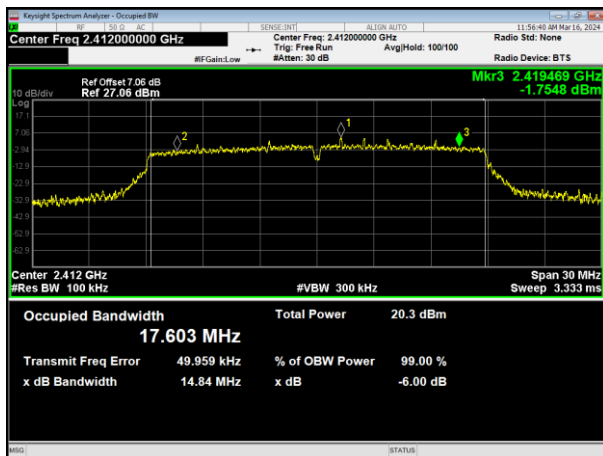


802.11n HT40

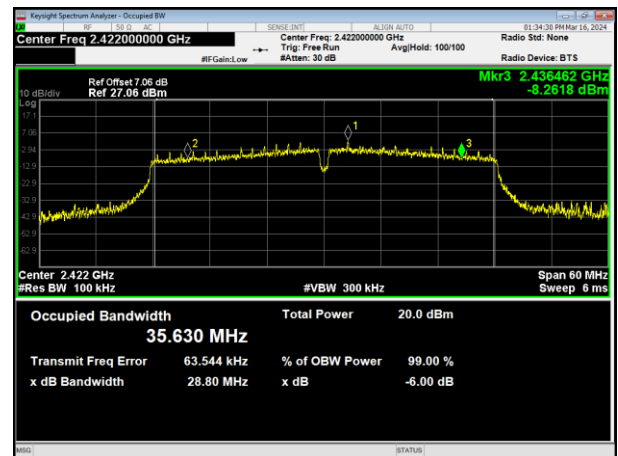


2412MHz

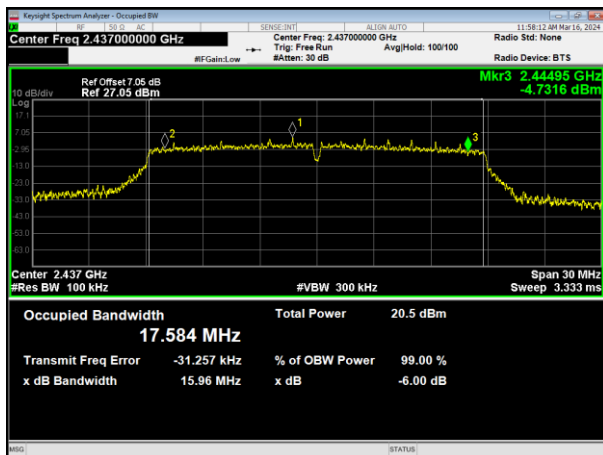


2422MHz

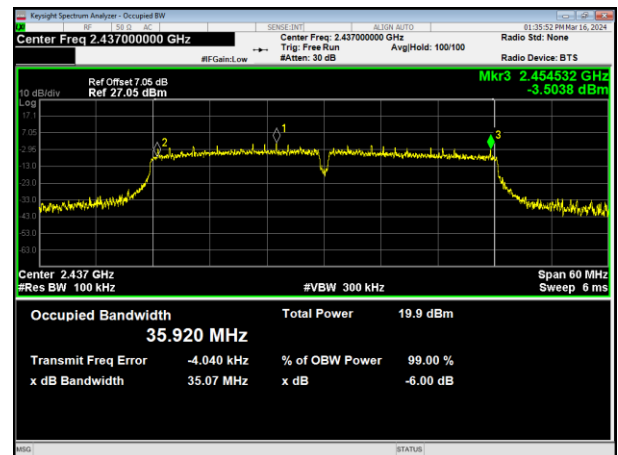

2437MHz

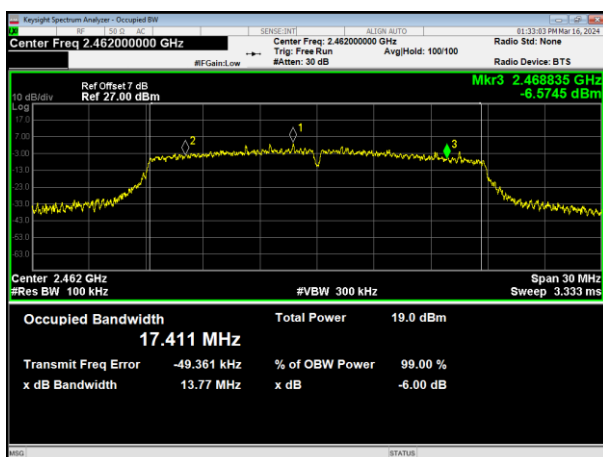

2437MHz

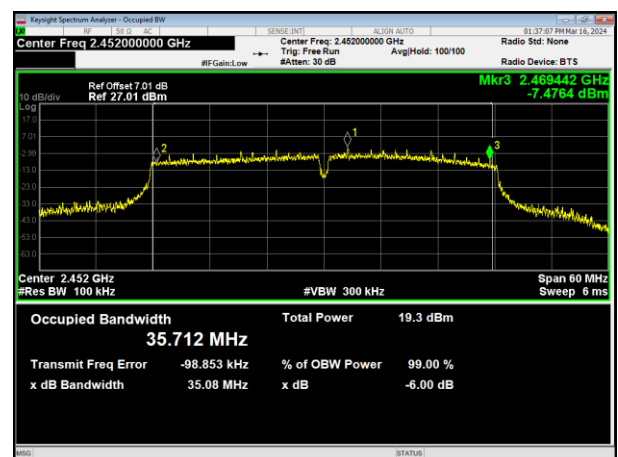


2462MHz

2452MHz




Antenna2:


802.11b

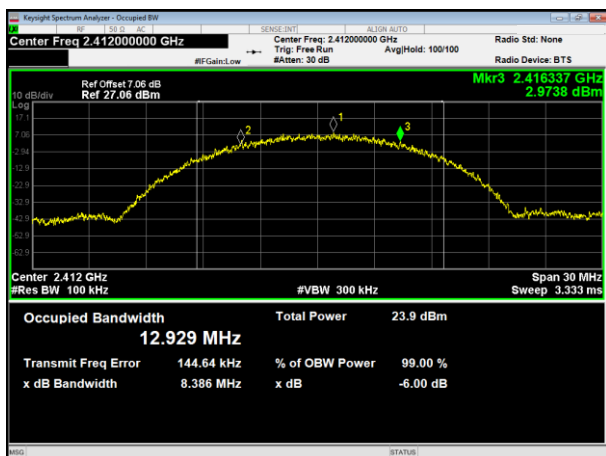


802.11g

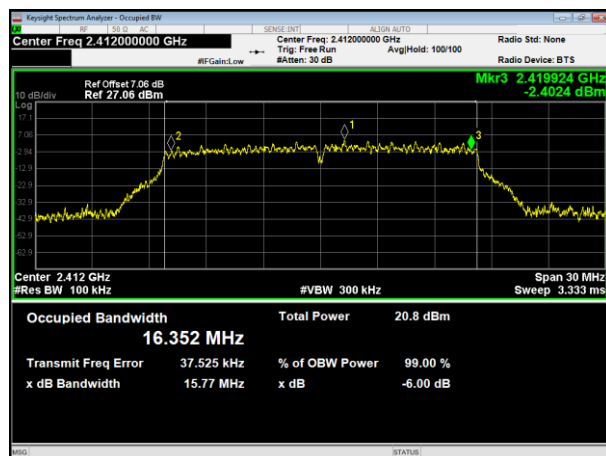


2412MHz

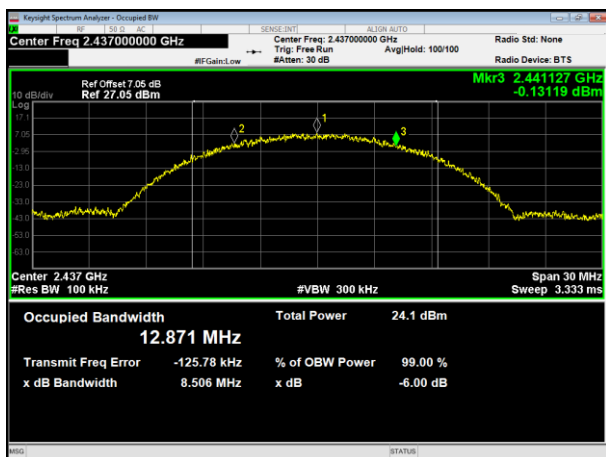


2412MHz

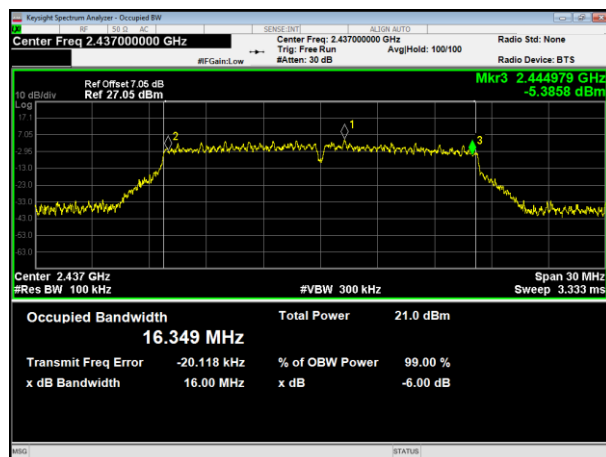

2437MHz

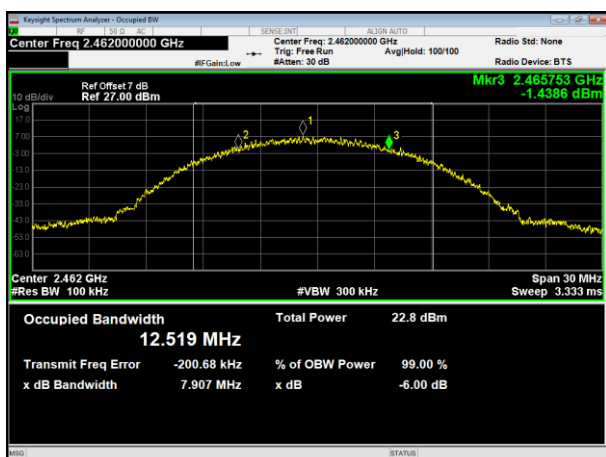

2437MHz

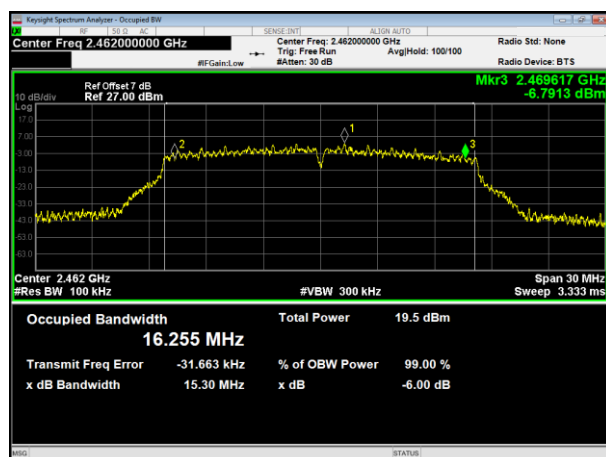


2462MHz


2462MHz




802.11n HT20

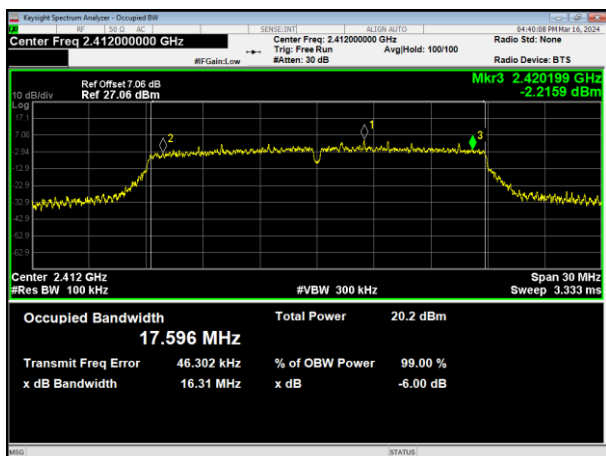


802.11n HT40

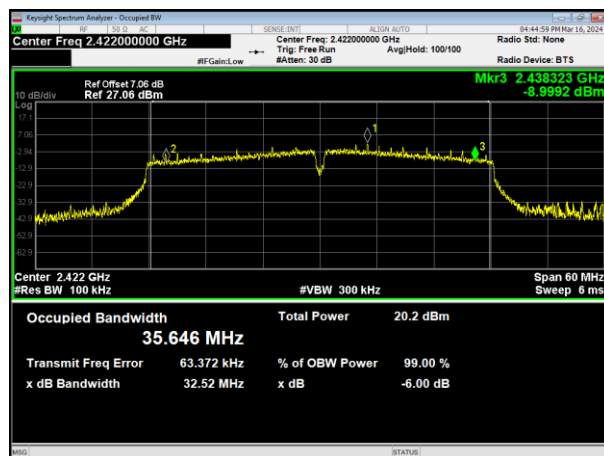


2412MHz

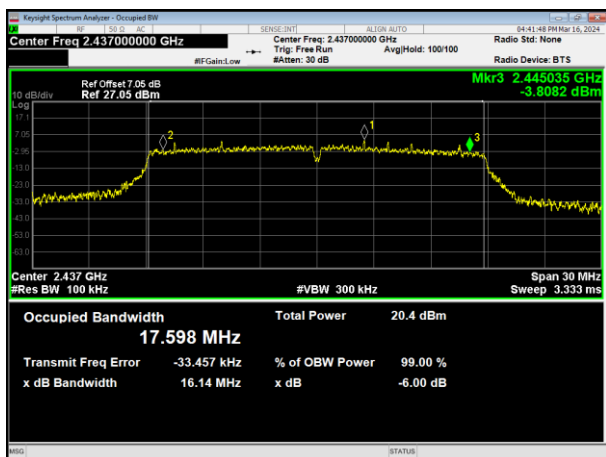


2422MHz

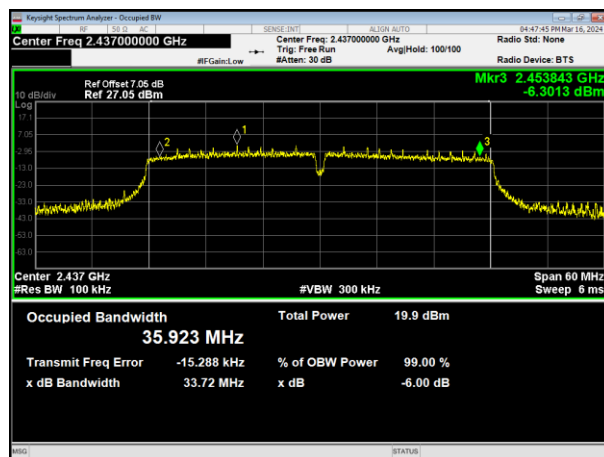

2437MHz

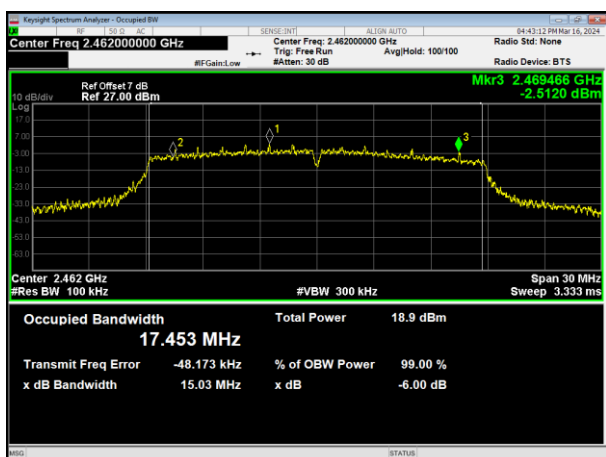

2437MHz

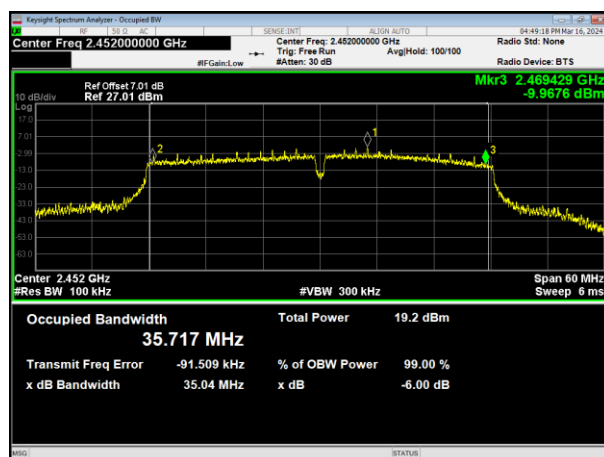

2462MHz

2452MHz



7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA

The EUT antenna is External antenna, It comply with the standard requirement.

8. TEST SEUUP PHOTO

Reference to the appendix I for details.

9. EUT PHOTO

Reference to the appendix II for details.

******* END OF REPORT *******