

TEST REPORT

Report No.: BCTC2407217909-2E

Applicant: Vivid-Hosting, LLC

Product Name: FRC Radio

Test Model: VH-109

Tested Date: 2024-07-15 to 2024-08-13

Issued Date: 2024-09-09


Shenzhen BCTC Testing Co., Ltd.



FCC ID:2BBOU10923

Product Name: FRC Radio
Trademark: N/A
Model/Type Ref.: VH-109,VH-113
Prepared For: Vivid-Hosting, LLC
Address: 4275 Executive Sq STE 206, La Jolla, CA 92037, USA
Manufacturer: Vivid-Hosting, LLC
Address: 4275 Executive Sq STE 206, La Jolla, CA 92037, USA
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2024-07-15
Sample tested Date: 2024-07-15 to 2024-08-13
Report No.: BCTC2407217909-2E
FCC Part15 15.407
ANSI C63.10-2013
Test Standards: KDB 662911 D01 v02r01
KDB 789033 D02 v02r01
KDB 987594 D02 v02r01
Test Results: PASS

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.


Table of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information and Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	9
4.5 Test Mode	11
4.6 Test Environment	12
4.7 Table Of Parameters Of Text Software Setting	12
4.8 Antenna Requirements	18
5. Test Facility And Test Instrument Used	20
5.1 Test Facility	20
5.2 Test Instrument Used	20
6. Conducted Emissions	22
6.1 Block Diagram Of Test Setup	22
6.2 Limit	22
6.3 Test Procedure	22
6.4 EUT Operating Conditions	23
6.5 Test Result	23
7. Radiated Emissions	23
7.1 Block Diagram Of Test Setup	24
7.2 Limit	25
7.3 Test Procedure	26
7.4 EUT Operating Conditions	27
7.5 Test Result	28
8. Power Spectral Density Test	101
8.1 Block Diagram Of Test Setup	101
8.2 Limit	101
8.3 Test Procedure	101
8.4 EUT Operating Conditions	102
8.5 Test Result	102
9. 26dB & 99% Emission Bandwidth	103
9.1 Block Diagram Of Test Setup	103
9.2 Limit	103
9.3 Test Procedure	103
9.4 EUT Operating Conditions	103
9.5 Test Result	104
10. Maximum Conducted Output Power and Maximum EIRP	105
10.1 Block Diagram Of Test Setup	105
10.2 Limit	105
10.3 Test Procedure	105

10.4	EUT Operating Conditions	106
10.5	Test Result.....	107
11.	In-Band Emission (Emission Mask).....	108
11.1	Block Diagram Of Test Setup.....	108
11.2	Limit	108
11.3	Test Procedure	108
11.4	EUT Operating Conditions	110
11.5	Test Result.....	110
12.	Spurious RF Conducted Emissions.....	111
12.1	Block Diagram Of Test Setup.....	111
12.2	Limit	111
12.3	Test Procedure	111
12.4	Test Result.....	111
13.	Frequency Stability Measurement.....	112
13.1	Block Diagram Of Test Setup.....	112
13.2	Limit	112
13.3	Test Procedure	112
13.4	Test Result.....	112
14.	Contention Based Protocol.....	113
14.1	Block Diagram Of Test Setup.....	113
14.2	Limit	113
14.3	Test Procedure	115
14.4	Test Result.....	116
15.	Duty Cycle Of Test Signal	117
15.1	Standard Requirement	117
15.2	Formula.....	117
15.3	Test Procedure	117
15.4	Test Result.....	117
16.	Antenna Requirement	118
16.1	Limit	118
16.2	Test Result.....	118
17.	EUT Test Setup Photographs.....	119

1. Version

Report No.	Issue Date	Description	Approved
BCTC2407217909-2E	2024-09-09	Original	Valid

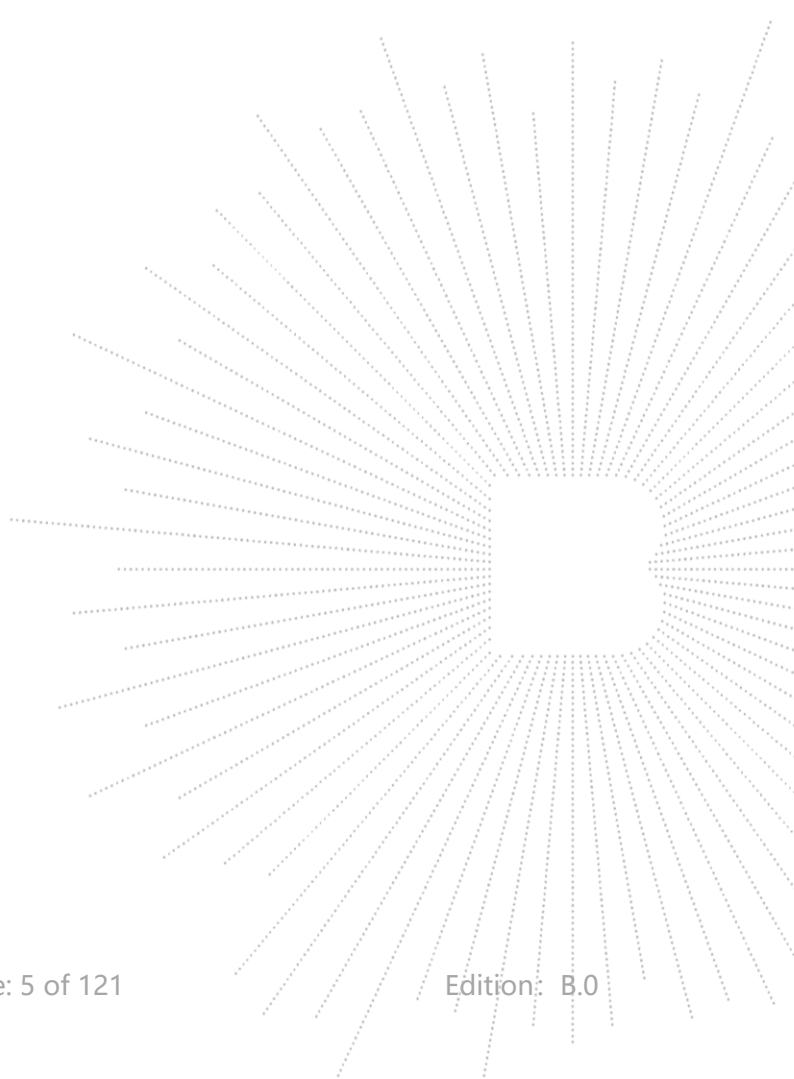

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)	PASS
2	Conducted Emission	15.207	N/A
3	26 dB and 99% Emission Bandwidth	15.407 (a)	N/A
4	Maximum Conducted Output Power	15.407 (a)	PASS
5	In-band Emission	15.407(b)	N/A
6	Power Spectral Density	15.407 (a)	PASS
7	Spurious Emissions at Antenna Terminals	15.407(b)	N/A
8	Frequency Stability	15.407(g)	N/A
9	Contention Based Protocol	15.407(d)	PASS
10	Antenna Requirement	15.203	PASS

NOTE: This report, based on the original report, only applies to antenna test items related to the above tests, and other items do not need to be tested. For other data, please refer to (BCTC2311144017-3E) or check the original FCC certificate (This test is not applicable)

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information and Test Setup


4.1 Product Information

Model/Type Ref.:	VH-109,VH-113
Differences Description:	The following types of equipment we produce are identical in electrical, mechanical and physical structure; The only differences are the model name and the antenna.
Equipment classes:	6XD
Hardware Version:	N/A
Software Version:	N/A
IEEE 802.11 WLAN Mode Supported	802.11ax20: 20MHz 802.11ax40: 40MHz 802.11ax80: 80MHz 802.11ax160: 160MHz
Operation Frequency:	U-NII-5: 5955-6415MHz U-NII-6: 6435-6515MHz U-NII-7: 6535-6865MHz U-NII-8: 6885-7115MHz
Type of Modulation:	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Number Of Channel	802.11ax20MHz bandwidth: 59 802.11ax40MHz bandwidth: 29 802.11ax80MHz bandwidth: 14 802.11ax160MHz bandwidth: 7
Transmit Power:	U-NII-5:16.00dBm U-NII-6:16.03dBm U-NII-7:17.21dBm U-NII-8:15.73dBm
Antenna installation:	Internal antenna
Antenna Gain:	4x4MIMO antenna (Molex): Antenna 1:3.17dBi Antenna 2:4.50dBi Antenna 3:2.78dBi Antenna 4:3.46dBi Quectel Antenna (YF0023CA): Antenna 1:6.62dBi Antenna 2:6.62dBi Antenna 3:6.62dBi Antenna 4:6.62dBi
power supply:	DC 12V form battery DC 12V form POE

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Radiated Spurious Emission:



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	FRC Radio	N/A	VH-109	N/A	EUT
E-2	POE power supply	N/A	N/A	N/A	Auxiliary
	DC power supply	N/A	D-41747 Viersen	6230316	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

U-NII-5: 5955-6415MHz

802.11ax20 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	25	6075	49	6195	73	6315
5	5975	29	6095	53	6215	77	6335
9	5995	33	6115	57	6235	81	6355
13	6015	37	6135	61	6255	85	6375
17	6035	41	6155	65	6275	89	6395
21	6055	45	6175	69	6295	93	6415

802.11ax40 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	27	6085	51	6205	75	6325
11	6005	35	6125	59	6245	83	6365
19	6045	43	6165	67	6285	91	6405

802.11ax80 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	39	6145	71	6305
23	6065	55	6225	87	6385

802.11ax160 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
15	6025	47	6185	79	6345

U-NII-6: 6435-6515MHz

802.11ax20 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
97	6435	105	6475	113	6515		
101	6455	109	6495				

802.11ax40 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
99	6445	107	6485	115	6525 (Straddle)		

802.11ax80 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
103	6465	119	6545 (Straddle)		

802.11ax160 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
111	6505 (Straddle)				

U-NII-7: 6535-6865MHz

802.11ax20 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117	6535	137	6635	157	6735	177	6835
121	6555	141	6655	161	6755	181	6855
125	6575	145	6675	165	6775	185	6875 (Straddle)
129	6595	149	6695	169	6795		
133	6615	153	6715	173	6815		

802.11ax40 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
123	6565	147	6685	171	6805		
131	6605	155	6725	179	6845		
139	6645	163	6765	187	6885 (Straddle)		

802.11ax80 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
135	6625	167	6785		
151	6705	183	6865 (Straddle)		

802.11ax160 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
143	6665	175	6825 (Straddle)		

U-NII-8: 6885-7115MHz

802.11ax20 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
189	6895	201	6955	213	7015	225	7075
193	6915	205	6975	217	7035	229	7095
197	6935	209	6995	221	7055	233	7115

802.11ax40 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
195	6925	211	7005	227	7085		
203	6965	219	7045				

802.11ax80 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
199	6945	215	7025		

802.11ax160 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
207	6985				

4.5 Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11ax20 CH1/ CH45/ CH 93 802.11ax20 CH97/ CH105/ CH113 802.11ax20 CH117/ CH149/ CH181/CH185 (Straddle) 802.11ax20 CH189/ CH209/ CH233
Mode 2	802.11ax40 CH3/ CH 43/ CH 91 802.11ax40 CH99/ CH 107/ CH115 (Straddle) 802.11ax40 CH123/ CH 147/ CH 179/ CH 187 (Straddle) 802.11ax40 CH195/ CH 203/ CH 227

Mode 3	802.11ax80 CH 7/CH 39/ CH 87 802.11ax80 CH 103/CH 119 (Straddle) 802.11ax80 CH 135/CH 151/ CH 167/ CH 183 (Straddle) 802.11ax80 CH 199/CH 215
Mode 4	802.11ax160 CH 15/CH 47/ CH 79 802.11ax160 CH 111 802.11ax160 CH 143/CH 175 (Straddle) 802.11ax160 CH 207
Mode 5	Link Mode

4.6 Test Environment

1. Normal Test Conditions:

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Temperature(°C):	26
Test Voltage(DC):	12V

2. Extreme Test Conditions:

For tests at extreme voltages, measurements shall be made over the extremes of the power source voltage range as declared by the manufacturer.

Test Conditions	LV	NV	HV
Test Voltage (DC)	4.5	12	19

4.7 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

5955MHz-7115MHz 1T1R (Antenna 1) 4x4MIMO antenna							
Test Software Version	QRCT						
Frequency (MHz)	5955	6175	6415	6435	6475	6515	6535
802.11ax20 Mode	8	8	7	7	7	7	7
Frequency (MHz)	6695	6855	6875	6895	6695	7115	
802.11ax20 Mode	7	7	7	7	8	7	
Frequency (MHz)	5965	6165	6405	6445	6485	6525	6565
802.11ax40 Mode	8	8	8	8	8	8	8
Frequency (MHz)	6685	6845	6885	6925	6965	7085	
802.11ax40 Mode	8	7	8	8	8	8	

Frequency (MHz)	5985	6145	6385	6465	6545	6625	6705
802.11ax80 Mode	10	10	10	10	10	10	10
Frequency (MHz)	6785	6865	6945	7025			
802.11ax80 Mode	10	10	10	10			
Frequency (MHz)	6025	6185	6345	6505	6665	6825	6985
802.11ax160 Mode	12	12	12	12	12	10	12

5955MHz-7115MHz 1T1R (Antenna 2) 4x4MIMO antenna							
Test Software Version	QRCT						
Frequency (MHz)	5955	6175	6415	6435	6475	6515	6535
802.11ax20 Mode	8	10	8	8	8	8	8
Frequency (MHz)	6695	6855	6875	6895	6695	7115	
802.11ax20 Mode	7	7	8	8	8	8	
Frequency (MHz)	5965	6165	6405	6445	6485	6525	6565
802.11ax40 Mode	12	12	12	12	12	12	10
Frequency (MHz)	6685	6845	6885	6925	6965	7085	
802.11ax40 Mode	7	9	11	12	13	11	
Frequency (MHz)	5985	6145	6385	6465	6545	6625	6705
802.11ax80 Mode	14	14	16	15	14	11	10
Frequency (MHz)	6785	6865	6945	7025			
802.11ax80 Mode	11	13	16	16			
Frequency (MHz)	6025	6185	6345	6505	6665	6825	6985
802.11ax160 Mode	16	18	18	17	13	14	18

5955MHz-7115MHz 1T1R (Antenna 3) 4x4MIMO antenna							
Test Software Version	QRCT						
Frequency (MHz)	5955	6175	6415	6435	6475	6515	6535
802.11ax20 Mode	9	9	9	8	8	9	9
Frequency (MHz)	6695	6855	6875	6895	6695	7115	
802.11ax20 Mode	9	8	8	9	8	8	
Frequency (MHz)	5965	6165	6405	6445	6485	6525	6565
802.11ax40 Mode	12	12	12	12	12	12	14
Frequency (MHz)	6685	6845	6885	6925	6965	7085	
802.11ax40 Mode	13	10	12	12	12	12	
Frequency (MHz)	5985	6145	6385	6465	6545	6625	6705

802.11ax80 Mode	15	15	15	15	15	17	16
Frequency (MHz)	6785	6865	6945	7025			
802.11ax80 Mode	15	14	14	14			
Frequency (MHz)	6025	6185	6345	6505	6665	6825	6985
802.11ax160 Mode	18	17	17	17	19	16	16

5955MHz-7115MHz 1T1R (Antenna 4) 4x4MIMO antenna							
Test Software Version	QRCT						
Frequency (MHz)	5955	6175	6415	6435	6475	6515	6535
802.11ax20 Mode	11	9	9	9	9	9	9
Frequency (MHz)	6695	6855	6875	6895	6695	7115	
802.11ax20 Mode	10	9	9	10	9	8	
Frequency (MHz)	5965	6165	6405	6445	6485	6525	6565
802.11ax40 Mode	12	12	12	12	12	12	12
Frequency (MHz)	6685	6845	6885	6925	6965	7085	
802.11ax40 Mode	12	12	12	12	12	11	
Frequency (MHz)	5985	6145	6385	6465	6545	6625	6705
802.11ax80 Mode	15	15	15	15	15	15	15
Frequency (MHz)	6785	6865	6945	7025			
802.11ax80 Mode	15	15	15	14			
Frequency (MHz)	6025	6185	6345	6505	6665	6825	6985
802.11ax160 Mode	17	17	17	17	17	17	17

5955MHz-7115MHz MIMO 4x4MIMO antenna							
Test Software Version	QRCT						
Frequency (MHz)	5955	6175	6415	6435	6475	6515	6535
802.11ax20 Mode	-3	-3	-4	-4	-4	-4	-4
Frequency (MHz)	6695	6855	6875	6895	6695	7115	
802.11ax20 Mode	-4	-5	-5	-2	-2	-2	
Frequency (MHz)	5965	6165	6405	6445	6485	6525	6565
802.11ax40 Mode	0	0	-1	-1	-1	-1	-1
Frequency (MHz)	6685	6845	6885	6925	6965	7085	
802.11ax40 Mode	0	-1	0	1	1	1	
Frequency (MHz)	5985	6145	6385	6465	6545	6625	6705
802.11ax80 Mode	3	3	3	3	3	4	4

Frequency (MHz)	6785	6865	6945	7025			
802.11ax80 Mode	4	4	4	4			
Frequency (MHz)	6025	6185	6345	6505	6665	6825	6985
802.11ax160 Mode	6	6	6	6	6	6	6

5955MHz-7115MHz 1T1R (Antenna 1) Quectel Antenna (YF0023CA)							
Test Software Version	QRCT						
Frequency (MHz)	5955	6175	6415	6435	6475	6515	6535
802.11ax20 Mode	8	5	4	4	5	5	5
Frequency (MHz)	6695	6855	6875	6895	6695	7115	
802.11ax20 Mode	4	4	6	6	6	4	
Frequency (MHz)	5965	6165	6405	6445	6485	6525	6565
802.11ax40 Mode	8	7	7	7	7	7	7
Frequency (MHz)	6685	6845	6885	6925	6965	7085	
802.11ax40 Mode	7	7	7	7	7	7	
Frequency (MHz)	5985	6145	6385	6465	6545	6625	6705
802.11ax80 Mode	10	10	10	10	10	8	9
Frequency (MHz)	6785	6865	6945	7025			
802.11ax80 Mode	9	9	10	9			
Frequency (MHz)	6025	6185	6345	6505	6665	6825	6985
802.11ax160 Mode	15	13	11	11	11	11	14

5955MHz-7115MHz 1T1R (Antenna 2) Quectel Antenna (YF0023CA)							
Test Software Version	QRCT						
Frequency (MHz)	5955	6175	6415	6435	6475	6515	6535
802.11ax20 Mode	5	4	3	3	3	3	4
Frequency (MHz)	6695	6855	6875	6895	6695	7115	
802.11ax20 Mode	3	3	5	4	4	4	
Frequency (MHz)	5965	6165	6405	6445	6485	6525	6565
802.11ax40 Mode	8	5	5	5	7	7	7
Frequency (MHz)	6685	6845	6885	6925	6965	7085	
802.11ax40 Mode	7	8	8	8	8	8	

Frequency (MHz)	5985	6145	6385	6465	6545	6625	6705
802.11ax80 Mode	10	10	10	9	9	8	8
Frequency (MHz)	6785	6865	6945	7025			
802.11ax80 Mode	9	9	10	10			
Frequency (MHz)	6025	6185	6345	6505	6665	6825	6985
802.11ax160 Mode	13	13	13	12	10	11	14

5955MHz-7115MHz 1T1R (Antenna 3) Quectel Antenna (YF0023CA)							
Test Software Version	QRCT						
Frequency (MHz)	5955	6175	6415	6435	6475	6515	6535
802.11ax20 Mode	9	6	4	4	4	4	5
Frequency (MHz)	6695	6855	6875	6895	6695	7115	
802.11ax20 Mode	4	5	5	5	6	6	
Frequency (MHz)	5965	6165	6405	6445	6485	6525	6565
802.11ax40 Mode	12	10	7	7	8	8	8
Frequency (MHz)	6685	6845	6885	6925	6965	7085	
802.11ax40 Mode	8	10	10	10	12	8	
Frequency (MHz)	5985	6145	6385	6465	6545	6625	6705
802.11ax80 Mode	15	13	10	10	10	10	10
Frequency (MHz)	6785	6865	6945	7025			
802.11ax80 Mode	10	10	10	10			
Frequency (MHz)	6025	6185	6345	6505	6665	6825	6985
802.11ax160 Mode	18	15	12	12	12	12	12

5955MHz-7115MHz 1T1R (Antenna 4) Quectel Antenna (YF0023CA)							
Test Software Version	QRCT						
Frequency (MHz)	5955	6175	6415	6435	6475	6515	6535
802.11ax20 Mode	8	4	5	4	5	3	3
Frequency (MHz)	6695	6855	6875	6895	6695	7115	
802.11ax20 Mode	3	5	5	6	6	5	
Frequency (MHz)	5965	6165	6405	6445	6485	6525	6565
802.11ax40 Mode	12	6	7	7	7	7	7
Frequency (MHz)	6685	6845	6885	6925	6965	7085	
802.11ax40 Mode	6	8	8	9	9	7	
Frequency (MHz)	5985	6145	6385	6465	6545	6625	6705

802.11ax80 Mode	15	11	11	10	9	10	9
Frequency (MHz)	6785	6865	6945	7025			
802.11ax80 Mode	10	10	15	14			
Frequency (MHz)	6025	6185	6345	6505	6665	6825	6985
802.11ax160 Mode	15	13	12	12	11	11	14

5955MHz-7115MHz MIMO Quectel Antenna (YF0023CA)							
Test Software Version	QRCT						
Frequency (MHz)	5955	6175	6415	6435	6475	6515	6535
802.11ax20 Mode	-12	-12	-12	-13	-13	-13	-12
Frequency (MHz)	6695	6855	6875	6895	6695	7115	
802.11ax20 Mode	-12	-12	-12	-12	-12	-12	
Frequency (MHz)	5965	6165	6405	6445	6485	6525	6565
802.11ax40 Mode	-12	-10	-10	-10	-10	-10	-10
Frequency (MHz)	6685	6845	6885	6925	6965	7085	
802.11ax40 Mode	-4	-4	-4	-4	-4	-5	
Frequency (MHz)	5985	6145	6385	6465	6545	6625	6705
802.11ax80 Mode	-5	-5	-5	-5	-5	-5	-5
Frequency (MHz)	6785	6865	6945	7025			
802.11ax80 Mode	-5	-5	-5	-5			
Frequency (MHz)	6025	6185	6345	6505	6665	6825	6985
802.11ax160 Mode	-3	-3	-3	-3	-3	-3	0

4.8 Antenna Requirements

4x4MIMO antenna:

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For power measurements on IEEE 802.11 devices,

Directional gain = GANT + Array Gain, where Array Gain is as follows:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

GANT is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation follows F)2)f)ii) of KDB 662911 D01 v02r01.

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;

G_k is the gain in dBi of the k th antenna.

As minimum NSS=1 is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2 \dots G_N$ denotes single antenna gain.

If a device has four antenna, GANT1= 3.17dBi; GANT2=4.50dBi; GANT3=2.78dBi; GANT4=3.46dBi

Directional gain of power measurement = max (3.17, 4.50, 2.78, 3.46) + 0 = 4.50 dBi

Directional gain of PSD measurement = $10 \cdot \log [(10^{3.17/20} + 10^{4.50/20} + 10^{2.78/20} + 10^{3.46/20})^2 / 4] = 9.52$ dBi


	Antenna 1 (dBi)	Antenna 2 (dBi)	Antenna 3 (dBi)	Antenna 4 (dBi)	Directional gain for Power (dBi)	Directional gain for PSD (dBi)
5955-7115MHz	3.17	4.50	2.78	3.46	4.50	9.52

Quectel Antenna (YF0023CA) :

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
1	N/A	N/A	Internal antenna	6.62	N/A
2	N/A	N/A	Internal antenna	6.62	N/A
3	N/A	N/A	Internal antenna	6.62	N/A
4	N/A	N/A	Internal antenna	6.62	N/A

EUT has 4 Internal antenna with Max gain GANT 6.62dBi on every antenna, CDD device with one spatial streams, also can operat with one spatial streams according to KDB662911 D01 v02r01,

Directional gain = GANT + 10 log (NANT) dBi=6.62+10log (4) =12.64dBi

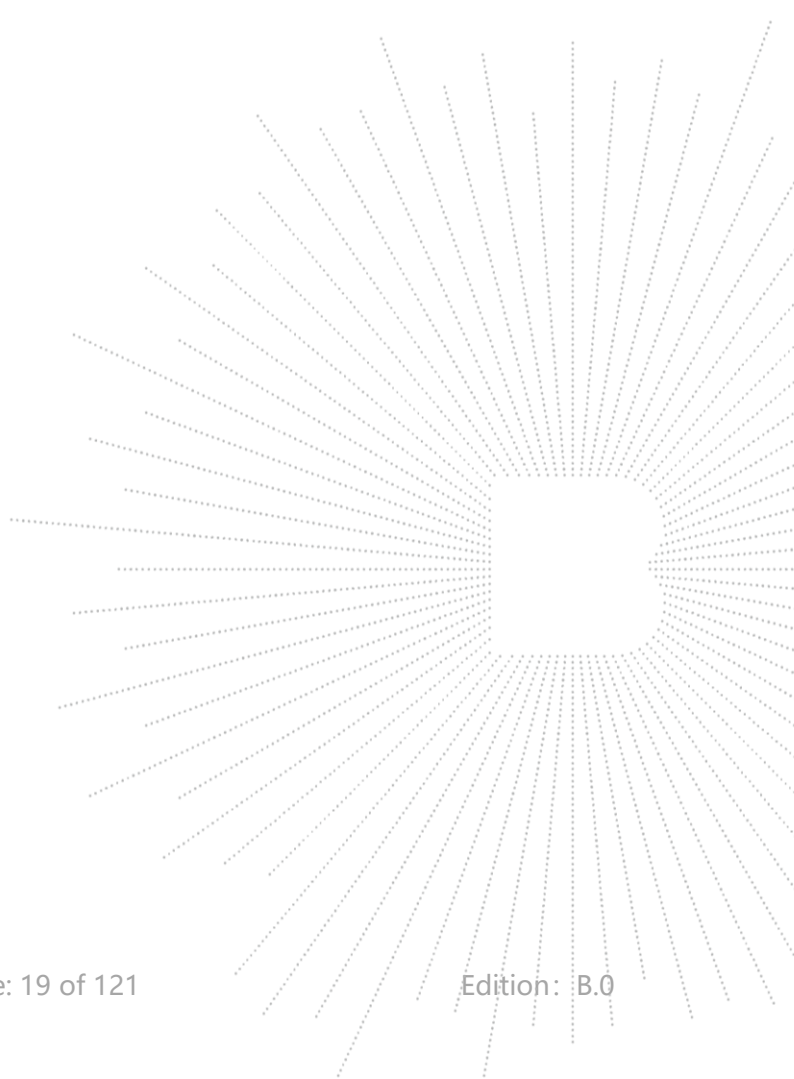

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China.
The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB DC-6GHz	1650	May 16, 2024	May 15, 2025

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	942	May 29, 2023	May 28, 2024
Loop Antenna	Schwarzbeck	FMZB1519B	00014	May 31, 2023	May 30, 2024
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 31, 2023	May 30, 2024
Preamplifier	MITEQ	TTA1840-35-H G	2034381	May 16, 2024	May 15, 2025
Horn antenna	Schwarzbeck	BBHA9170	00822	May 31, 2023	May 30, 2024
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\
Spectrum Analyzer	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Signal Generator	Keysight	N5182B	MY56200519	May 16, 2024	May 15, 2025
Signal Generator	Keysight	83711B	US37100131	Sept. 05, 2023	Sept. 04, 2024
Communication test set	R&S	CMW500	126173	Nov. 13. 2023	Nov. 12, 2024

D.C. Power Supply	LongWei	TPR-6405D	\	Nov. 13. 2023	Nov. 12, 2024
Programmable constant temperature and humidity test chamber	DGBELL	BTKS5-150C	\	Jul. 01, 2024	Jun. 30, 2025
Radio frequency control box	MAIWEI	MW100-RFCB	\	\	\
Software	MAIWEI	MTS 8310	\	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

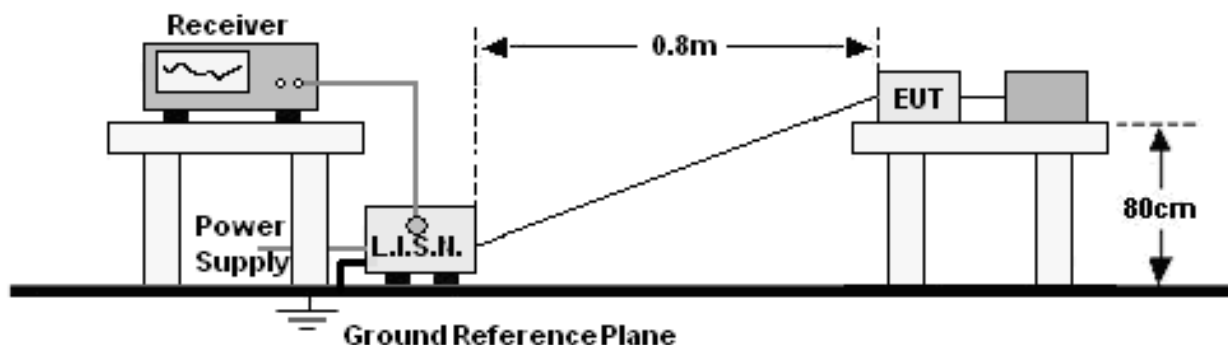

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

N/A (This test is not applicable)


NOTE: This report, based on the original report, only applies to antenna test items related to the above tests, and other items do not need to be tested. For other data, please refer to (BCTC2311144017-2E) or check the original FCC certificate.

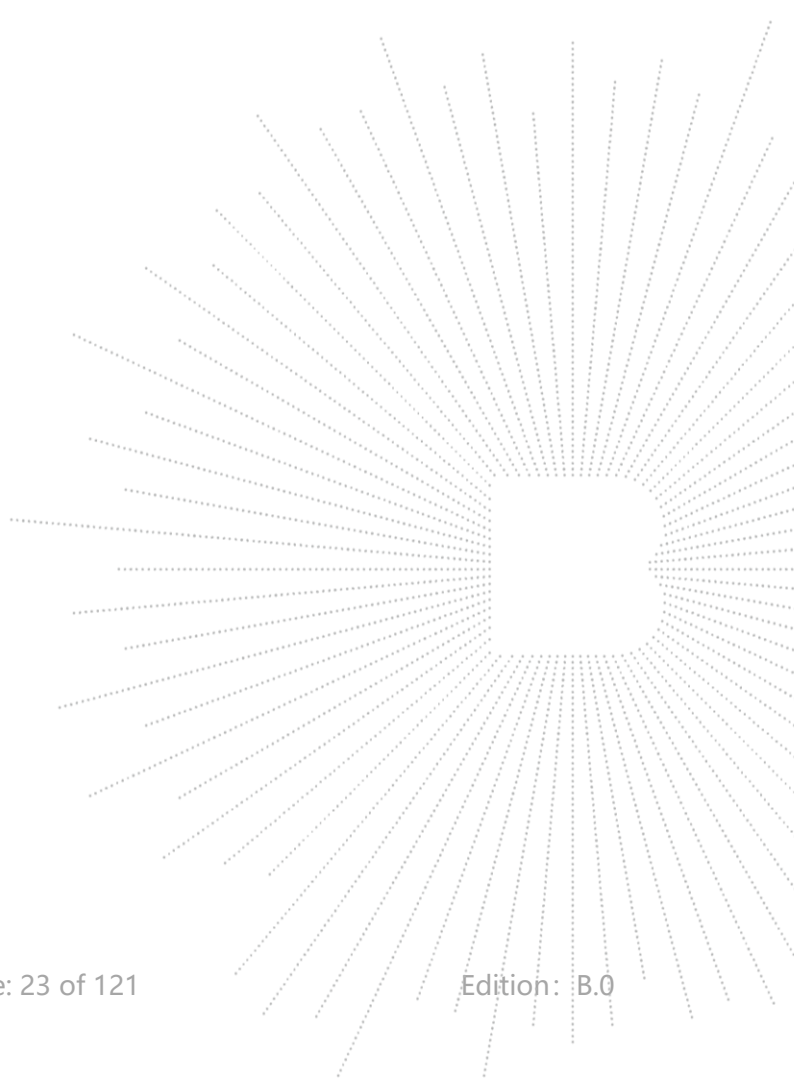


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

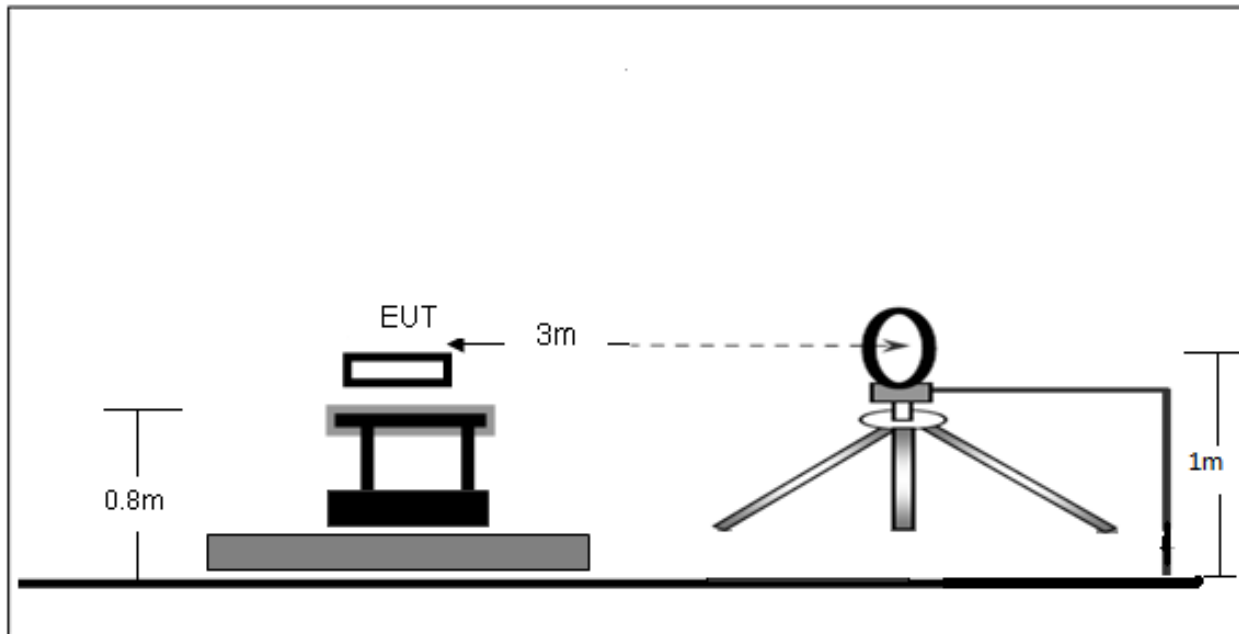

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

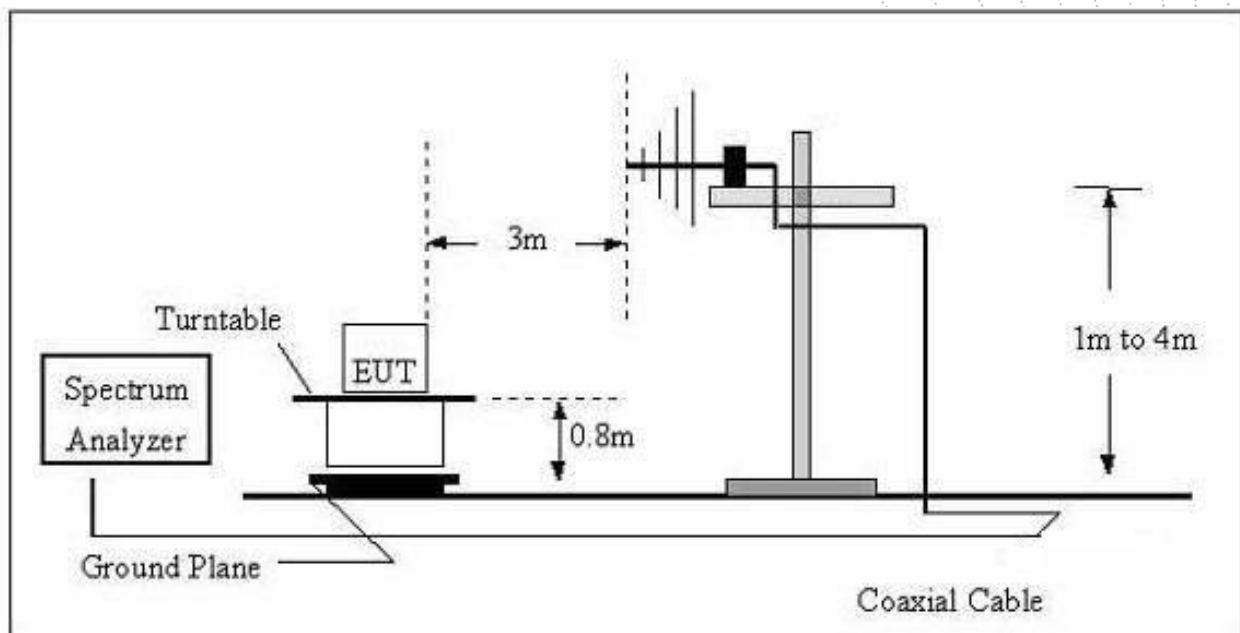

(C) Radiated Emission Test-Up Frequency Above 1GHz

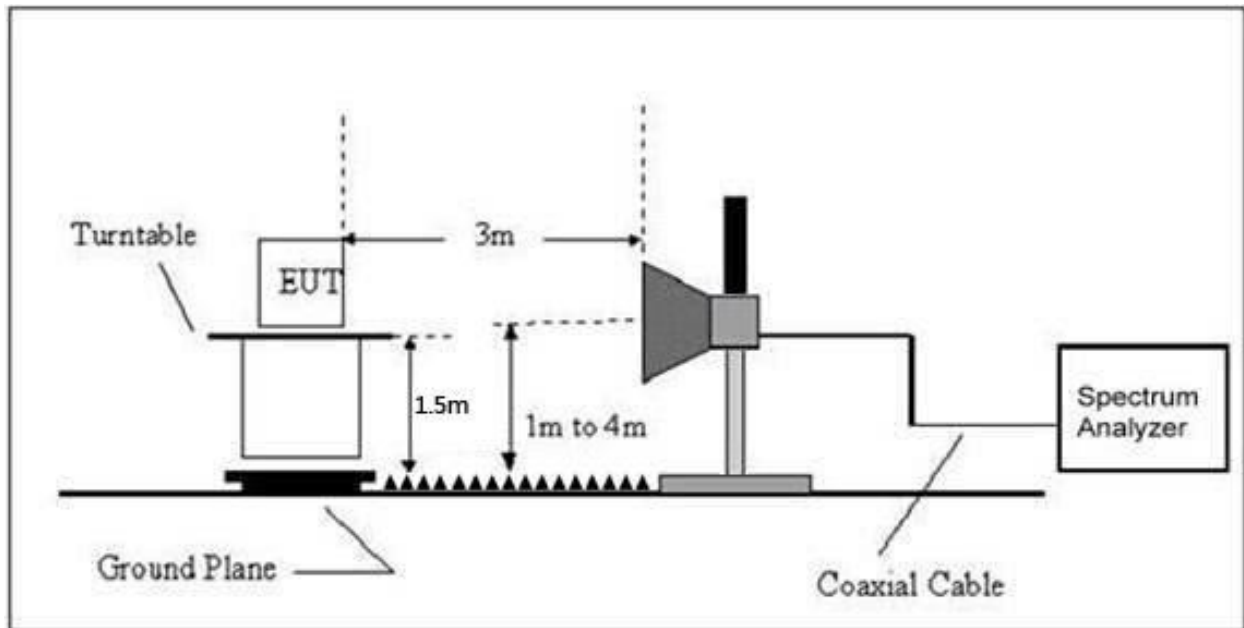

7.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency	Field Strength	Distance	Field Strength Limit at 3m Distance	
(MHz)	uV/m	(m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(kHz)$	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(kHz)$	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

For transmitters operating within the 5.925–7.125 GHz band: Any emissions outside of the 5.925–7.125 GHz band must not exceed an e.i.r.p. of –27 dBm/MHz.

According 987594 D02 U-NII 6GHz EMC Measurement section G:

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205.

It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz

Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26℃	Relative Humidity:	24%
Pressure:	101 kPa	Test Voltage:	DC 12V from DC power
Test Mode:	Mode 5	Polarization:	--


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

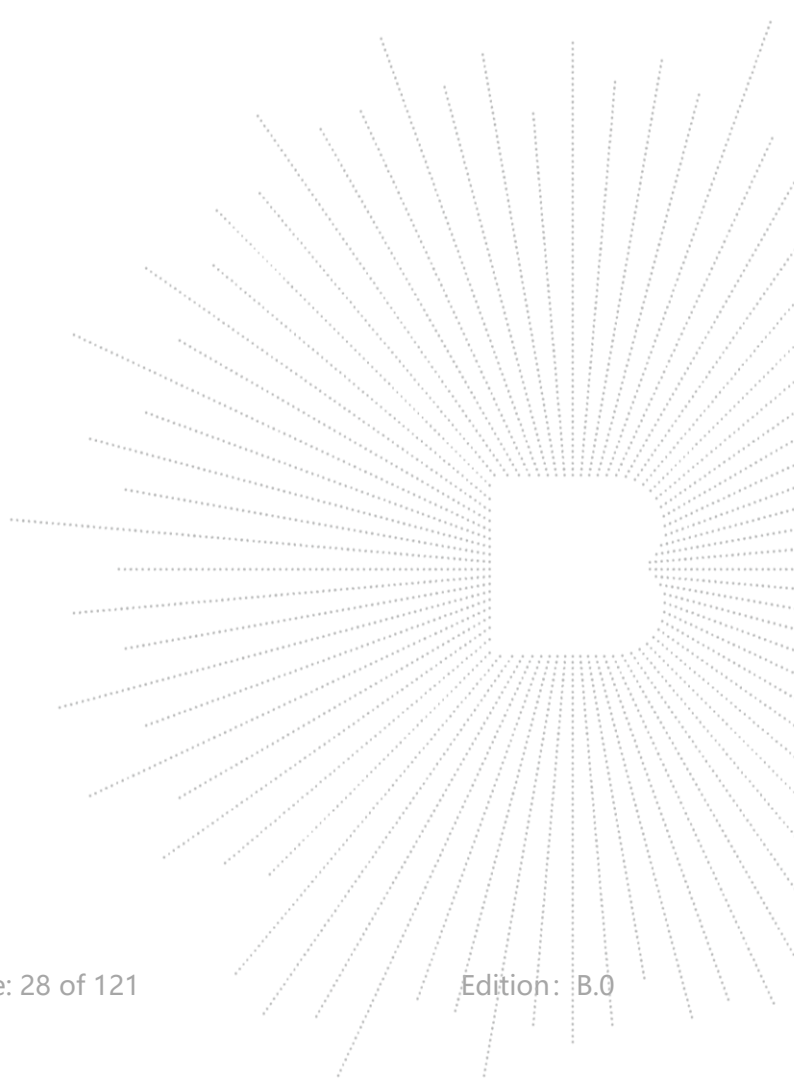

Between 30MHz – 1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 12V from POE
Test Mode :	Mode 5	Polarization :	Vertical

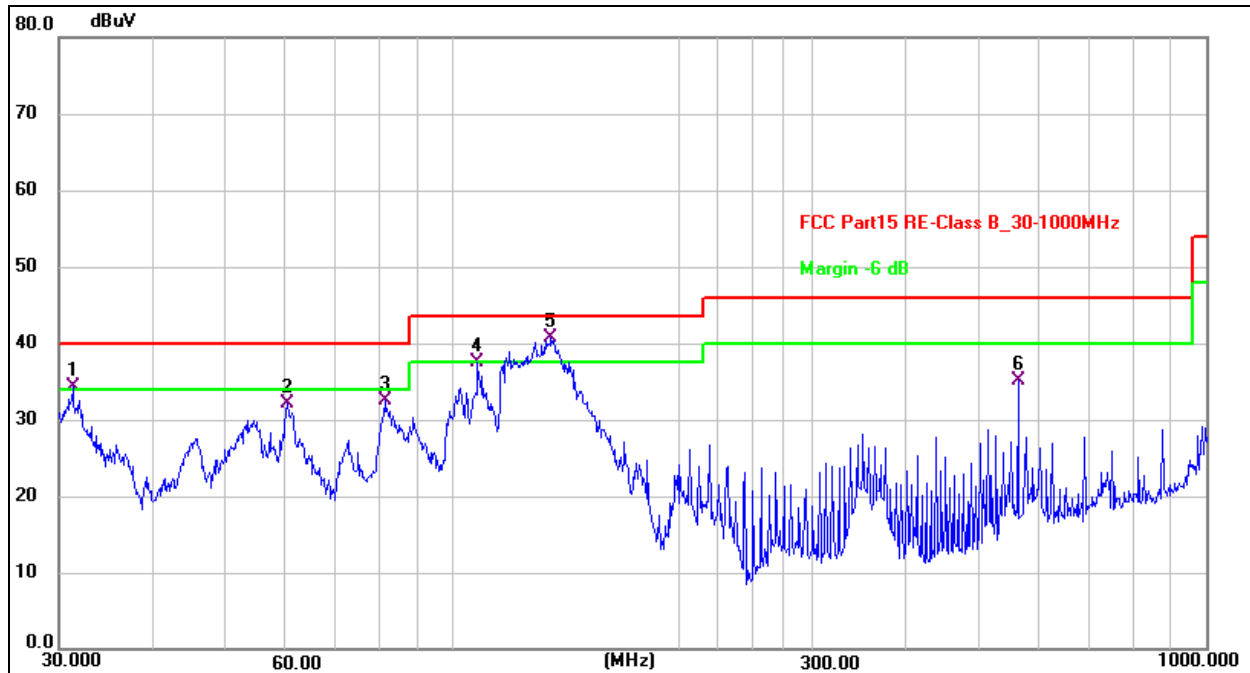


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over= Measurement-Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 !	31.2893	51.75	-17.50	34.25	40.00	-5.75	QP
2	60.2801	49.95	-17.91	32.04	40.00	-7.96	QP
3	81.2117	53.07	-20.59	32.48	40.00	-7.52	QP
4	107.8877	57.70	-20.29	37.41	43.50	-6.09	QP
5 *	135.0319	58.90	-18.15	40.75	43.50	-2.75	QP
6	562.6623	44.90	-9.85	35.05	46.00	-10.95	QP

Temperature:	24 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	DC 12V from POE
Test Mode:	Mode 5	Polarization :	Horizontal

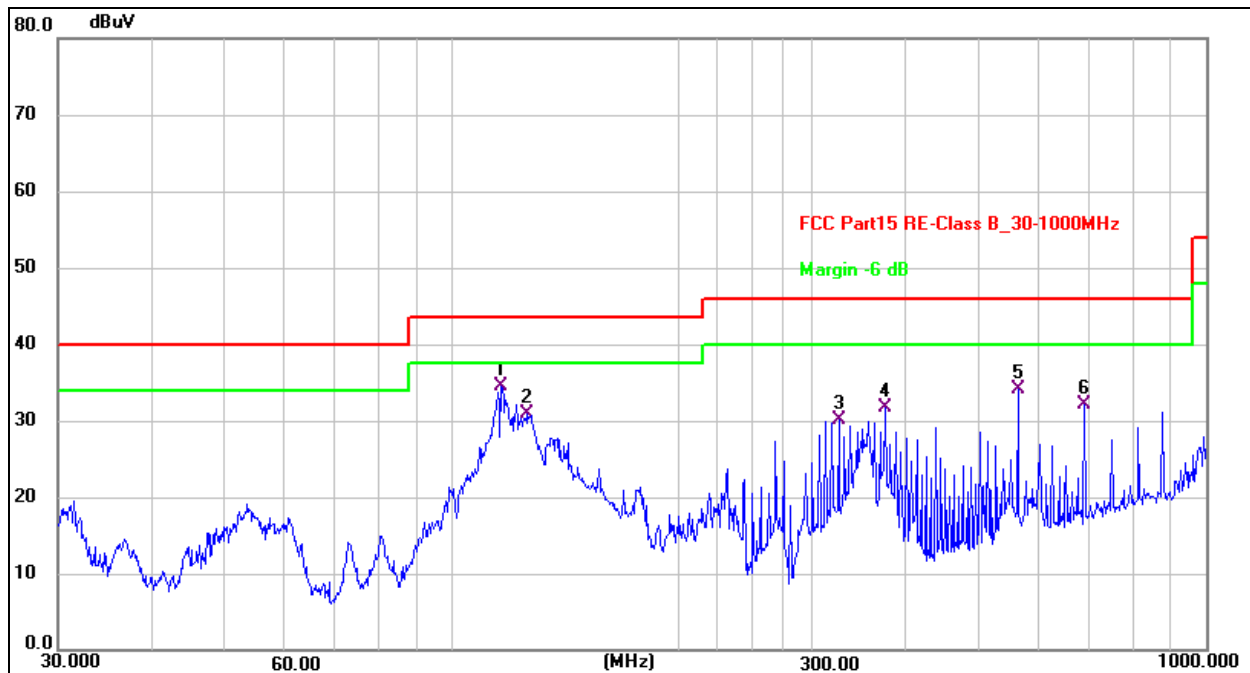

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	116.1321	54.09	-19.62	34.47	43.50	-9.03	QP
2	125.8863	49.70	-18.87	30.83	43.50	-12.67	QP
3	325.5958	46.02	-16.01	30.01	46.00	-15.99	QP
4	375.9385	46.37	-14.73	31.64	46.00	-14.36	QP
5	562.6624	44.03	-9.85	34.18	46.00	-11.82	QP
6	689.5644	39.19	-7.06	32.13	46.00	-13.87	QP

Between 1GHz – 40GHz

4x4MIMO antenna U-NII-5: 5955-6415MHz

Test Mode :	TX(U-NII-5: 5955-6415MHz) - 802.11ax20
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5955 MHz)-Above 1G							
Vertical	4683.623	74.70	-20.23	54.47	74	-19.53	Pk
Vertical	4683.623	59.16	-20.23	38.93	54	-15.07	AV
Vertical	11910.183	64.60	-8.63	55.97	68.2	-12.23	Pk
Vertical	11910.183	49.12	-8.63	40.49	54	-13.51	AV
Vertical	17865.102	59.63	-1.57	58.06	68.2	-10.14	Pk
Vertical	17865.102	44.62	-1.57	43.05	54	-10.95	AV
Horizontal	4679.030	70.63	-20.73	49.90	74	-24.10	Pk
Horizontal	4679.030	59.05	-20.73	38.32	54	-15.68	AV
Horizontal	11910.114	60.60	-8.63	51.97	68.2	-16.23	Pk
Horizontal	11910.114	49.43	-8.63	40.80	54	-13.20	AV
Horizontal	17865.111	55.81	-1.57	54.24	68.2	-13.96	Pk
Horizontal	17865.111	44.23	-1.57	42.66	54	-11.34	AV
middle Channel (6175 MHz)-Above 1G							
Vertical	4592.034	74.52	-20.42	54.10	74	-19.90	Pk
Vertical	4592.034	59.82	-20.42	39.40	54	-14.60	AV
Vertical	12350.027	60.10	-9.16	50.94	68.2	-17.26	Pk
Vertical	12350.027	49.03	-9.16	39.87	54	-14.13	AV
Vertical	18525.041	58.00	6.65	64.65	68.2	-3.55	Pk
Vertical	18525.041	44.15	6.65	50.80	54	-3.20	AV
Horizontal	4592.046	70.88	-20.42	50.47	74	-23.53	Pk
Horizontal	4592.046	59.70	-20.42	39.28	54	-14.72	AV
Horizontal	12350.050	61.63	-9.16	52.47	68.2	-15.73	Pk
Horizontal	12350.050	49.18	-9.16	40.02	54	-13.98	AV
Horizontal	18525.188	58.90	6.65	65.55	68.2	-2.65	Pk
Horizontal	18525.188	44.69	6.65	51.34	54	-2.66	AV
High Channel (6415 MHz)-Above 1G							
Vertical	6039.054	71.33	-18.93	52.40	68.2	-15.80	Pk
Vertical	6039.054	59.39	-18.93	40.45	54	-13.55	AV
Vertical	12830.118	63.68	-8.92	54.76	74	-19.24	Pk
Vertical	12830.118	49.36	-8.92	40.44	54	-13.56	AV
Vertical	19245.147	59.92	7.78	67.70	68.2	-0.50	Pk
Vertical	19245.147	44.19	7.78	51.97	54	-2.03	AV
Horizontal	6039.062	72.16	-18.93	53.23	68.2	-14.97	Pk
Horizontal	6039.062	59.57	-18.93	40.64	54	-13.36	AV
Horizontal	12830.134	63.25	-8.92	54.33	74	-19.67	Pk
Horizontal	12830.134	49.87	-8.92	40.95	54	-13.05	AV
Horizontal	19245.092	57.92	7.78	65.70	68.2	-2.50	Pk
Horizontal	19245.092	44.10	7.78	51.88	54	-2.12	AV

Note: The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-5: 5955-6415MHz) - 802.11ax40
-------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5965 MHz)-Above 1G							
Vertical	4679.108	70.77	-20.24	50.53	74	-23.47	Pk
Vertical	4679.108	59.32	-20.24	39.08	54	-14.92	AV
Vertical	11930.196	63.42	-8.51	54.91	74	-19.09	Pk
Vertical	11930.196	49.30	-8.51	40.79	54	-13.21	AV
Vertical	17895.052	56.46	-1.43	55.03	68.2	-13.17	Pk
Vertical	17895.052	44.76	-1.43	43.33	54	-10.67	AV
Horizontal	4679.146	73.24	-20.24	53.00	74	-21.00	Pk
Horizontal	4679.146	59.68	-20.24	39.44	54	-14.56	AV
Horizontal	11930.145	62.87	-8.51	54.36	74	-19.64	Pk
Horizontal	11930.145	49.06	-8.51	40.55	54	-13.45	AV
Horizontal	17895.008	55.65	-1.43	54.22	68.2	-13.98	Pk
Horizontal	17895.008	44.10	-1.43	42.67	54	-11.33	AV
middle Channel (6165 MHz)-Above 1G							
Vertical	6039.123	73.08	-18.93	54.14	68.2	-14.06	Pk
Vertical	6039.123	59.43	-18.93	40.50	54	-13.50	AV
Vertical	12330.103	60.24	-9.16	51.08	74	-22.92	Pk
Vertical	12330.103	49.86	-9.16	40.70	54	-13.30	AV
Vertical	18495.014	56.14	6.65	62.79	68.2	-5.41	Pk
Vertical	18495.014	44.71	6.65	51.36	54	-2.64	AV
Horizontal	6039.045	72.43	-18.93	53.50	68.2	-14.70	Pk
Horizontal	6039.045	59.87	-18.93	40.94	54	-13.06	AV
Horizontal	12330.079	64.88	-9.16	55.72	74	-18.28	Pk
Horizontal	12330.079	49.77	-9.16	40.61	54	-13.39	AV
Horizontal	18495.059	59.50	6.65	66.15	68.2	-2.05	Pk
Horizontal	18495.059	44.77	6.65	51.42	54	-2.58	AV
High Channel (6405 MHz)-Above 1G							
Vertical	6039.183	71.63	-18.93	52.70	68.2	-15.50	Pk
Vertical	6039.183	59.79	-18.93	40.86	54	-13.14	AV
Vertical	12810.057	61.32	-8.92	52.40	74	-21.60	Pk
Vertical	12810.057	49.35	-8.92	40.43	54	-13.57	AV
Vertical	19215.076	59.03	7.78	66.81	68.2	-1.39	Pk
Vertical	19215.076	44.83	7.78	52.61	54	-1.39	AV
Horizontal	6039.011	74.46	-18.93	55.53	68.2	-12.67	Pk
Horizontal	6039.011	59.11	-18.93	40.18	54	-13.82	AV
Horizontal	12810.000	61.61	-8.92	52.69	74	-21.31	Pk
Horizontal	12810.000	49.05	-8.92	40.13	54	-13.87	AV
Horizontal	19215.102	56.31	7.78	64.09	68.2	-4.11	Pk
Horizontal	19215.102	44.50	7.78	52.28	54	-1.72	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-5: 5955-6415MHz)- 802.11ax80
-------------	---------------------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5985 MHz)-Above 1G							
Vertical	4679.125	70.29	-20.24	50.05	74	-23.95	Pk
Vertical	4679.125	59.85	-20.24	39.61	54	-14.39	AV
Vertical	11970.082	64.09	-8.51	55.58	74	-18.42	Pk
Vertical	11970.082	49.56	-8.51	41.05	54	-12.95	AV
Vertical	17955.087	58.14	-1.41	56.73	68.2	-11.47	Pk
Vertical	17955.087	44.30	-1.41	42.89	54	-11.11	AV
Horizontal	4679.178	72.47	-20.24	52.22	74	-21.78	Pk
Horizontal	4679.178	59.98	-20.24	39.73	54	-14.27	AV
Horizontal	11970.156	63.93	-8.51	55.42	74	-18.58	Pk
Horizontal	11970.156	49.90	-8.51	41.39	54	-12.61	AV
Horizontal	17955.032	55.07	-1.41	53.66	68.2	-14.54	Pk
Horizontal	17955.032	44.58	-1.41	43.17	54	-10.83	AV
Middle Channel (6145 MHz)-Above 1G							
Vertical	6039.036	71.46	-18.93	52.53	68.2	-15.67	Pk
Vertical	6039.036	59.34	-18.93	40.41	54	-13.59	AV
Vertical	12290.071	60.72	-9.21	51.51	74	-22.49	Pk
Vertical	12290.071	49.66	-9.21	40.45	54	-13.55	AV
Vertical	18435.153	55.75	6.57	62.32	68.2	-5.88	Pk
Vertical	18435.153	44.94	6.57	51.51	54	-2.49	AV
Horizontal	6039.015	73.60	-18.93	54.67	68.2	-13.53	Pk
Horizontal	6039.015	59.21	-18.93	40.27	54	-13.73	AV
Horizontal	12290.029	61.38	-9.21	52.17	74	-21.83	Pk
Horizontal	12290.029	49.98	-9.21	40.77	54	-13.23	AV
Horizontal	18435.149	56.97	6.57	63.54	68.2	-4.66	Pk
Horizontal	18435.149	44.36	6.57	50.93	54	-3.07	AV
High Channel (6385 MHz)-Above 1G							
Vertical	6039.049	73.82	-18.93	54.89	68.2	-13.31	Pk
Vertical	6039.049	59.84	-18.93	40.91	54	-13.09	AV
Vertical	12770.020	64.91	-8.97	55.94	74	-18.06	Pk
Vertical	12770.020	49.12	-8.97	40.15	54	-13.85	AV
Vertical	19155.027	56.81	7.83	64.64	68.2	-3.56	Pk
Vertical	19155.027	44.40	7.83	52.23	54	-1.77	AV
Horizontal	6039.073	71.72	-18.93	52.78	68.2	-15.42	Pk
Horizontal	6039.073	59.79	-18.93	40.86	54	-13.14	AV
Horizontal	12770.008	61.36	-8.97	52.39	74	-21.61	Pk
Horizontal	12770.008	49.48	-8.97	40.51	54	-13.49	AV
Horizontal	19155.035	57.23	7.83	65.06	68.2	-3.14	Pk
Horizontal	19155.035	44.90	7.83	52.73	54	-1.27	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode: TX(U-NII-5: 5955-6415MHz) - 802.11ax160

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6025 MHz)-Above 1G							
Vertical	4679.006	74.87	-20.24	54.63	74	-19.37	Pk
Vertical	4679.006	59.48	-20.24	39.23	54	-14.77	AV
Vertical	12050.054	63.87	-8.45	55.42	74	-18.58	Pk
Vertical	12050.054	49.94	-8.45	41.49	54	-12.51	AV
Vertical	18075.179	55.58	-1.31	54.27	68.2	-13.93	Pk
Vertical	18075.179	44.40	-1.31	43.09	54	-10.91	AV
Horizontal	4679.019	72.37	-20.24	52.13	74	-21.87	Pk
Horizontal	4679.019	59.71	-20.24	39.47	54	-14.53	AV
Horizontal	12050.001	64.39	-8.45	55.94	74	-18.06	Pk
Horizontal	12050.001	49.59	-8.45	41.14	54	-12.86	AV
Horizontal	18075.118	59.86	-1.31	58.55	68.2	-9.65	Pk
Horizontal	18075.118	44.77	-1.31	43.46	54	-10.54	AV
middle Channel (6185 MHz)-Above 1G							
Vertical	6039.100	72.14	-18.93	53.21	68.2	-14.99	Pk
Vertical	6039.100	59.06	-18.93	40.13	54	-13.87	AV
Vertical	12370.127	60.57	-9.03	51.54	74	-22.46	Pk
Vertical	12370.127	49.23	-9.03	40.20	54	-13.80	AV
Vertical	18555.107	58.08	6.68	64.76	68.2	-3.44	Pk
Vertical	18555.107	44.49	6.68	51.17	54	-2.83	AV
Horizontal	6039.073	71.34	-18.93	52.40	68.2	-15.80	Pk
Horizontal	6039.073	59.01	-18.93	40.08	54	-13.92	AV
Horizontal	12370.028	62.78	-9.03	53.75	74	-20.25	Pk
Horizontal	12370.028	49.43	-9.03	40.40	54	-13.60	AV
Horizontal	18555.056	55.97	6.68	62.65	68.2	-5.55	Pk
Horizontal	18555.056	44.76	6.68	51.44	54	-2.56	AV
High Channel (6345 MHz)-Above 1G							
Vertical	6039.143	72.59	-18.93	53.66	68.2	-14.54	Pk
Vertical	6039.143	59.58	-18.93	40.64	54	-13.36	AV
Vertical	12690.084	64.80	-8.97	55.83	74	-18.17	Pk
Vertical	12690.084	49.36	-8.97	40.39	54	-13.61	AV
Vertical	19035.164	59.86	7.68	67.54	68.2	-0.66	Pk
Vertical	19035.164	44.21	7.68	51.89	54	-2.11	AV
Horizontal	6039.117	74.64	-18.93	55.71	68.2	-12.49	Pk
Horizontal	6039.117	59.37	-18.93	40.44	54	-13.56	AV
Horizontal	12690.111	60.58	-8.97	51.61	74	-22.39	Pk
Horizontal	12690.111	49.83	-8.97	40.86	54	-13.14	AV
Horizontal	19035.193	58.69	7.68	66.37	68.2	-1.83	Pk
Horizontal	19035.193	45.00	7.68	52.68	54	-1.32	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

4x4MIMO antenna U-NII-6: 6435-6515MHz

Test Mode :	TX(U-NII-6: 6435-6515MHz) - 802.11ax20
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6435 MHz)-Above 1G							
Vertical	4682.698	73.45	-20.23	53.21	74	-20.79	Pk
Vertical	4682.698	59.33	-20.23	39.10	54	-14.90	AV
Vertical	12870.013	62.97	-7.95	55.02	68.2	-13.18	Pk
Vertical	12870.013	49.08	-7.95	41.13	54	-12.87	AV
Vertical	19305.125	55.12	7.76	62.88	68.2	-5.32	Pk
Vertical	19305.125	44.86	7.76	52.62	54	-1.38	AV
Horizontal	4679.131	71.15	-20.73	50.42	74	-23.58	Pk
Horizontal	4679.131	59.73	-20.73	39.00	54	-15.00	AV
Horizontal	12870.183	61.80	-7.95	53.85	68.2	-14.35	Pk
Horizontal	12870.183	49.47	-7.95	41.52	54	-12.48	AV
Horizontal	19305.131	55.19	7.76	62.95	68.2	-5.25	Pk
Horizontal	19305.131	44.67	7.76	52.43	54	-1.57	AV
middle Channel (6475 MHz)-Above 1G							
Vertical	4592.092	74.41	-20.42	53.99	74	-20.01	Pk
Vertical	4592.092	59.69	-20.42	39.28	54	-14.72	AV
Vertical	12950.144	63.39	-7.89	55.50	68.2	-12.70	Pk
Vertical	12950.144	49.19	-7.89	41.30	54	-12.70	AV
Vertical	19425.049	55.24	7.78	63.02	68.2	-5.18	Pk
Vertical	19425.049	44.34	7.78	52.12	54	-1.88	AV
Horizontal	4592.019	73.77	-20.42	53.35	74	-20.65	Pk
Horizontal	4592.019	59.03	-20.42	38.61	54	-15.39	AV
Horizontal	12950.107	61.15	-7.89	53.26	68.2	-14.94	Pk
Horizontal	12950.107	49.30	-7.89	41.41	54	-12.59	AV
Horizontal	19425.155	55.77	7.78	63.55	68.2	-4.65	Pk
Horizontal	19425.155	44.75	7.78	52.53	54	-1.47	AV
High Channel (6515 MHz)-Above 1G							
Vertical	6039.192	70.09	-18.93	51.16	68.2	-17.04	Pk
Vertical	6039.192	59.93	-18.93	41.00	54	-13.00	AV
Vertical	13030.113	60.33	-7.80	52.53	74	-21.47	Pk
Vertical	13030.113	49.90	-7.80	42.10	54	-11.90	AV
Vertical	19545.195	55.91	7.78	63.69	68.2	-4.51	Pk
Vertical	19545.195	44.47	7.78	52.25	54	-1.75	AV
Horizontal	6039.102	70.86	-18.93	51.92	68.2	-16.28	Pk
Horizontal	6039.102	59.34	-18.93	40.40	54	-13.60	AV
Horizontal	13030.148	60.72	-7.80	52.92	74	-21.08	Pk
Horizontal	13030.148	49.85	-7.80	42.05	54	-11.95	AV
Horizontal	19545.186	57.69	7.78	65.47	68.2	-2.73	Pk
Horizontal	19545.186	44.93	7.78	52.71	54	-1.29	AV

Note: The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-6: 6435-6515MHz) - 802.11ax40
-------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6445 MHz)-Above 1G							
Vertical	4679.071	71.57	-20.24	51.33	74	-22.67	Pk
Vertical	4679.071	59.31	-20.24	39.07	54	-14.93	AV
Vertical	12890.146	62.33	-7.95	54.38	74	-19.62	Pk
Vertical	12890.146	49.70	-7.95	41.75	54	-12.25	AV
Vertical	19335.051	58.76	7.76	66.52	68.2	-1.68	Pk
Vertical	19335.051	44.64	7.76	52.40	54	-1.60	AV
Horizontal	4679.096	74.36	-20.24	54.12	74	-19.88	Pk
Horizontal	4679.096	59.98	-20.24	39.74	54	-14.26	AV
Horizontal	12890.046	61.37	-7.95	53.42	74	-20.58	Pk
Horizontal	12890.046	49.50	-7.95	41.55	54	-12.45	AV
Horizontal	19335.178	56.66	7.76	64.42	68.2	-3.78	Pk
Horizontal	19335.178	44.31	7.76	52.07	54	-1.93	AV
middle Channel (6485 MHz)-Above 1G							
Vertical	6039.022	70.22	-18.93	51.28	68.2	-16.92	Pk
Vertical	6039.022	59.03	-18.93	40.09	54	-13.91	AV
Vertical	12970.089	60.71	-7.85	52.86	74	-21.14	Pk
Vertical	12970.089	49.56	-7.85	41.71	54	-12.29	AV
Vertical	19455.152	56.77	7.78	64.55	68.2	-3.65	Pk
Vertical	19455.152	44.62	7.78	52.40	54	-1.60	AV
Horizontal	6039.130	73.64	-18.93	54.71	68.2	-13.49	Pk
Horizontal	6039.130	59.97	-18.93	41.04	54	-12.96	AV
Horizontal	12970.190	60.10	-7.85	52.25	74	-21.75	Pk
Horizontal	12970.190	49.89	-7.85	42.04	54	-11.96	AV
Horizontal	19455.055	56.96	7.78	64.74	68.2	-3.46	Pk
Horizontal	19455.055	44.68	7.78	52.46	54	-1.54	AV
High Channel (6525 MHz)-Above 1G							
Vertical	6039.033	72.21	-18.93	53.28	68.2	-14.92	Pk
Vertical	6039.033	59.04	-18.93	40.10	54	-13.90	AV
Vertical	13050.014	60.41	-7.8	52.61	74	-21.39	Pk
Vertical	13050.014	49.08	-7.8	41.28	54	-12.72	AV
Vertical	19575.120	56.54	7.78	64.32	68.2	-3.88	Pk
Vertical	19575.120	44.19	7.78	51.97	54	-2.03	AV
Horizontal	6039.063	73.09	-18.93	54.16	68.2	-14.04	Pk
Horizontal	6039.063	59.57	-18.93	40.64	54	-13.36	AV
Horizontal	13050.037	61.90	-7.8	54.10	74	-19.90	Pk
Horizontal	13050.037	49.06	-7.8	41.26	54	-12.74	AV
Horizontal	19575.088	57.10	7.78	64.88	68.2	-3.32	Pk
Horizontal	19575.088	44.81	7.78	52.59	54	-1.41	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-6: 6435-6515MHz)- 802.11ax80
-------------	---------------------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6465 MHz)-Above 1G							
Vertical	4679.165	71.64	-20.24	51.40	74	-22.60	Pk
Vertical	4679.165	59.70	-20.24	39.46	54	-14.54	AV
Vertical	12930.127	63.08	-7.85	55.23	74	-18.77	Pk
Vertical	12930.127	49.17	-7.85	41.32	54	-12.68	AV
Vertical	19395.136	57.11	7.76	64.87	68.2	-3.33	Pk
Vertical	19395.136	44.47	7.76	52.23	54	-1.77	AV
Horizontal	4679.032	74.55	-20.24	54.31	74	-19.69	Pk
Horizontal	4679.032	59.87	-20.24	39.63	54	-14.37	AV
Horizontal	12930.131	61.41	-7.85	53.56	74	-20.44	Pk
Horizontal	12930.131	49.08	-7.85	41.23	54	-12.77	AV
Horizontal	19395.062	56.96	7.76	64.72	68.2	-3.48	Pk
Horizontal	19395.062	44.49	7.76	52.25	54	-1.75	AV
High Channel (6545 MHz)-Above 1G							
Vertical	6039.022	71.63	-18.93	52.70	68.2	-15.50	Pk
Vertical	6039.022	59.38	-18.93	40.44	54	-13.56	AV
Vertical	13090.089	60.49	-7.8	52.69	74	-21.31	Pk
Vertical	13090.089	49.38	-7.8	41.58	54	-12.42	AV
Vertical	19635.072	57.20	7.78	64.98	68.2	-3.22	Pk
Vertical	19635.072	44.63	7.78	52.41	54	-1.59	AV
Horizontal	6039.149	74.42	-18.93	55.49	68.2	-12.71	Pk
Horizontal	6039.149	59.85	-18.93	40.91	54	-13.09	AV
Horizontal	13090.036	61.18	-7.8	53.38	74	-20.62	Pk
Horizontal	13090.036	49.28	-7.8	41.48	54	-12.52	AV
Horizontal	19635.108	58.19	7.78	65.97	68.2	-2.23	Pk
Horizontal	19635.108	44.32	7.78	52.10	54	-1.90	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode:	TX(U-NII-6: 6435-6515MHz)- 802.11ax160
------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6505 MHz)-Above 1G							
Vertical	4679.087	74.61	-20.24	54.37	74	-19.63	Pk
Vertical	4679.087	59.07	-20.24	38.83	54	-15.17	AV
Vertical	13010.053	64.45	-7.8	56.65	74	-17.35	Pk
Vertical	13010.053	49.89	-7.8	42.09	54	-11.91	AV
Vertical	19515.080	58.88	7.78	66.66	68.2	-1.54	Pk
Vertical	19515.080	44.72	7.78	52.50	54	-1.50	AV
Horizontal	4679.007	74.20	-20.24	53.96	74	-20.04	Pk
Horizontal	4679.007	59.32	-20.24	39.08	54	-14.92	AV
Horizontal	13010.037	60.52	-7.8	52.72	74	-21.28	Pk
Horizontal	13010.037	49.20	-7.8	41.40	54	-12.60	AV
Horizontal	19515.191	58.09	7.78	65.87	68.2	-2.33	Pk
Horizontal	19515.191	44.18	7.78	51.96	54	-2.04	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

4x4MIMO antenna U-NII-7: 6535-6865MHz

Test Mode :	TX(U-NII-7: 6535-6865MHz) - 802.11ax20
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6535 MHz)-Above 1G							
Vertical	4680.082	74.08	-20.24	53.84	74	-20.16	Pk
Vertical	4680.082	59.37	-20.24	39.13	54	-14.87	AV
Vertical	13070.030	64.95	-7.8	57.15	68.2	-11.05	Pk
Vertical	13070.030	49.11	-7.8	41.31	54	-12.69	AV
Vertical	19605.095	55.53	7.78	63.31	68.2	-4.89	Pk
Vertical	19605.095	44.47	7.78	52.25	54	-1.75	AV
Horizontal	4679.196	70.82	-20.73	50.09	74	-23.91	Pk
Horizontal	4679.196	59.20	-20.73	38.47	54	-15.53	AV
Horizontal	13070.162	62.50	-7.8	54.70	68.2	-13.50	Pk
Horizontal	13070.162	49.42	-7.8	41.62	54	-12.38	AV
Horizontal	19605.145	56.06	7.78	63.84	68.2	-4.36	Pk
Horizontal	19605.145	44.25	7.78	52.03	54	-1.97	AV
Middle Channel (6695 MHz)-Above 1G							
Vertical	4592.096	74.05	-20.42	53.63	74	-20.37	Pk
Vertical	4592.096	59.79	-20.42	39.37	54	-14.63	AV
Vertical	13390.164	60.11	-7.53	52.58	68.2	-15.62	Pk
Vertical	13390.164	49.82	-7.53	42.29	54	-11.71	AV
Vertical	20085.039	59.94	8.00	67.94	68.2	-0.26	Pk
Vertical	20085.039	44.70	8.00	52.70	54	-1.30	AV
Horizontal	4592.194	72.04	-20.42	51.63	74	-22.37	Pk
Horizontal	4592.194	59.34	-20.42	38.93	54	-15.07	AV
Horizontal	13390.151	64.79	-7.53	57.26	68.2	-10.94	Pk
Horizontal	13390.151	49.49	-7.53	41.96	54	-12.04	AV
Horizontal	20085.183	58.46	8.00	66.46	68.2	-1.74	Pk
Horizontal	20085.183	44.15	8.00	52.15	54	-1.85	AV
High Channel (6855 MHz)-Above 1G							
Vertical	6039.073	74.69	-18.93	55.76	68.2	-12.44	Pk
Vertical	6039.073	59.69	-18.93	40.76	54	-13.24	AV
Vertical	13710.197	62.98	-7.31	55.67	74	-18.33	Pk
Vertical	13710.197	49.03	-7.31	41.72	54	-12.28	AV
Vertical	20565.127	57.13	3.72	60.85	68.2	-7.35	Pk
Vertical	20565.127	44.39	3.72	48.11	54	-5.89	AV
Horizontal	6039.139	74.21	-18.93	55.28	68.2	-12.92	Pk
Horizontal	6039.139	59.94	-18.93	41.01	54	-12.99	AV
Horizontal	13710.093	60.98	-7.31	53.67	74	-20.33	Pk
Horizontal	13710.093	49.39	-7.31	42.08	54	-11.92	AV
Horizontal	20565.072	56.75	3.72	60.47	68.2	-7.73	Pk
Horizontal	20565.072	44.29	3.72	48.01	54	-5.99	AV
High Channel (6875 MHz)-Above 1G							
Vertical	6039.178	74.76	-18.93	55.83	68.2	-12.37	Pk
Vertical	6039.178	59.86	-18.93	40.93	54	-13.07	AV
Vertical	13750.053	64.51	-7.31	57.20	74	-16.80	Pk

Vertical	13750.053	49.32	-7.31	42.01	54	-11.99	AV
Vertical	20625.165	55.83	3.71	59.54	68.2	-8.66	Pk
Vertical	20625.165	44.79	3.71	48.50	54	-5.50	AV
Horizontal	6039.055	70.29	-18.93	51.36	68.2	-16.84	Pk
Horizontal	6039.055	59.01	-18.93	40.08	54	-13.92	AV
Horizontal	13750.058	63.00	-7.31	55.69	74	-18.31	Pk
Horizontal	13750.058	49.82	-7.31	42.51	54	-11.49	AV
Horizontal	20625.185	59.42	3.71	63.13	68.2	-5.07	Pk
Horizontal	20625.185	44.85	3.71	48.56	54	-5.44	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-7: 6535-6865MHz) - 802.11ax40
-------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6565 MHz)-Above 1G							
Vertical	4679.057	74.61	-20.24	54.37	74	-19.63	Pk
Vertical	4679.057	59.61	-20.24	39.37	54	-14.63	AV
Vertical	13130.031	60.93	-7.65	53.28	74	-20.72	Pk
Vertical	13130.031	49.91	-7.65	42.26	54	-11.74	AV
Vertical	19695.011	57.32	7.78	65.10	68.2	-3.10	Pk
Vertical	19695.011	44.30	7.78	52.08	54	-1.92	AV
Horizontal	4679.041	71.63	-20.24	51.39	74	-22.61	Pk
Horizontal	4679.041	59.21	-20.24	38.97	54	-15.03	AV
Horizontal	13130.058	62.21	-7.65	54.56	74	-19.44	Pk
Horizontal	13130.058	49.60	-7.65	41.95	54	-12.05	AV
Horizontal	19695.108	58.98	7.78	66.76	68.2	-1.44	Pk
Horizontal	19695.108	44.67	7.78	52.45	54	-1.55	AV
middle Channel (6685 MHz)-Above 1G							
Vertical	6039.076	72.19	-18.93	53.26	68.2	-14.94	Pk
Vertical	6039.076	59.03	-18.93	40.09	54	-13.91	AV
Vertical	13370.054	60.33	-7.53	52.80	74	-21.20	Pk
Vertical	13370.054	49.61	-7.53	42.08	54	-11.92	AV
Vertical	20055.176	56.16	8	64.16	68.2	-4.04	Pk
Vertical	20055.176	44.90	8	52.90	54	-1.10	AV
Horizontal	6039.152	73.69	-18.93	54.76	68.2	-13.44	Pk
Horizontal	6039.152	59.63	-18.93	40.70	54	-13.30	AV
Horizontal	13370.175	63.78	-7.53	56.25	74	-17.75	Pk
Horizontal	13370.175	49.28	-7.53	41.75	54	-12.25	AV
Horizontal	20055.004	56.54	8	64.54	68.2	-3.66	Pk
Horizontal	20055.004	44.14	8	52.14	54	-1.86	AV
High Channel (6845 MHz)-Above 1G							
Vertical	6039.151	71.92	-18.93	52.99	68.2	-15.21	Pk
Vertical	6039.151	59.48	-18.93	40.55	54	-13.45	AV
Vertical	13690.151	64.80	-7.31	57.49	74	-16.51	Pk
Vertical	13690.151	49.08	-7.31	41.77	54	-12.23	AV
Vertical	20535.052	59.44	3.72	63.16	68.2	-5.04	Pk
Vertical	20535.052	44.88	3.72	48.60	54	-5.40	AV
Horizontal	6039.009	72.18	-18.93	53.25	68.2	-14.95	Pk
Horizontal	6039.009	59.92	-18.93	40.99	54	-13.01	AV
Horizontal	13690.003	61.17	-7.31	53.86	74	-20.14	Pk
Horizontal	13690.003	49.75	-7.31	42.44	54	-11.56	AV
Horizontal	20535.052	57.01	3.72	60.73	68.2	-7.47	Pk
Horizontal	20535.052	44.64	3.72	48.36	54	-5.64	AV
High Channel (6885 MHz)-Above 1G							
Vertical	6039.111	70.92	-18.93	51.98	68.2	-16.22	Pk
Vertical	6039.111	59.56	-18.93	40.63	54	-13.37	AV
Vertical	13770.165	62.53	-7.31	55.22	74	-18.78	Pk
Vertical	13770.165	49.19	-7.31	41.88	54	-12.12	AV
Vertical	20655.093	58.61	3.71	62.32	68.2	-5.88	Pk

Vertical	20655.093	44.30	3.71	48.01	54	-5.99	AV
Horizontal	6039.132	74.87	-18.93	55.94	68.2	-12.26	Pk
Horizontal	6039.132	59.24	-18.93	40.31	54	-13.69	AV
Horizontal	13770.121	63.84	-7.31	56.53	74	-17.47	Pk
Horizontal	13770.121	49.78	-7.31	42.47	54	-11.53	AV
Horizontal	20655.099	56.11	3.71	59.82	68.2	-8.38	Pk
Horizontal	20655.099	44.50	3.71	48.21	54	-5.79	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-7: 6535-6865MHz)- 802.11ax80
-------------	---------------------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6625 MHz)-Above 1G							
Vertical	4679.059	74.74	-20.24	54.50	74	-19.50	Pk
Vertical	4679.059	59.86	-20.24	39.61	54	-14.39	AV
Vertical	13250.131	64.59	-7.61	56.98	74	-17.02	Pk
Vertical	13250.131	49.74	-7.61	42.13	54	-11.87	AV
Vertical	19875.061	58.68	7.78	66.46	68.2	-1.74	Pk
Vertical	19875.061	44.19	7.78	51.97	54	-2.03	AV
Horizontal	4679.134	71.15	-20.24	50.90	74	-23.10	Pk
Horizontal	4679.134	59.20	-20.24	38.96	54	-15.04	AV
Horizontal	13250.004	62.13	-7.61	54.52	74	-19.48	Pk
Horizontal	13250.004	49.13	-7.61	41.52	54	-12.48	AV
Horizontal	19875.019	55.00	7.78	62.78	68.2	-5.42	Pk
Horizontal	19875.019	44.52	7.78	52.30	54	-1.70	AV
Middle Channel (6705 MHz)-Above 1G							
Vertical	6039.084	71.11	-18.93	52.18	68.2	-16.02	Pk
Vertical	6039.084	59.68	-18.93	40.74	54	-13.26	AV
Vertical	13410.152	64.90	-7.4	57.50	74	-16.50	Pk
Vertical	13410.152	49.49	-7.4	42.09	54	-11.91	AV
Vertical	20115.092	55.83	6.35	62.18	68.2	-6.02	Pk
Vertical	20115.092	44.63	6.35	50.98	54	-3.02	AV
Horizontal	6039.176	73.45	-18.93	54.52	68.2	-13.68	Pk
Horizontal	6039.176	59.66	-18.93	40.72	54	-13.28	AV
Horizontal	13410.166	62.11	-7.4	54.71	74	-19.29	Pk
Horizontal	13410.166	49.69	-7.4	42.29	54	-11.71	AV
Horizontal	20115.024	58.72	6.35	65.07	68.2	-3.13	Pk
Horizontal	20115.024	44.63	6.35	50.98	54	-3.02	AV
High Channel (6785 MHz)-Above 1G							
Vertical	6039.130	74.07	-18.93	55.14	68.2	-13.06	Pk
Vertical	6039.130	59.64	-18.93	40.71	54	-13.29	AV
Vertical	13570.125	60.95	-7.39	53.56	74	-20.44	Pk
Vertical	13570.125	49.36	-7.39	41.97	54	-12.03	AV
Vertical	20355.105	57.62	5.82	63.44	68.2	-4.76	Pk
Vertical	20355.105	44.90	5.82	50.72	54	-3.28	AV
Horizontal	6039.053	74.42	-18.93	55.49	68.2	-12.71	Pk
Horizontal	6039.053	59.21	-18.93	40.27	54	-13.73	AV
Horizontal	13570.078	61.09	-7.39	53.70	74	-20.30	Pk
Horizontal	13570.078	49.12	-7.39	41.73	54	-12.27	AV
Horizontal	20355.117	57.00	5.82	62.82	68.2	-5.38	Pk
Horizontal	20355.117	44.22	5.82	50.04	54	-3.96	AV
High Channel (6865 MHz)-Above 1G							
Vertical	6039.105	70.59	-18.93	51.66	68.2	-16.54	Pk
Vertical	6039.105	59.07	-18.93	40.14	54	-13.86	AV
Vertical	13730.061	61.73	-7.23	54.50	74	-19.50	Pk
Vertical	13730.061	49.15	-7.23	41.92	54	-12.08	AV

Vertical	20595.159	56.20	3.51	59.71	68.2	-8.49	Pk
Vertical	20595.159	44.82	3.51	48.33	54	-5.67	AV
Horizontal	6039.128	71.60	-18.93	52.67	68.2	-15.53	Pk
Horizontal	6039.128	59.63	-18.93	40.70	54	-13.30	AV
Horizontal	13730.196	63.88	-7.23	56.65	74	-17.35	Pk
Horizontal	13730.196	49.86	-7.23	42.63	54	-11.37	AV
Horizontal	20595.084	55.07	3.51	58.58	68.2	-9.62	Pk
Horizontal	20595.084	44.46	3.51	47.97	54	-6.03	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode: TX(U-NII-7: 6535-6865MHz)- 802.11ax160

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6665 MHz)-Above 1G							
Vertical	4679.116	72.09	-20.24	51.85	74	-22.15	Pk
Vertical	4679.116	59.90	-20.24	39.66	54	-14.34	AV
Vertical	13330.016	61.10	-7.5	53.60	74	-20.40	Pk
Vertical	13330.016	49.49	-7.5	41.99	54	-12.01	AV
Vertical	19995.038	56.75	8	64.75	68.2	-3.45	Pk
Vertical	19995.038	44.48	8	52.48	54	-1.52	AV
Horizontal	4679.132	73.72	-20.24	53.48	74	-20.52	Pk
Horizontal	4679.132	59.91	-20.24	39.67	54	-14.33	AV
Horizontal	13330.082	63.61	-7.5	56.11	74	-17.89	Pk
Horizontal	13330.082	49.14	-7.5	41.64	54	-12.36	AV
Horizontal	19995.100	56.69	8	64.69	68.2	-3.51	Pk
Horizontal	19995.100	44.68	8	52.68	54	-1.32	AV
High Channel (6825 MHz)-Above 1G							
Vertical	6039.149	70.60	-18.93	51.66	68.2	-16.54	Pk
Vertical	6039.149	59.06	-18.93	40.13	54	-13.87	AV
Vertical	13650.156	64.23	-7.3	56.93	74	-17.07	Pk
Vertical	13650.156	49.51	-7.3	42.21	54	-11.79	AV
Vertical	20475.149	58.09	4.27	62.36	68.2	-5.84	Pk
Vertical	20475.149	44.71	4.27	48.98	54	-5.02	AV
Horizontal	6039.138	73.74	-18.93	54.81	68.2	-13.39	Pk
Horizontal	6039.138	59.09	-18.93	40.16	54	-13.84	AV
Horizontal	13650.021	64.89	-7.3	57.59	74	-16.41	Pk
Horizontal	13650.021	49.85	-7.3	42.55	54	-11.45	AV
Horizontal	20475.199	58.78	4.27	63.05	68.2	-5.15	Pk
Horizontal	20475.199	44.76	4.27	49.03	54	-4.97	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

4x4MIMO antenna U-NII-8: 6885-7115MHz

Test Mode :	TX(U-NII-8: 6885-7115MHz) - 802.11ax20
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6895 MHz)-Above 1G							
Vertical	4683.672	72.20	-20.23	51.97	74	-22.03	Pk
Vertical	4683.672	59.73	-20.23	39.50	54	-14.50	AV
Vertical	13790.062	64.00	-7.23	56.77	68.2	-11.43	Pk
Vertical	13790.062	49.90	-7.23	42.67	54	-11.33	AV
Vertical	20685.111	58.00	3.51	61.51	68.2	-6.69	Pk
Vertical	20685.111	44.30	3.51	47.81	54	-6.19	AV
Horizontal	4679.117	72.30	-20.73	51.57	74	-22.43	Pk
Horizontal	4679.117	59.61	-20.73	38.88	54	-15.12	AV
Horizontal	13790.048	62.97	-7.23	55.74	68.2	-12.46	Pk
Horizontal	13790.048	49.98	-7.23	42.75	54	-11.25	AV
Horizontal	20685.100	57.26	3.51	60.77	68.2	-7.43	Pk
Horizontal	20685.100	44.56	3.51	48.07	54	-5.93	AV
middle Channel (6995 MHz)-Above 1G							
Vertical	4592.019	70.74	-20.42	50.32	74	-23.68	Pk
Vertical	4592.019	59.09	-20.42	38.67	54	-15.33	AV
Vertical	13990.062	64.66	-6.83	57.83	68.2	-10.37	Pk
Vertical	13990.062	49.05	-6.83	42.22	54	-11.78	AV
Vertical	20985.167	59.61	-1.95	57.66	68.2	-10.54	Pk
Vertical	20985.167	44.34	-1.95	42.39	54	-11.61	AV
Horizontal	4592.077	73.22	-20.42	52.80	74	-21.20	Pk
Horizontal	4592.077	59.34	-20.42	38.92	54	-15.08	AV
Horizontal	13990.131	61.91	-6.83	55.08	68.2	-13.12	Pk
Horizontal	13990.131	49.14	-6.83	42.31	54	-11.69	AV
Horizontal	20985.036	56.29	-1.95	54.34	68.2	-13.86	Pk
Horizontal	20985.036	44.22	-1.95	42.27	54	-11.73	AV
High Channel (7115 MHz)-Above 1G							
Vertical	4592.041	73.53	-20.42	53.11	68.2	-15.09	Pk
Vertical	4592.041	59.71	-20.42	39.29	54	-14.71	AV
Vertical	14230.059	62.83	-7.12	55.71	74	-18.29	Pk
Vertical	14230.059	49.89	-7.12	42.77	54	-11.23	AV
Vertical	21345.187	55.90	-1.91	53.99	68.2	-14.21	Pk
Vertical	21345.187	44.31	-1.91	42.40	54	-11.60	AV
Horizontal	6039.139	72.97	-18.93	54.04	68.2	-14.16	Pk
Horizontal	6039.139	59.35	-18.93	40.42	54	-13.58	AV
Horizontal	14230.044	62.05	-7.12	54.93	74	-19.07	Pk
Horizontal	14230.044	49.20	-7.12	42.08	54	-11.92	AV
Horizontal	21345.159	55.43	-1.91	53.52	68.2	-14.68	Pk
Horizontal	21345.159	44.27	-1.91	42.36	54	-11.64	AV

Note: The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-8: 6885-7115MHz) - 802.11ax40
-------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6925 MHz)-Above 1G							
Vertical	4679.049	72.96	-20.24	52.72	74	-21.28	Pk
Vertical	4679.049	59.99	-20.24	39.74	54	-14.26	AV
Vertical	13850.170	62.64	-7.23	55.41	74	-18.59	Pk
Vertical	13850.170	49.42	-7.23	42.19	54	-11.81	AV
Vertical	20775.015	55.54	3.51	59.05	68.2	-9.15	Pk
Vertical	20775.015	44.28	3.51	47.79	54	-6.21	AV
Horizontal	4679.136	73.16	-20.24	52.91	74	-21.09	Pk
Horizontal	4679.136	59.67	-20.24	39.42	54	-14.58	AV
Horizontal	13850.104	60.66	-7.23	53.43	74	-20.57	Pk
Horizontal	13850.104	49.14	-7.23	41.91	54	-12.09	AV
Horizontal	20775.144	56.69	3.51	60.20	68.2	-8.00	Pk
Horizontal	20775.144	44.28	3.51	47.79	54	-6.21	AV
middle Channel (6965 MHz)-Above 1G							
Vertical	6039.181	72.88	-18.93	53.95	68.2	-14.25	Pk
Vertical	6039.181	59.48	-18.93	40.54	54	-13.46	AV
Vertical	13930.031	60.69	-6.83	53.86	74	-20.14	Pk
Vertical	13930.031	49.59	-6.83	42.76	54	-11.24	AV
Vertical	20895.111	59.24	-1.95	57.29	68.2	-10.91	Pk
Vertical	20895.111	44.64	-1.95	42.69	54	-11.31	AV
Horizontal	6039.080	74.46	-18.93	55.53	68.2	-12.67	Pk
Horizontal	6039.080	59.44	-18.93	40.51	54	-13.49	AV
Horizontal	13930.043	62.36	-6.83	55.53	74	-18.47	Pk
Horizontal	13930.043	49.78	-6.83	42.95	54	-11.05	AV
Horizontal	20895.115	55.52	-1.95	53.57	68.2	-14.63	Pk
Horizontal	20895.115	44.81	-1.95	42.86	54	-11.14	AV
High Channel (7085 MHz)-Above 1G							
Vertical	6039.050	70.84	-18.93	51.91	68.2	-16.29	Pk
Vertical	6039.050	59.68	-18.93	40.75	54	-13.25	AV
Vertical	14170.159	63.99	-7.12	56.87	74	-17.13	Pk
Vertical	14170.159	49.42	-7.12	42.30	54	-11.70	AV
Vertical	21255.026	56.86	-1.91	54.95	68.2	-13.25	Pk
Vertical	21255.026	44.35	-1.91	42.44	54	-11.56	AV
Horizontal	6039.077	74.53	-18.93	55.60	68.2	-12.60	Pk
Horizontal	6039.077	59.28	-18.93	40.35	54	-13.65	AV
Horizontal	14170.140	63.83	-7.12	56.71	74	-17.29	Pk
Horizontal	14170.140	49.49	-7.12	42.37	54	-11.63	AV
Horizontal	21255.140	56.46	-1.91	54.55	68.2	-13.65	Pk
Horizontal	21255.140	44.60	-1.91	42.69	54	-11.31	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-8: 6885-7115MHz) - 802.11ax80
-------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6945 MHz)-Above 1G							
Vertical	4679.148	73.50	-20.24	53.26	74	-20.74	Pk
Vertical	4679.148	59.09	-20.24	38.85	54	-15.15	AV
Vertical	13890.127	63.07	-7.23	55.84	74	-18.16	Pk
Vertical	13890.127	49.40	-7.23	42.17	54	-11.83	AV
Vertical	20835.044	55.75	3.51	59.26	68.2	-8.94	Pk
Vertical	20835.044	44.51	3.51	48.02	54	-5.98	AV
Horizontal	4679.016	74.02	-20.24	53.78	74	-20.22	Pk
Horizontal	4679.016	59.30	-20.24	39.06	54	-14.94	AV
Horizontal	13890.029	63.98	-7.23	56.75	74	-17.25	Pk
Horizontal	13890.029	49.99	-7.23	42.76	54	-11.24	AV
Horizontal	20835.075	56.09	3.51	59.60	68.2	-8.60	Pk
Horizontal	20835.075	44.43	3.51	47.94	54	-6.06	AV
High Channel (7025 MHz)-Above 1G							
Vertical	6039.080	71.41	-18.93	52.48	68.2	-15.72	Pk
Vertical	6039.080	59.52	-18.93	40.59	54	-13.41	AV
Vertical	14050.155	61.35	-6.83	54.52	74	-19.48	Pk
Vertical	14050.155	49.54	-6.83	42.71	54	-11.29	AV
Vertical	21075.182	59.65	-1.95	57.70	68.2	-10.50	Pk
Vertical	21075.182	44.09	-1.95	42.14	54	-11.86	AV
Horizontal	6039.155	73.20	-18.93	54.26	68.2	-13.94	Pk
Horizontal	6039.155	59.47	-18.93	40.54	54	-13.46	AV
Horizontal	14050.131	63.34	-6.83	56.51	74	-17.49	Pk
Horizontal	14050.131	49.78	-6.83	42.95	54	-11.05	AV
Horizontal	21075.072	56.31	-1.95	54.36	68.2	-13.84	Pk
Horizontal	21075.072	44.21	-1.95	42.26	54	-11.74	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode:	TX(U-NII-8: 6885-7115MHz) - 802.11ax160
------------	---

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6985 MHz)-Above 1G							
Vertical	4679.114	71.47	-20.24	51.23	74	-22.77	Pk
Vertical	4679.114	59.79	-20.24	39.55	54	-14.45	AV
Vertical	13970.040	60.76	-6.83	53.93	74	-20.07	Pk
Vertical	13970.040	49.51	-6.83	42.68	54	-11.32	AV
Vertical	20955.006	55.84	-1.95	53.89	68.2	-14.31	Pk
Vertical	20955.006	44.08	-1.95	42.13	54	-11.87	AV
Horizontal	4679.154	72.11	-20.24	51.87	74	-22.13	Pk
Horizontal	4679.154	59.60	-20.24	39.35	54	-14.65	AV
Horizontal	13970.191	60.57	-6.83	53.74	74	-20.26	Pk
Horizontal	13970.191	49.60	-6.83	42.77	54	-11.23	AV
Horizontal	20955.030	55.18	-1.95	53.23	68.2	-14.97	Pk
Horizontal	20955.030	44.14	-1.95	42.19	54	-11.81	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Quectel Antenna (YF0023CA) U-NII-5: 5955-6415MHz

Test Mode : TX(U-NII-5: 5955-6415MHz) - 802.11ax20

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5955 MHz)-Above 1G							
Vertical	4683.657	70.47	-20.23	50.24	74	-23.76	Pk
Vertical	4683.657	59.49	-20.23	39.26	54	-14.74	AV
Vertical	11910.161	61.04	-8.63	52.41	68.2	-15.79	Pk
Vertical	11910.161	49.70	-8.63	41.07	54	-12.93	AV
Vertical	17865.162	57.19	-1.57	55.62	68.2	-12.58	Pk
Vertical	17865.162	44.78	-1.57	43.21	54	-10.79	AV
Horizontal	4679.123	71.23	-20.73	50.50	74	-23.50	Pk
Horizontal	4679.123	59.95	-20.73	39.22	54	-14.78	AV
Horizontal	11910.026	60.22	-8.63	51.59	68.2	-16.61	Pk
Horizontal	11910.026	49.47	-8.63	40.84	54	-13.16	AV
Horizontal	17865.188	55.38	-1.57	53.81	68.2	-14.39	Pk
Horizontal	17865.188	44.67	-1.57	43.10	54	-10.90	AV
middle Channel (6175 MHz)-Above 1G							
Vertical	4592.057	73.66	-20.42	53.24	74	-20.76	Pk
Vertical	4592.057	60.00	-20.42	39.58	54	-14.42	AV
Vertical	12350.110	64.05	-9.16	54.89	68.2	-13.31	Pk
Vertical	12350.110	49.89	-9.16	40.73	54	-13.27	AV
Vertical	18525.003	55.13	6.65	61.78	68.2	-6.42	Pk
Vertical	18525.003	44.65	6.65	51.30	54	-2.70	AV
Horizontal	4592.098	73.46	-20.42	53.04	74	-20.96	Pk
Horizontal	4592.098	59.69	-20.42	39.27	54	-14.73	AV
Horizontal	12350.089	62.64	-9.16	53.48	68.2	-14.72	Pk
Horizontal	12350.089	49.50	-9.16	40.34	54	-13.66	AV
Horizontal	18525.145	57.82	6.65	64.47	68.2	-3.73	Pk
Horizontal	18525.145	44.18	6.65	50.83	54	-3.17	AV
High Channel (6415 MHz)-Above 1G							
Vertical	6039.075	74.69	-18.93	55.76	68.2	-12.44	Pk
Vertical	6039.075	59.07	-18.93	40.14	54	-13.86	AV
Vertical	12830.008	61.34	-8.92	52.42	74	-21.58	Pk
Vertical	12830.008	49.81	-8.92	40.89	54	-13.11	AV
Vertical	19245.127	57.37	7.78	65.15	68.2	-3.05	Pk
Vertical	19245.127	44.54	7.78	52.32	54	-1.68	AV
Horizontal	6039.062	72.39	-18.93	53.46	68.2	-14.74	Pk
Horizontal	6039.062	59.96	-18.93	41.03	54	-12.97	AV
Horizontal	12830.195	60.06	-8.92	51.14	74	-22.86	Pk
Horizontal	12830.195	49.25	-8.92	40.33	54	-13.67	AV
Horizontal	19245.063	58.82	7.78	66.60	68.2	-1.60	Pk
Horizontal	19245.063	44.53	7.78	52.31	54	-1.69	AV

Note: The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-5: 5955-6415MHz) - 802.11ax40
-------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5965 MHz)-Above 1G							
Vertical	4679.174	73.72	-20.24	53.48	74	-20.52	Pk
Vertical	4679.174	59.82	-20.24	39.58	54	-14.42	AV
Vertical	11930.087	62.53	-8.51	54.02	74	-19.98	Pk
Vertical	11930.087	49.85	-8.51	41.34	54	-12.66	AV
Vertical	17895.095	55.30	-1.43	53.87	68.2	-14.33	Pk
Vertical	17895.095	44.21	-1.43	42.78	54	-11.22	AV
Horizontal	4679.131	73.53	-20.24	53.29	74	-20.71	Pk
Horizontal	4679.131	59.18	-20.24	38.94	54	-15.06	AV
Horizontal	11930.083	62.24	-8.51	53.73	74	-20.27	Pk
Horizontal	11930.083	49.65	-8.51	41.14	54	-12.86	AV
Horizontal	17895.070	58.30	-1.43	56.87	68.2	-11.33	Pk
Horizontal	17895.070	44.22	-1.43	42.79	54	-11.21	AV
middle Channel (6165 MHz)-Above 1G							
Vertical	6039.195	72.09	-18.93	53.16	68.2	-15.04	Pk
Vertical	6039.195	59.11	-18.93	40.18	54	-13.82	AV
Vertical	12330.170	62.35	-9.16	53.19	74	-20.81	Pk
Vertical	12330.170	49.44	-9.16	40.28	54	-13.72	AV
Vertical	18495.076	59.06	6.65	65.71	68.2	-2.49	Pk
Vertical	18495.076	44.40	6.65	51.05	54	-2.95	AV
Horizontal	6039.070	70.64	-18.93	51.71	68.2	-16.49	Pk
Horizontal	6039.070	59.59	-18.93	40.66	54	-13.34	AV
Horizontal	12330.072	62.73	-9.16	53.57	74	-20.43	Pk
Horizontal	12330.072	49.07	-9.16	39.91	54	-14.09	AV
Horizontal	18495.124	57.41	6.65	64.06	68.2	-4.14	Pk
Horizontal	18495.124	44.26	6.65	50.91	54	-3.09	AV
High Channel (6405 MHz)-Above 1G							
Vertical	6039.075	70.86	-18.93	51.93	68.2	-16.27	Pk
Vertical	6039.075	59.39	-18.93	40.45	54	-13.55	AV
Vertical	12810.064	63.94	-8.92	55.02	74	-18.98	Pk
Vertical	12810.064	49.57	-8.92	40.65	54	-13.35	AV
Vertical	19215.121	56.80	7.78	64.58	68.2	-3.62	Pk
Vertical	19215.121	44.74	7.78	52.52	54	-1.48	AV
Horizontal	6039.197	71.81	-18.93	52.88	68.2	-15.32	Pk
Horizontal	6039.197	59.08	-18.93	40.15	54	-13.85	AV
Horizontal	12810.036	61.84	-8.92	52.92	74	-21.08	Pk
Horizontal	12810.036	49.73	-8.92	40.81	54	-13.19	AV
Horizontal	19215.103	58.68	7.78	66.46	68.2	-1.74	Pk
Horizontal	19215.103	44.09	7.78	51.87	54	-2.13	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-5: 5955-6415MHz)- 802.11ax80
-------------	---------------------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5985 MHz)-Above 1G							
Vertical	4679.123	74.82	-20.24	54.58	74	-19.42	Pk
Vertical	4679.123	59.02	-20.24	38.78	54	-15.22	AV
Vertical	11970.171	60.94	-8.51	52.43	74	-21.57	Pk
Vertical	11970.171	49.09	-8.51	40.58	54	-13.42	AV
Vertical	17955.091	58.28	-1.41	56.87	68.2	-11.33	Pk
Vertical	17955.091	44.64	-1.41	43.23	54	-10.77	AV
Horizontal	4679.103	74.81	-20.24	54.57	74	-19.43	Pk
Horizontal	4679.103	59.07	-20.24	38.83	54	-15.17	AV
Horizontal	11970.084	63.71	-8.51	55.20	74	-18.80	Pk
Horizontal	11970.084	49.17	-8.51	40.66	54	-13.34	AV
Horizontal	17955.167	56.75	-1.41	55.34	68.2	-12.86	Pk
Horizontal	17955.167	44.36	-1.41	42.95	54	-11.05	AV
Middle Channel (6145 MHz)-Above 1G							
Vertical	6039.118	70.47	-18.93	51.54	68.2	-16.66	Pk
Vertical	6039.118	59.19	-18.93	40.26	54	-13.74	AV
Vertical	12290.119	60.68	-9.21	51.47	74	-22.53	Pk
Vertical	12290.119	49.85	-9.21	40.64	54	-13.36	AV
Vertical	18435.049	56.38	6.57	62.95	68.2	-5.25	Pk
Vertical	18435.049	44.99	6.57	51.56	54	-2.44	AV
Horizontal	6039.118	70.04	-18.93	51.11	68.2	-17.09	Pk
Horizontal	6039.118	59.47	-18.93	40.54	54	-13.46	AV
Horizontal	12290.054	61.82	-9.21	52.61	74	-21.39	Pk
Horizontal	12290.054	49.98	-9.21	40.77	54	-13.23	AV
Horizontal	18435.187	57.88	6.57	64.45	68.2	-3.75	Pk
Horizontal	18435.187	44.01	6.57	50.58	54	-3.42	AV
High Channel (6385 MHz)-Above 1G							
Vertical	6039.187	72.53	-18.93	53.60	68.2	-14.60	Pk
Vertical	6039.187	59.57	-18.93	40.64	54	-13.36	AV
Vertical	12770.056	64.43	-8.97	55.46	74	-18.54	Pk
Vertical	12770.056	49.27	-8.97	40.30	54	-13.70	AV
Vertical	19155.140	55.75	7.83	63.58	68.2	-4.62	Pk
Vertical	19155.140	44.54	7.83	52.37	54	-1.63	AV
Horizontal	6039.130	71.47	-18.93	52.54	68.2	-15.66	Pk
Horizontal	6039.130	59.59	-18.93	40.66	54	-13.34	AV
Horizontal	12770.021	64.24	-8.97	55.27	74	-18.73	Pk
Horizontal	12770.021	49.50	-8.97	40.53	54	-13.47	AV
Horizontal	19155.047	57.48	7.83	65.31	68.2	-2.89	Pk
Horizontal	19155.047	44.70	7.83	52.53	54	-1.47	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode:	TX(U-NII-5: 5955-6415MHz) - 802.11ax160
------------	---

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6025 MHz)-Above 1G							
Vertical	4679.011	74.17	-20.24	53.93	74	-20.07	Pk
Vertical	4679.011	59.51	-20.24	39.27	54	-14.73	AV
Vertical	12050.172	62.39	-8.45	53.94	74	-20.06	Pk
Vertical	12050.172	49.15	-8.45	40.70	54	-13.30	AV
Vertical	18075.081	56.30	-1.31	54.99	68.2	-13.21	Pk
Vertical	18075.081	44.54	-1.31	43.23	54	-10.77	AV
Horizontal	4679.169	71.58	-20.24	51.34	74	-22.66	Pk
Horizontal	4679.169	59.27	-20.24	39.03	54	-14.97	AV
Horizontal	12050.038	63.44	-8.45	54.99	74	-19.01	Pk
Horizontal	12050.038	49.24	-8.45	40.79	54	-13.21	AV
Horizontal	18075.047	57.59	-1.31	56.28	68.2	-11.92	Pk
Horizontal	18075.047	44.68	-1.31	43.37	54	-10.63	AV
middle Channel (6185 MHz)-Above 1G							
Vertical	6039.191	72.60	-18.93	53.67	68.2	-14.53	Pk
Vertical	6039.191	59.17	-18.93	40.24	54	-13.76	AV
Vertical	12370.186	62.09	-9.03	53.06	74	-20.94	Pk
Vertical	12370.186	49.72	-9.03	40.69	54	-13.31	AV
Vertical	18555.011	56.90	6.68	63.58	68.2	-4.62	Pk
Vertical	18555.011	44.52	6.68	51.20	54	-2.80	AV
Horizontal	6039.182	72.66	-18.93	53.73	68.2	-14.47	Pk
Horizontal	6039.182	59.36	-18.93	40.43	54	-13.57	AV
Horizontal	12370.075	61.77	-9.03	52.74	74	-21.26	Pk
Horizontal	12370.075	49.73	-9.03	40.70	54	-13.30	AV
Horizontal	18555.070	59.43	6.68	66.11	68.2	-2.09	Pk
Horizontal	18555.070	44.78	6.68	51.46	54	-2.54	AV
High Channel (6345 MHz)-Above 1G							
Vertical	6039.159	73.61	-18.93	54.68	68.2	-13.52	Pk
Vertical	6039.159	59.97	-18.93	41.04	54	-12.96	AV
Vertical	12690.198	60.51	-8.97	51.54	74	-22.46	Pk
Vertical	12690.198	49.85	-8.97	40.88	54	-13.12	AV
Vertical	19035.160	58.17	7.68	65.85	68.2	-2.35	Pk
Vertical	19035.160	44.13	7.68	51.81	54	-2.19	AV
Horizontal	6039.144	71.34	-18.93	52.41	68.2	-15.79	Pk
Horizontal	6039.144	59.23	-18.93	40.30	54	-13.70	AV
Horizontal	12690.034	61.72	-8.97	52.75	74	-21.25	Pk
Horizontal	12690.034	49.47	-8.97	40.50	54	-13.50	AV
Horizontal	19035.104	55.72	7.68	63.40	68.2	-4.80	Pk
Horizontal	19035.104	44.86	7.68	52.54	54	-1.46	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

Test Mode is MIMO Mode (4T4R).

Quectel Antenna (YF0023CA) U-NII-6: 6435-6515MHz

Test Mode :	TX(U-NII-6: 6435-6515MHz) - 802.11ax20
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6435 MHz)-Above 1G							
Vertical	4680.625	74.60	-20.24	54.36	74	-19.64	Pk
Vertical	4680.625	59.66	-20.24	39.42	54	-14.58	AV
Vertical	12870.142	61.43	-7.95	53.48	68.2	-14.72	Pk
Vertical	12870.142	49.56	-7.95	41.61	54	-12.39	AV
Vertical	19305.196	56.67	7.76	64.43	68.2	-3.77	Pk
Vertical	19305.196	44.95	7.76	52.71	54	-1.29	AV
Horizontal	4679.168	71.76	-20.73	51.03	74	-22.97	Pk
Horizontal	4679.168	59.18	-20.73	38.45	54	-15.55	AV
Horizontal	12870.188	63.25	-7.95	55.30	68.2	-12.90	Pk
Horizontal	12870.188	49.97	-7.95	42.02	54	-11.98	AV
Horizontal	19305.181	56.55	7.76	64.31	68.2	-3.89	Pk
Horizontal	19305.181	44.39	7.76	52.15	54	-1.85	AV
middle Channel (6475 MHz)-Above 1G							
Vertical	4592.028	72.90	-20.42	52.49	74	-21.51	Pk
Vertical	4592.028	59.11	-20.42	38.70	54	-15.30	AV
Vertical	12950.059	64.65	-7.89	56.76	68.2	-11.44	Pk
Vertical	12950.059	49.58	-7.89	41.69	54	-12.31	AV
Vertical	19425.125	59.23	7.78	67.01	68.2	-1.19	Pk
Vertical	19425.125	44.54	7.78	52.32	54	-1.68	AV
Horizontal	4592.121	70.90	-20.42	50.48	74	-23.52	Pk
Horizontal	4592.121	59.81	-20.42	39.40	54	-14.60	AV
Horizontal	12950.063	64.68	-7.89	56.79	68.2	-11.41	Pk
Horizontal	12950.063	49.61	-7.89	41.72	54	-12.28	AV
Horizontal	19425.129	57.32	7.78	65.10	68.2	-3.10	Pk
Horizontal	19425.129	44.79	7.78	52.57	54	-1.43	AV
High Channel (6515 MHz)-Above 1G							
Vertical	6039.012	72.66	-18.93	53.72	68.2	-14.48	Pk
Vertical	6039.012	59.21	-18.93	40.28	54	-13.72	AV
Vertical	13030.182	64.69	-7.80	56.89	74	-17.11	Pk
Vertical	13030.182	49.02	-7.80	41.22	54	-12.78	AV
Vertical	19545.175	57.75	7.78	65.53	68.2	-2.67	Pk
Vertical	19545.175	44.83	7.78	52.61	54	-1.39	AV
Horizontal	6039.065	70.13	-18.93	51.20	68.2	-17.00	Pk
Horizontal	6039.065	59.96	-18.93	41.03	54	-12.97	AV
Horizontal	13030.076	64.06	-7.80	56.26	74	-17.74	Pk
Horizontal	13030.076	49.72	-7.80	41.92	54	-12.08	AV
Horizontal	19545.063	55.89	7.78	63.67	68.2	-4.53	Pk
Horizontal	19545.063	44.22	7.78	52.00	54	-2.00	AV

Note: The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-6: 6435-6515MHz) - 802.11ax40
-------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6445 MHz)-Above 1G							
Vertical	4679.022	72.81	-20.24	52.57	74	-21.43	Pk
Vertical	4679.022	59.90	-20.24	39.66	54	-14.34	AV
Vertical	12890.081	64.74	-7.95	56.79	74	-17.21	Pk
Vertical	12890.081	49.78	-7.95	41.83	54	-12.17	AV
Vertical	19335.025	59.44	7.76	67.20	68.2	-1.00	Pk
Vertical	19335.025	44.68	7.76	52.44	54	-1.56	AV
Horizontal	4679.003	71.01	-20.24	50.77	74	-23.23	Pk
Horizontal	4679.003	59.42	-20.24	39.18	54	-14.82	AV
Horizontal	12890.050	60.83	-7.95	52.88	74	-21.12	Pk
Horizontal	12890.050	49.92	-7.95	41.97	54	-12.03	AV
Horizontal	19335.158	55.13	7.76	62.89	68.2	-5.31	Pk
Horizontal	19335.158	44.52	7.76	52.28	54	-1.72	AV
middle Channel (6485 MHz)-Above 1G							
Vertical	6039.049	71.77	-18.93	52.84	68.2	-15.36	Pk
Vertical	6039.049	59.73	-18.93	40.79	54	-13.21	AV
Vertical	12970.080	64.11	-7.85	56.26	74	-17.74	Pk
Vertical	12970.080	49.41	-7.85	41.56	54	-12.44	AV
Vertical	19455.069	59.19	7.78	66.97	68.2	-1.23	Pk
Vertical	19455.069	44.26	7.78	52.04	54	-1.96	AV
Horizontal	6039.135	73.59	-18.93	54.65	68.2	-13.55	Pk
Horizontal	6039.135	59.16	-18.93	40.23	54	-13.77	AV
Horizontal	12970.153	63.17	-7.85	55.32	74	-18.68	Pk
Horizontal	12970.153	49.25	-7.85	41.40	54	-12.60	AV
Horizontal	19455.120	57.10	7.78	64.88	68.2	-3.32	Pk
Horizontal	19455.120	44.86	7.78	52.64	54	-1.36	AV
High Channel (6525 MHz)-Above 1G							
Vertical	6039.173	71.64	-18.93	52.71	68.2	-15.49	Pk
Vertical	6039.173	59.17	-18.93	40.24	54	-13.76	AV
Vertical	13050.074	60.49	-7.8	52.69	74	-21.31	Pk
Vertical	13050.074	49.11	-7.8	41.31	54	-12.69	AV
Vertical	19575.166	59.32	7.78	67.10	68.2	-1.10	Pk
Vertical	19575.166	44.66	7.78	52.44	54	-1.56	AV
Horizontal	6039.127	72.73	-18.93	53.79	68.2	-14.41	Pk
Horizontal	6039.127	59.70	-18.93	40.76	54	-13.24	AV
Horizontal	13050.198	62.96	-7.8	55.16	74	-18.84	Pk
Horizontal	13050.198	49.48	-7.8	41.68	54	-12.32	AV
Horizontal	19575.117	59.25	7.78	67.03	68.2	-1.17	Pk
Horizontal	19575.117	44.00	7.78	51.78	54	-2.22	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-6: 6435-6515MHz)- 802.11ax80
-------------	---------------------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6465 MHz)-Above 1G							
Vertical	4679.039	72.52	-20.24	52.27	74	-21.73	Pk
Vertical	4679.039	59.67	-20.24	39.43	54	-14.57	AV
Vertical	12930.199	64.88	-7.85	57.03	74	-16.97	Pk
Vertical	12930.199	49.18	-7.85	41.33	54	-12.67	AV
Vertical	19395.062	57.04	7.76	64.80	68.2	-3.40	Pk
Vertical	19395.062	44.71	7.76	52.47	54	-1.53	AV
Horizontal	4679.112	70.90	-20.24	50.66	74	-23.34	Pk
Horizontal	4679.112	59.03	-20.24	38.79	54	-15.21	AV
Horizontal	12930.054	61.53	-7.85	53.68	74	-20.32	Pk
Horizontal	12930.054	49.76	-7.85	41.91	54	-12.09	AV
Horizontal	19395.082	57.78	7.76	65.54	68.2	-2.66	Pk
Horizontal	19395.082	44.86	7.76	52.62	54	-1.38	AV
High Channel (6545 MHz)-Above 1G							
Vertical	6039.148	73.43	-18.93	54.50	68.2	-13.70	Pk
Vertical	6039.148	59.46	-18.93	40.53	54	-13.47	AV
Vertical	13090.187	61.42	-7.8	53.62	74	-20.38	Pk
Vertical	13090.187	49.59	-7.8	41.79	54	-12.21	AV
Vertical	19635.089	57.28	7.78	65.06	68.2	-3.14	Pk
Vertical	19635.089	44.50	7.78	52.28	54	-1.72	AV
Horizontal	6039.198	74.81	-18.93	55.87	68.2	-12.33	Pk
Horizontal	6039.198	59.81	-18.93	40.87	54	-13.13	AV
Horizontal	13090.072	61.74	-7.8	53.94	74	-20.06	Pk
Horizontal	13090.072	49.86	-7.8	42.06	54	-11.94	AV
Horizontal	19635.010	57.20	7.78	64.98	68.2	-3.22	Pk
Horizontal	19635.010	44.56	7.78	52.34	54	-1.66	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode:	TX(U-NII-6: 6435-6515MHz)- 802.11ax160
------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6505 MHz)-Above 1G							
Vertical	4679.069	74.07	-20.24	53.83	74	-20.17	Pk
Vertical	4679.069	59.72	-20.24	39.48	54	-14.52	AV
Vertical	13010.112	63.64	-7.8	55.84	74	-18.16	Pk
Vertical	13010.112	49.18	-7.8	41.38	54	-12.62	AV
Vertical	19515.058	57.93	7.78	65.71	68.2	-2.49	Pk
Vertical	19515.058	44.56	7.78	52.34	54	-1.66	AV
Horizontal	4679.188	73.19	-20.24	52.94	74	-21.06	Pk
Horizontal	4679.188	59.66	-20.24	39.42	54	-14.58	AV
Horizontal	13010.172	60.26	-7.8	52.46	74	-21.54	Pk
Horizontal	13010.172	49.43	-7.8	41.63	54	-12.37	AV
Horizontal	19515.041	56.19	7.78	63.97	68.2	-4.23	Pk
Horizontal	19515.041	44.11	7.78	51.89	54	-2.11	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Quectel Antenna (YF0023CA) U-NII-7: 6535-6865MHz

Test Mode :	TX(U-NII-7: 6535-6865MHz) - 802.11ax20
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6535 MHz)-Above 1G							
Vertical	4681.269	74.11	-20.24	53.87	74	-20.13	Pk
Vertical	4681.269	59.53	-20.24	39.29	54	-14.71	AV
Vertical	13070.033	64.37	-7.8	56.57	68.2	-11.63	Pk
Vertical	13070.033	49.22	-7.8	41.42	54	-12.58	AV
Vertical	19605.050	56.80	7.78	64.58	68.2	-3.62	Pk
Vertical	19605.050	44.25	7.78	52.03	54	-1.97	AV
Horizontal	4679.145	73.26	-20.73	52.53	74	-21.47	Pk
Horizontal	4679.145	59.21	-20.73	38.48	54	-15.52	AV
Horizontal	13070.018	63.87	-7.8	56.07	68.2	-12.13	Pk
Horizontal	13070.018	49.98	-7.8	42.18	54	-11.82	AV
Horizontal	19605.015	57.64	7.78	65.42	68.2	-2.78	Pk
Horizontal	19605.015	44.10	7.78	51.88	54	-2.12	AV
Middle Channel (6695 MHz)-Above 1G							
Vertical	4592.184	71.50	-20.42	51.09	74	-22.91	Pk
Vertical	4592.184	59.78	-20.42	39.37	54	-14.63	AV
Vertical	13390.173	61.41	-7.53	53.88	68.2	-14.32	Pk
Vertical	13390.173	49.97	-7.53	42.44	54	-11.56	AV
Vertical	20085.079	58.05	8.00	66.05	68.2	-2.15	Pk
Vertical	20085.079	44.90	8.00	52.90	54	-1.10	AV
Horizontal	4592.195	70.23	-20.42	49.81	74	-24.19	Pk
Horizontal	4592.195	59.81	-20.42	39.40	54	-14.60	AV
Horizontal	13390.103	62.36	-7.53	54.83	68.2	-13.37	Pk
Horizontal	13390.103	49.25	-7.53	41.72	54	-12.28	AV
Horizontal	20085.033	58.20	8.00	66.20	68.2	-2.00	Pk
Horizontal	20085.033	44.85	8.00	52.85	54	-1.15	AV
High Channel (6855 MHz)-Above 1G							
Vertical	6039.072	72.48	-18.93	53.55	68.2	-14.65	Pk
Vertical	6039.072	59.99	-18.93	41.06	54	-12.94	AV
Vertical	13710.140	64.34	-7.31	57.03	74	-16.97	Pk
Vertical	13710.140	49.81	-7.31	42.50	54	-11.50	AV
Vertical	20565.018	56.95	3.72	60.67	68.2	-7.53	Pk
Vertical	20565.018	44.79	3.72	48.51	54	-5.49	AV
Horizontal	6039.158	71.93	-18.93	53.00	68.2	-15.20	Pk
Horizontal	6039.158	59.61	-18.93	40.67	54	-13.33	AV
Horizontal	13710.141	63.15	-7.31	55.84	74	-18.16	Pk
Horizontal	13710.141	49.47	-7.31	42.16	54	-11.84	AV
Horizontal	20565.026	55.92	3.72	59.64	68.2	-8.56	Pk
Horizontal	20565.026	44.07	3.72	47.79	54	-6.21	AV
High Channel (6875 MHz)-Above 1G							
Vertical	6039.071	72.31	-18.93	53.37	68.2	-14.83	Pk
Vertical	6039.071	59.38	-18.93	40.45	54	-13.55	AV
Vertical	13750.043	64.40	-7.31	57.09	74	-16.91	Pk

Vertical	13750.043	49.41	-7.31	42.10	54	-11.90	AV
Vertical	20625.173	59.68	3.71	63.39	68.2	-4.81	Pk
Vertical	20625.173	44.93	3.71	48.64	54	-5.36	AV
Horizontal	6039.052	70.63	-18.93	51.70	68.2	-16.50	Pk
Horizontal	6039.052	59.19	-18.93	40.26	54	-13.74	AV
Horizontal	13750.132	63.42	-7.31	56.11	74	-17.89	Pk
Horizontal	13750.132	49.35	-7.31	42.04	54	-11.96	AV
Horizontal	20625.075	55.76	3.71	59.47	68.2	-8.73	Pk
Horizontal	20625.075	44.05	3.71	47.76	54	-6.24	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-7: 6535-6865MHz) - 802.11ax40
-------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6565 MHz)-Above 1G							
Vertical	4679.129	70.98	-20.24	50.74	74	-23.26	Pk
Vertical	4679.129	59.07	-20.24	38.83	54	-15.17	AV
Vertical	13130.002	62.47	-7.65	54.82	74	-19.18	Pk
Vertical	13130.002	49.91	-7.65	42.26	54	-11.74	AV
Vertical	19695.157	55.36	7.78	63.14	68.2	-5.06	Pk
Vertical	19695.157	44.28	7.78	52.06	54	-1.94	AV
Horizontal	4679.110	73.95	-20.24	53.71	74	-20.29	Pk
Horizontal	4679.110	59.64	-20.24	39.39	54	-14.61	AV
Horizontal	13130.116	62.13	-7.65	54.48	74	-19.52	Pk
Horizontal	13130.116	49.10	-7.65	41.45	54	-12.55	AV
Horizontal	19695.095	56.66	7.78	64.44	68.2	-3.76	Pk
Horizontal	19695.095	44.87	7.78	52.65	54	-1.35	AV
middle Channel (6685 MHz)-Above 1G							
Vertical	6039.078	71.60	-18.93	52.66	68.2	-15.54	Pk
Vertical	6039.078	59.87	-18.93	40.94	54	-13.06	AV
Vertical	13370.189	62.97	-7.53	55.44	74	-18.56	Pk
Vertical	13370.189	49.23	-7.53	41.70	54	-12.30	AV
Vertical	20055.162	57.26	8	65.26	68.2	-2.94	Pk
Vertical	20055.162	44.90	8	52.90	54	-1.10	AV
Horizontal	6039.064	74.18	-18.93	55.25	68.2	-12.95	Pk
Horizontal	6039.064	59.78	-18.93	40.85	54	-13.15	AV
Horizontal	13370.002	64.40	-7.53	56.87	74	-17.13	Pk
Horizontal	13370.002	49.67	-7.53	42.14	54	-11.86	AV
Horizontal	20055.067	55.68	8	63.68	68.2	-4.52	Pk
Horizontal	20055.067	44.07	8	52.07	54	-1.93	AV
High Channel (6845 MHz)-Above 1G							
Vertical	6039.029	74.89	-18.93	55.96	68.2	-12.24	Pk
Vertical	6039.029	59.58	-18.93	40.65	54	-13.35	AV
Vertical	13690.036	61.58	-7.31	54.27	74	-19.73	Pk
Vertical	13690.036	49.39	-7.31	42.08	54	-11.92	AV
Vertical	20535.192	57.86	3.72	61.58	68.2	-6.62	Pk
Vertical	20535.192	44.23	3.72	47.95	54	-6.05	AV
Horizontal	6039.167	71.48	-18.93	52.55	68.2	-15.65	Pk
Horizontal	6039.167	59.59	-18.93	40.66	54	-13.34	AV
Horizontal	13690.068	62.30	-7.31	54.99	74	-19.01	Pk
Horizontal	13690.068	49.32	-7.31	42.01	54	-11.99	AV
Horizontal	20535.157	57.90	3.72	61.62	68.2	-6.58	Pk
Horizontal	20535.157	44.43	3.72	48.15	54	-5.85	AV
High Channel (6885 MHz)-Above 1G							
Vertical	6039.146	74.78	-18.93	55.85	68.2	-12.35	Pk
Vertical	6039.146	59.05	-18.93	40.12	54	-13.88	AV
Vertical	13770.149	64.16	-7.31	56.85	74	-17.15	Pk
Vertical	13770.149	49.60	-7.31	42.29	54	-11.71	AV
Vertical	20655.126	58.88	3.71	62.59	68.2	-5.61	Pk

Vertical	20655.126	44.25	3.71	47.96	54	-6.04	AV
Horizontal	6039.019	72.81	-18.93	53.88	68.2	-14.32	Pk
Horizontal	6039.019	59.41	-18.93	40.48	54	-13.52	AV
Horizontal	13770.069	63.68	-7.31	56.37	74	-17.63	Pk
Horizontal	13770.069	49.57	-7.31	42.26	54	-11.74	AV
Horizontal	20655.071	58.58	3.71	62.29	68.2	-5.91	Pk
Horizontal	20655.071	44.32	3.71	48.03	54	-5.97	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode : TX(U-NII-7: 6535-6865MHz)- 802.11ax80

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6625 MHz)-Above 1G							
Vertical	4679.166	70.24	-20.24	49.99	74	-24.01	Pk
Vertical	4679.166	59.98	-20.24	39.74	54	-14.26	AV
Vertical	13250.152	61.20	-7.61	53.59	74	-20.41	Pk
Vertical	13250.152	49.85	-7.61	42.24	54	-11.76	AV
Vertical	19875.018	55.40	7.78	63.18	68.2	-5.02	Pk
Vertical	19875.018	44.68	7.78	52.46	54	-1.54	AV
Horizontal	4679.079	74.31	-20.24	54.07	74	-19.93	Pk
Horizontal	4679.079	59.04	-20.24	38.80	54	-15.20	AV
Horizontal	13250.056	63.69	-7.61	56.08	74	-17.92	Pk
Horizontal	13250.056	49.82	-7.61	42.21	54	-11.79	AV
Horizontal	19875.006	55.43	7.78	63.21	68.2	-4.99	Pk
Horizontal	19875.006	44.31	7.78	52.09	54	-1.91	AV
Middle Channel (6705 MHz)-Above 1G							
Vertical	6039.180	71.14	-18.93	52.21	68.2	-15.99	Pk
Vertical	6039.180	59.28	-18.93	40.34	54	-13.66	AV
Vertical	13410.036	61.25	-7.4	53.85	74	-20.15	Pk
Vertical	13410.036	49.46	-7.4	42.06	54	-11.94	AV
Vertical	20115.166	57.57	6.35	63.92	68.2	-4.28	Pk
Vertical	20115.166	44.80	6.35	51.15	54	-2.85	AV
Horizontal	6039.064	73.43	-18.93	54.50	68.2	-13.70	Pk
Horizontal	6039.064	59.86	-18.93	40.93	54	-13.07	AV
Horizontal	13410.130	60.22	-7.4	52.82	74	-21.18	Pk
Horizontal	13410.130	49.99	-7.4	42.59	54	-11.41	AV
Horizontal	20115.147	59.75	6.35	66.10	68.2	-2.10	Pk
Horizontal	20115.147	44.47	6.35	50.82	54	-3.18	AV
High Channel (6785 MHz)-Above 1G							
Vertical	6039.088	70.20	-18.93	51.27	68.2	-16.93	Pk
Vertical	6039.088	59.89	-18.93	40.96	54	-13.04	AV
Vertical	13570.156	60.36	-7.39	52.97	74	-21.03	Pk
Vertical	13570.156	49.77	-7.39	42.38	54	-11.62	AV
Vertical	20355.189	57.98	5.82	63.80	68.2	-4.40	Pk
Vertical	20355.189	44.32	5.82	50.14	54	-3.86	AV
Horizontal	6039.028	72.14	-18.93	53.21	68.2	-14.99	Pk
Horizontal	6039.028	59.35	-18.93	40.42	54	-13.58	AV
Horizontal	13570.060	62.01	-7.39	54.62	74	-19.38	Pk
Horizontal	13570.060	49.39	-7.39	42.00	54	-12.00	AV
Horizontal	20355.136	57.99	5.82	63.81	68.2	-4.39	Pk
Horizontal	20355.136	44.32	5.82	50.14	54	-3.86	AV
High Channel (6865 MHz)-Above 1G							
Vertical	6039.091	73.70	-18.93	54.77	68.2	-13.43	Pk
Vertical	6039.091	59.37	-18.93	40.44	54	-13.56	AV
Vertical	13730.064	60.90	-7.23	53.67	74	-20.33	Pk
Vertical	13730.064	49.53	-7.23	42.30	54	-11.70	AV

Vertical	20595.170	55.97	3.51	59.48	68.2	-8.72	Pk
Vertical	20595.170	44.40	3.51	47.91	54	-6.09	AV
Horizontal	6039.000	71.64	-18.93	52.70	68.2	-15.50	Pk
Horizontal	6039.000	59.55	-18.93	40.62	54	-13.38	AV
Horizontal	13730.196	64.72	-7.23	57.49	74	-16.51	Pk
Horizontal	13730.196	49.79	-7.23	42.56	54	-11.44	AV
Horizontal	20595.148	58.89	3.51	62.40	68.2	-5.80	Pk
Horizontal	20595.148	44.69	3.51	48.20	54	-5.80	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode: TX(U-NII-7: 6535-6865MHz)- 802.11ax160

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6665 MHz)-Above 1G							
Vertical	4679.080	72.86	-20.24	52.62	74	-21.38	Pk
Vertical	4679.080	60.00	-20.24	39.76	54	-14.24	AV
Vertical	13330.135	60.86	-7.5	53.36	74	-20.64	Pk
Vertical	13330.135	49.10	-7.5	41.60	54	-12.40	AV
Vertical	19995.193	58.59	8	66.59	68.2	-1.61	Pk
Vertical	19995.193	44.40	8	52.40	54	-1.60	AV
Horizontal	4679.024	74.59	-20.24	54.34	74	-19.66	Pk
Horizontal	4679.024	59.15	-20.24	38.91	54	-15.09	AV
Horizontal	13330.125	62.92	-7.5	55.42	74	-18.58	Pk
Horizontal	13330.125	49.52	-7.5	42.02	54	-11.98	AV
Horizontal	19995.047	57.04	8	65.04	68.2	-3.16	Pk
Horizontal	19995.047	44.77	8	52.77	54	-1.23	AV
High Channel (6825 MHz)-Above 1G							
Vertical	6039.088	72.45	-18.93	53.52	68.2	-14.68	Pk
Vertical	6039.088	59.46	-18.93	40.53	54	-13.47	AV
Vertical	13650.095	62.74	-7.3	55.44	74	-18.56	Pk
Vertical	13650.095	49.38	-7.3	42.08	54	-11.92	AV
Vertical	20475.147	59.61	4.27	63.88	68.2	-4.32	Pk
Vertical	20475.147	44.52	4.27	48.79	54	-5.21	AV
Horizontal	6039.134	70.60	-18.93	51.67	68.2	-16.53	Pk
Horizontal	6039.134	59.61	-18.93	40.68	54	-13.32	AV
Horizontal	13650.068	61.58	-7.3	54.28	74	-19.72	Pk
Horizontal	13650.068	49.92	-7.3	42.62	54	-11.38	AV
Horizontal	20475.165	55.60	4.27	59.87	68.2	-8.33	Pk
Horizontal	20475.165	44.09	4.27	48.36	54	-5.64	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Quectel Antenna (YF0023CA) U-NII-8: 6885-7115MHz

Test Mode :	TX(U-NII-8: 6885-7115MHz) - 802.11ax20
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6895 MHz)-Above 1G							
Vertical	4682.794	72.60	-20.23	52.36	74	-21.64	Pk
Vertical	4682.794	59.98	-20.23	39.75	54	-14.25	AV
Vertical	13790.112	61.88	-7.23	54.65	68.2	-13.55	Pk
Vertical	13790.112	49.76	-7.23	42.53	54	-11.47	AV
Vertical	20685.015	58.45	3.51	61.96	68.2	-6.24	Pk
Vertical	20685.015	44.44	3.51	47.95	54	-6.05	AV
Horizontal	4679.059	72.20	-20.73	51.47	74	-22.53	Pk
Horizontal	4679.059	59.89	-20.73	39.16	54	-14.84	AV
Horizontal	13790.099	62.15	-7.23	54.92	68.2	-13.28	Pk
Horizontal	13790.099	49.05	-7.23	41.82	54	-12.18	AV
Horizontal	20685.115	58.32	3.51	61.83	68.2	-6.37	Pk
Horizontal	20685.115	44.97	3.51	48.48	54	-5.52	AV
middle Channel (6995 MHz)-Above 1G							
Vertical	4592.004	70.96	-20.42	50.55	74	-23.45	Pk
Vertical	4592.004	59.60	-20.42	39.18	54	-14.82	AV
Vertical	13990.037	63.33	-6.83	56.50	68.2	-11.70	Pk
Vertical	13990.037	49.23	-6.83	42.40	54	-11.60	AV
Vertical	20985.137	56.91	-1.95	54.96	68.2	-13.24	Pk
Vertical	20985.137	44.32	-1.95	42.37	54	-11.63	AV
Horizontal	4592.074	72.60	-20.42	52.19	74	-21.81	Pk
Horizontal	4592.074	59.28	-20.42	38.86	54	-15.14	AV
Horizontal	13990.119	60.58	-6.83	53.75	68.2	-14.45	Pk
Horizontal	13990.119	49.75	-6.83	42.92	54	-11.08	AV
Horizontal	20985.099	58.79	-1.95	56.84	68.2	-11.36	Pk
Horizontal	20985.099	44.93	-1.95	42.98	54	-11.02	AV
High Channel (7115 MHz)-Above 1G							
Vertical	4592.029	72.11	-20.42	51.69	68.2	-16.51	Pk
Vertical	4592.029	59.81	-20.42	39.39	54	-14.61	AV
Vertical	14230.171	62.97	-7.12	55.85	74	-18.15	Pk
Vertical	14230.171	49.07	-7.12	41.95	54	-12.05	AV
Vertical	21345.084	57.89	-1.91	55.98	68.2	-12.22	Pk
Vertical	21345.084	44.37	-1.91	42.46	54	-11.54	AV
Horizontal	6039.174	73.98	-18.93	55.05	68.2	-13.15	Pk
Horizontal	6039.174	59.58	-18.93	40.65	54	-13.35	AV
Horizontal	14230.196	62.01	-7.12	54.89	74	-19.11	Pk
Horizontal	14230.196	49.03	-7.12	41.91	54	-12.09	AV
Horizontal	21345.018	55.98	-1.91	54.07	68.2	-14.13	Pk
Horizontal	21345.018	44.41	-1.91	42.50	54	-11.50	AV

Note: The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-8: 6885-7115MHz) - 802.11ax40
-------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6925 MHz)-Above 1G							
Vertical	4679.190	72.12	-20.24	51.88	74	-22.12	Pk
Vertical	4679.190	59.33	-20.24	39.08	54	-14.92	AV
Vertical	13850.041	60.27	-7.23	53.04	74	-20.96	Pk
Vertical	13850.041	49.06	-7.23	41.83	54	-12.17	AV
Vertical	20775.139	59.49	3.51	63.00	68.2	-5.20	Pk
Vertical	20775.139	44.70	3.51	48.21	54	-5.79	AV
Horizontal	4679.138	70.09	-20.24	49.85	74	-24.15	Pk
Horizontal	4679.138	59.04	-20.24	38.80	54	-15.20	AV
Horizontal	13850.067	63.92	-7.23	56.69	74	-17.31	Pk
Horizontal	13850.067	49.42	-7.23	42.19	54	-11.81	AV
Horizontal	20775.066	55.07	3.51	58.58	68.2	-9.62	Pk
Horizontal	20775.066	44.90	3.51	48.41	54	-5.59	AV
middle Channel (6965 MHz)-Above 1G							
Vertical	6039.055	72.68	-18.93	53.74	68.2	-14.46	Pk
Vertical	6039.055	59.68	-18.93	40.75	54	-13.25	AV
Vertical	13930.004	63.31	-6.83	56.48	74	-17.52	Pk
Vertical	13930.004	49.86	-6.83	43.03	54	-10.97	AV
Vertical	20895.186	56.90	-1.95	54.95	68.2	-13.25	Pk
Vertical	20895.186	44.92	-1.95	42.97	54	-11.03	AV
Horizontal	6039.032	74.45	-18.93	55.52	68.2	-12.68	Pk
Horizontal	6039.032	59.78	-18.93	40.85	54	-13.15	AV
Horizontal	13930.122	61.98	-6.83	55.15	74	-18.85	Pk
Horizontal	13930.122	49.46	-6.83	42.63	54	-11.37	AV
Horizontal	20895.007	55.35	-1.95	53.40	68.2	-14.80	Pk
Horizontal	20895.007	44.01	-1.95	42.06	54	-11.94	AV
High Channel (7085 MHz)-Above 1G							
Vertical	6039.110	72.22	-18.93	53.29	68.2	-14.91	Pk
Vertical	6039.110	59.53	-18.93	40.60	54	-13.40	AV
Vertical	14170.125	62.87	-7.12	55.75	74	-18.25	Pk
Vertical	14170.125	49.34	-7.12	42.22	54	-11.78	AV
Vertical	21255.014	59.47	-1.91	57.56	68.2	-10.64	Pk
Vertical	21255.014	44.97	-1.91	43.06	54	-10.94	AV
Horizontal	6039.023	74.68	-18.93	55.75	68.2	-12.45	Pk
Horizontal	6039.023	59.51	-18.93	40.57	54	-13.43	AV
Horizontal	14170.022	61.41	-7.12	54.29	74	-19.71	Pk
Horizontal	14170.022	49.88	-7.12	42.76	54	-11.24	AV
Horizontal	21255.200	59.62	-1.91	57.71	68.2	-10.49	Pk
Horizontal	21255.200	44.13	-1.91	42.22	54	-11.78	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode :	TX(U-NII-8: 6885-7115MHz) - 802.11ax80
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6945 MHz)-Above 1G							
Vertical	4679.134	71.57	-20.24	51.33	74	-22.67	Pk
Vertical	4679.134	59.18	-20.24	38.94	54	-15.06	AV
Vertical	13890.036	63.63	-7.23	56.40	74	-17.60	Pk
Vertical	13890.036	49.94	-7.23	42.71	54	-11.29	AV
Vertical	20835.186	59.87	3.51	63.38	68.2	-4.82	Pk
Vertical	20835.186	44.41	3.51	47.92	54	-6.08	AV
Horizontal	4679.183	73.60	-20.24	53.36	74	-20.64	Pk
Horizontal	4679.183	59.55	-20.24	39.31	54	-14.69	AV
Horizontal	13890.012	64.53	-7.23	57.30	74	-16.70	Pk
Horizontal	13890.012	49.21	-7.23	41.98	54	-12.02	AV
Horizontal	20835.179	55.72	3.51	59.23	68.2	-8.97	Pk
Horizontal	20835.179	44.79	3.51	48.30	54	-5.70	AV
High Channel (7025 MHz)-Above 1G							
Vertical	6039.139	73.44	-18.93	54.51	68.2	-13.69	Pk
Vertical	6039.139	59.85	-18.93	40.92	54	-13.08	AV
Vertical	14050.052	64.81	-6.83	57.98	74	-16.02	Pk
Vertical	14050.052	49.98	-6.83	43.15	54	-10.85	AV
Vertical	21075.138	58.60	-1.95	56.65	68.2	-11.55	Pk
Vertical	21075.138	44.53	-1.95	42.58	54	-11.42	AV
Horizontal	6039.186	70.24	-18.93	51.31	68.2	-16.89	Pk
Horizontal	6039.186	59.81	-18.93	40.88	54	-13.12	AV
Horizontal	14050.011	64.15	-6.83	57.32	74	-16.68	Pk
Horizontal	14050.011	49.24	-6.83	42.41	54	-11.59	AV
Horizontal	21075.178	59.28	-1.95	57.33	68.2	-10.87	Pk
Horizontal	21075.178	44.73	-1.95	42.78	54	-11.22	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

Test Mode:	TX(U-NII-8: 6885-7115MHz) - 802.11ax160
------------	---

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6985 MHz)-Above 1G							
Vertical	4679.144	70.23	-20.24	49.99	74	-24.01	Pk
Vertical	4679.144	59.36	-20.24	39.12	54	-14.88	AV
Vertical	13970.189	63.79	-6.83	56.96	74	-17.04	Pk
Vertical	13970.189	49.44	-6.83	42.61	54	-11.39	AV
Vertical	20955.142	58.08	-1.95	56.13	68.2	-12.07	Pk
Vertical	20955.142	44.20	-1.95	42.25	54	-11.75	AV
Horizontal	4679.062	70.59	-20.24	50.35	74	-23.65	Pk
Horizontal	4679.062	60.00	-20.24	39.76	54	-14.24	AV
Horizontal	13970.111	62.65	-6.83	55.82	74	-18.18	Pk
Horizontal	13970.111	49.80	-6.83	42.97	54	-11.03	AV
Horizontal	20955.123	56.10	-1.95	54.15	68.2	-14.05	Pk
Horizontal	20955.123	44.95	-1.95	43.00	54	-11.00	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode (4T4R).

4x4MIMO antenna:

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 20 Frequency(MHz): 5955

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5862.25	V	44.71	68.20
5914.25	V	45.10	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5888.25	H	45.56	68.20
5930.50	H	45.04	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L – Preamp
(4) Test Mode is MIMO Mode (4T4R).

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 20

☒ 5955

Ant.Pol

H

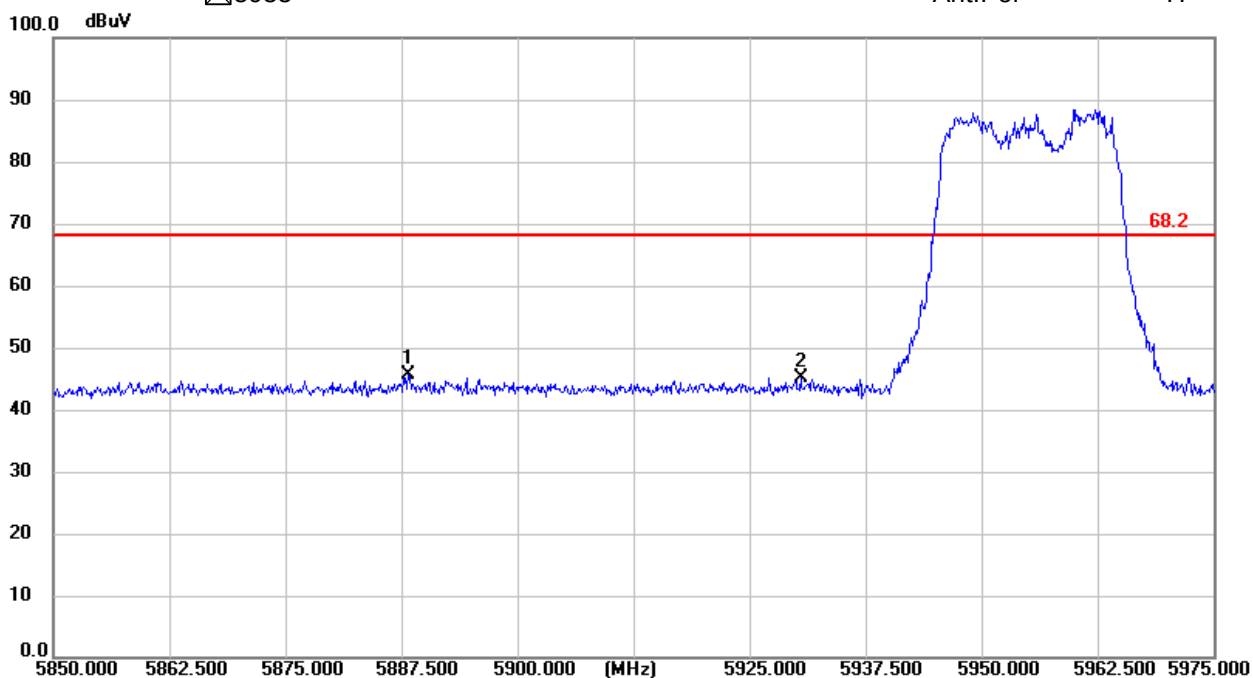

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 20

☒ 5955

Ant.Pol

V

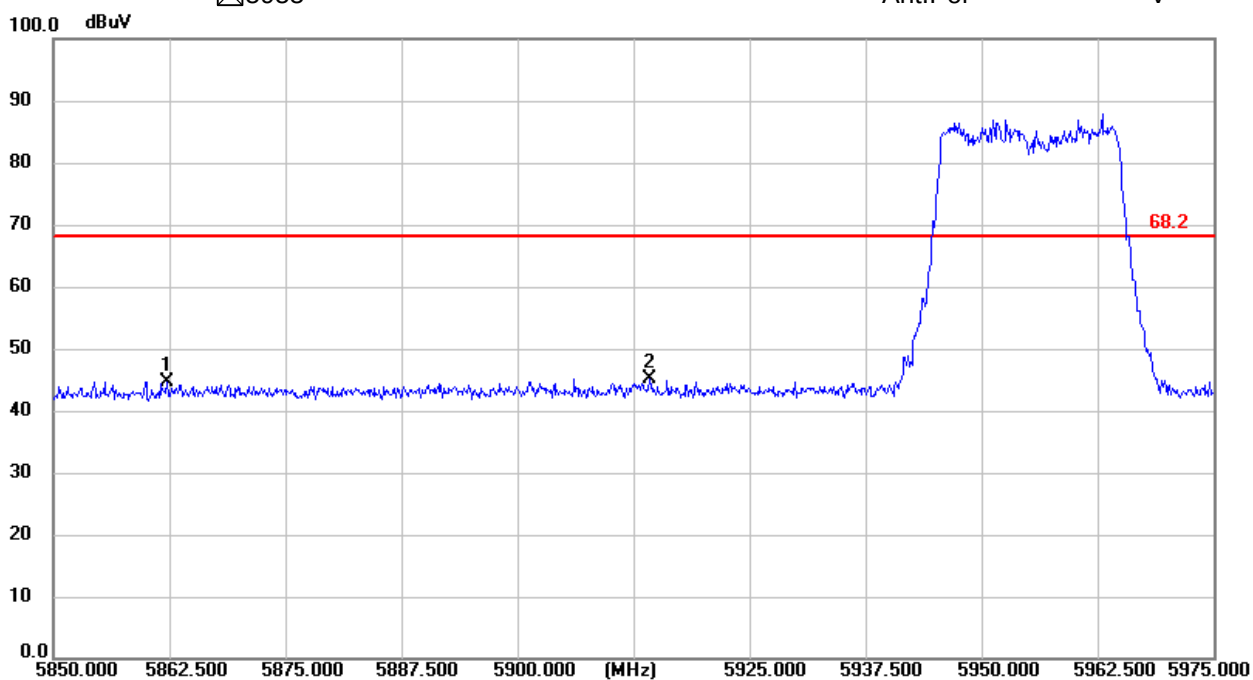


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 40 Frequency(MHz): 5965

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5877.30	V	45.61	68.20
5918.55	V	45.15	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5861.85	H	45.24	68.20
5918.25	H	46.09	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

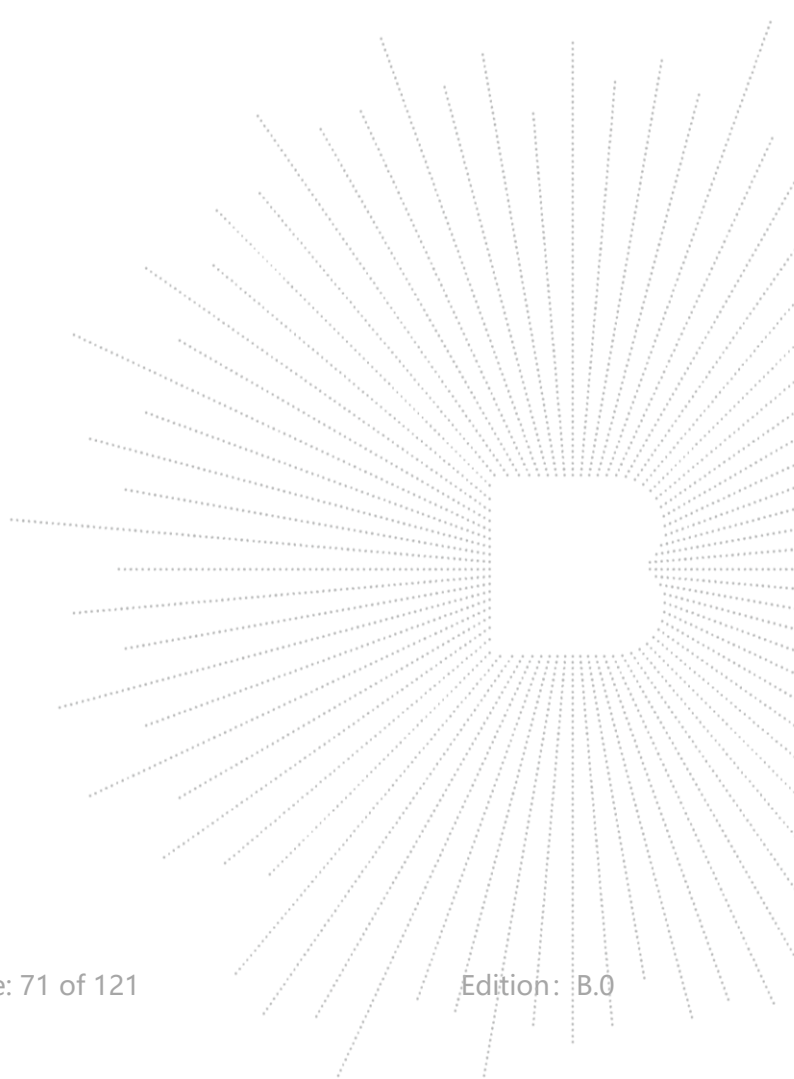

U-NII - 5

Test Model


Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 40

☒ 5965

Ant.Pol

H

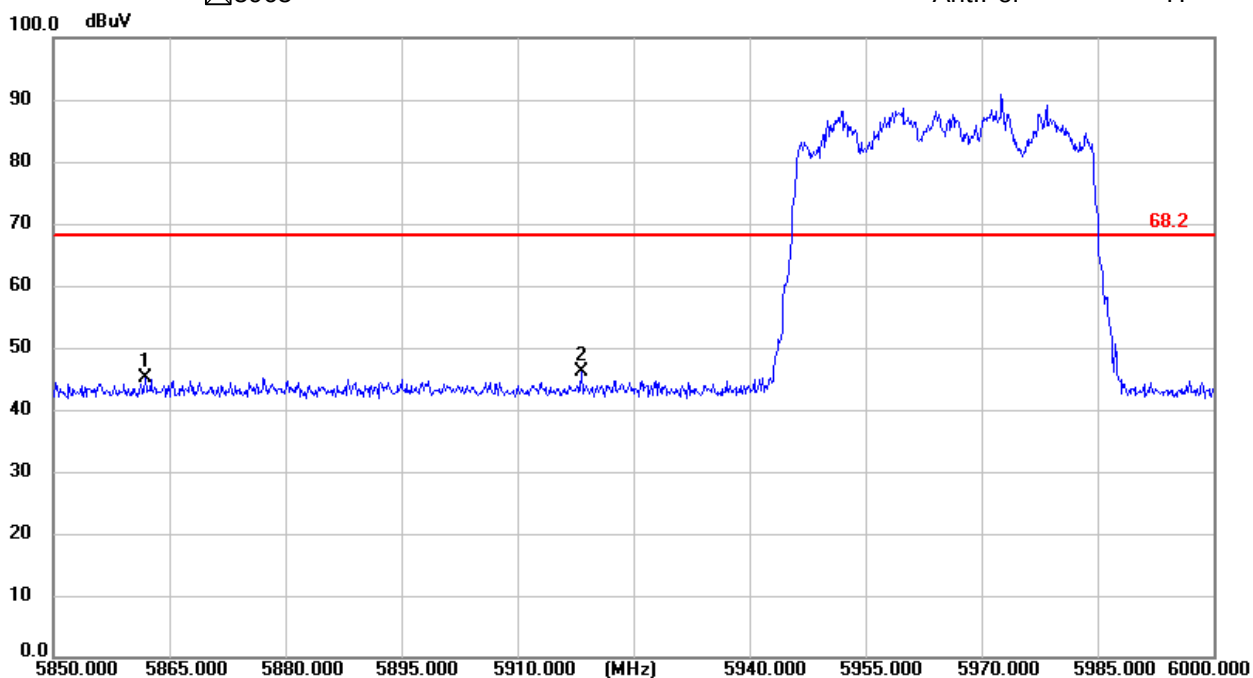

U-NII - 5

Test Model


Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 40

☒ 5965

Ant.Pol

V

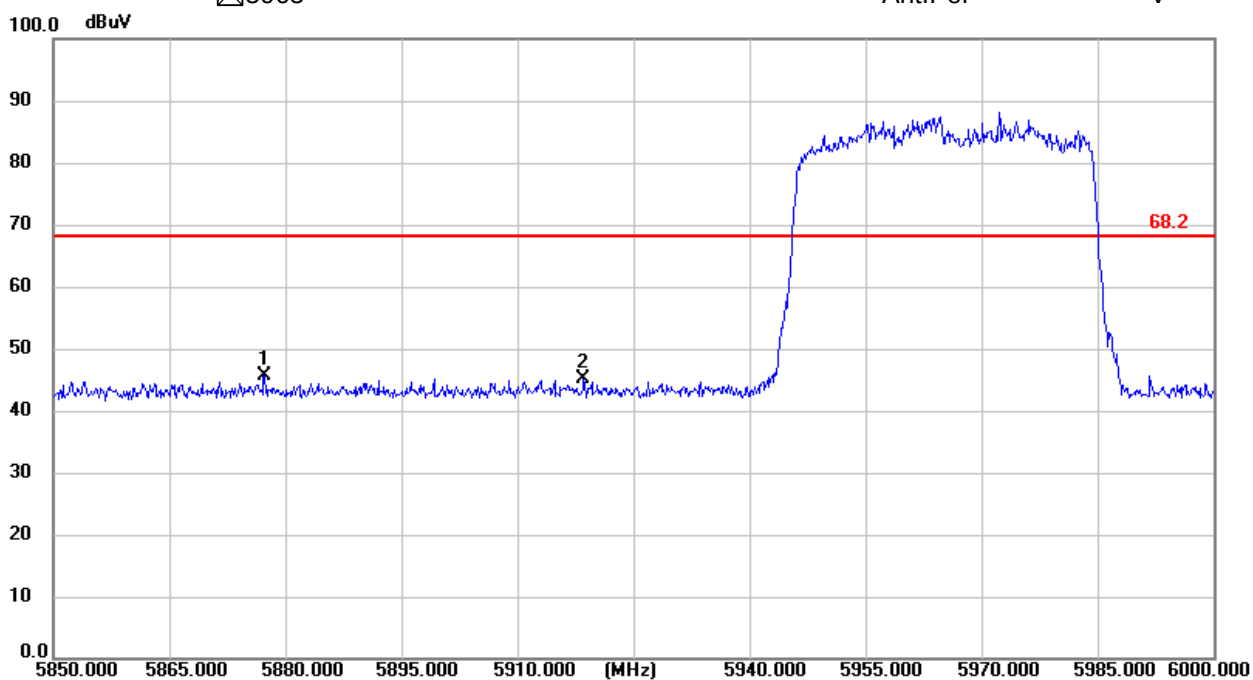


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 80 Frequency(MHz): 5985

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5911.20	V	44.96	68.20
5933.60	V	45.48	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5893.60	H	44.71	68.20
5921.20	H	45.58	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

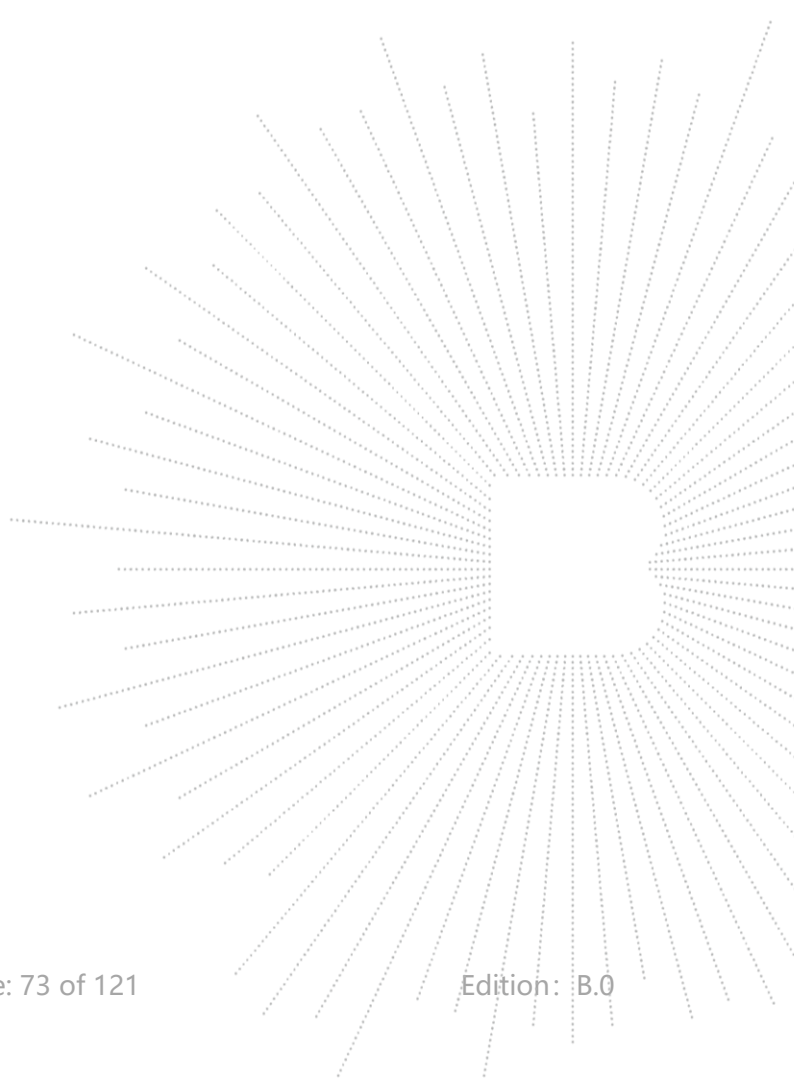

U-NII - 5

Test Model


Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 80

☒ 5985

Ant.Pol

H

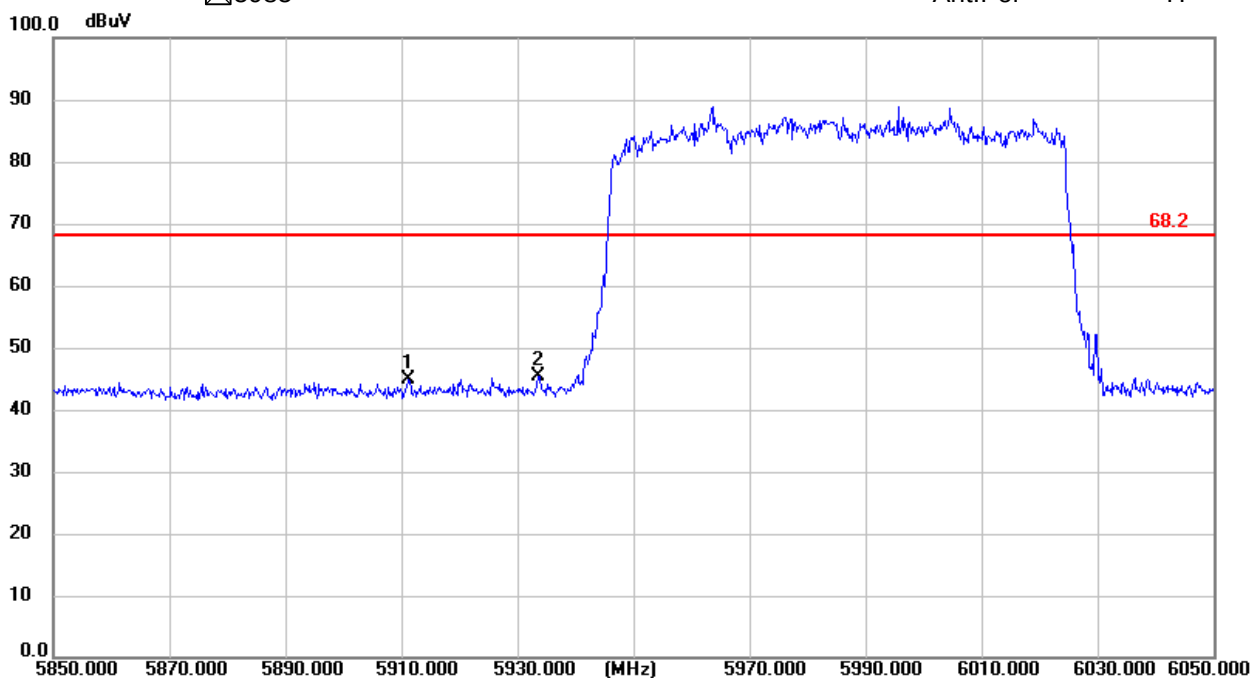

U-NII - 5

Test Model


Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 80

☒ 5985

Ant.Pol

V

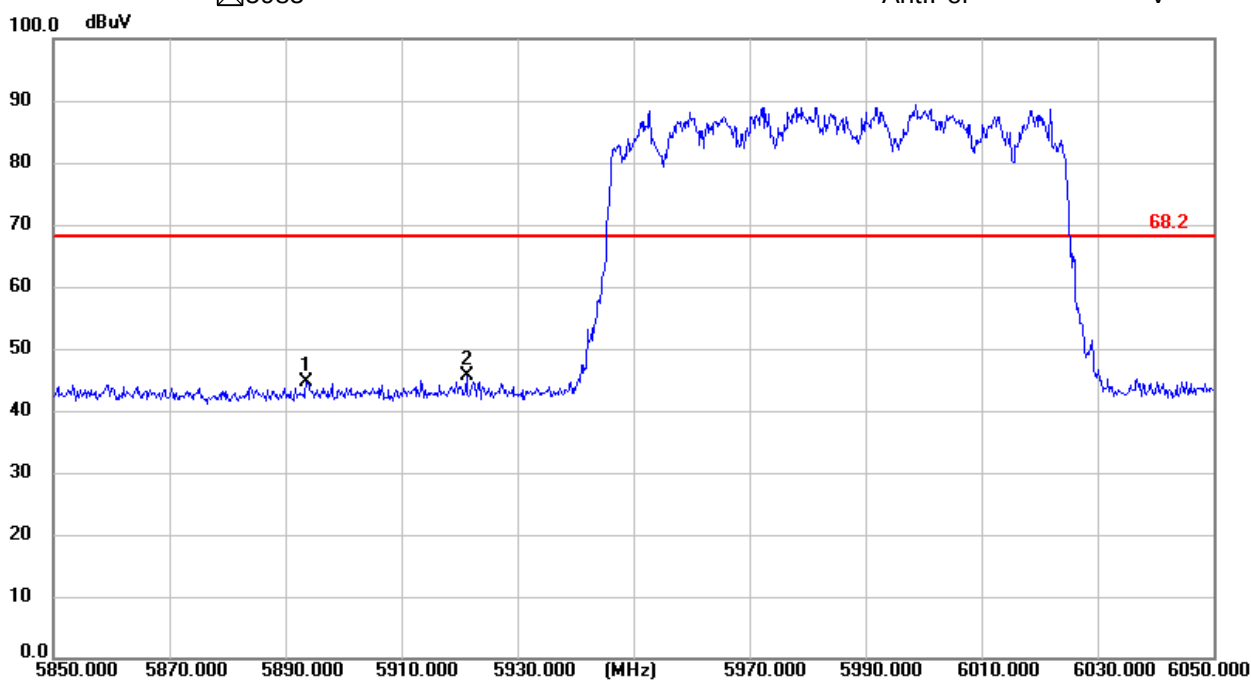


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 160 Frequency(MHz): 6025

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
6025.50	V	44.59	68.20
5871.50	V	44.59	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5688.50	H	45.05	68.20
5872.50	H	44.72	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

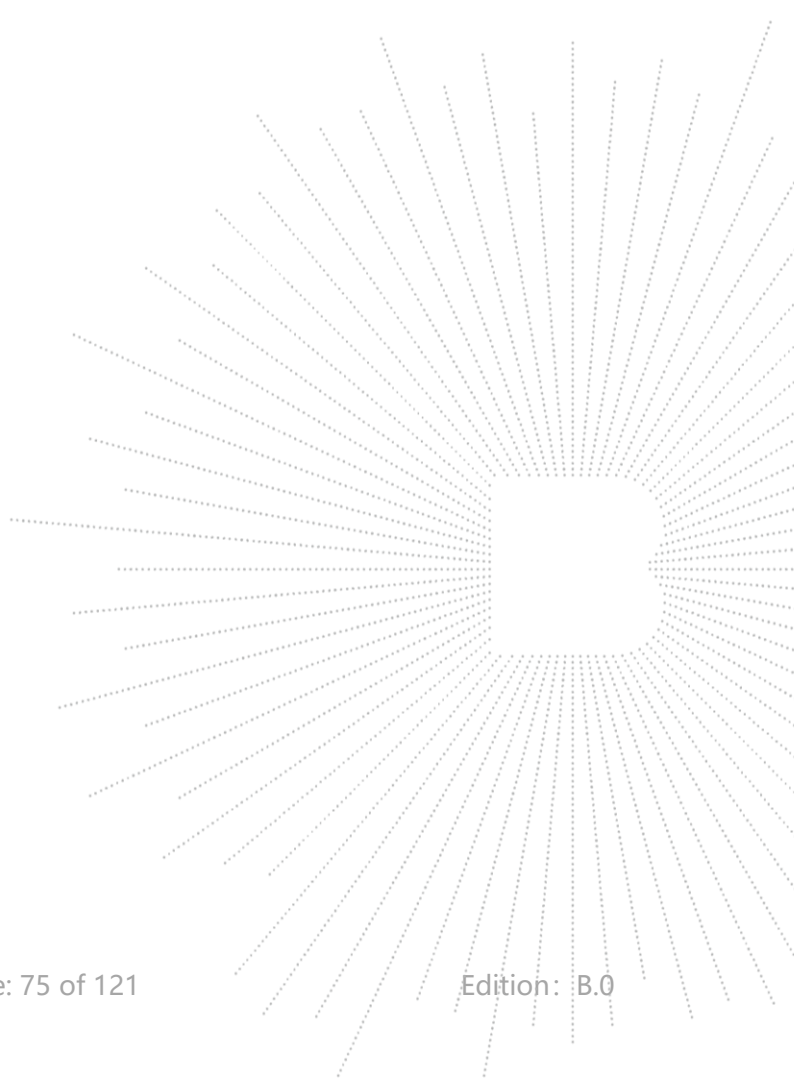

U-NII - 5

Test Model


Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 160

☒ 6025

Ant.Pol

H

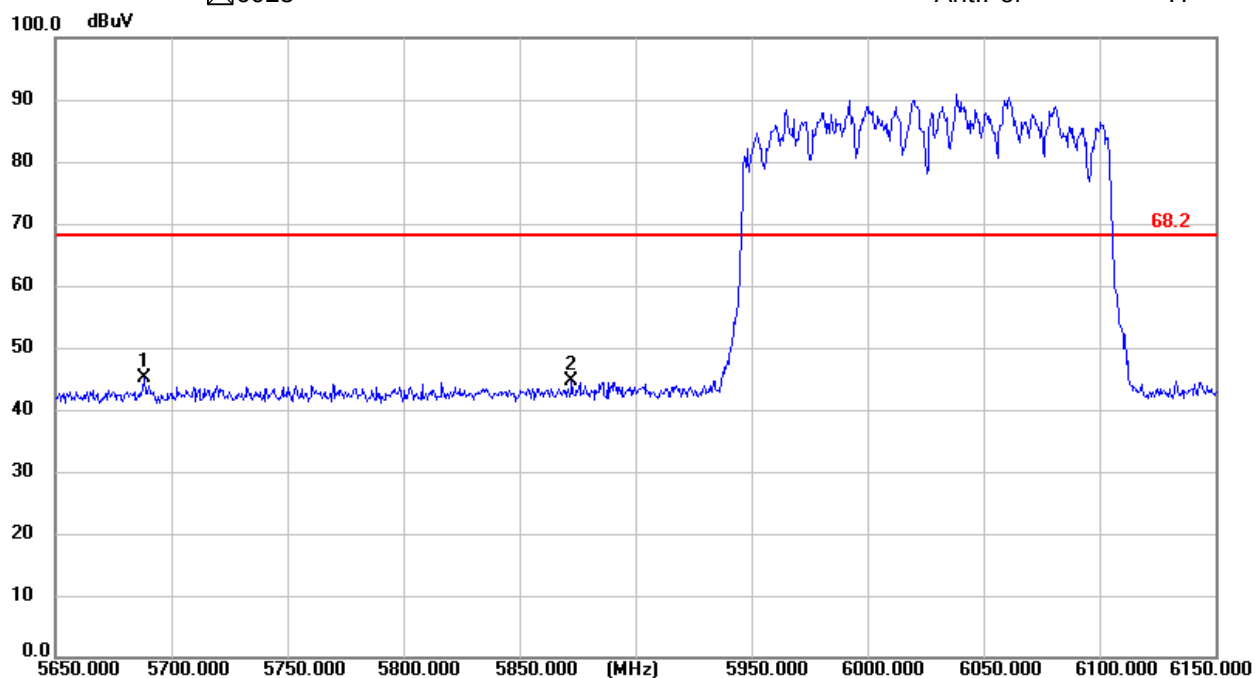

U-NII - 5

Test Model


Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 160

☒ 6025

Ant.Pol

V

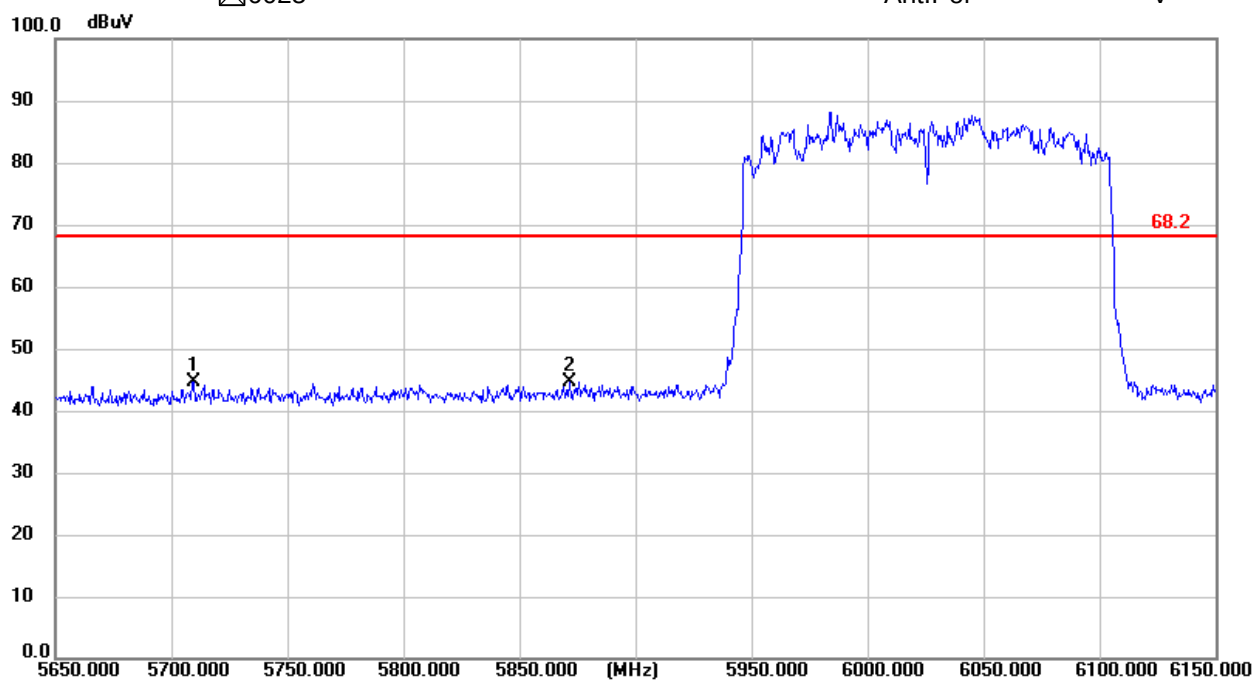


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 20 Frequency(MHz): 7115

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7155.20	V	47.69	68.20
7212.50	V	47.10	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7157.15	H	48.12	68.20
7217.00	H	48.73	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

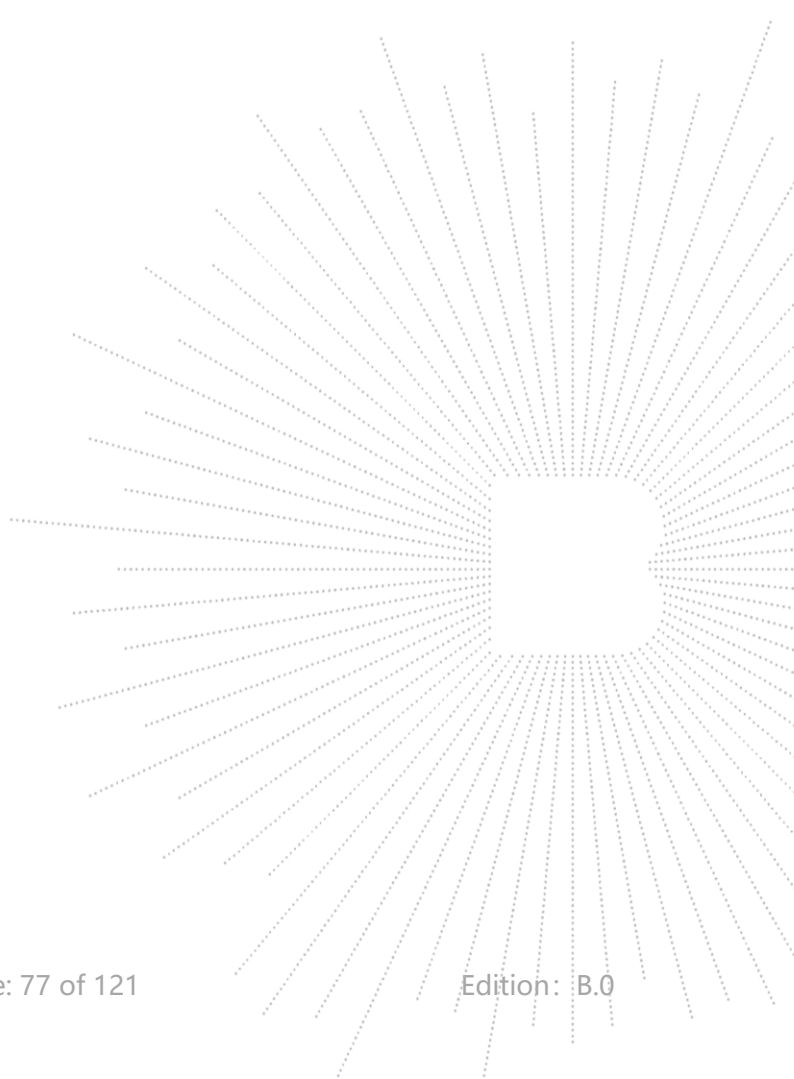

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 20

☒ 7115

Ant.Pol

H

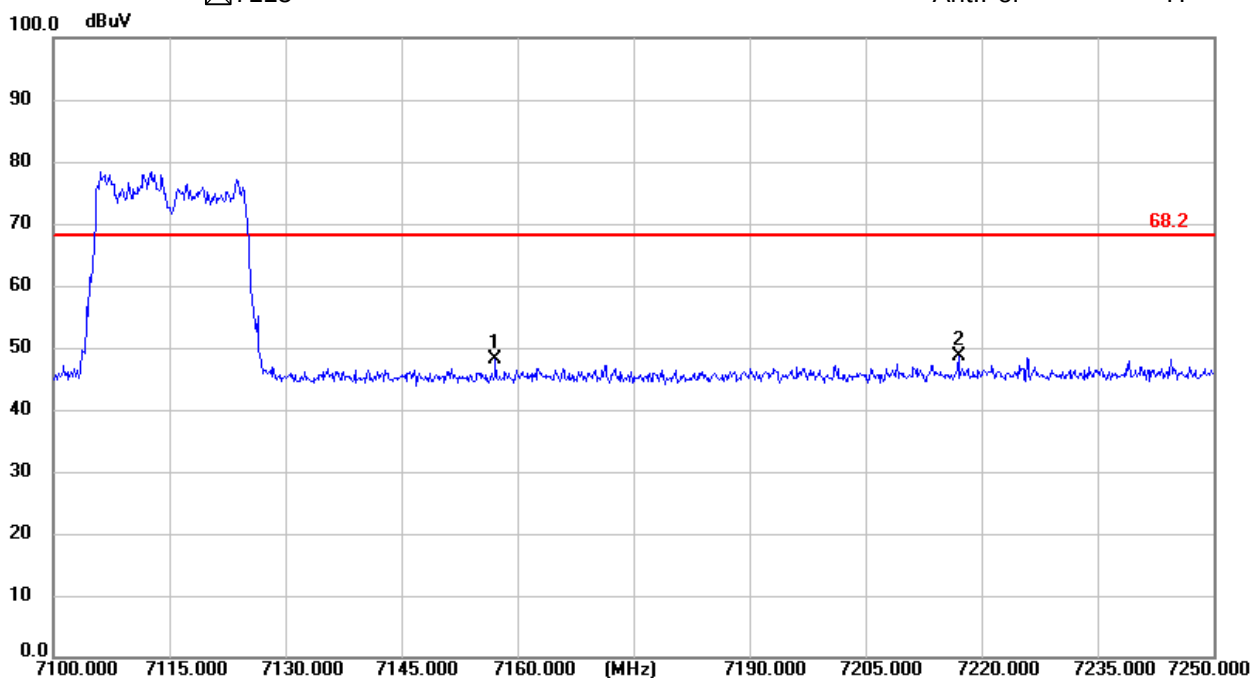

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 20

☒ 7115

Ant.Pol

V

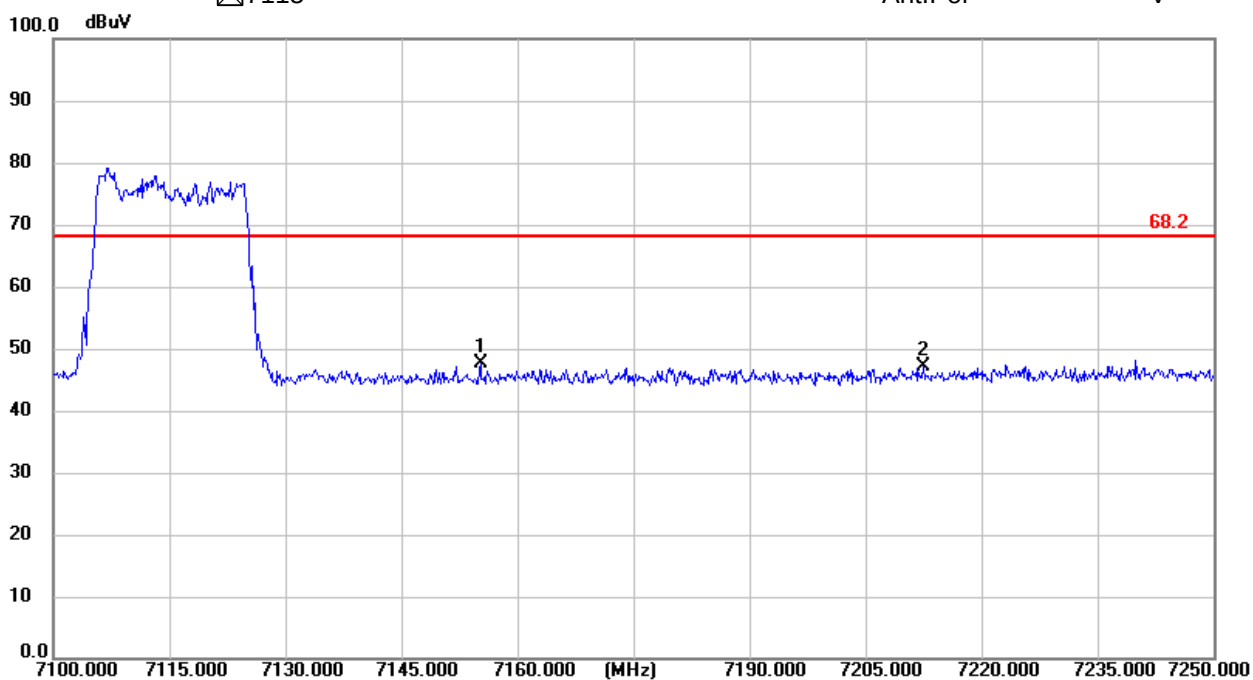


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 40 Frequency(MHz): 7085

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7148.00	V	47.13	68.20
7181.80	V	47.17	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7130.20	H	46.45	68.20
7202.80	H	46.99	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

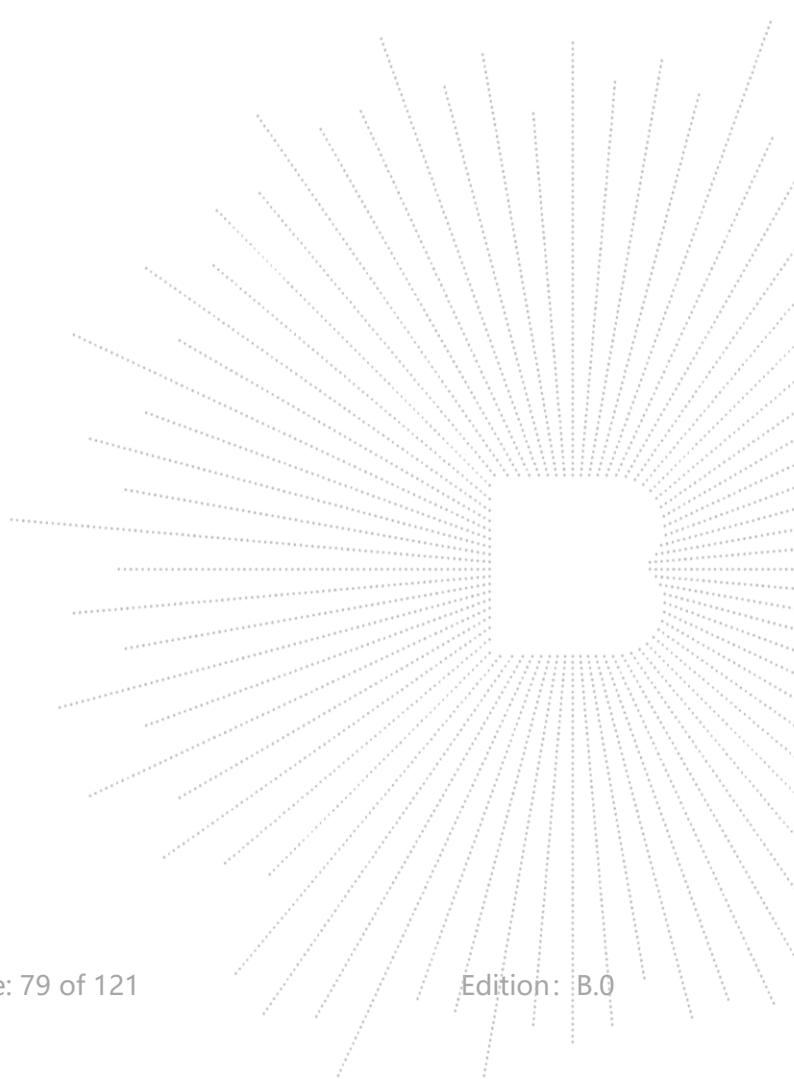

U-NII - 8

Test Model


Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 40

☒ 7085

Ant. Pol

H

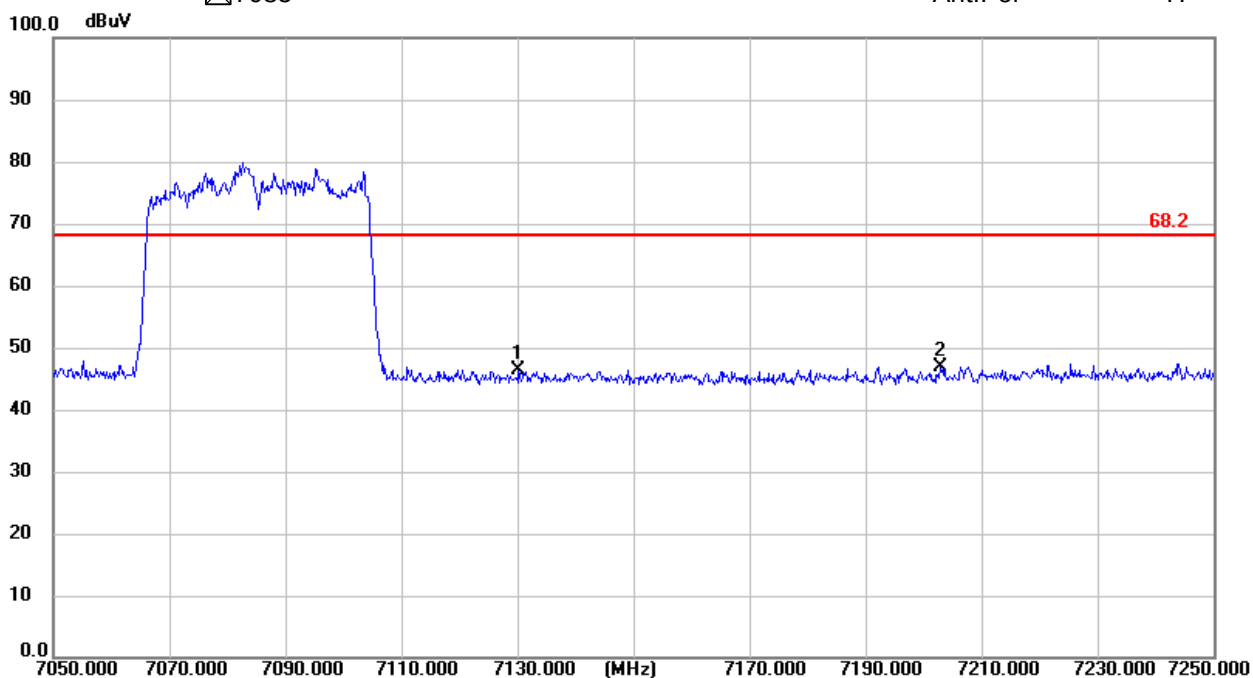

U-NII - 8

Test Model


Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 40

☒ 7085

Ant. Pol

V

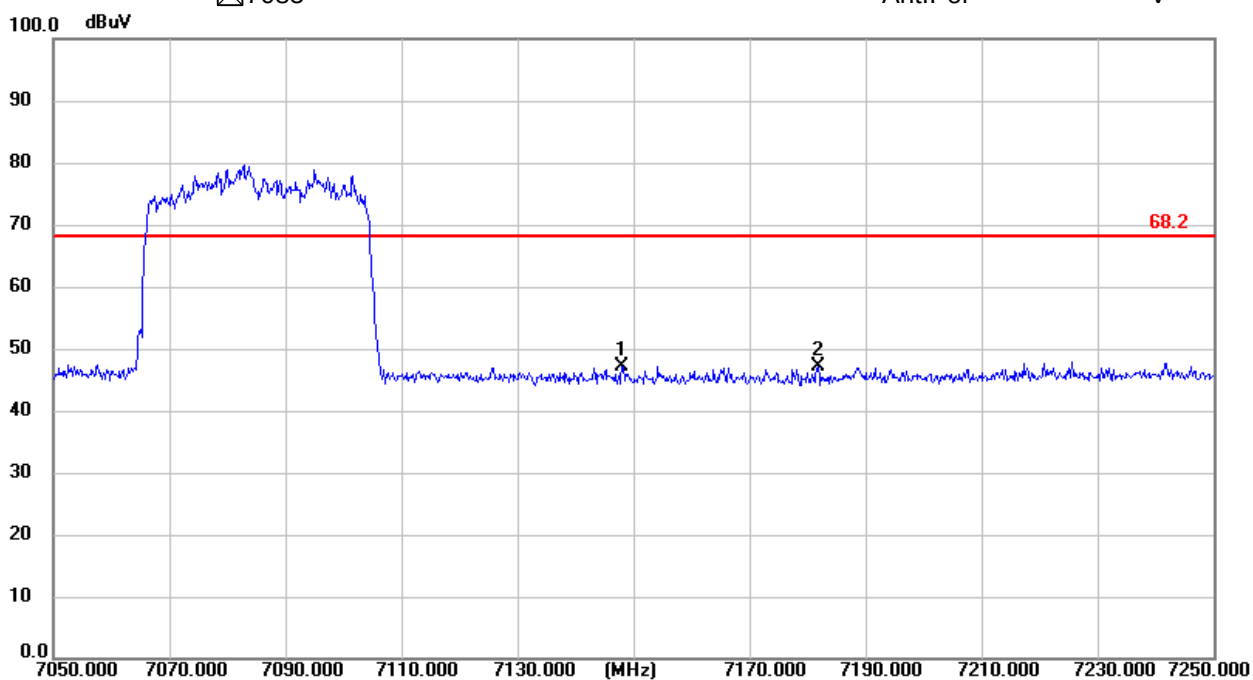


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 80 Frequency(MHz): 7025

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7086.60	V	47.80	68.20
7147.40	V	47.51	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7079.80	H	47.48	68.20
7121.60	H	46.68	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

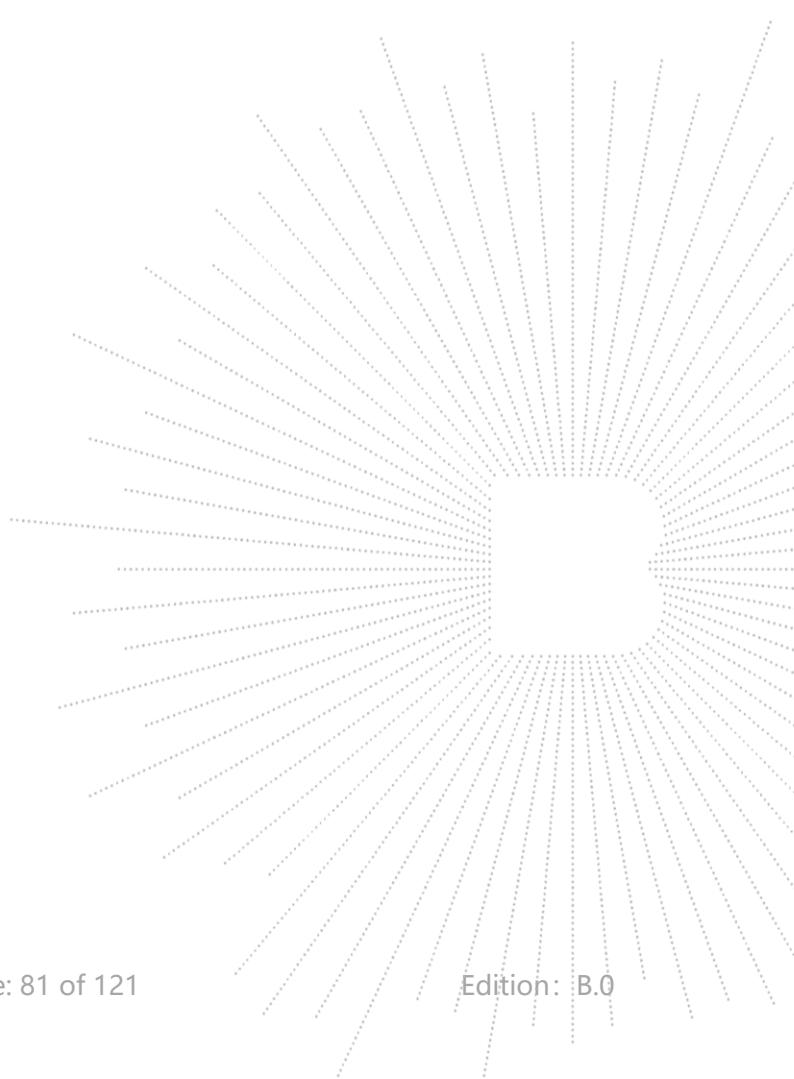

U-NII - 8

Test Model


Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 80

☒ 7025

Ant.Pol

H

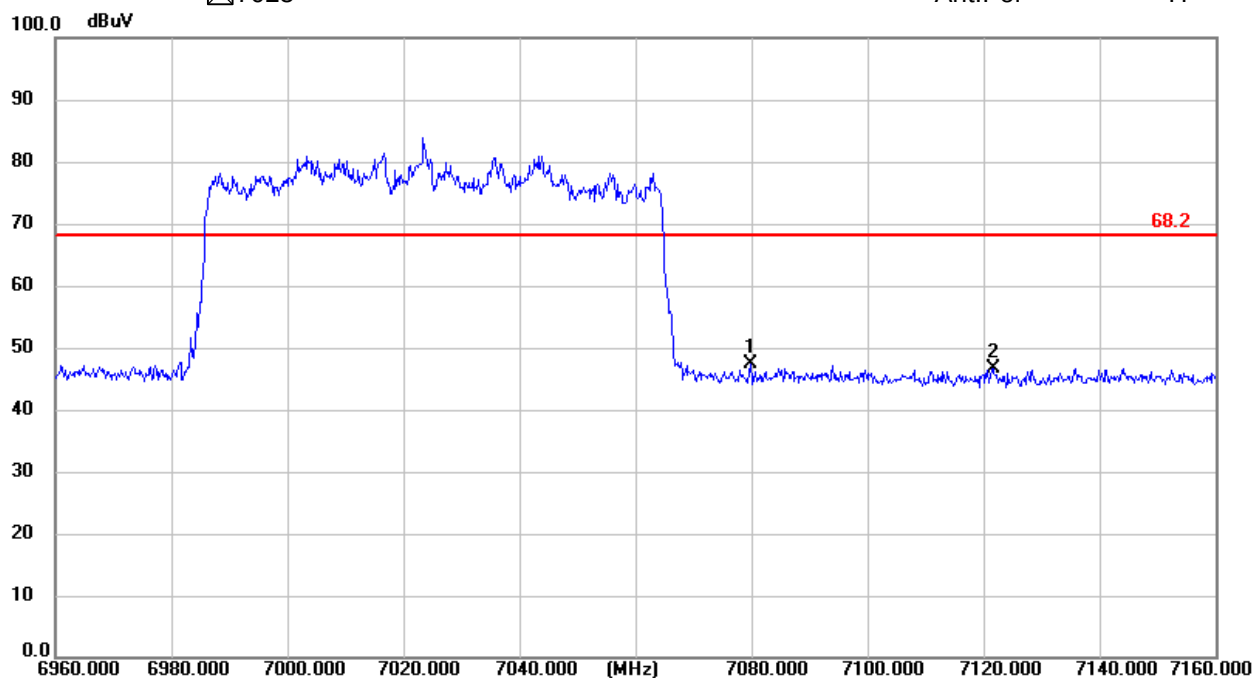

U-NII - 8

Test Model

Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 80

☒ 7025

Ant.Pol

V




● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 160 Frequency(MHz): 6985

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7086.44	V	47.22	68.20
7247.10	V	47.42	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7124.14	H	47.05	68.20
7197.80	H	47.27	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

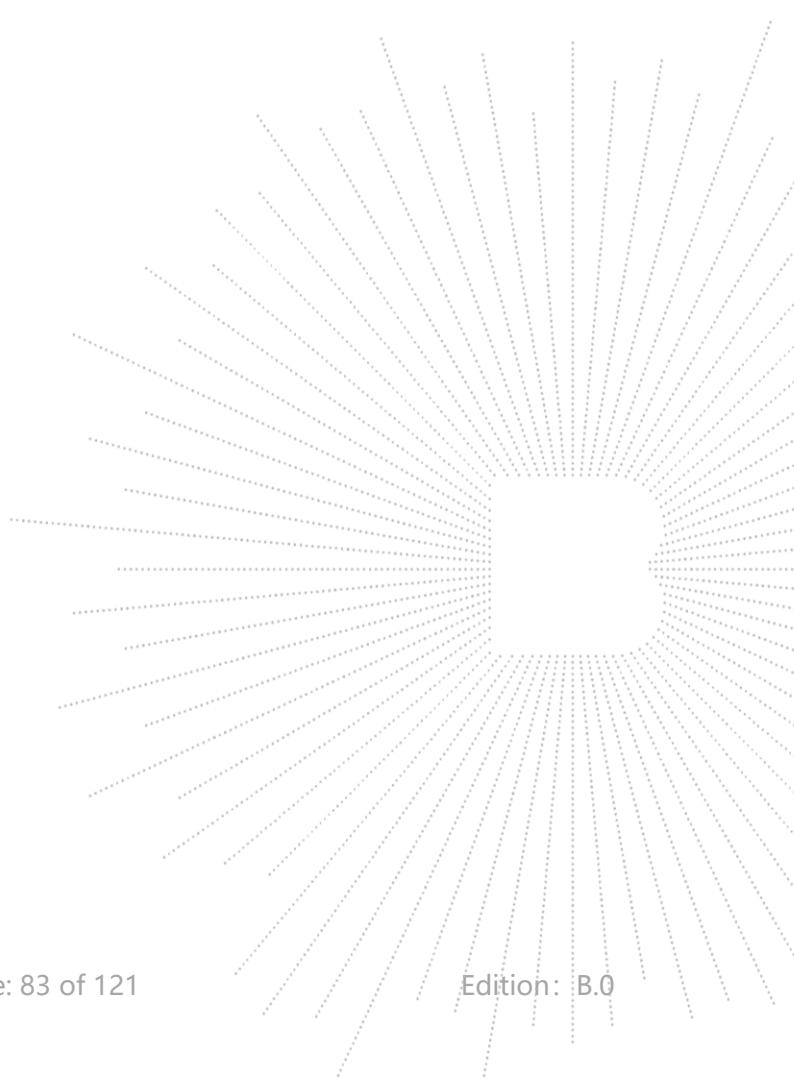

U-NII - 8

Test Model


Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 160

☒ 6985

Ant. Pol

H

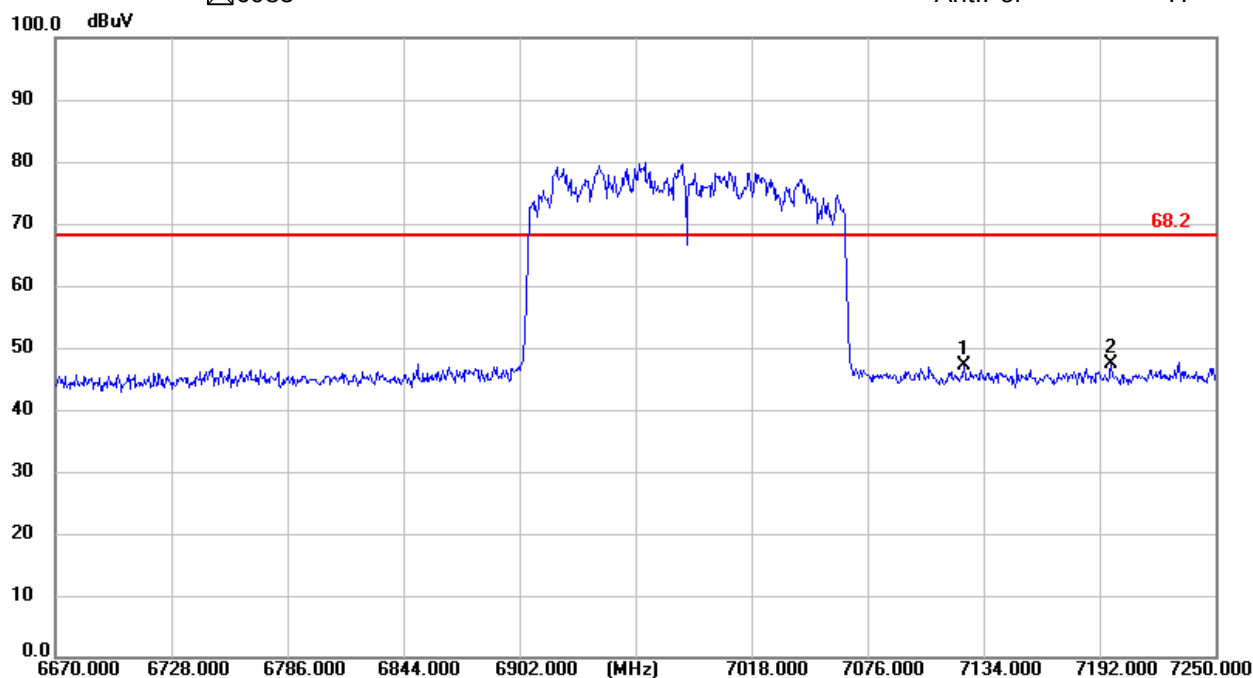

U-NII - 8

Test Model


Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 160

☒ 6985

Ant. Pol

V

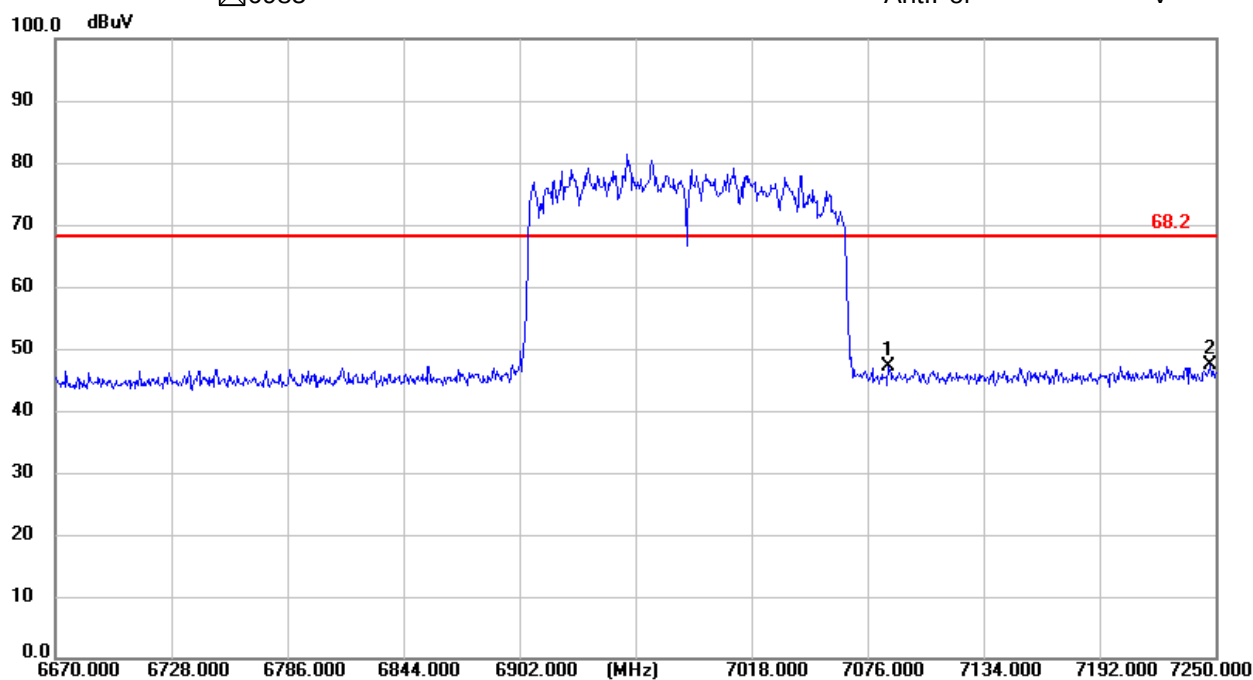

Quectel Antenna (YF0023CA) :

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 20 Frequency(MHz): 5955

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5863.62	V	44.33	68.20
5911.50	V	44.58	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5896.87	H	44.52	68.20
5922.75	H	45.72	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L – Preamp
(4) Test Mode is MIMO Mode (4T4R).

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 20

☒ 5955

Ant.Pol

H

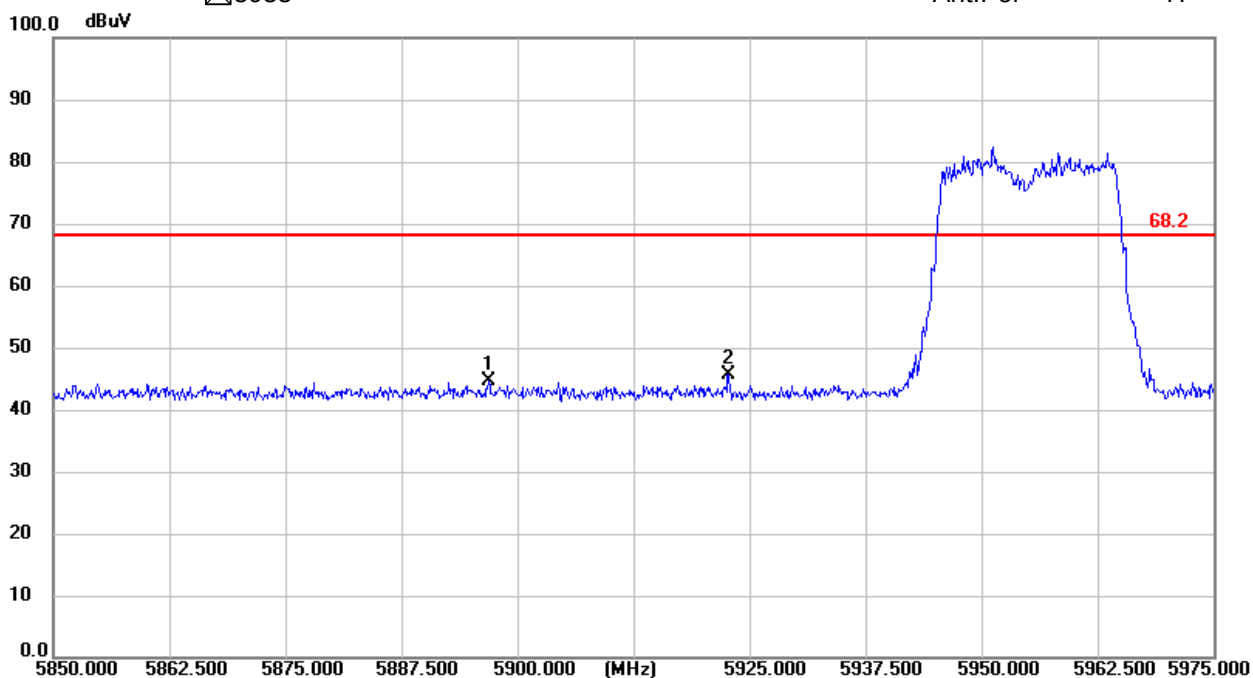

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 20

☒ 5955

Ant.Pol

V

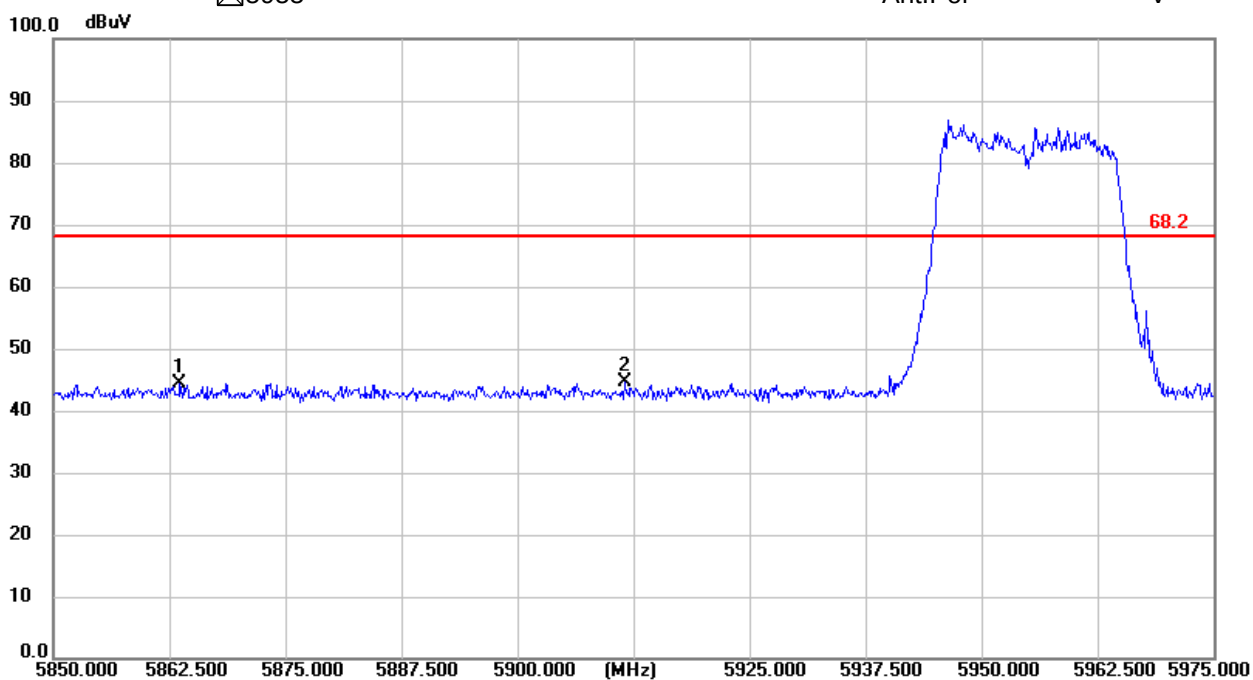


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 40 Frequency(MHz): 5965

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5894.70	V	44.57	68.20
5916.15	V	44.61	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5870.25	H	44.56	68.20
5909.40	H	44.10	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

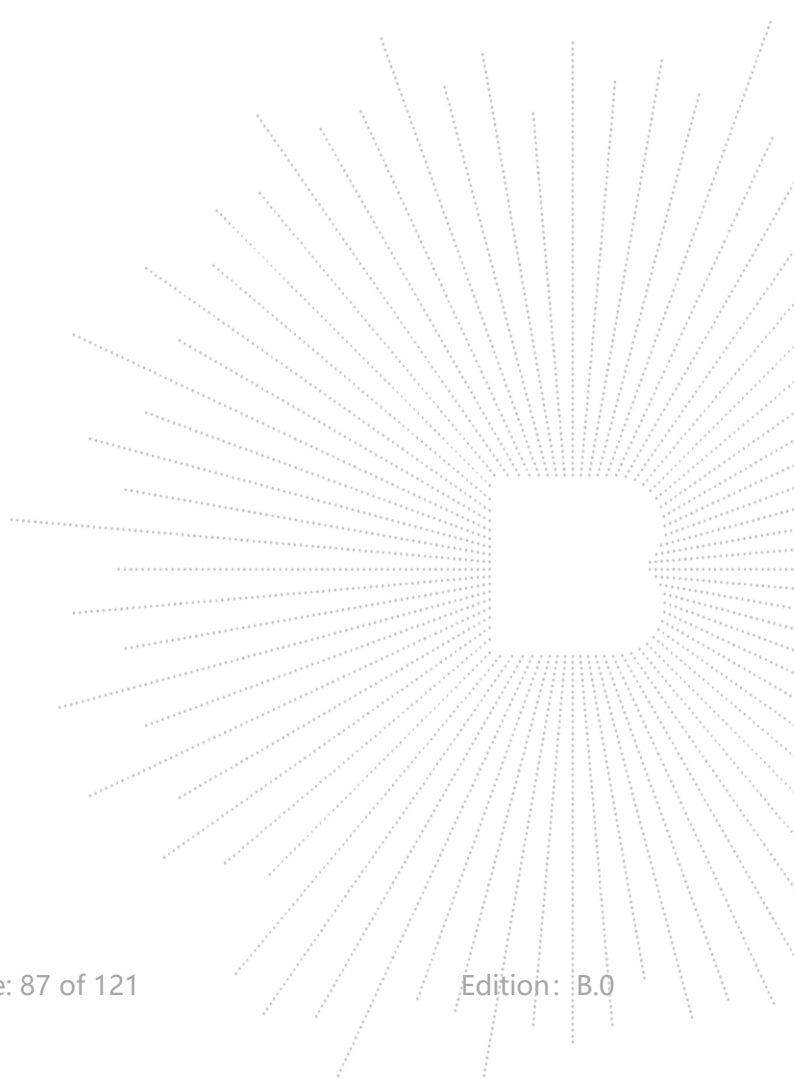

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 40

☒ 5965

Ant.Pol

H

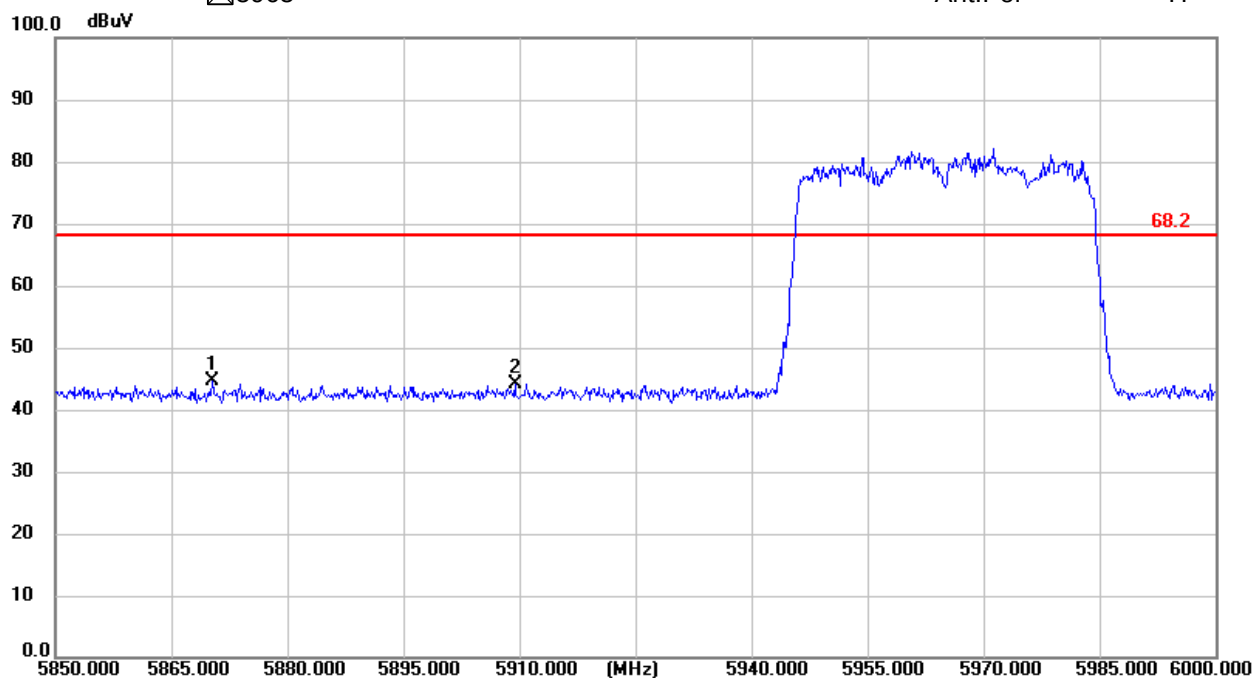

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 40

☒ 5965

Ant.Pol

V

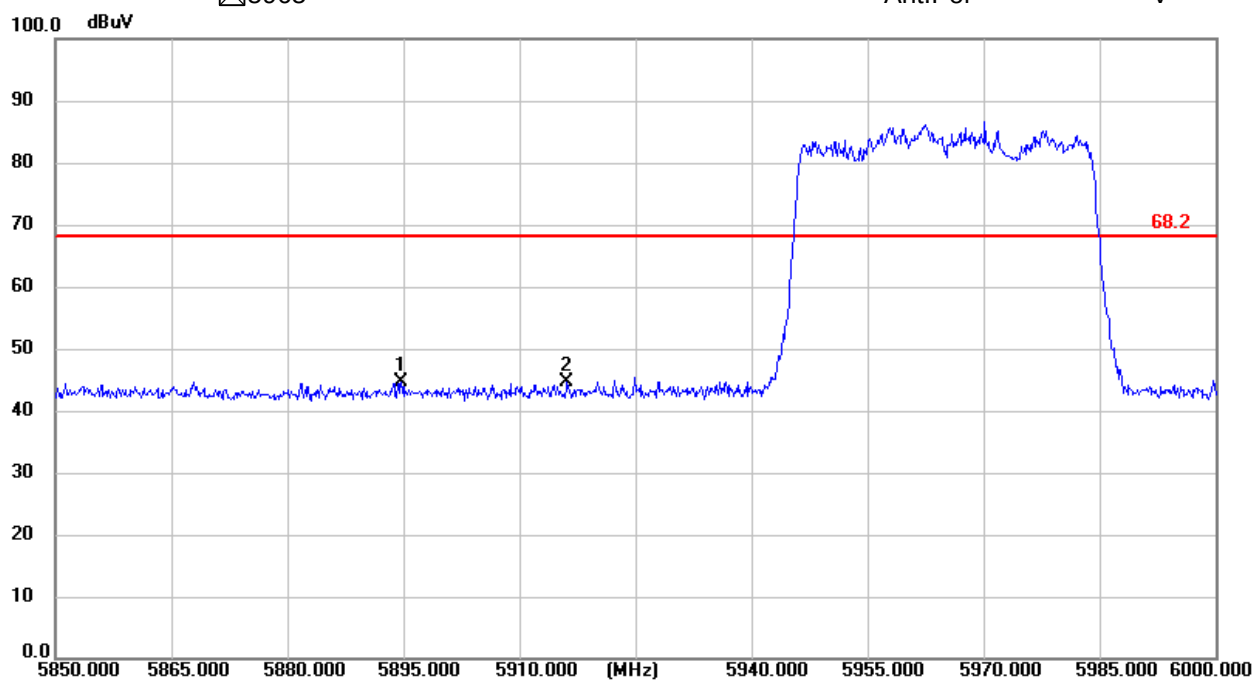


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 80 Frequency(MHz): 5985

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5855.60	V	44.07	68.20
5924.00	V	44.25	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5865.60	H	44.29	68.20
5887.60	H	44.31	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

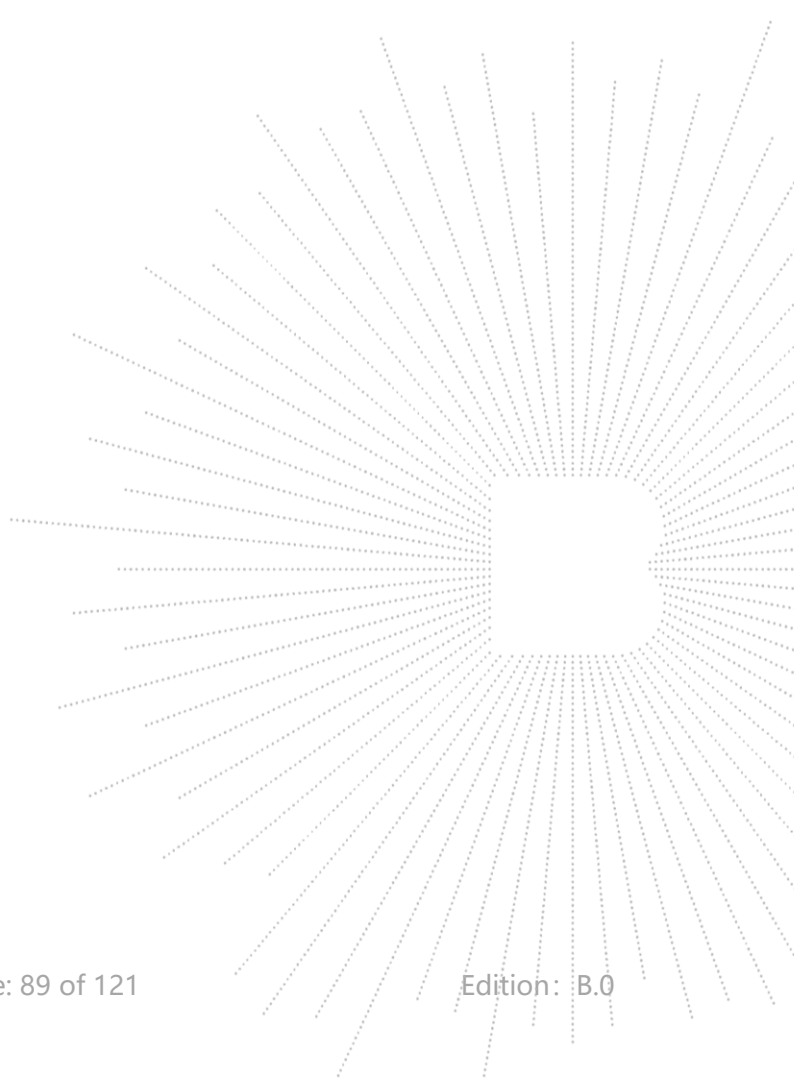

U-NII - 5

Test Model


Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 80

☒ 5985

Ant.Pol

H

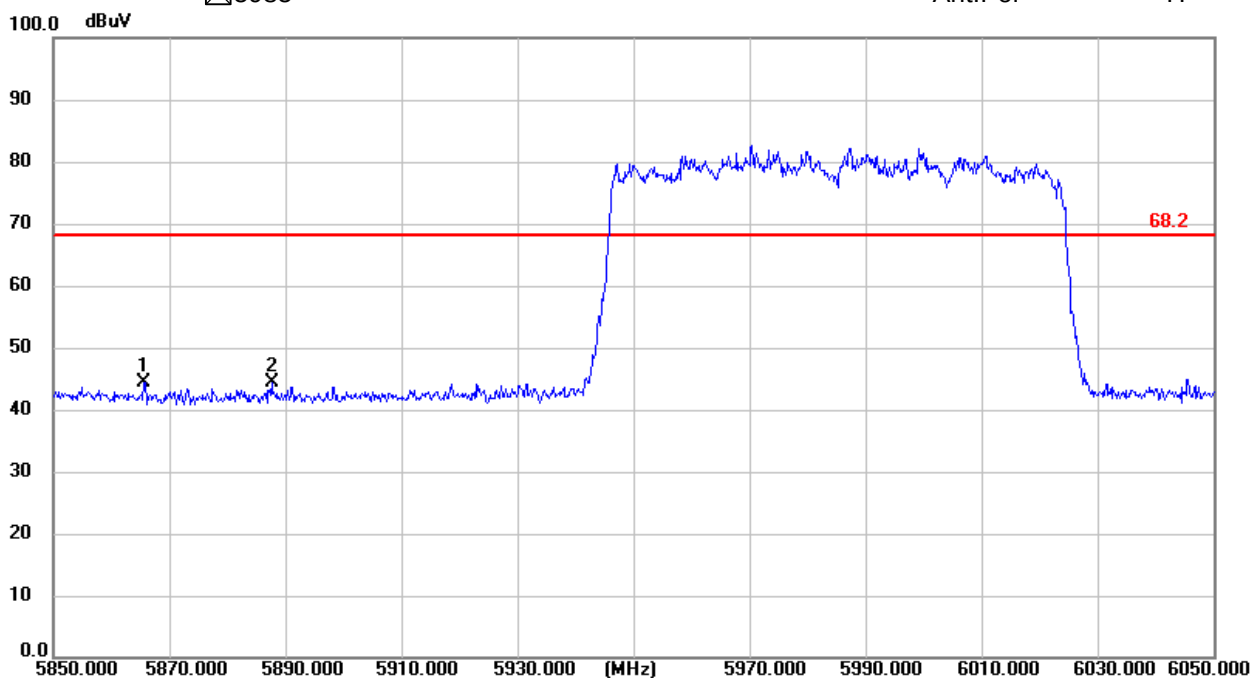

U-NII - 5

Test Model


Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 80

☒ 5985

Ant.Pol

V

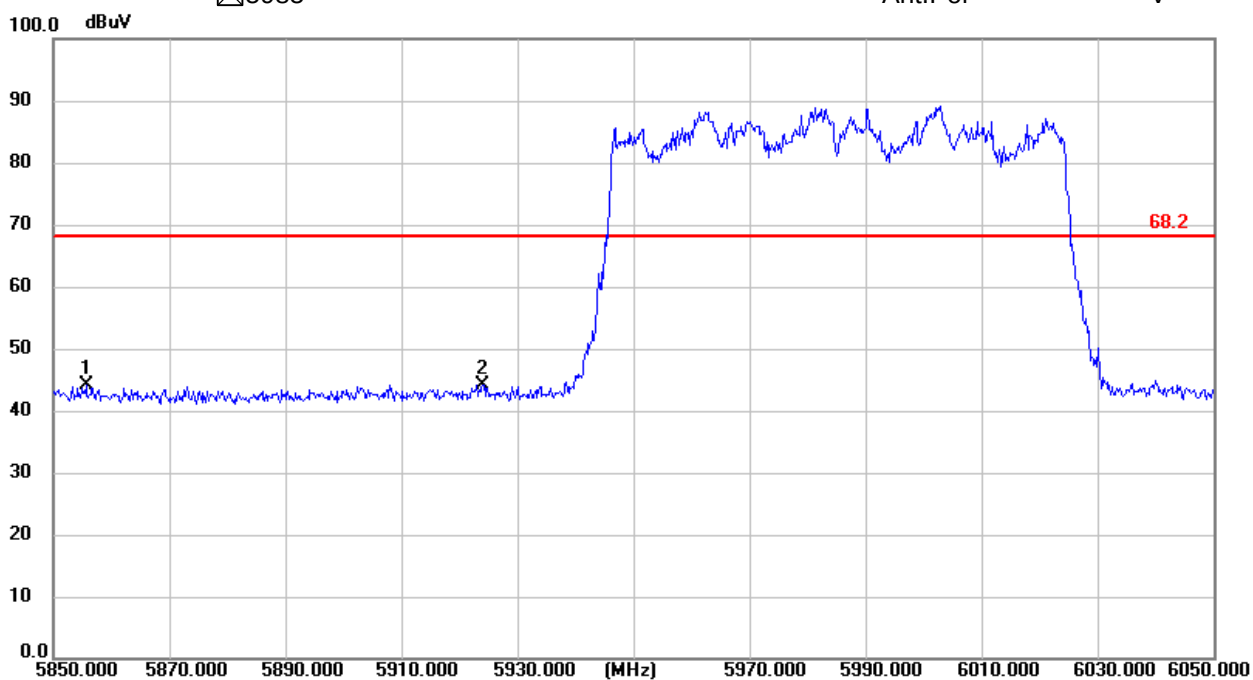


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 160 Frequency(MHz): 6025

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5863.00	V	47.97	68.20
5902.50	V	48.50	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5770.50	H	44.85	68.20
5890.50	H	46.30	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

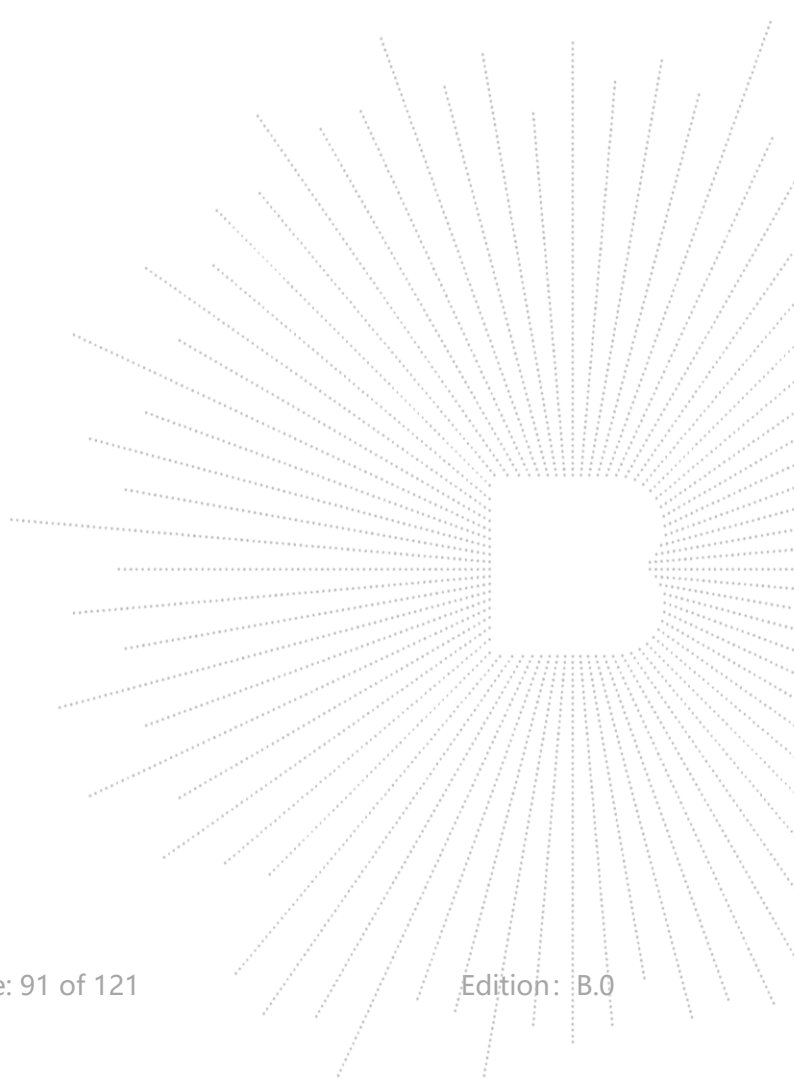

U-NII - 5

Test Model


Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 160

☒ 6025

Ant.Pol

H

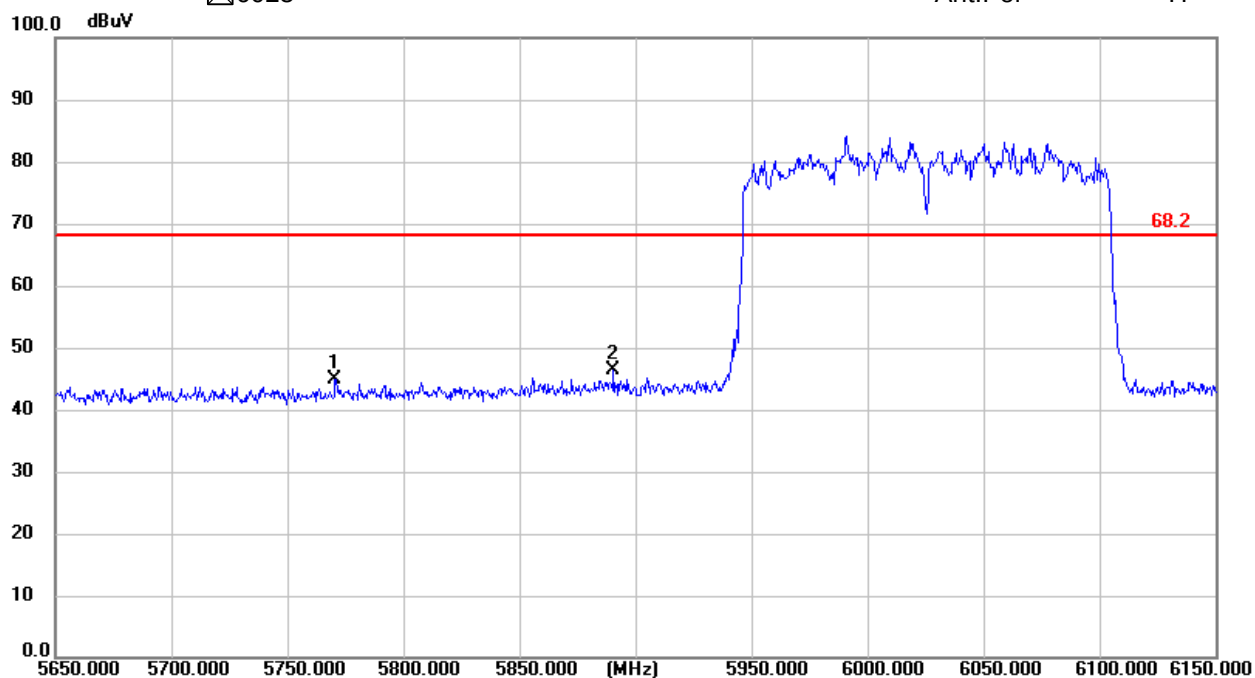

U-NII - 5

Test Model


Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 160

☒ 6025

Ant.Pol

V

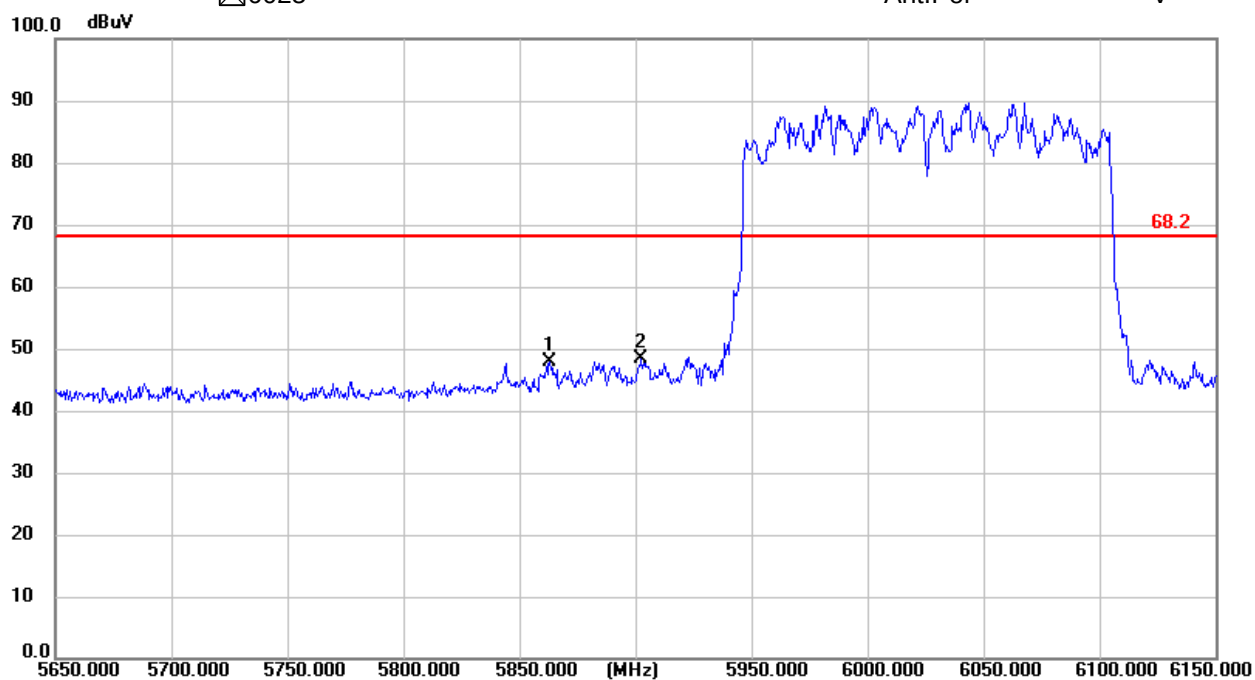


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 20 Frequency(MHz): 7115

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7167.50	V	46.43	68.20
7208.75	V	46.94	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7154.00	H	46.45	68.20
7220.60	H	47.16	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

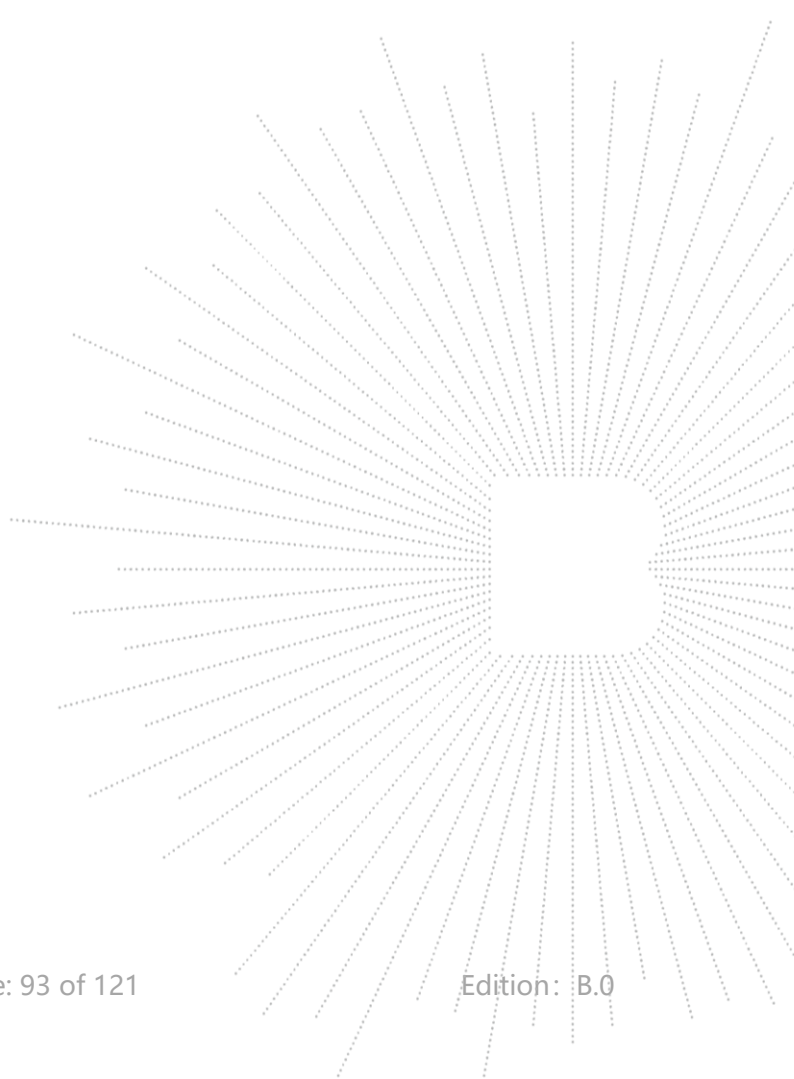

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 20

☒ 7115

Ant.Pol

H

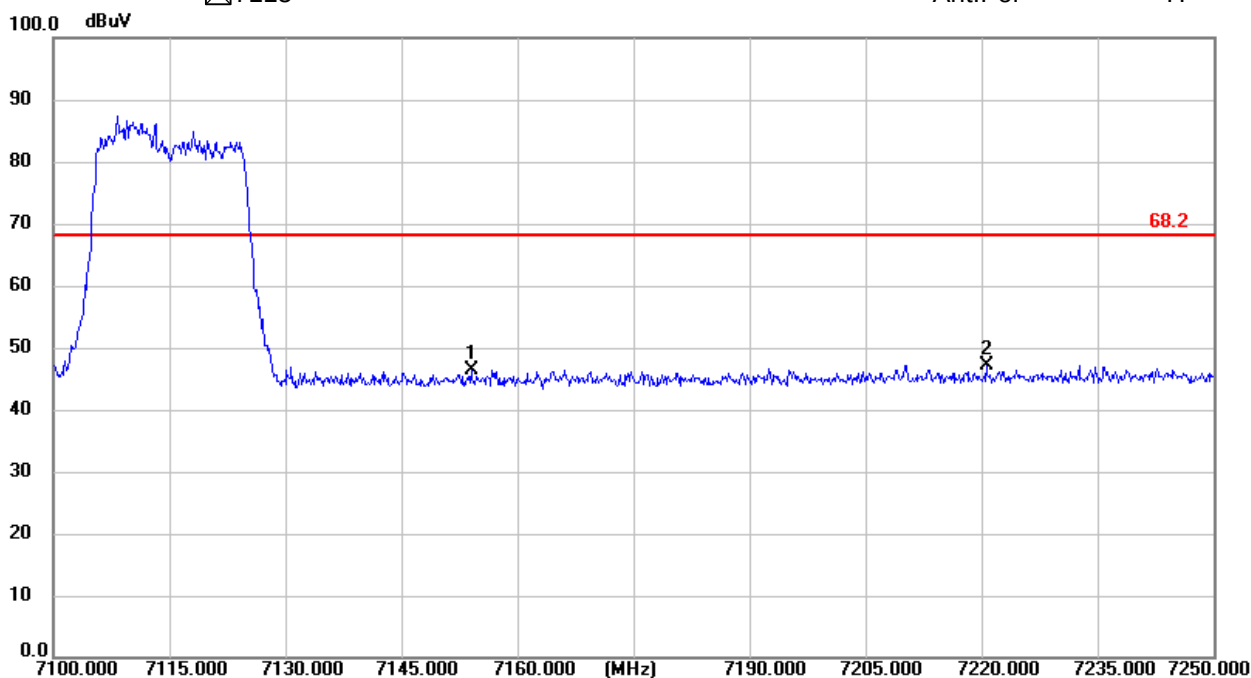

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 20

☒ 7115

Ant.Pol

V

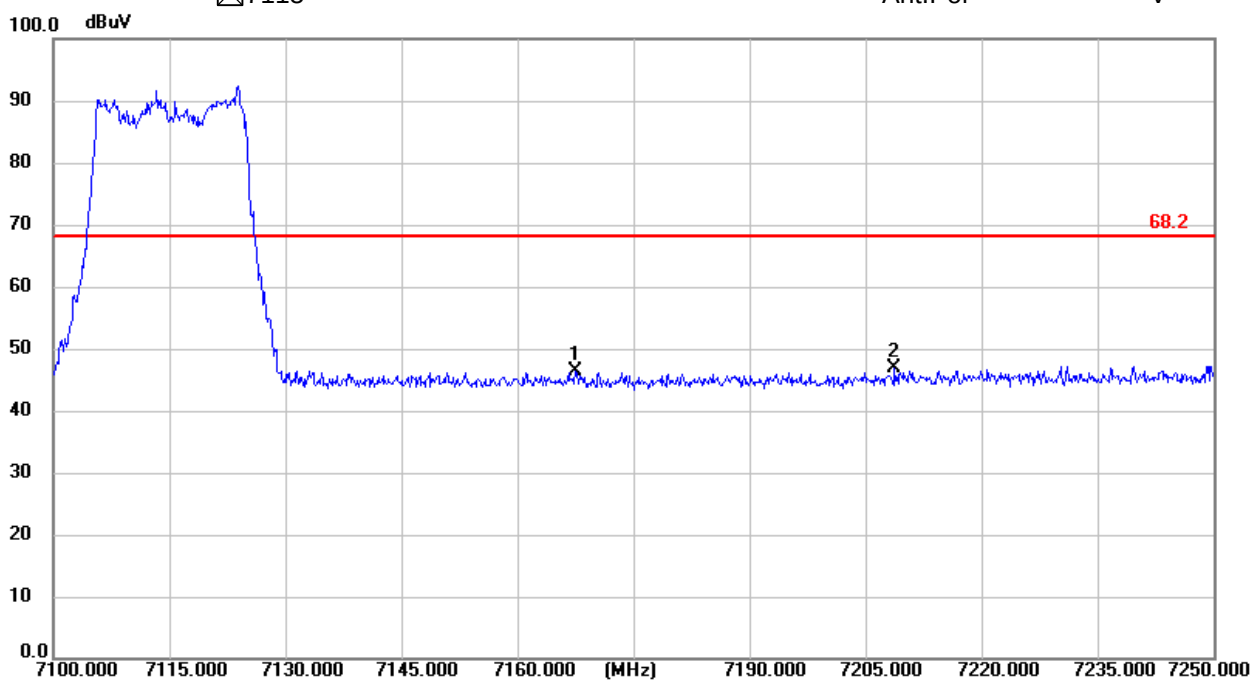


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 40 Frequency(MHz): 7085

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7131.40	V	46.38	68.20
7168.80	V	45.58	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7112.00	H	46.01	68.20
7155.40	H	45.90	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

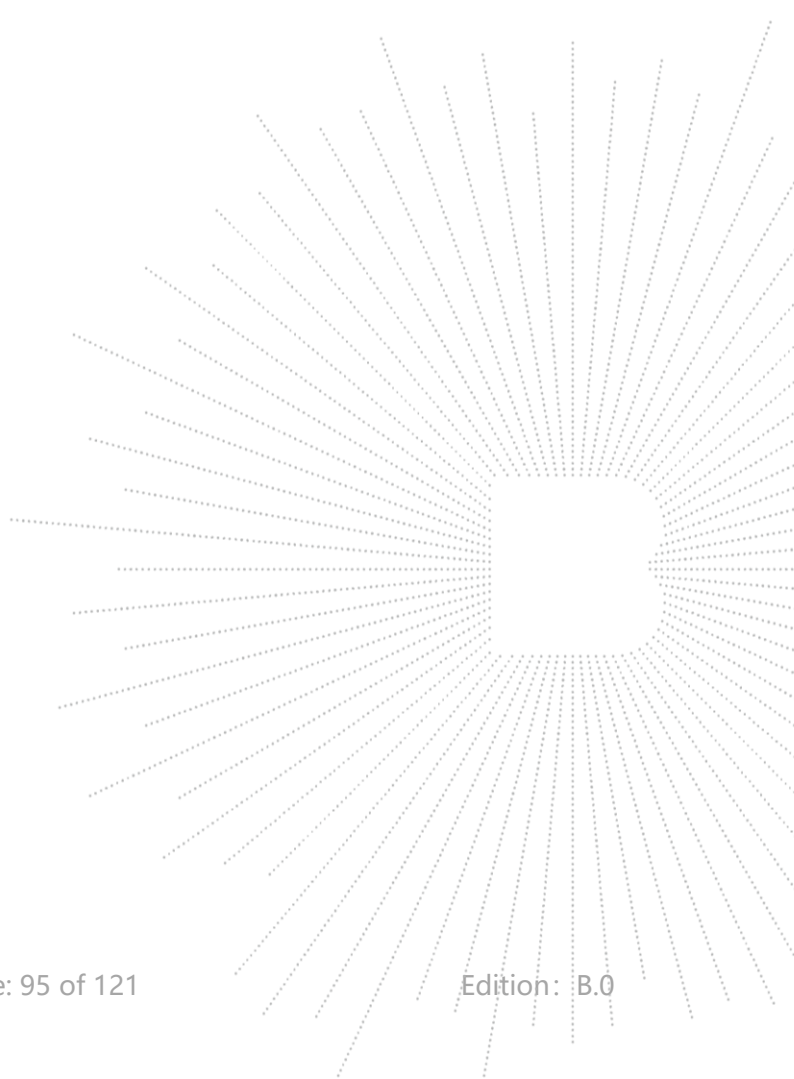

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 40

☒ 7085

Ant.Pol

H

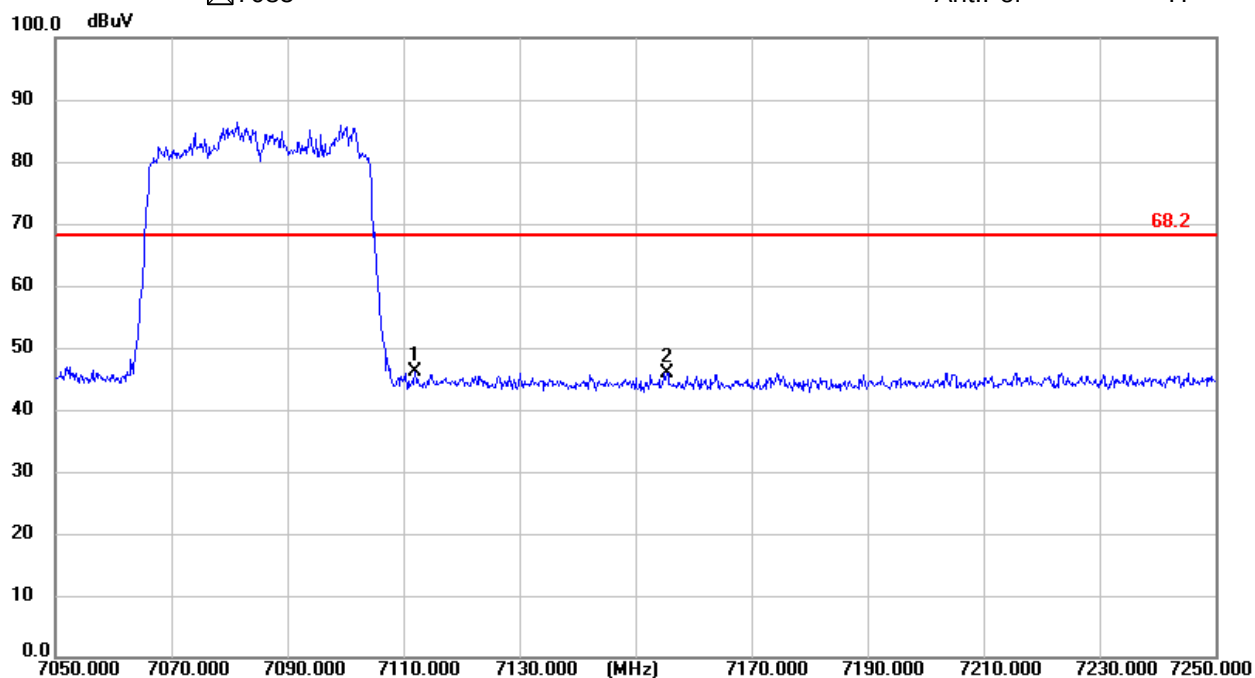

U-NII - 8

Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 40

☒ 7085

Ant.Pol

V




● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 80 Frequency(MHz): 7025

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7082.40	V	47.84	68.20
7119.00	V	45.93	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7073.40	H	47.73	68.20
7097.00	H	46.58	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

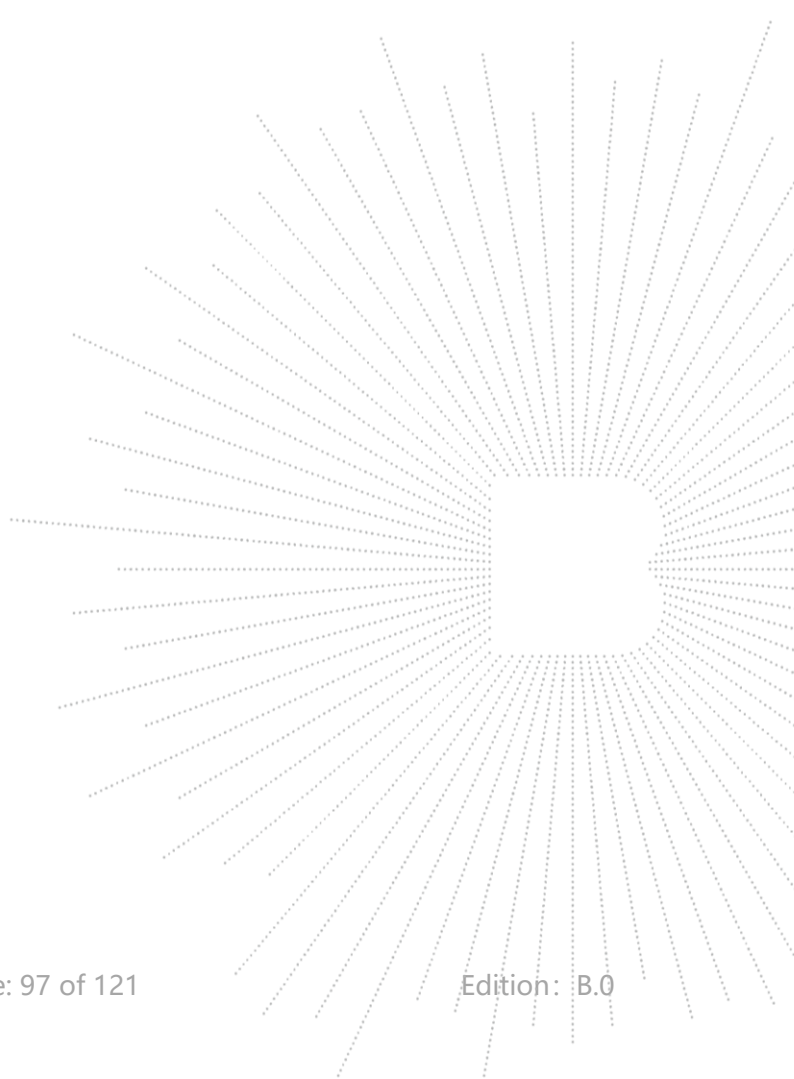

U-NII - 8

Test Model

Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 80

☒ 7025

Ant.Pol

H



U-NII - 8

Test Model


Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 80

☒ 7025

Ant.Pol

V

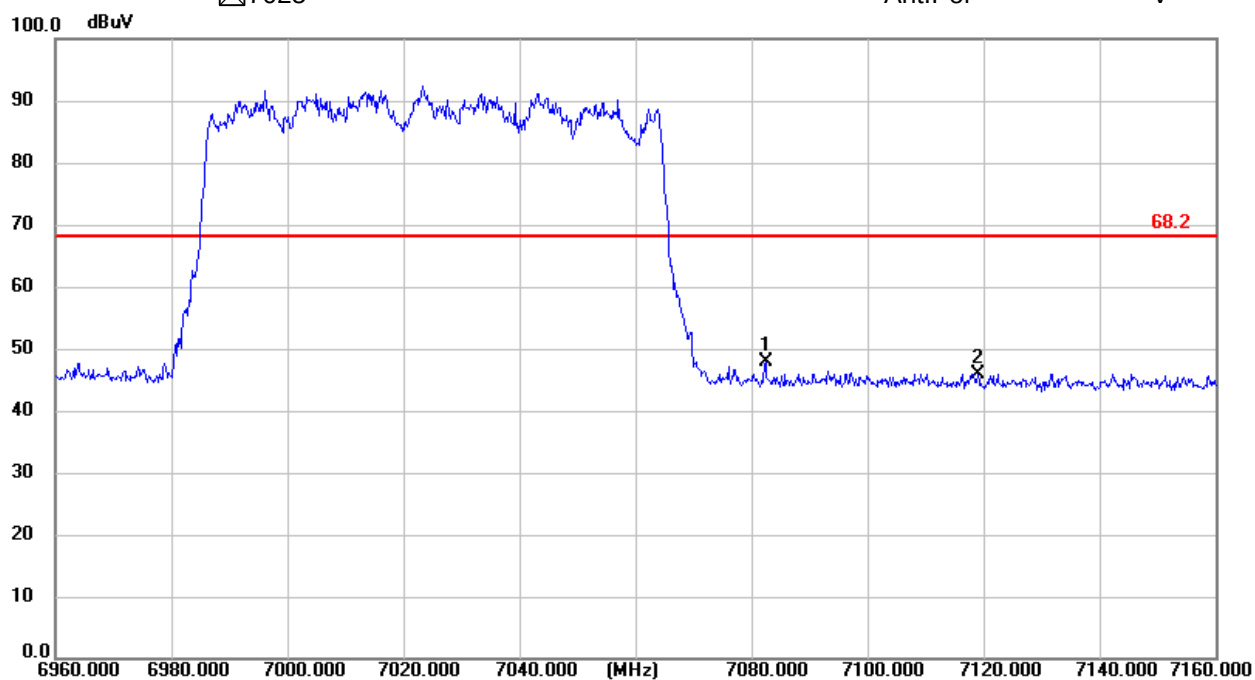


● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 160 Frequency(MHz): 6985

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7093.40	V	49.78	68.20
7145.02	V	48.77	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7107.90	H	48.33	68.20
7163.00	H	47.39	68.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Test Mode is MIMO Mode (4T4R).

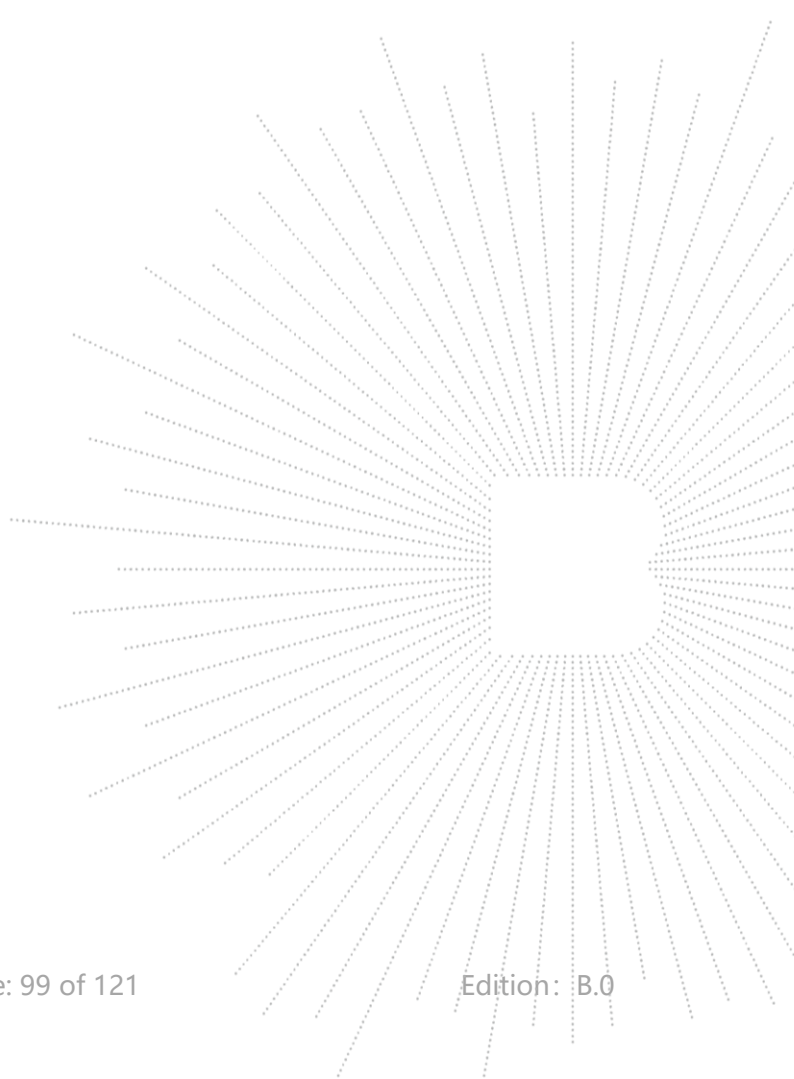

U-NII - 8

Test Model


Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 160

☒ 6985

Ant. Pol

H

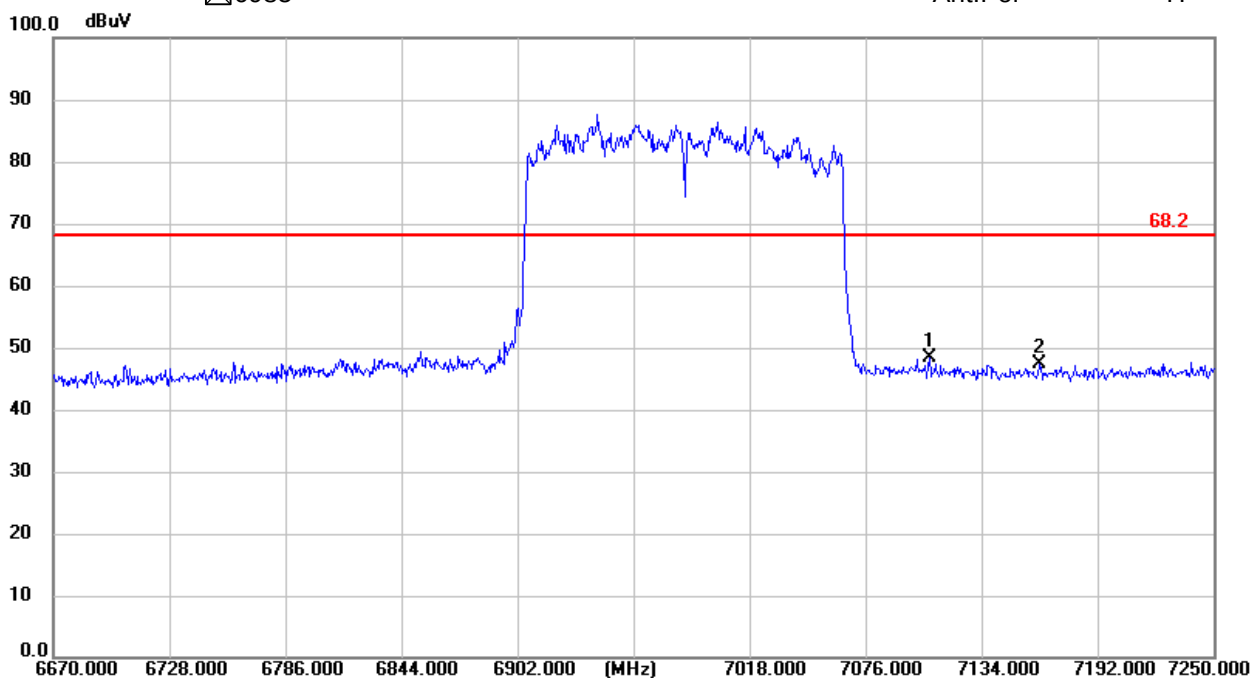

U-NII - 8

Test Model


Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 160

☒ 6985

Ant. Pol

V

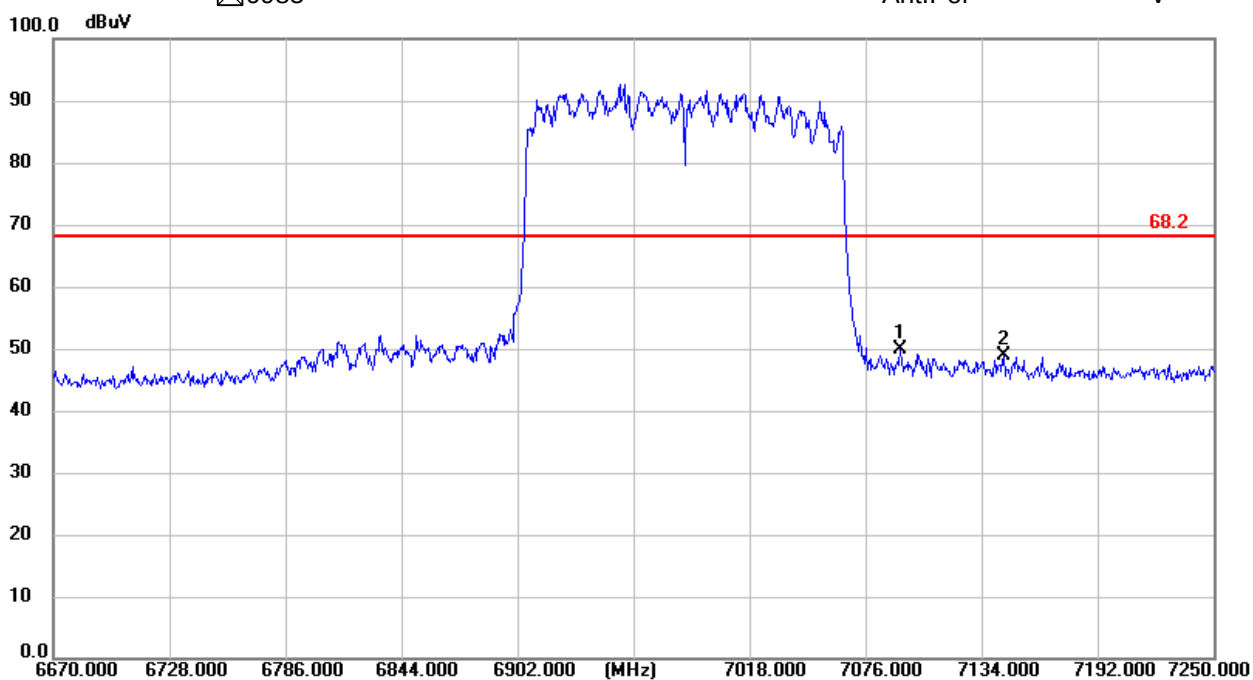

8. Power Spectral Density Test

8.1 Block Diagram Of Test Setup



8.2 Limit

For a standard power access point (6SD) and fixed client (6FC) device operating in the 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 23 dBm e.i.r.p in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For an indoor access point (6ID) operating in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For a subordinate device (6PP) operating under the control of an indoor access point in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For client devices(6FX), except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

For client devices(6XD) operating under the control of an indoor access point in the 5.925–7.125 GHz bands, the maximum power spectral density must not exceed –1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

8.3 Test Procedure

For devices operating in the bands 5.925–7.125 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set RBW $\geq 1/T$, where T is defined in section II.B.I.a).
- b) Set VBW ≥ 3 RBW.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW ($< 500 \text{ KHz}$) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW ($< 1 \text{ MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.


Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


8.5 Test Result

Please refer to Appendix 3: Power Spectral Density
Test Result: Pass

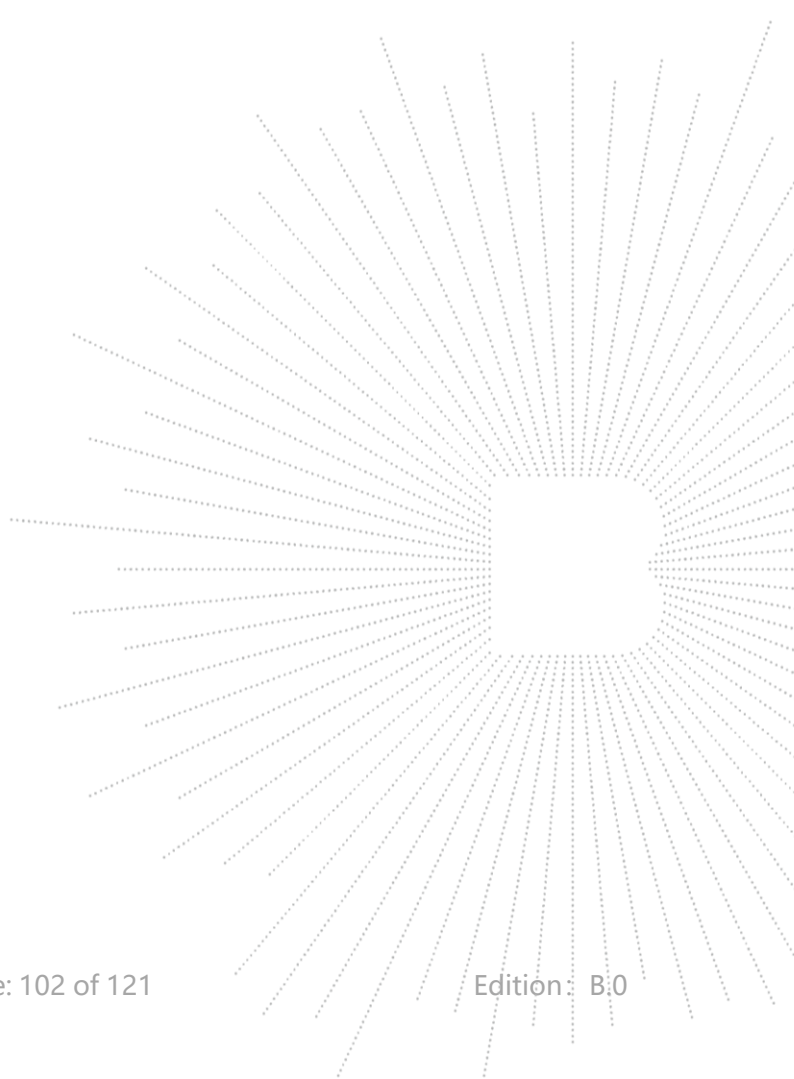

9. 26dB & 99% Emission Bandwidth

9.1 Block Diagram Of Test Setup

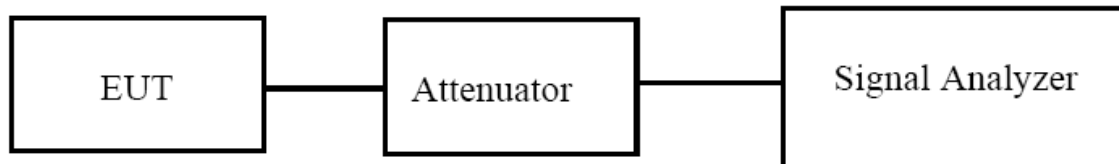

9.2 Limit

The maximum transmitter channel bandwidth for U–NII devices in the 5.925–7.125 GHz band is 320 megahertz

9.3 Test Procedure

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.


9.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

9.5 Test Result

N/A (This test is not applicable)

NOTE: This report, based on the original report, only applies to antenna test items related to the above tests, and other items do not need to be tested. For other data, please refer to (BCTC2311144017-3E) or check the original FCC certificate.

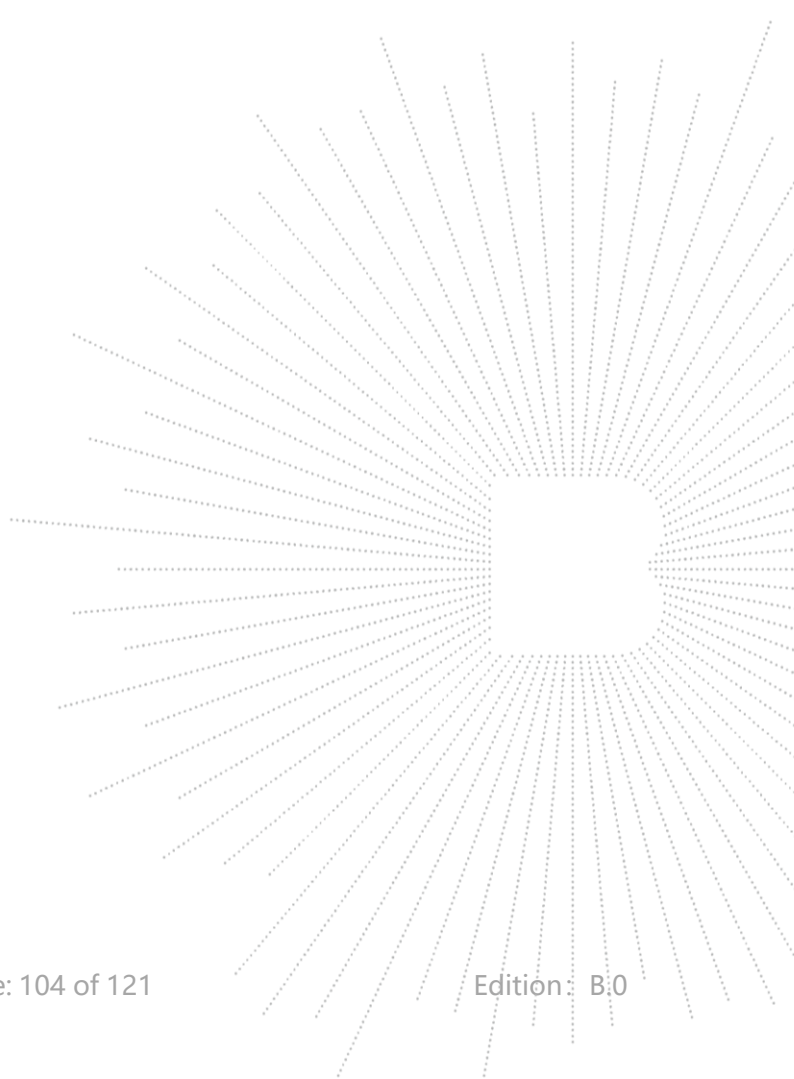

10. Maximum Conducted Output Power and Maximum EIRP

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

For a standard power access point (6SD) and fixed client (6FC) device operating in the 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 23 dBm e.i.r.p. in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For an indoor access point (6ID) operating in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For a subordinate device (6PP) operating under the control of an indoor access point in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For client devices(6FX), except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

For client devices(6XD) operating under the control of an indoor access point in the 5.925–7.125 GHz bands, the maximum power spectral density must not exceed –1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

10.3 Test Procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are

expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).

- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.


(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

10.5 Test Result

Please refer to Appendix 2: Maximum Conducted Output Power and Maximum EIRP
Test Result: Pass

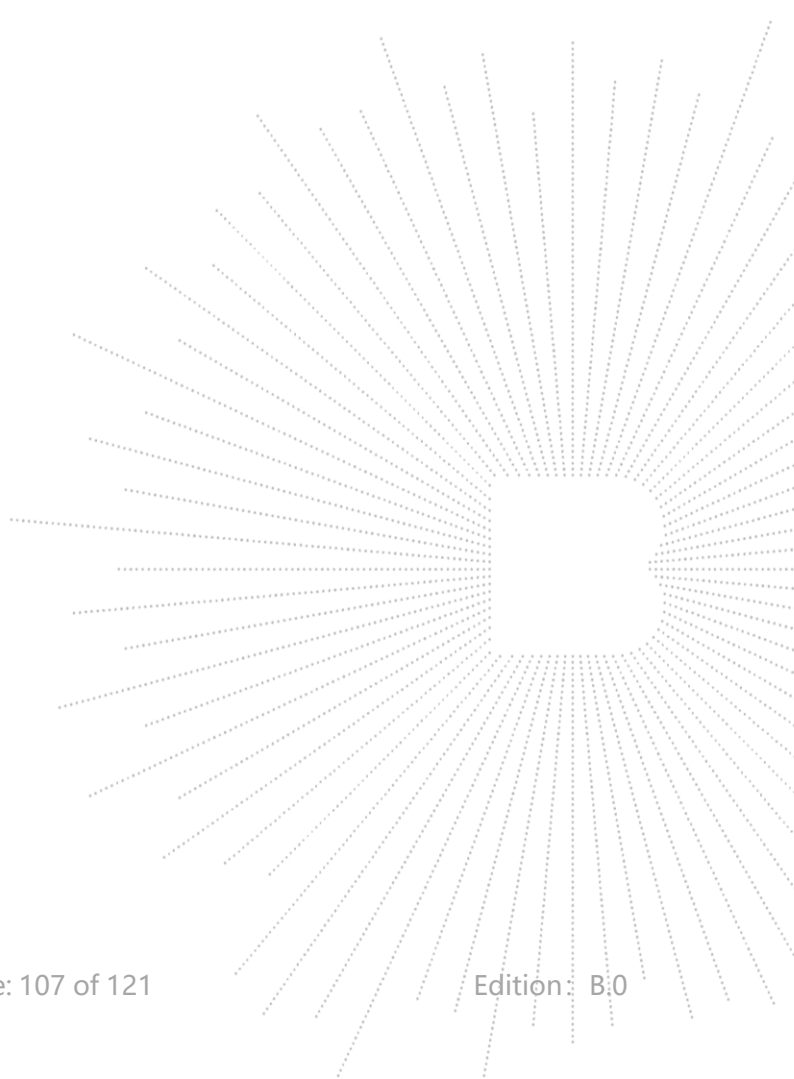

11. In-Band Emission (Emission Mask)

11.1 Block Diagram Of Test Setup



11.2 Limit

According to FCC §15.407(b)

For transmitters operating within the 5.925–7.125 GHz band: Any emissions outside of the 5.925–7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

(7) For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

11.3 Test Procedure

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW or 99% of the occupied bandwidth.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density

(in dB) as follows:

- Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
- Suppressed by 28 dB at one channel bandwidth from the channel center.
- Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

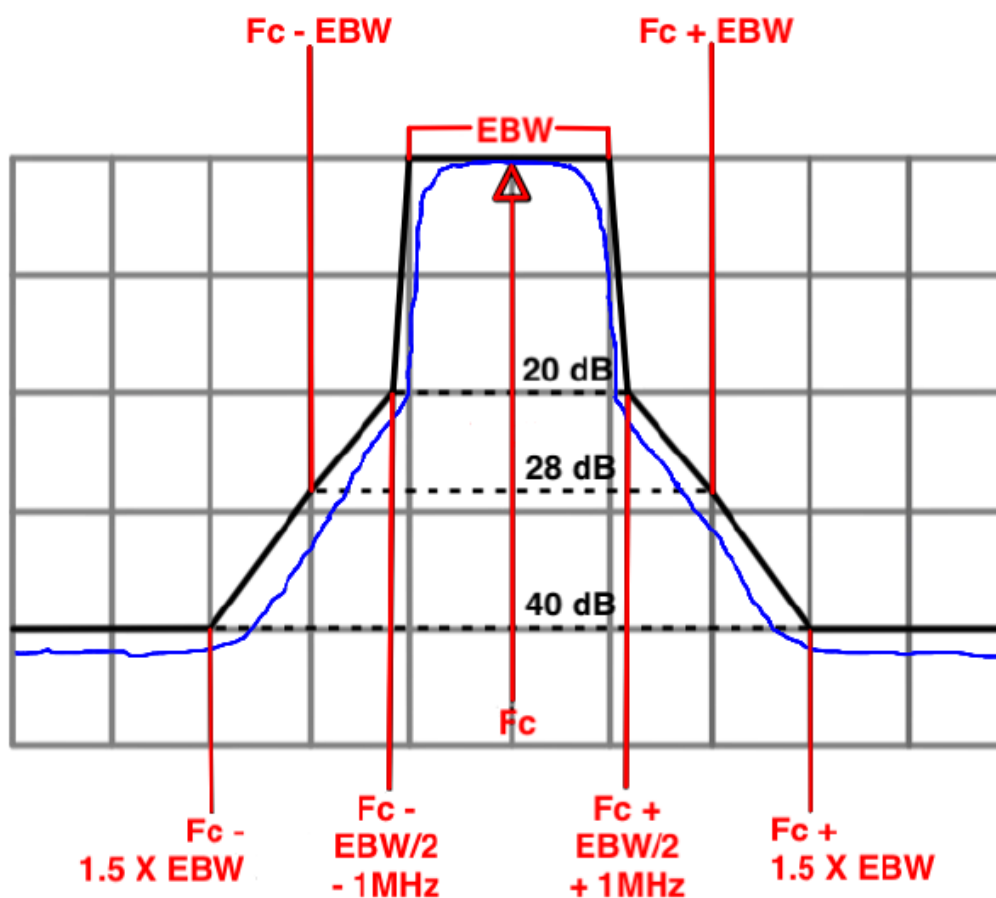


Figure 5. Generic Emission Mask

If a device utilizes channel puncturing the following additional requirements shall be met:

1. Standard Power Devices:

- a. The device shall meet the FCC mask for the full nominal bandwidth regardless of whether the punctured channel portion is at the channel edge or internal to the channel. As an example, if a 40 megahertz sub-channel is punctured from a 160 megahertz channel, this new configuration shall still meet the FCC mask based on a 160 megahertz nominal bandwidth; i.e., at the edges of the nominal channel. Nominal bandwidth as defined here refers to 20, 40, 80, 160 & 320 megahertz bandwidths. Test data shall be provided for each nominal bandwidth capable of puncturing with at least one configuration where the puncturing is at the outer edge of the nominal bandwidth and several configurations where the puncturing is internal to the nominal bandwidth (puncturing using $20 \times N$ subchannels, where N is an integer). The mask is constructed based on 26 dB bandwidth; and
- b. The device, when deployed must comply with all the AFC requirements; i.e., the power transmitted within the punctured region must be at or below the power that an AFC would permit for transmitting across the

punctured channels' bandwidth.

2. Low Power Indoor Devices: Channel puncturing is not permitted because, unlike standard power devices which receive channel/power information from the AFC, LPI devices have no such mechanism for ascertaining the level of suppression needed in the punctured region to protect incumbent operations


11.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data

11.5 Test Result

N/A (This test is not applicable)

NOTE: This report, based on the original report, only applies to antenna test items related to the above tests, and other items do not need to be tested. For other data, please refer to (BCTC2311144017-3E) or check the original FCC certificate

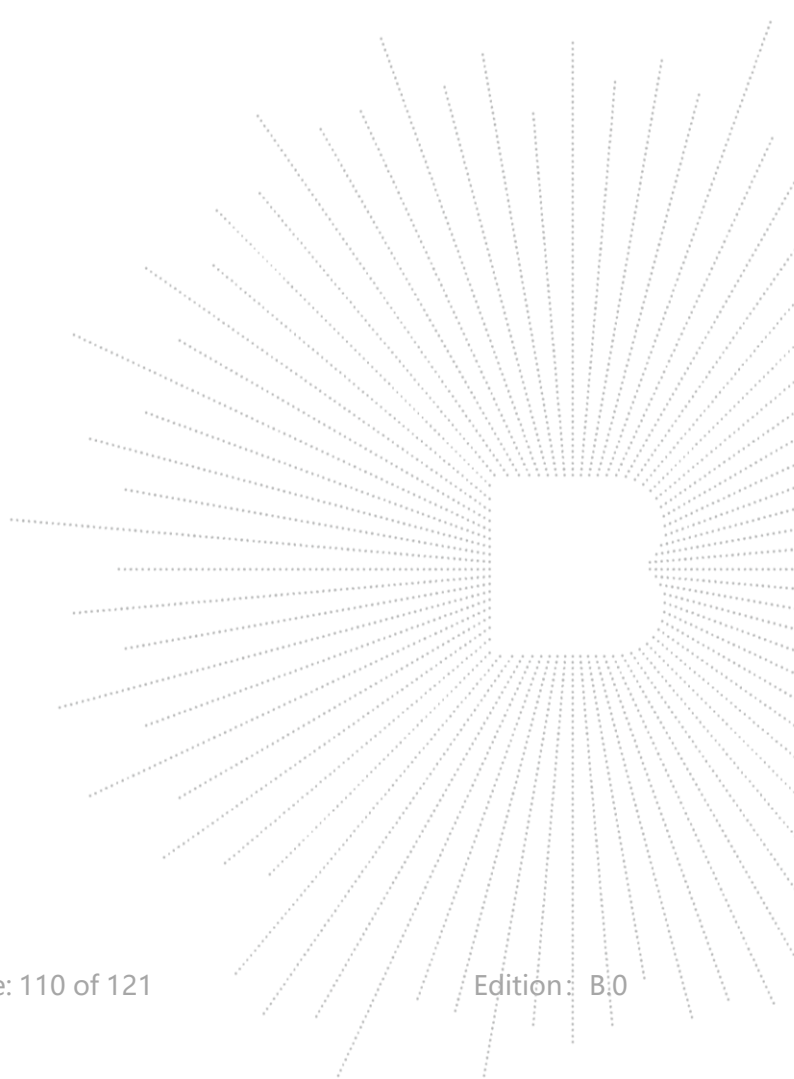

12. Spurious RF Conducted Emissions

12.1 Block Diagram Of Test Setup



12.2 Limit

For transmitters operating within the 5.925–7.125 GHz band: Any emissions outside of the 5.925–7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

12.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


12.4 Test Result

N/A (This test is not applicable)

NOTE: This report, based on the original report, only applies to antenna test items related to the above tests, and other items do not need to be tested. For other data, please refer to (BCTC2311144017-3E) or check the original FCC certificate.

13. Frequency Stability Measurement

13.1 Block Diagram Of Test Setup

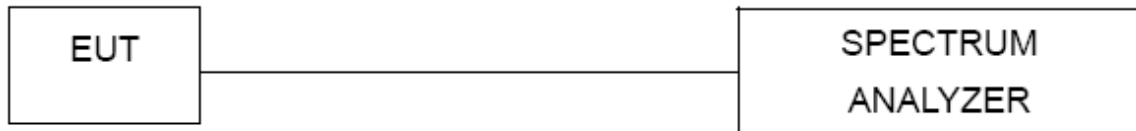

13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)..

13.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and he limit is less than ± 20 ppm (IEEE 802.11nspecification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

13.4 Test Result

N/A (This test is not applicable)

NOTE: This report, based on the original report, only applies to antenna test items related to the above tests, and other items do not need to be tested. For other data, please refer to (BCTC2311144017-3E) or check the original FCC certificate.

14. Contention Based Protocol

14.1 Block Diagram Of Test Setup

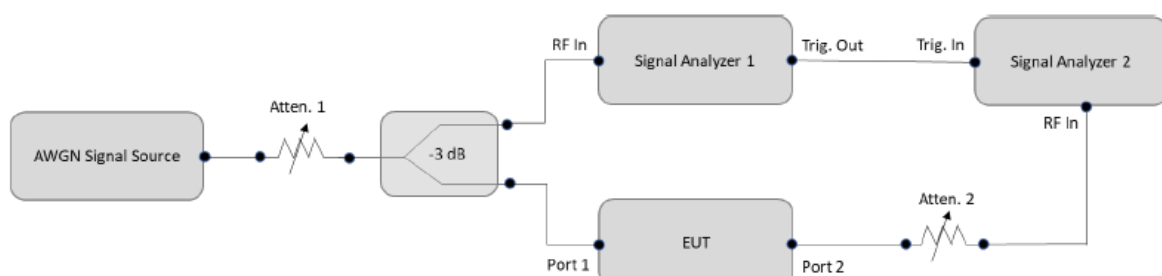


Figure 2. Contention-based protocol test setup, conducted method

14.2 Limit

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm)¹. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF

energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Required number of tests

Incumbent and EUT (access point, subordinate or client) signals may occupy different portions of the channel. Depending on the EUT transmission bandwidth and incumbent signal center frequency (simulated by a 10 MHz wide AWGN signal), the center frequency of the EUT signal F_{C1} may fall within the incumbent's occupied bandwidth (Figure 1.a), or outside of it (Figure 1.b).

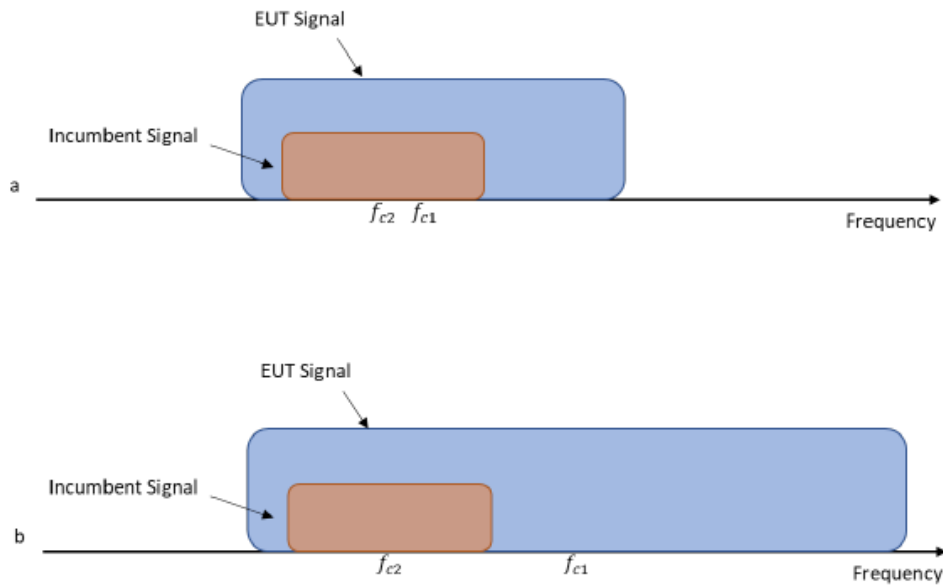


Figure 1. Two possible scenarios where a) center frequency of EUT transmission falls within incumbent's bandwidth, or b) outside of it

To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency F_{C2}) tuned to different center frequencies within the EUT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed;

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

F_{C1} : Center frequency of EUT transmission

F_{C2} : Center frequency of simulated incumbent signal

14.3 Test Procedure


To ensure the EUT is capable of detecting co-channel energy, the first step is to configure the EUT to transmit with a constant duty cycle.² To simulate an incumbent signal, a signal generator (or similar source) that is capable of generating band-limited additive white Gaussian noise (AWGN) is required. Depending on the EUT antenna configuration, the AWGN signal can be provided to the EUT receiver via a conducted method (Figure 2) or a radiated method (Figure 3). Figure 2 shows the conducted test setup where a band-limited AWGN signal is generated at a very low power level and injected into the EUT's antenna port. The AWGN signal power level is then incrementally increased while the EUT transmission is monitored on a signal analyzer ² to verify if the EUT can sense the AWGN signal and can subsequently cease its transmission. A triggered measurement, as shown in Figure 2, is optional, and assists with determining the time it takes the EUT to cease transmission (or vacate the channel) upon detecting RF energy. If the EUT has only one antenna port, then an AWGN signal source can be connected to the same antenna port.

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer ², as shown in Figure 2. Ensure that the attenuator ² provides enough attenuation to not overload the signal analyzer ² receiver.
4. Monitoring the signal analyzer ², verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal.
Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer ¹ and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer ¹.
8. Monitor the signal analyzer ² to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

14.4 Test Result

For 6XD, when performing Content Based Protocol, only the power is reduced and the antenna gain does not change; so the worst data refers to the 6ID test report Content Based Protocol data.

Please refer to BCTC2407217909-1E FCC Part15.407 6ID test report .Contention Based Protocol Chapter
Test Result: Pass

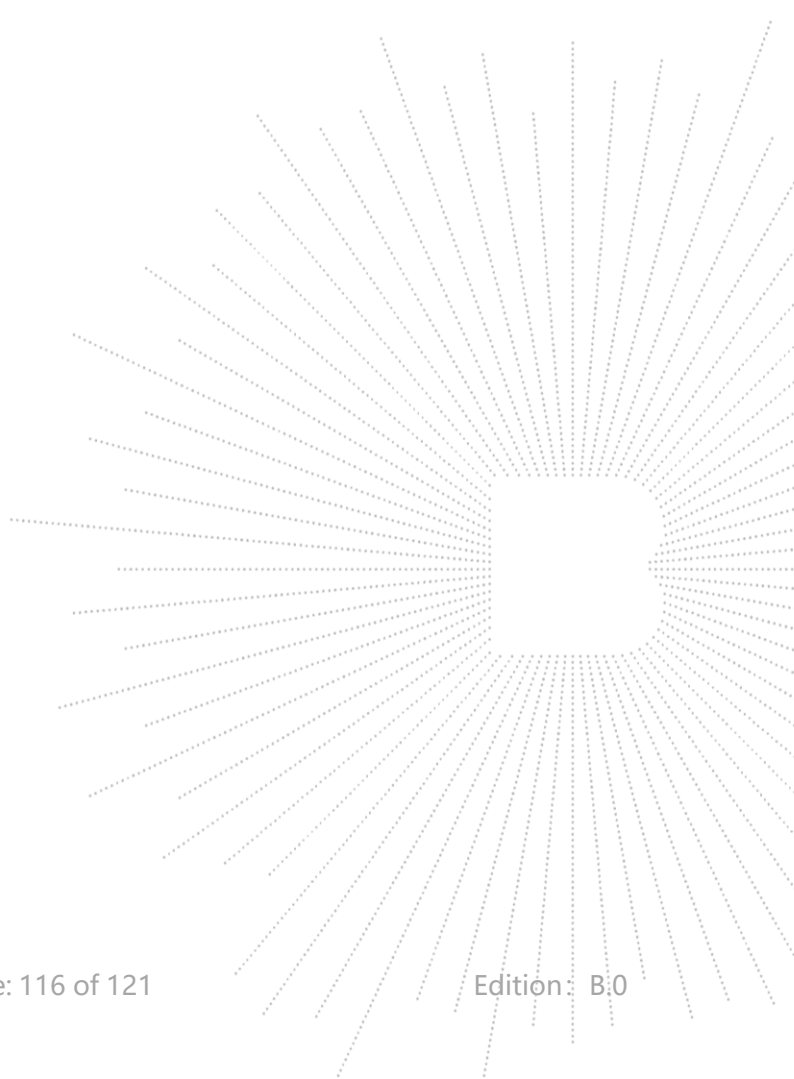

15. Duty Cycle Of Test Signal

15.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

15.2 Formula


Duty Cycle = $T_{on} / (T_{on} + T_{off})$

15.3 Test Procedure

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

15.4 Test Result

Please refer to Appendix 1: Duty Cycle
Test Result: Pass

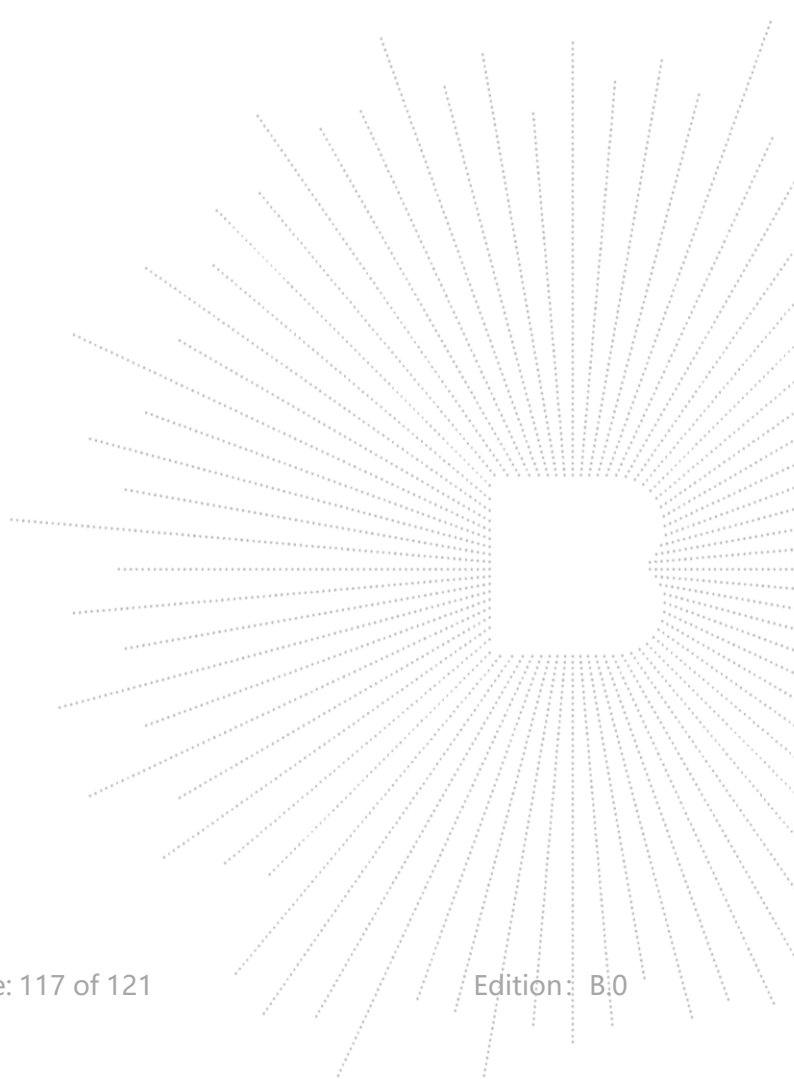


16. Antenna Requirement

16.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


16.2 Test Result


The EUT antenna is internal antenna, fulfill the requirement of this section.

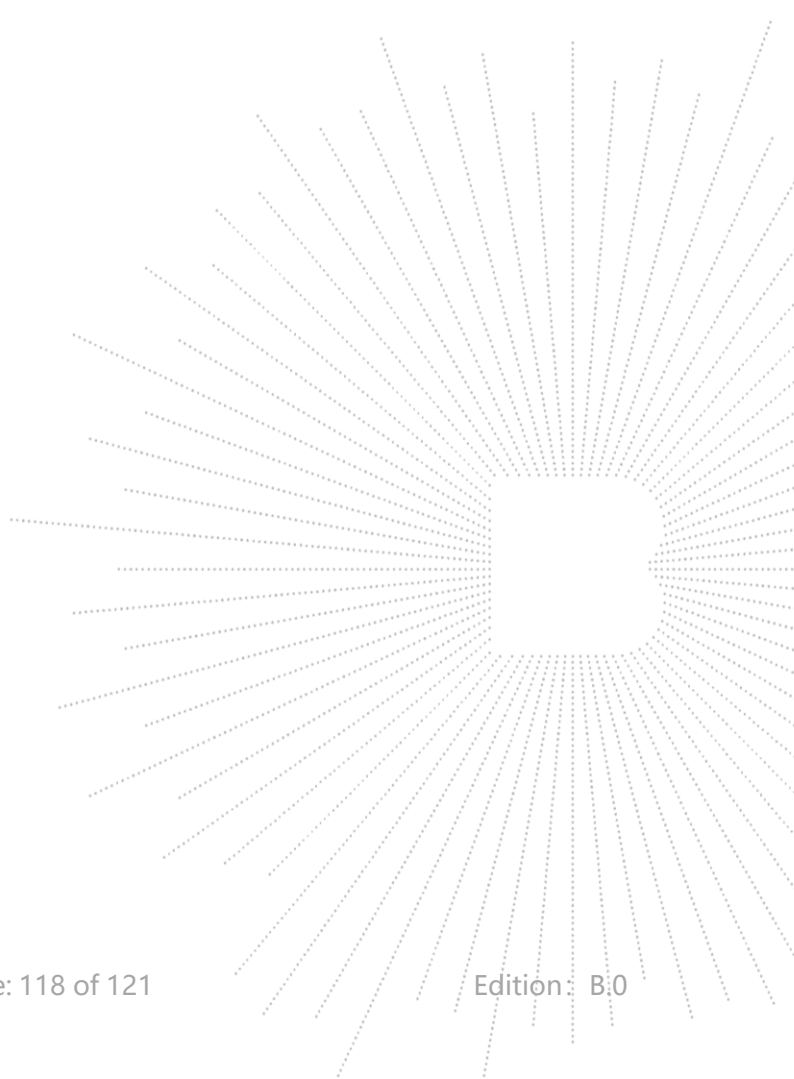

17. EUT Test Setup Photographs

Radiated Measurement Photos

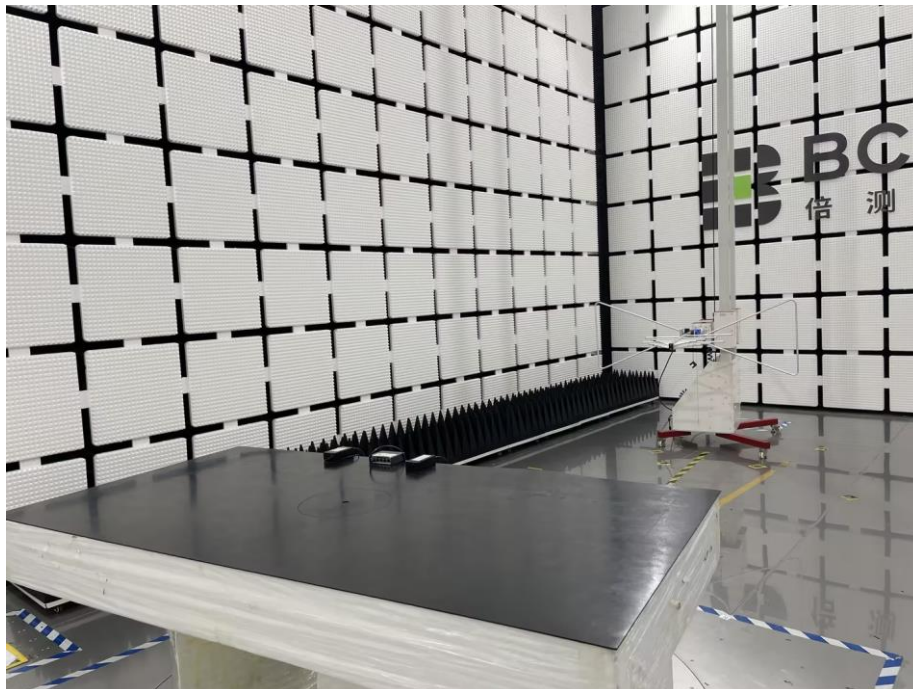

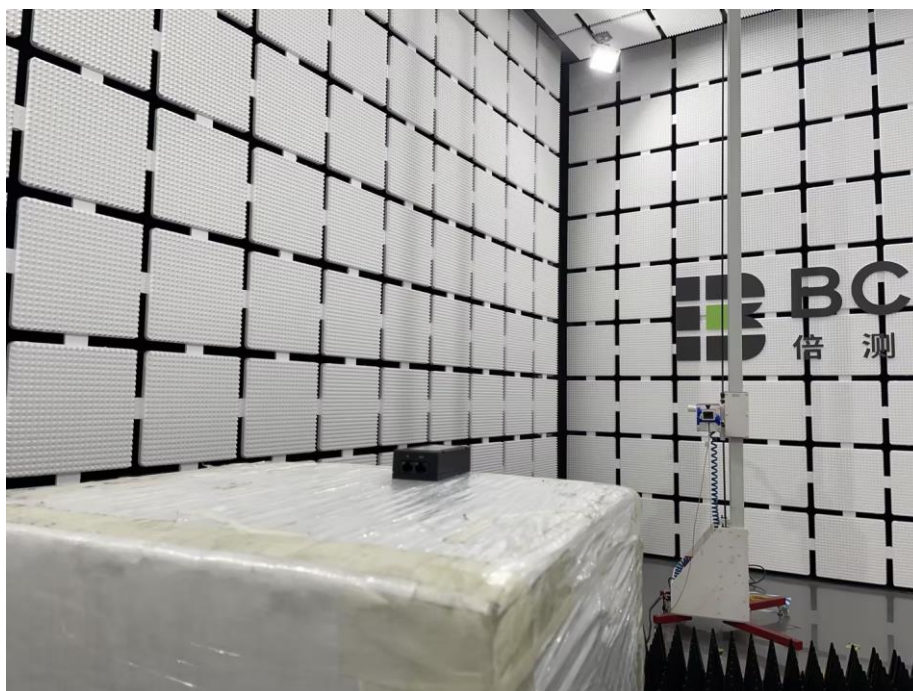

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** END *****