

FCC Test Report

Report No. : 1812C40194812503

Applicant : Shenzhen Radiomaster Co.,Ltd

Address : 4F Yangtian Building, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China

Product Name : XR3

Report Date : 2025-07-22

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information.....	6
1.1. Client Information	6
1.2. Description of Device (EUT).....	6
1.3. Auxiliary Equipment Used During Test.....	7
1.4. Description of Test Modes.....	7
1.5. Description Of Test Setup	8
1.6. Test Equipment List.....	9
1.7. Measurement Uncertainty	10
1.8. Additional Instructions	10
1.9. Description of Test Facility	11
1.10. Disclaimer.....	11
2. Summary of Test Results	12
3. Conducted Emission Test.....	13
3.1. Test Standard and Limit	13
3.2. Test Setup	13
3.3. Test Procedure.....	13
3.4. Test Data.....	13
4. Radiation Spurious Emission and Band Edge.....	14
4.1. Test Standard and Limit	14
4.2. Test Setup	14
4.3. Test Procedure.....	15
4.4. Test Data.....	16
5. Maximum Peak Output Power Test.....	22
5.1. Test Standard and Limit	22
5.2. Test Setup	22
5.3. Test Procedure.....	22
5.4. Test Data.....	22
6. 20dB Occupy Bandwidth Test	25
6.1. Test Standard	25
6.2. Test Setup	25
6.3. Test Procedure.....	25
6.4. Test Data.....	25
7. Carrier Frequency Separation Test	28
7.1. Test Standard and Limit	28
7.2. Test Setup	28
7.3. Test Procedure.....	28
7.4. Test Data.....	28
8. Number of Hopping Channel Test.....	31

8.1. Test Standard and Limit	31
8.2. Test Setup	31
8.3. Test Procedure	31
8.4. Test Data	31
9. Dwell Time Test	34
9.1. Test Standard and Limit	34
9.2. Test Setup	34
9.3. Test Procedure	34
9.4. Test Data	34
10. 100kHz Bandwidth of Frequency Band Edge Requirement	37
10.1. Test Standard and Limit	37
10.2. Test Setup	37
10.3. Test Procedure	37
10.4. Test Data	37
11. Antenna Requirement	42
11.1. Test Standard and Requirement	42
11.2. Antenna Connected Construction	42
APPENDIX I -- TEST SETUP PHOTOGRAPH	43
APPENDIX II -- EXTERNAL PHOTOGRAPH	43
APPENDIX III -- INTERNAL PHOTOGRAPH	43

TEST REPORT

Applicant : Shenzhen Radiomaster Co.,Ltd
Manufacturer : Shenzhen Radiomaster Co.,Ltd
Product Name : XR3
Model No. : XR3
Trade Mark : Radiomaster
Rating(s) : Input: DC 4.5-8.4V

Test Standard(s) : 47 CFR Part 15.247

Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 15.247 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt 2024-12-25

Date of Test 2024-12-25 to 2025-05-19

Prepared By

Cecilia Chen

(Cecilia Chen)

Approved & Authorized Signer

Snowy Meng

(Snowy Meng)

Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2025-07-22

1. General Information

1.1. Client Information

Applicant	:	Shenzhen Radiomaster Co.,Ltd
Address	:	4F Yangtian Building, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China
Manufacturer	:	Shenzhen Radiomaster Co.,Ltd
Address	:	4F Yangtian Building, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China
Factory	:	Shenzhen Radiomaster Co.,Ltd
Address	:	4F Yangtian Building, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China

1.2. Description of Device (EUT)

Product Name	:	XR3
Model No.	:	XR3
Trade Mark	:	Radiomaster
Test Power Supply	:	DC 5V
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Mode	:	☐ DSSS ☒ FHSS
Operation Frequency	:	903.5-926.9MHz
Number of Channel	:	40 Channels
Modulation Type	:	CSS
Antenna Type	:	ANT 1: Monopole Antenna ANT 2: Monopole Antenna
Antenna Gain(Peak)	:	ANT 1: 1.35dBi ANT 2: 1.35dBi
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 3) ANT 1 and ANT 2 cannot support simultaneous transmission.		

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
/	/	/	/

1.4. Description of Test Modes


Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	903.5	9	908.3	17	913.1	25	917.9	33	922.7
2	904.1	10	908.9	18	913.7	26	918.5	34	923.3
3	904.7	11	909.5	19	914.3	27	919.1	35	923.9
4	905.3	12	910.1	20	914.9	28	919.7	36	924.5
5	905.9	13	910.7	21	915.5	29	920.3	37	925.1
6	906.5	14	911.3	22	916.1	30	920.9	38	925.7
7	907.1	15	911.9	23	916.7	31	921.5	39	926.3
8	907.7	16	912.5	24	917.3	32	922.1	40	926.9

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT was tested with Channel 1, 20 and 40.

1.5. Description Of Test Setup

RE

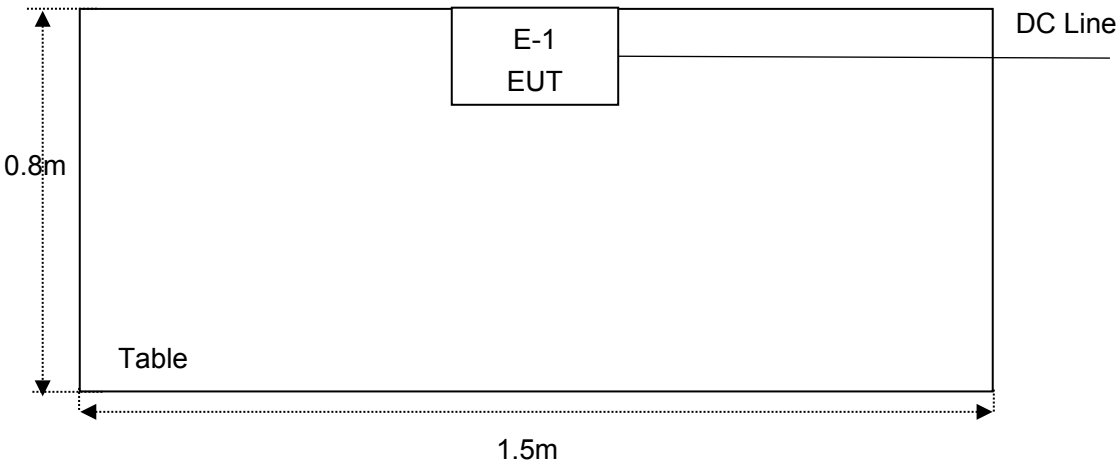

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	2024-09-09	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT00 1	2024-01-17 2025-01-13	1 Year 1 Year
3.	EMI Test XR2	Rohde & Schwarz	ESCI	100627	2024-01-17 2025-01-13	1 Year 1 Year
4.	EMI Test XR2	Rohde & Schwarz	ESR26	101481	2024-01-23 2025-01-14	1 Year 1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	2024-09-09	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G- 45	SKET-PA-002	2024-01-17 2025-01-13	1 Year 1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	2022-10-16	3 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	2022-10-23	3 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	2024-09-12	1 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	2024-01-22	3 Year
11.	Pre-amplifier	SONOMA	310N	186860	2024-01-17 2025-01-14	1 Year 1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	2024-09-09	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	2024-02-04 2025-02-21	1 Year 1 Year
15.	Signal Generator	Agilent	E4421B	MY41000743	2024-10-10 2025-02-21	1 Year 1 Year
16.	DC Power Supply	IVYTECH	IV3605	1804D360510	2024-09-09	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	2024-10-14	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	2024-05-06 2025-04-25	1 Year 1 Year

1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.8dB
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (Below 30MHz)	3.53dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.78dB; 6G-18GHz: 4.88dB 18G-40GHz: 5.68dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Additional Instructions

Power level setup in software: VCP_V1.5.0_Setup_x64_64bits

Operation Band:

Mode	Channel(MHz)	Power level	Transmitting type
LoRa 900M	903.5	default	data pack TX
LoRa 900M	914.9	default	data pack TX
LoRa 900M	926.9	default	data pack TX

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.:279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.10. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	N/A
15.205/15.209	Spurious Emission	PASS
15.247(b)(2)	Conducted Peak Output Power	PASS
15.247(a)(1)(i)	20dB Occupied Bandwidth	PASS
15.247(a)(1)	Carrier Frequencies Separation	PASS
15.247(a)(1)(i)	Hopping Channel Number	PASS
15.247(a)(1)(i), 15.247(f)	Dwell Time	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

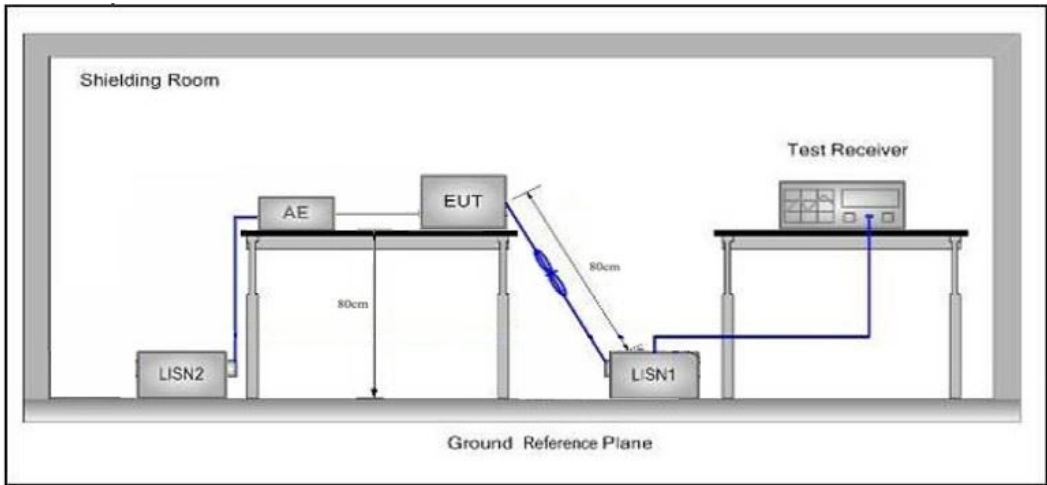

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test XR3 (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Not applicable for DC power device.

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

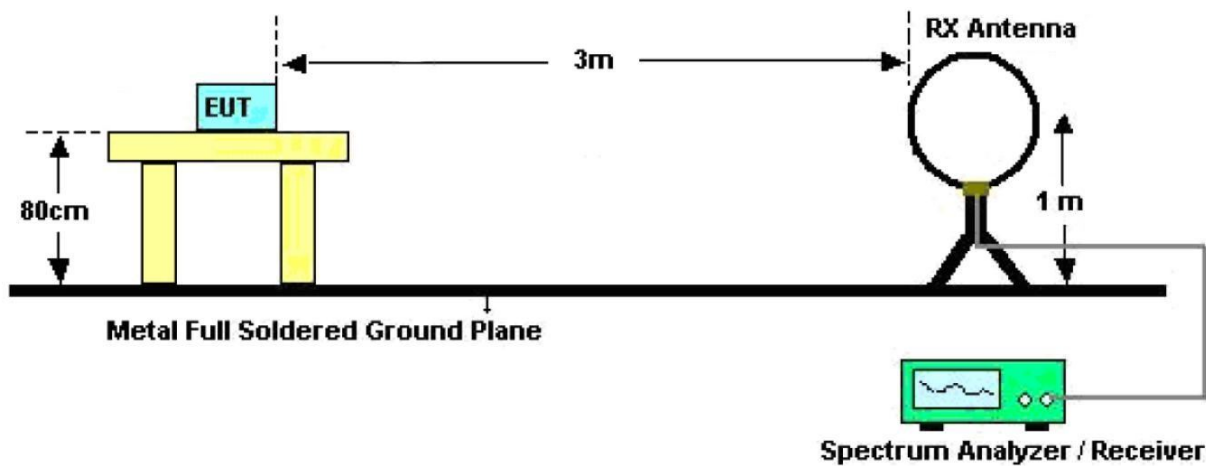


Figure 1. Below 30MHz

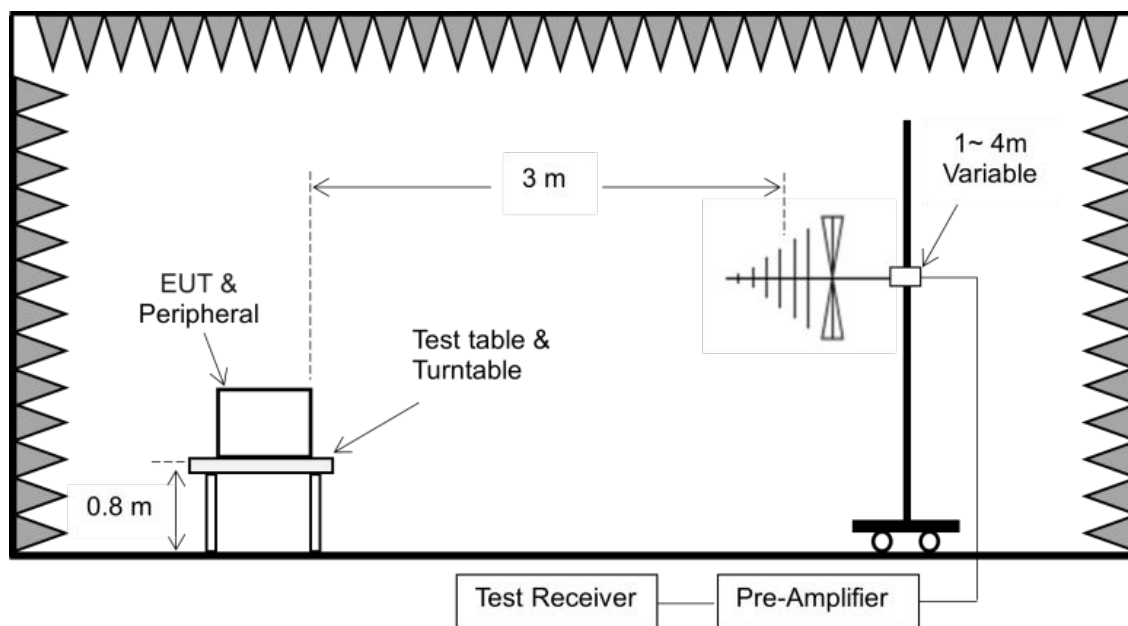


Figure 2. 30MHz to 1GHz

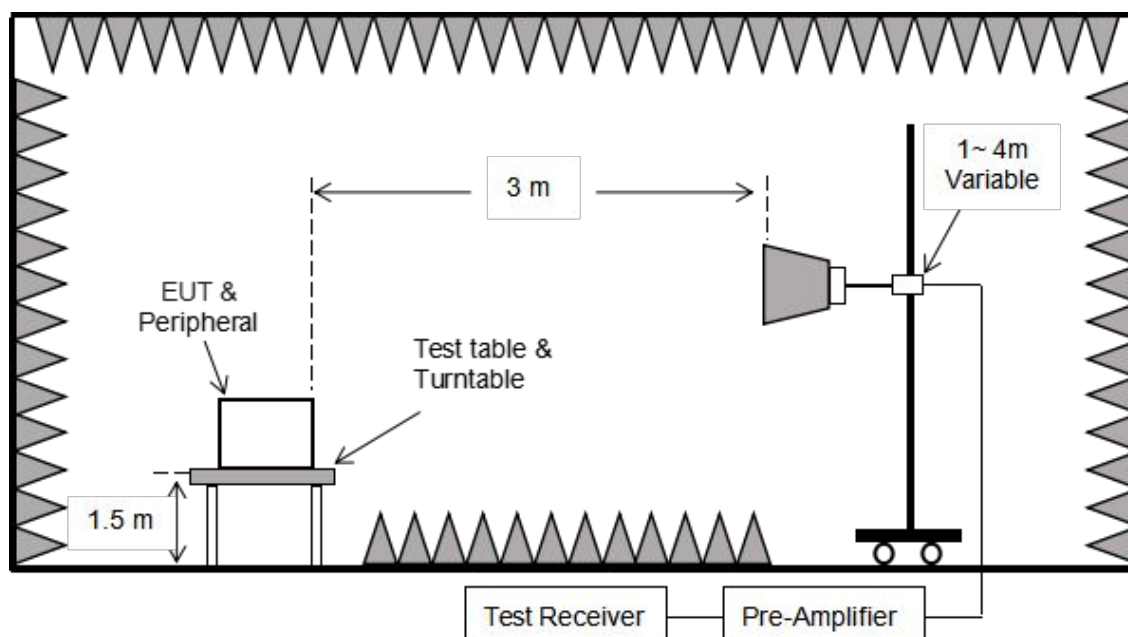


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.



Test Results (30~1000MHz)


Test Mode: 903.5MHz
Power Source: DC 5V
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 22.5°C/55%RH
Fundamental



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	41.7129	29.71	-16.18	13.53	40.00	-26.47	QP	
2	49.3594	29.77	-17.20	12.57	40.00	-27.43	QP	
3	100.5806	30.10	-18.59	11.51	43.50	-31.99	QP	
4	239.9874	35.49	-18.71	16.78	46.00	-29.22	QP	
5	319.9370	48.04	-16.20	31.84	46.00	-14.16	QP	
6	926.9012	135.04	-6.35	128.69				

Test Results (30~1000MHz)

Test Mode: 903.5MHz
Power Source: DC 5V
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 22.5°C/55%RH
Fundamental

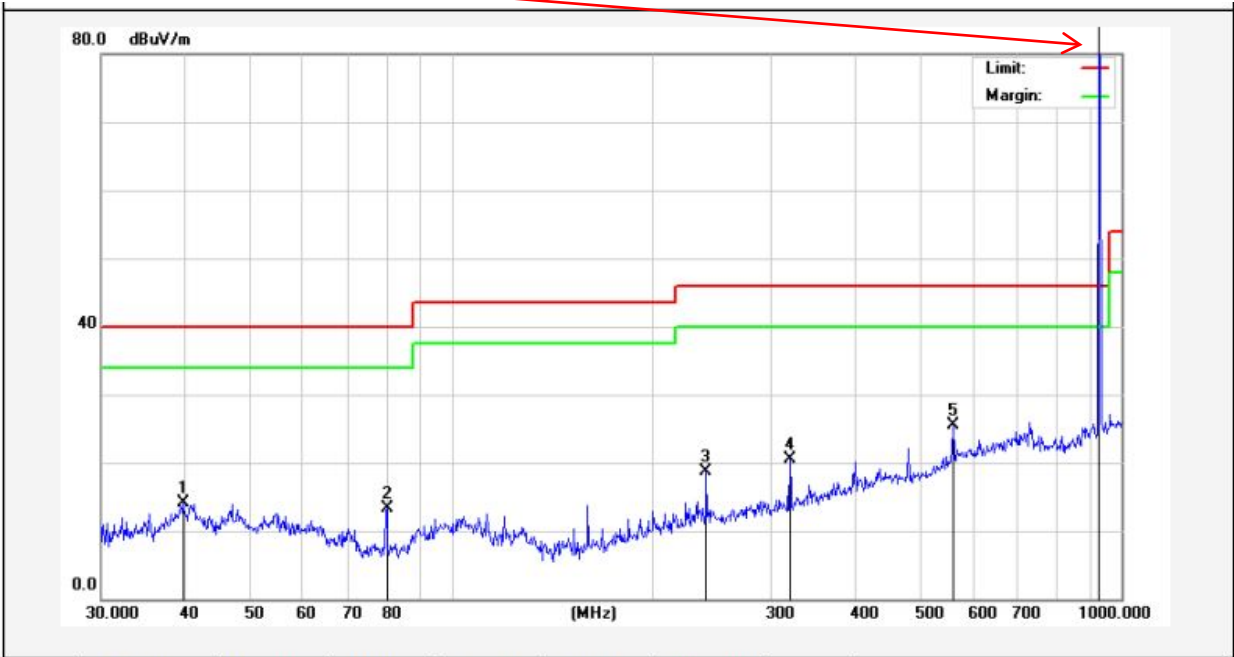

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	39.7146	30.22	-16.09	14.13	40.00	-25.87	QP	
2	80.0806	36.03	-22.79	13.24	40.00	-26.76	QP	
3	239.9874	37.33	-18.70	18.63	46.00	-27.37	QP	
4	319.9370	36.39	-15.80	20.59	46.00	-25.41	QP	
5	560.6928	37.18	-11.65	25.53	46.00	-20.47	QP	
6	926.9012	124.98	-6.35	118.63				

Note:
1. Only record the worst data (ANT1) in the report.
2. Result(dBμV/m) = Reading(dBμV) + Factor(dB/m);
Over Limit(dB) = Result(dBμV/m) - Limit(dBμV/m)

Test Results (1GHz-25GHz)

Test channel: Lowest						
Peak value:						
Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
1807.00	29.06	15.27	44.33	74.00	-29.67	Vertical
2710.50	30.21	18.09	48.30	74.00	-25.70	Vertical
3614.00	31.42	23.76	55.18	74.00	-18.82	Vertical
4517.50	*			74.00		Vertical
5421.00	*			74.00		Vertical
1807.00	29.43	15.27	44.70	74.00	-29.30	Horizontal
2710.50	30.09	18.09	48.18	74.00	-25.82	Horizontal
3614.00	29.29	23.76	53.05	74.00	-20.95	Horizontal
4517.50	*			74.00		Horizontal
5421.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	polarization
1807.00	18.44	15.27	33.71	54.00	-20.29	Vertical
2710.50	19.24	18.09	37.33	54.00	-16.67	Vertical
3614.00	20.44	23.76	44.20	54.00	-9.80	Vertical
4517.50	*			54.00		Vertical
5421.00	*			54.00		Vertical
1807.00	17.78	15.27	33.05	54.00	-20.95	Horizontal
2710.50	19.15	18.09	37.24	54.00	-16.76	Horizontal
3614.00	18.60	23.76	42.36	54.00	-11.64	Horizontal
4517.50	*			54.00		Horizontal
5421.00	*			54.00		Horizontal

Test Results (1GHz-25GHz)

Test channel: Middle						
Peak value:						
Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
1829.80	29.08	15.42	44.50	74.00	-29.50	Vertical
2744.70	30.06	18.02	48.08	74.00	-25.92	Vertical
3659.60	30.43	23.80	54.23	74.00	-19.77	Vertical
4574.50	*			74.00		Vertical
5489.40	*			74.00		Vertical
1829.80	29.13	15.42	44.55	74.00	-29.45	Horizontal
2744.70	30.08	18.02	48.10	74.00	-25.90	Horizontal
3659.60	28.99	23.80	52.79	74.00	-21.21	Horizontal
4574.50	*			74.00		Horizontal
5489.40	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	
1829.80	18.17	15.42	33.59	54.00	-20.41	polarization
2744.70	19.34	18.02	37.36	54.00	-16.64	Vertical
3659.60	20.30	23.80	44.10	54.00	-9.90	Vertical
4574.50	*			54.00		Vertical
5489.40	*			54.00		Vertical
1829.80	17.69	15.42	33.11	54.00	-20.89	Vertical
2744.70	18.71	18.02	36.73	54.00	-17.27	Horizontal
3659.60	19.11	23.80	42.91	54.00	-11.09	Horizontal
4574.50	*			54.00		Horizontal
5489.40	*			54.00		Horizontal

Test Results (1GHz-25GHz)

Test channel: Highest						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1853.80	29.35	15.58	44.93	74.00	-29.07	Vertical
2780.70	30.07	17.93	48.00	74.00	-26.00	Vertical
3707.60	30.98	23.83	54.81	74.00	-19.19	Vertical
4634.50	*			74.00		Vertical
5561.40	*			74.00		Vertical
1853.80	29.20	15.58	44.78	74.00	-29.22	Horizontal
2780.70	30.11	17.93	48.04	74.00	-25.96	Horizontal
3707.60	29.67	23.83	53.50	74.00	-20.50	Horizontal
4634.50	*			74.00		Horizontal
5561.40	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
1853.80	19.29	15.58	34.87	54.00	-19.13	Vertical
2780.70	20.35	17.93	38.28	54.00	-15.72	Vertical
3707.60	20.85	23.83	44.68	54.00	-9.32	Vertical
4634.50	*			54.00		Vertical
5561.40	*			54.00		Vertical
1853.80	19.13	15.58	34.71	54.00	-19.29	Horizontal
2780.70	20.08	17.93	38.01	54.00	-15.99	Horizontal
3707.60	19.01	23.83	42.84	54.00	-11.16	Horizontal
4634.50	*			54.00		Horizontal
5561.40	*			54.00		Horizontal

Remark:


1. During the test, pre-scan all ANT and only show the test data of the worst case (ANT1) in this report.
2. Result =Reading + Factor
3. Test frequency are from 1GHz to 25GHz, "*"means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(2)
Test Limit	For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

5.2. Test Setup



5.3. Test Procedure


1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW ≥ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold

5.4. Test Data

Temperature:	25.5 °C	Humidity:	47 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

For ANT1:

Test Channel	Peak Power output (dBm)	Limit (dBm)	Results
Low	22.617	≤23.98	PASS
Middle	22.494	≤23.98	PASS
High	22.830	≤23.98	PASS

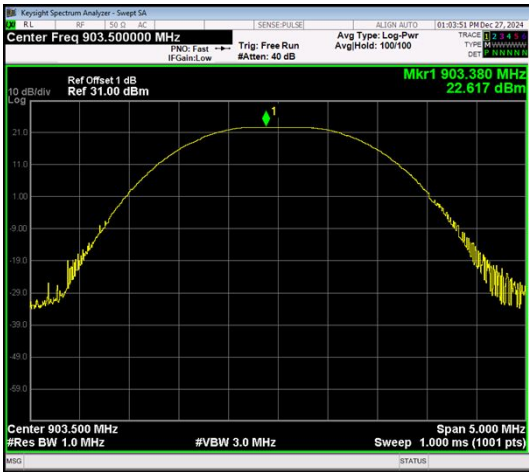

Low Channel



Mid Channel



High Channel

For ANT2:

Test Channel	Peak Power output (dBm)	Limit (dBm)	Results
Low	22.680	≤23.98	PASS
Middle	22.403	≤23.98	PASS
High	22.252	≤23.98	PASS



Low Channel



Mid Channel




High Channel

6. 20dB Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)(i)
Limit	Less than 500KHz

6.2. Test Setup



6.3. Test Procedure

Using the following spectrum analyzer settings:


1. Span= approximately 2 to 5 times the OBW.
2. Set the RBW =1%~5% of the OBW.
3. Set the VBW $\geq$ RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

6.4. Test Data

Temperature:	25.5 °C	Humidity:	47 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------


For ANT1:

Test Channel	Bandwidth (kHz)	Limit (kHz)	Results
Low	299.2	≤500	PASS
Middle	288.4	≤500	PASS
High	296.2	≤500	PASS

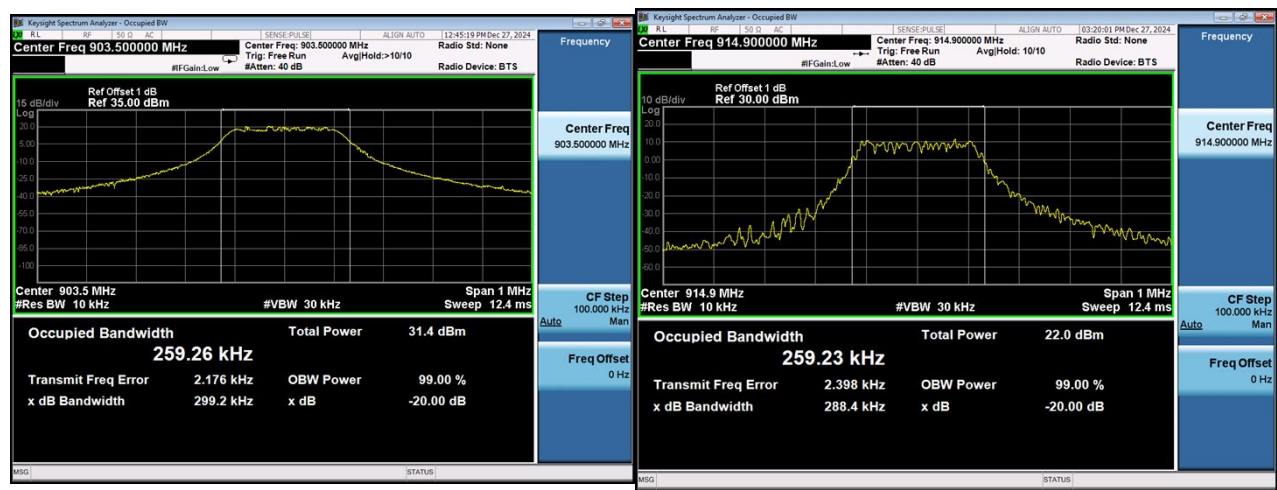

Low Channel


Mid Channel

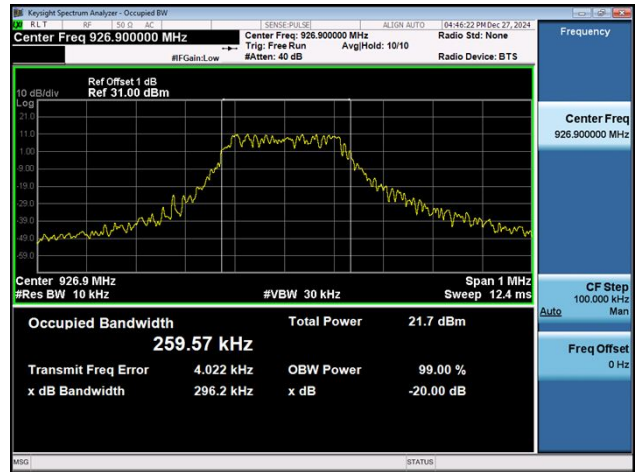


High Channel

For ANT2:

Test Channel	Bandwidth (kHz)	Limit (kHz)	Results
Low	301.8	≤500	PASS
Middle	290.9	≤500	PASS
High	288.4	≤500	PASS

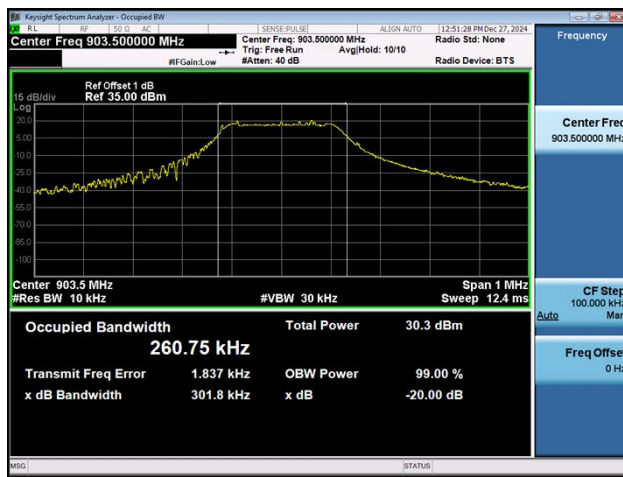

Low Channel

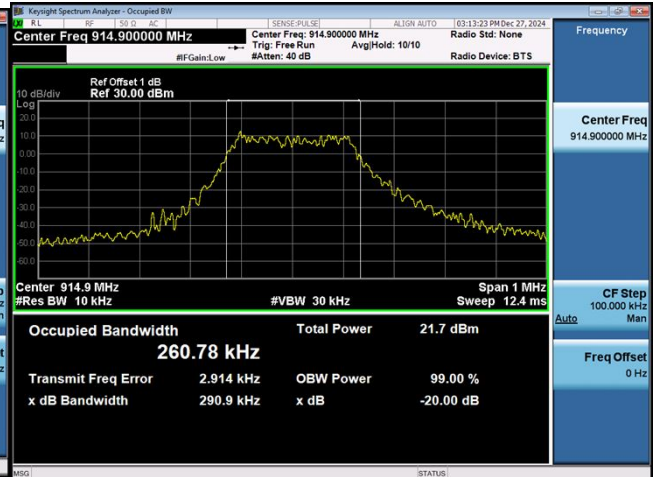

Mid Channel




High Channel

7. Carrier Frequency Separation Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	> 25 kHz or the 20 dB bandwidth whichever is greater.

7.2. Test Setup



7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:


1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW =approximately 30% of the channel spacing.
3. Set the VBW $\geq$ RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

7.4. Test Data

Temperature:	25.5 °C	Humidity:	47 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

For ANT1:


Mode	Frequency (MHz)	Separation Read Value (kHz)	Limit (kHz)	Result
Hopping	914.7	30	299.2	PASS

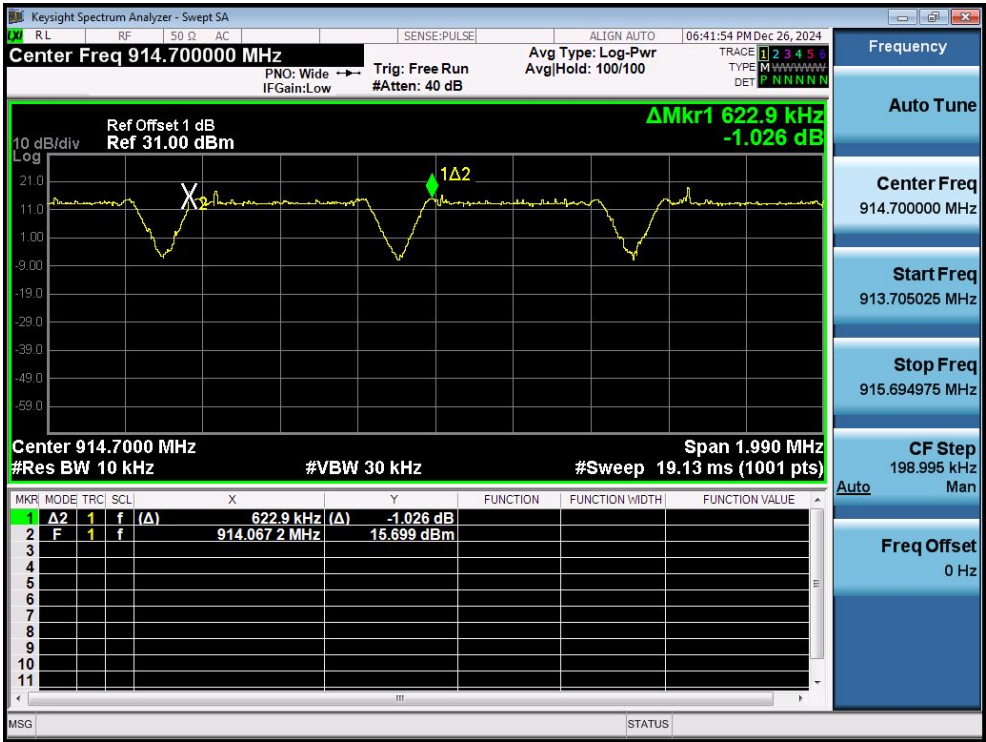

Hopping

For ANT2:

Mode	Frequency (MHz)	Separation Read Value (kHz)	Limit (kHz)	Result
Hopping	913.7	30	301.8	PASS

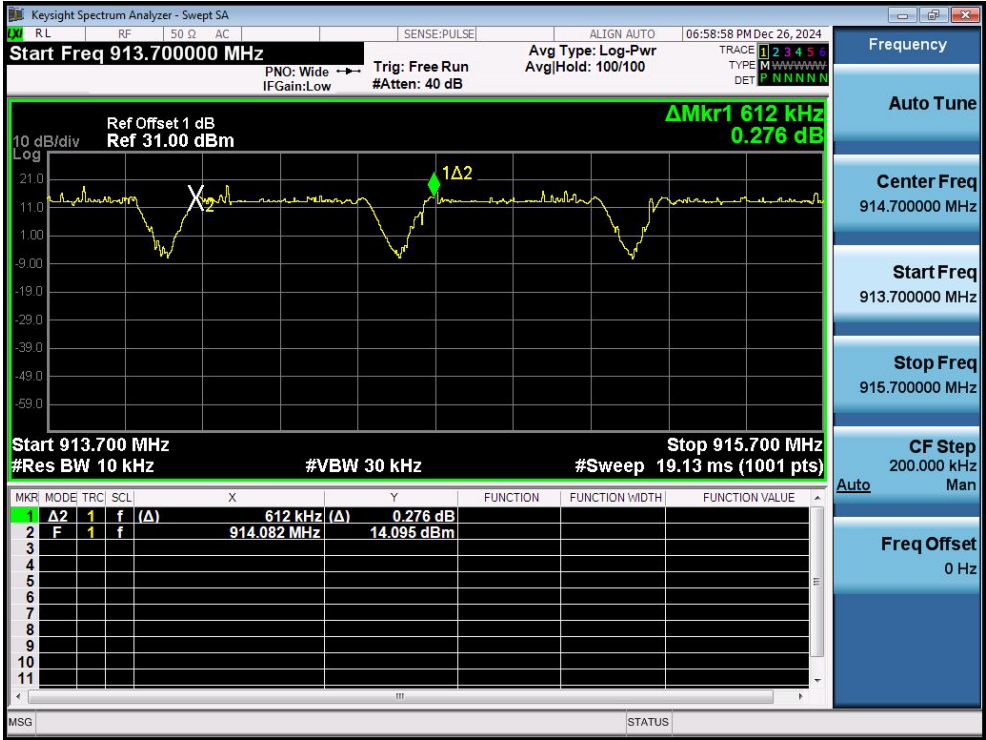


Hopping

8. Number of Hopping Channel Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247(a)(1)(i)
Test Limit	≥ 50 channels for 20 dB bandwidth less than 250KHz ≥ 25 channels for 20 dB bandwidth greater than 250KHz

8.2. Test Setup



8.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:


1. Span= the frequency band of operation
2. Set the RBW = less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. Set the VBW $\geq$ RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

8.4. Test Data

Temperature:	25.5 °C	Humidity:	47 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

For ANT1:


Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
902-928MHz	40	≥25

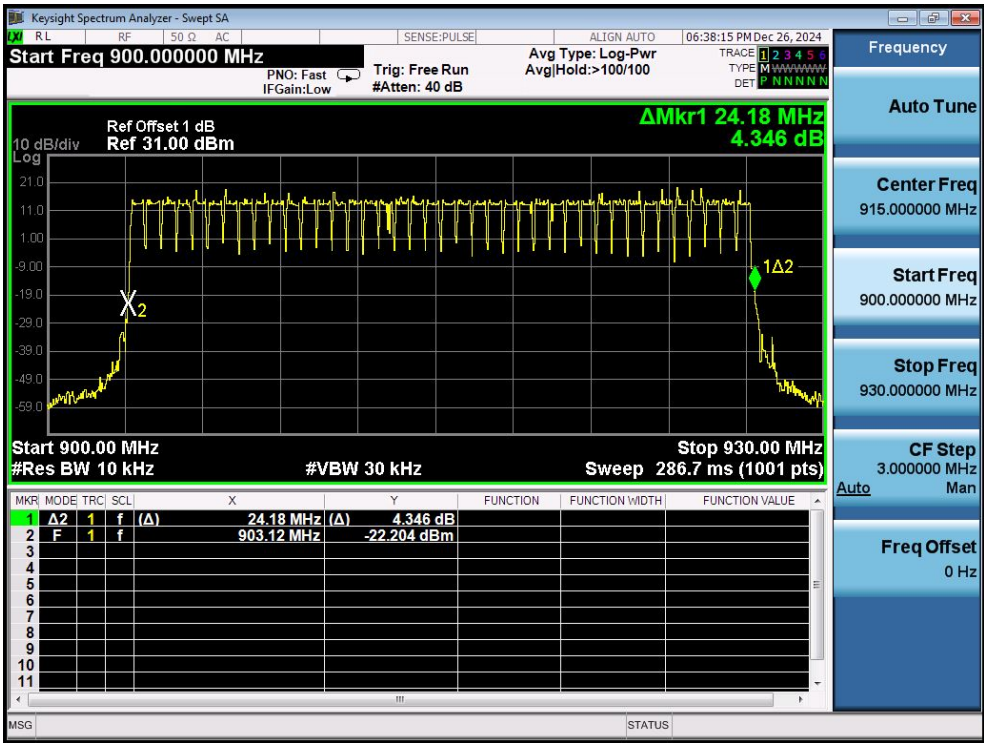

Hopping

For ANT2:

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
902-928MHz	40	≥25

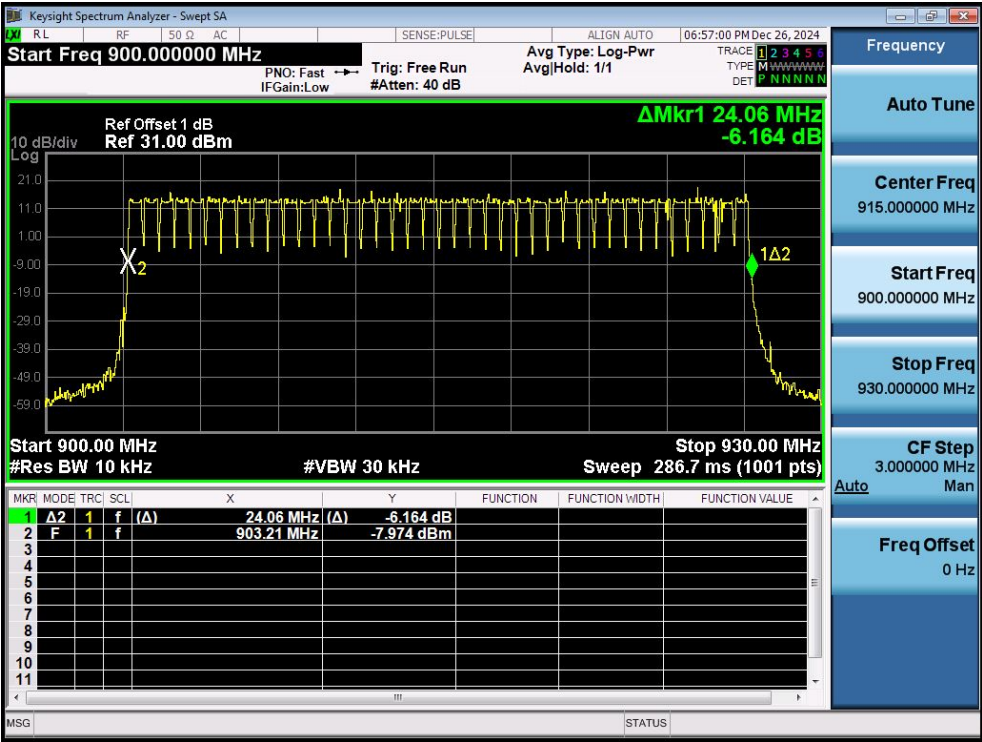


Hopping

9. Dwell Time Test

9.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247(a)(1)(i), 15.247(f)
Test Limit	15.247(a)(1)(i): if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. 15.247(f): For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned-off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4

9.2. Test Setup



9.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 100 KHz.
3. Set the VBW = 300 KHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = clear write.

9.4. Test Data

Temperature:	25.5 °C	Humidity:	47 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

For ANT1:

Requirement	Pulse width (ms)	Observe Period(s)	TotalHops [Num]	Dwell time (ms)	Limit (s)	Result
15.247(a)(1)(i)	9.1	10	7	9.1	0.40	PASS

Keysight Spectrum Analyzer - Swept SA

R1150.000000

SENSE:PULSE

ALIGN: AUTO

06:33:40 PM Dec 26, 2024

Center Freq 926.750000 MHz

PN0: Wide

Trig: Video

Avg Type: Log-Pwr

IFGain: Low

#Atten: 40 dB

AvgHold: 1/1

TYPE: M

DET: P

Ref Offset 1 dB

Ref 31.00 dBm

10 dB/div

Log

21.0

11.0

1.00

-9.00

-19.0

-29.0

-39.0

-49.0

-59.0

Center 926.750000 MHz

Res BW 100 kHz

#VBW 300 kHz

Sweep 10.00 s (1001 pts)

Span 0 Hz

MSO

STATUS

Frequency

Auto Tune

Center Freq 926.750000 MHz

Start Freq 926.750000 MHz

Stop Freq 926.750000 MHz

CF Step 100.000 kHz

Auto

Freq Offset 0 Hz

Keysight Spectrum Analyzer - Swept SA

R1150.000000

SENSE:PULSE

ALIGN: AUTO

06:35:34 PM Dec 26, 2024

Center Freq 926.750000 MHz

PN0: Wide

Trig: Video

Avg Type: Log-Pwr

IFGain: Low

#Atten: 40 dB

AvgHold: 1/1

TYPE: M

DET: P

Ref Offset 1 dB

Ref 31.00 dBm

10 dB/div

Log

21.0

11.0

1.00

-9.00

-19.0

-29.0

-39.0

-49.0

-59.0

Center 926.750000 MHz

Res BW 100 kHz

#VBW 300 kHz

Sweep 100.0 ms (1001 pts)

Span 0 Hz

ΔMkr1 9.100 ms -22.500 dB

X2

1Δ2

MSO

STATUS

Frequency

Auto Tune

Center Freq 926.750000 MHz

Start Freq 926.750000 MHz

Stop Freq 926.750000 MHz

CF Step 100.000 kHz

Auto

Freq Offset 0 Hz

MNR

MODE

TRIG

SCL

1

Δ2

1

t

(A)

9.100 ms

(A)

-22.500 dB

19.70 ms

-33.411 dBm

FUNCTION

FUNCTION WIDTH

FUNCTION VALUE


Hopping

10. 100kHz Bandwidth of Frequency Band Edge Requirement

10.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

10.2. Test Setup



10.3. Test Procedure


The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

10.4. Test Data


Temperature:	25.5 °C	Humidity:	47 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

For ANT1:
Band edge measurements

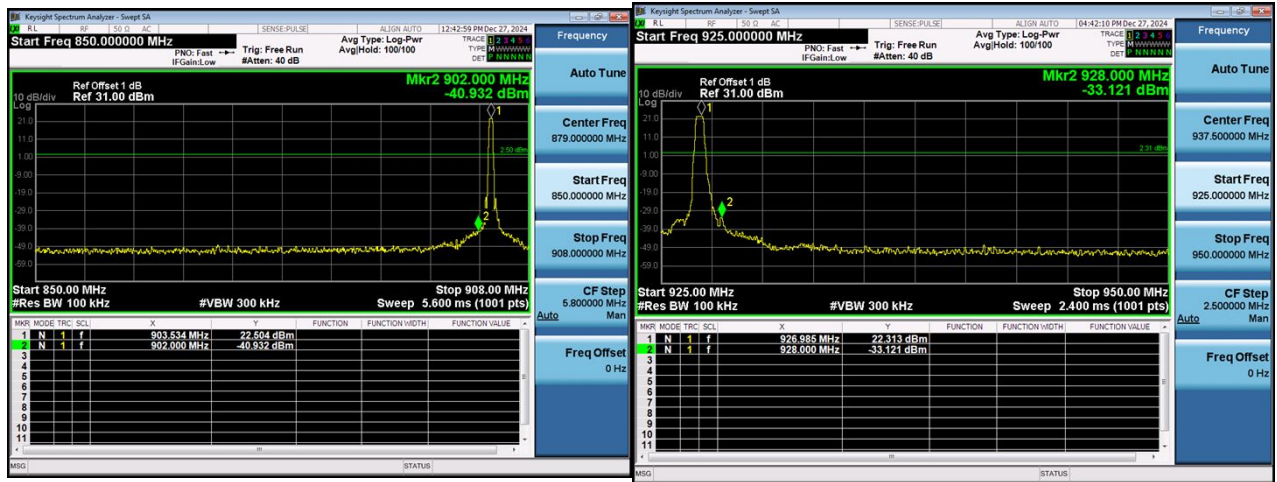

For Low channel Non-Hopping Mode

For High channel Non-Hopping Mode

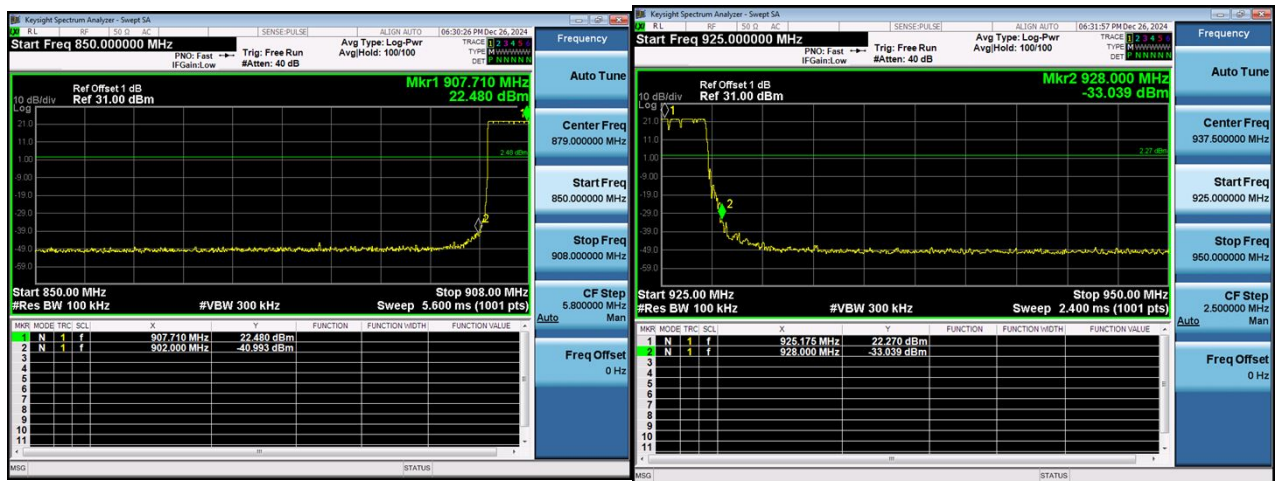

For Low channel Hopping Mode


For High channel Hopping Mode

Conducted Emission Method




Low Channel

Mid Channel

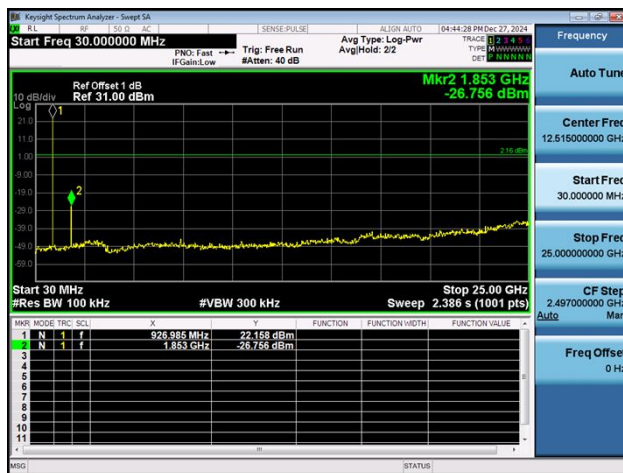


High Channel

For ANT2:
Band edge measurements

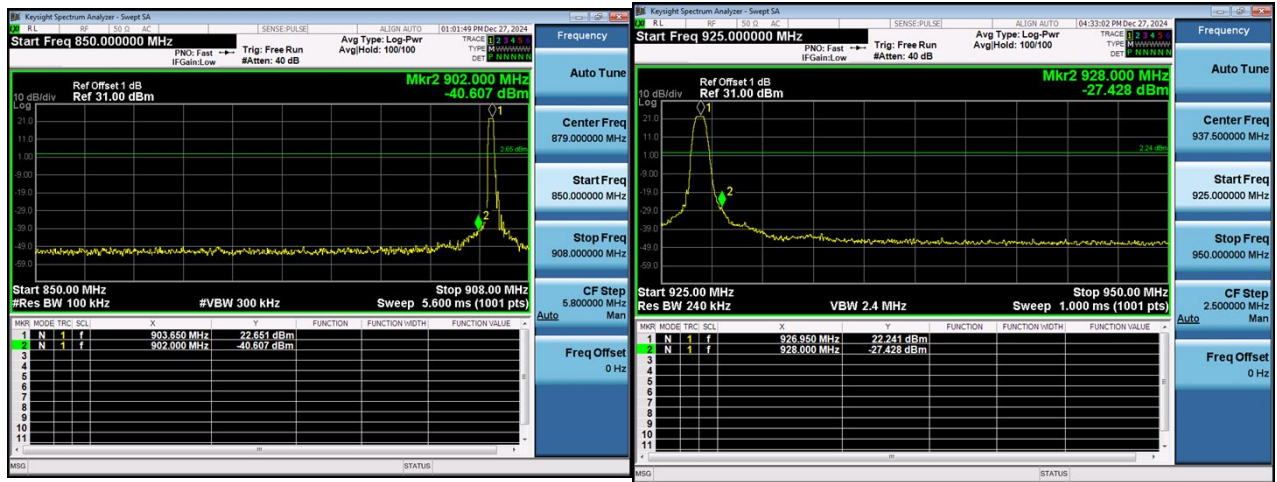

For Low channel Non-Hopping Mode


For High channel Non-Hopping Mode

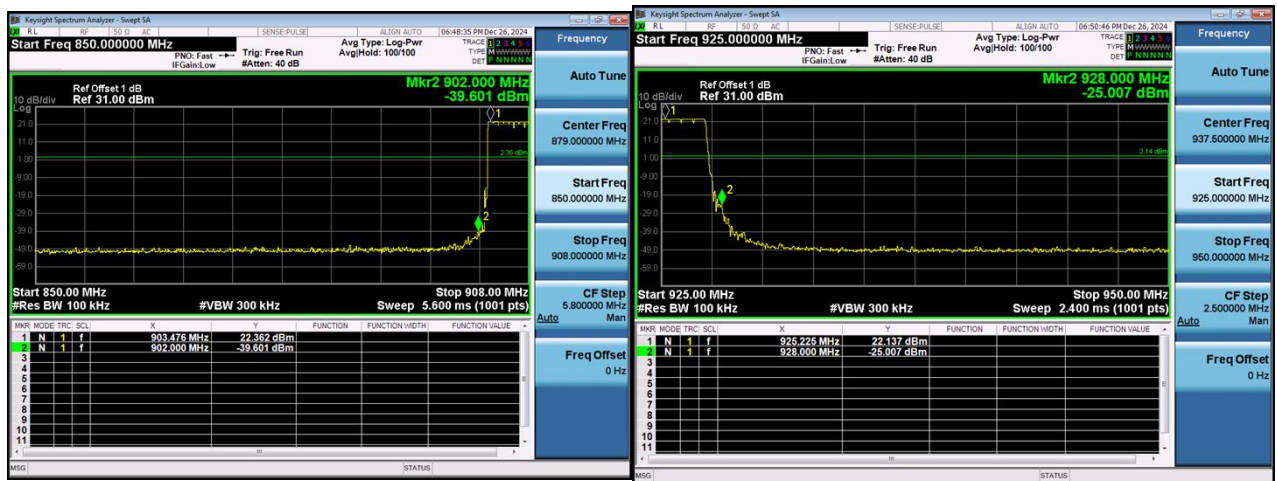

For Low channel Hopping Mode


For High channel Hopping Mode

Conducted Emission Method

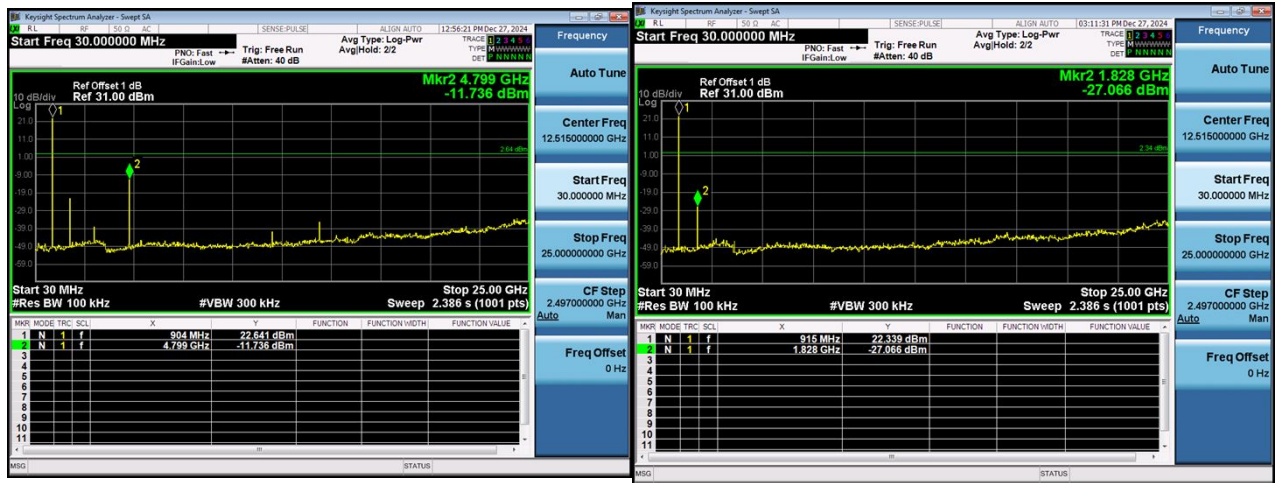

Low Channel

Mid Channel

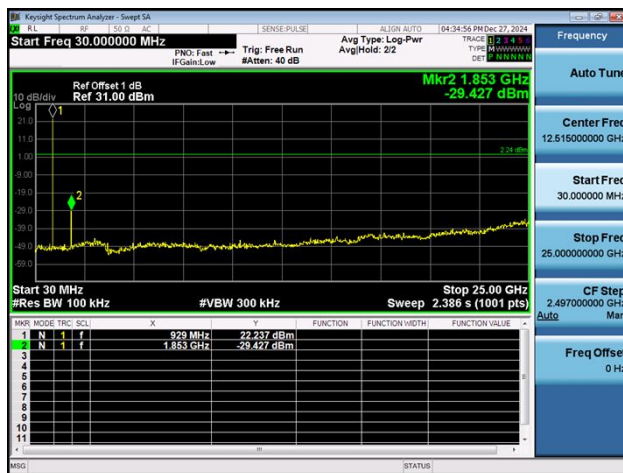

High Channel

11. Antenna Requirement

11.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

11.2. Antenna Connected Construction

The antenna is Monopole Antenna which permanently attached, and the best case gain of the antenna are 1.35dBi for ANT 1 and 1.35dBi for ANT 2. It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----