




Test Report No.:
FCCSZ2024-0060-RF

RF Test Report

FCC ID : 2BBQXMW001
EUT : mmWave Radar
MODEL : MW001
BRAND NAME : N/A
APPLICANT : Telly, Inc.
Classification of Test : Commission Test

CVC Testing Technology (Shenzhen) Co., Ltd.



Applicant		Name : Telly, Inc. Address : 14622 Ventura Blvd Ste 102 PMB 2037 Sherman Oaks, CA 91403-3662 United States	
Manufacturer		Name : Telly, Inc. Address : 14622 Ventura Blvd Ste 102 PMB 2037 Sherman Oaks, CA 91403-3662 United States	
Equipment Under Test		Name : mmWave Radar Model/Type: MW001 Trade mark : N/A Serial NO.:N/A Sampe NO.:3-1	
Date of Receipt.	2024-08-12	Date of Testing	2024-08-12~2024.08.15
Test Specification		Test Result	
FCC Part 15, Subpart C (15.255)		PASS	
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied.	
		Seal of CVC Issue Date: 2024-08-19	
Tested by:  <u>Liang Jiatong</u> Name Signature	Reviewed by:  <u>Mo Xianbiao</u> Name Signature	Approved by:  <u>Dong Sanbi</u> Name Signature	
Other Aspects: NONE.			
Abbreviations:OK, Pass= passed		Fail = failed	N/A= not applicable
EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST LOCATION	7
2 GENERAL INFORMATION	8
2.1 GENERAL PRODUCT INFORMATION	8
2.2 TEST MODE	8
2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	9
2.4 DESCRIPTION OF SUPPORT UNITS	9
2.5 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHZ	10
2.6 RADIATED TEST SETUP	11
3 TEST TYPES AND RESULTS	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT	15
3.3 DUTY CYCLE, OFF TIME REQUIREMENT	28
3.4 BANDWIDTH MEASUREMENT	30
3.5 EIRP POWER MEASUREMENT	32
3.6 FREQUENCY STABILITY	34
4 PHOTOGRAPHS OF TEST SETUP	35
5 PHOTOGRAPHS OF THE EUT	36



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2024-0060-RF	Original release	2024-08-20



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15.255			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	DC power supply
15.255(d)	Transmitter Spurious Emissions	PASS	See section 3.2
15.215(c)	20dB Bandwidth	PASS	See section 3.4
---	Occupied Bandwidth Measurement	Report Only	See section 3.4
15.255(c)	Duty cycle, Off Time Requirement	PASS	See section 3.3
15.255(c)	EIRP	PASS	See section 3.5
15.255(f)	Frequency stability	PASS	See section 3.6
15.255(h)	Group Installation	N/A	The test is not applicable since there are no external phase-locking inputs in this EUT



1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
Radiation Spurious(1GHz-40GHz)					/
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 40	101898	1 year	2025.4.27
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2025.5.24
Antenna(30MHz~1001MHz)	SCHWARZBECK	VULB 9168	01133	1 year	2025.2.04
Horn antenna(1GHz-18GHz)	ETS	3117	227611	1 year	2025.4.02
Horn antenna(18GHz-40GHz)	QMS	QMS-00880	22051	1 year	2025.3.24
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
Filter group(RSE-BT/WiFi)	Rohde&Schwarz	WiFi /BT Variant 1	100820	1 year	2025.4.28
Filter group(RSE-Cellular)	Rohde&Schwarz	Cellular Variant 1	100768	1 year	2025.4.28
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100801	1 year	2025.4.28
Preamplifier(18GHz-40GHz)	Rohde&Schwarz	SCU40A	101209	1 year	2025.4.28
#2 control room	MORI	433	CS0300028	3 year	2026.5.16
Temperature and humidity meter	/	C193561517	C193561517	1 year	2025.4.28
Radiation Spurious(Below 1GHz)					/
EMI Test Receiver	Rohde&Schwarz	ESR 26	101718	1 year	2025/5/24
Antenna(30MHz~1000MHz)	SCHWARZBECK	VULB 9168	01132	1 year	2025/5/27
Horn antenna(1GHz-18GHz)	ETS	3117	227634	1 year	2025/3/25
Horn antenna(18GHz-40GHz)	SCHWARZBECK	BBHA 9170	01003	1 year	2025/3/25
3m anechoic chamber	MORI	966	CS0200019	3 year	2026/5/18
LISN (single-phase)	Rohde&Schwarz	ESH3-Z6	102152/102156	1 year	2025/4/27
Preamplifier(10kHz-1GHz)	Rohde&Schwarz	SCU-01F	100298	1 year	2025/4/28
Radiation Spurious(Above 40GHz)					/
Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
#2 control room	MORI	433	CS0300028	3 year	2026.5.16
Temperature and humidity meter	/	C193561517	C193561517	1 year	2025.4.28
Signal&Spectrum Analyzer	keysight	N9040B	CS0300074	1 year	2024.9.24
SA Expansion Module(40-60GHz)	VDI	N9029AV19	CS0300075	3 year	2025.9.14
SA Expansion Module(60-90GHz)	VDI	N9029AV12	CS0300076	3 year	2025.9.14
SA Expansion Module(90-140GHz)	VDI	N9029AV08	CS0300077	3 year	2025.9.14
SA Expansion Module(140-220GHz)	VDI	N9029AV05	CS0300078	3 year	2025.9.14
SA Expansion Module(220-330GHz)	VDI	N9029AV03	CS0300079	3 year	2025.9.14
Horn antenna(40-60GHz)	CMI	HO19R	CS0300086	3 year	2025.9.14
Horn antenna(60-90GHz)	CMI	HO12R	CS0300088	3 year	2025.9.14
Horn antenna(90-140GHz)	CMI	HO08R	CS0300090	3 year	2025.9.14
Horn antenna(140-220GHz)	CMI	HO05R	CS0300092	3 year	2025.9.14
Horn antenna(220-330GHz)	CMI	HO03R	CS0300094	3 year	2025.9.14



1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement Uncertainty		
No.	Item	Measurement Uncertainty
1	Occupied Channel Bandwidth	±1.86%
2	Radiated Emissions(30MHz-1GHz)	±5.0dB
3	Radiated Emissions(1GHz-18GHz)	±4.8dB
4	Radiated Emissions(18GHz-40GHz)	±5.1dB
5	Radiated Emissions(40GHz-60GHz)	±4.8dB
6	Radiated Emissions(60GHz-90GHz)	±4.8dB
7	Radiated Emissions(90GHz-140GHz)	±5.0dB
8	Radiated Emissions(140GHz-220GHz)	±5.1dB
9	Radiated Emissions(220GHz-300GHz)	±4.8dB
10	Temperature	±0.73°C
11	Supply voltages	±0.37 %
12	Humidity	±3.9 %

Remark: 95% Confidence Levels, k=2.

1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301-14,16, Guanguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, 518110, P. R. China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	mmWave Radar
BRAND	N/A
TEST MODEL	MW001
ADDITIONAL MODEL	N/A
POWER SUPPLY	DC 5V from host unit
MODULATION TECHNOLOGY	FMCW
FREQUENCY RANGE	60GHz-64GHz
PEAK OUTPUT POWER	1.79dBm (Maximum)
ANTENNA TYPE (Note 4)	Integrated patch antenna
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

Note:

1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. EUT photo refer to report (Report NO.: FCCSZ2024-0060-EUT).
4. Since the above data and/or information is provided by the client, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

2.2 TEST MODE

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis (if EUT with antenna diversity architecture) and packet type. The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

MODE	ANTENNA	FREQUENCY	TEST ITEM
Mode 1	Antenna Array Group1(3TX MIMO)	62.5GHz	ALL



2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC PART 15, SUBPART C. SECTION 15.255

KDB 364244 MEAS 15.255 RADARS DR01-45264

ANSI C63.10-2020

TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment

Keysight Application Note 5952-1039

All test items have been performed and recorded as per the above standards.

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment					
NO	Description	Brand	Model No.	Serial Number	Supplied by
1	Laptop	Lenovo	K4e-ARE120	MP20kshe	Lab
Support Cable					
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)




2.5 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHZ

The equipment under test was transmitting while connected to its integral antenna and is placed on a turn table. The measurement antenna is in the far field of the EUT per formula $2D^2/\lambda$ where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT. In this case, "D" is the largest dimension of the measurement antenna. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.


HornAntenna	Frequency (GHz)	Antenna Dimension A(mm)	Wavelength (λ)(m)	Far field R(m) $\geq 2D^2/\lambda$	Measurement Distance(D)(m)
QMS-00880	18	0.08	0.0167	0.77	3
	40	0.08	0.0075	1.71	
HO19R	40	0.046	0.0075	0.56	1
	60	0.046	0.005	0.85	
HO12R	60	0.03	0.005	0.36	1
	90	0.03	0.0033	0.55	
HO8R	90	0.019	0.0033	0.22	1
	140	0.019	0.0021	0.34	
HO5R	140	0.012	0.0021	0.14	1
	220	0.012	0.0014	0.21	
HO3R	220	0.008	0.0014	0.09	1
	330	0.008	0.0009	0.14	

2.6 RADIATED TEST SETUP


Below 30MHz Test Setup:

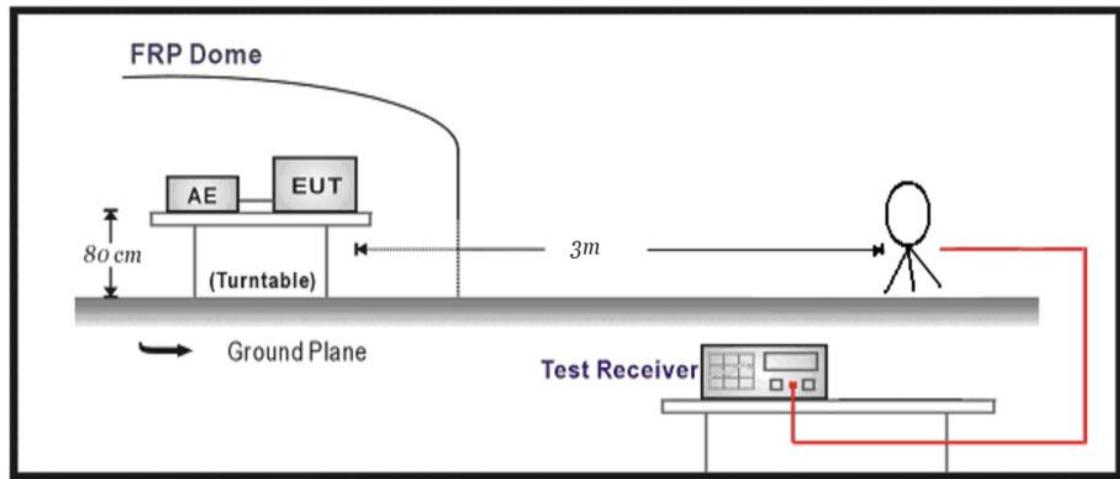


30MHz-1GHz Test Setup:

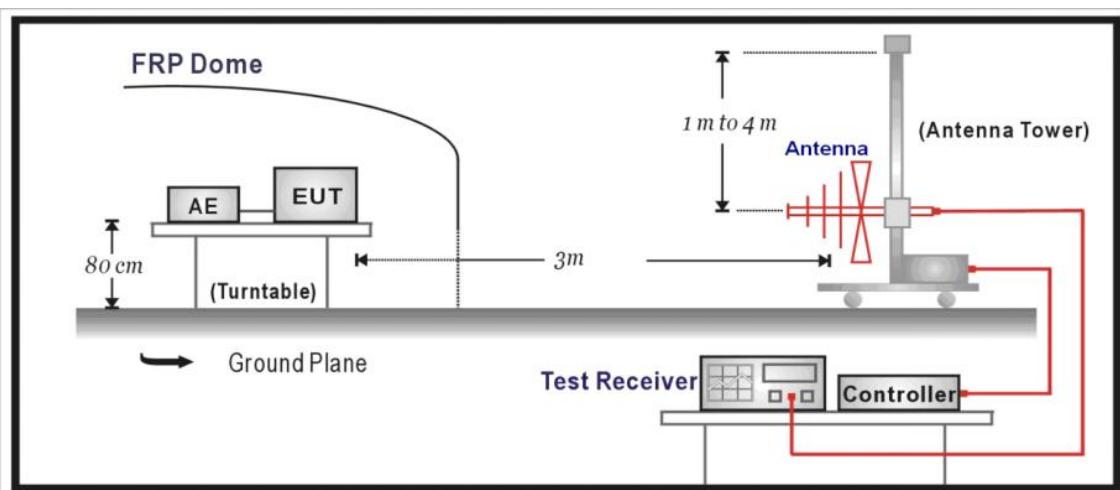

1GHz -40GHz Test Setup:

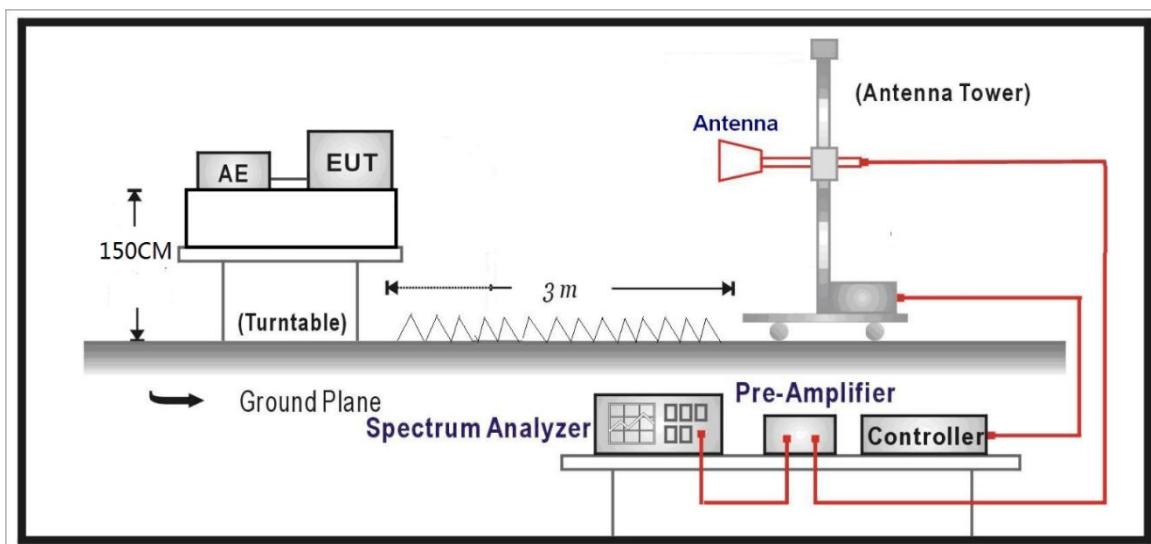

Above 40GHz Test Setup:

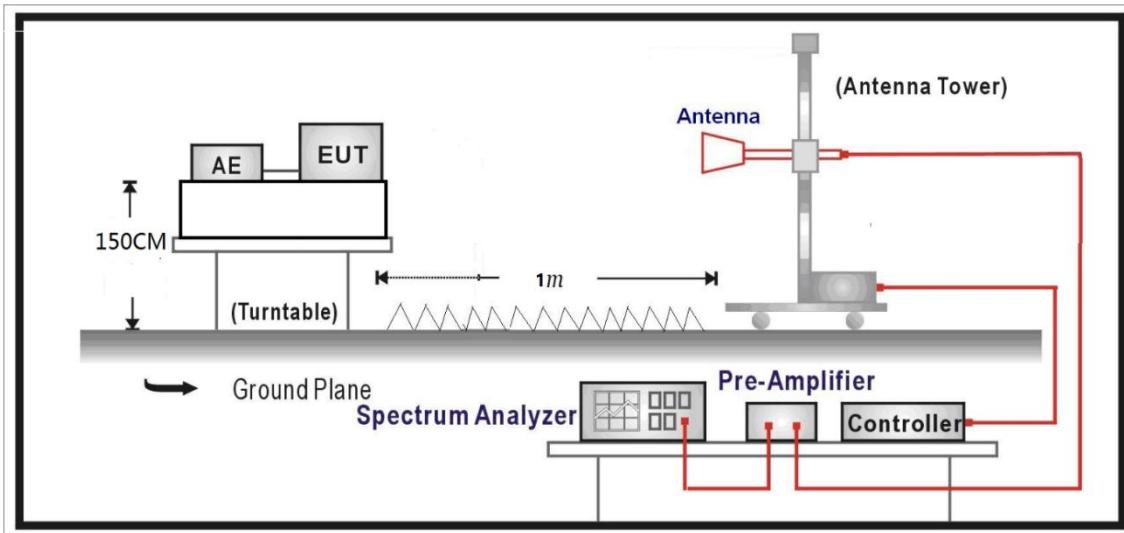

3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 Limit

Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50


NOTE: 1. The lower limit shall apply at the transition frequencies.

NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.1.2 Measurement procedure

- a. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- b. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- c. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

3.1.3 Test setup

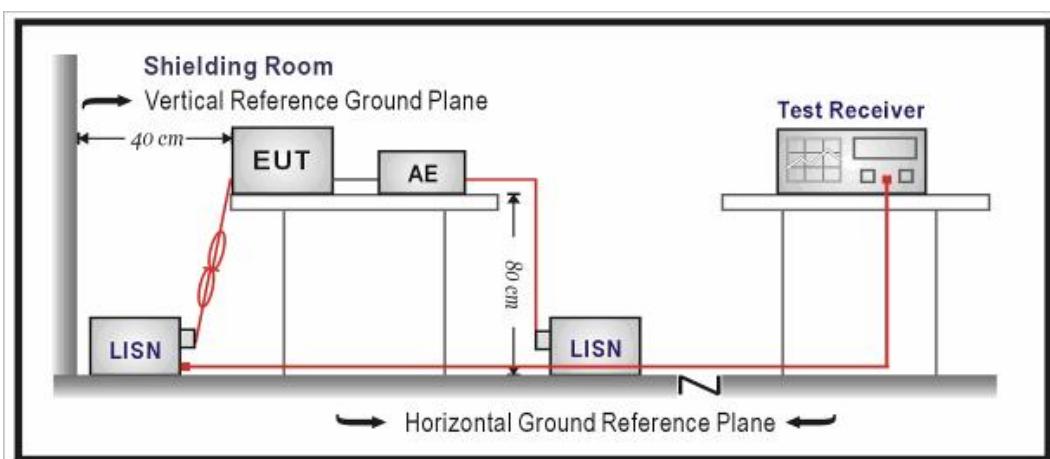



3.1.4 Test results

N/A,DC power supply



3.2 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT

3.2.1 Limit

Below 40 GHz radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.

NOTE: 2. Emission level (dB_{uV/m}) = 20 log Emission level (uV/m).

NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90pW/cm² at a distance of 3 meters.

FCC Frequency [GHz]	FCC EIRP [dBm]
40 - 200	90 pW/cm ² @ -10dBm
Limit conversion (pW/cm ² to dBm):	$P[\text{dBm}] = 10 * \log(4 * \pi * d^2 * P[\text{W}/\text{m}^2])$ d- distance of the limit defined in W/m ² . Here: 3 m. ----- 90 pW/cm ² : $P[\text{dBW}] = 10 * \log(4 * \pi * (3\text{m})^2 * 6 * 10^{-6}\text{W}/\text{m}^2)$ 90 pW/cm ² : $P[\text{dBW}] = -40 \text{ dBW}$ $P[\text{dBm}] = P[\text{dBW}] + 30$ 90 pW/cm ² : $P[\text{dBm}] = -40 \text{ dBW} + 30$ 90 pW/cm ² : $P[\text{dBm}] = -10 \text{ dBm}$



3.2.2 Measurement procedure

Measurement of harmonic and spurious emissions below 40 GHz

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

Measurement of harmonic and spurious emissions above 40 GHz

- a. Connect the test antenna covering the appropriate frequency range to a spectrum analyzer via an external mixer.
- b. Set spectrum analyzer RBW = 1MHz, VBW = 3MHz, average detector.
- c. Maximize all observed emissions. Note the maximum power indicated on the spectrum analyzer. Adjust this reading, if necessary, by the conversion loss of the external mixer used at the frequency under investigation and the external mixer IF cable loss.
- d. Calculate the maximum field strength of the emission at the measurement distance
- e. Calculate the power density at the distance specified by the limit from the field strength at the distance specified by the limit
- f. Repeat the preceding sequence for every emission observed in the frequency band under investigation.

3.2.3 Test setup

See section 2.5 of this report.




3.2.4 Test results(9kHz-30MHz)

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

3.2.5 Test results(30MHz-1GHz)

Test Mode:	62.5GHz	Frequency Range	30MHz-1000MHz
Detector Function	Quasi-Peak(QP)		

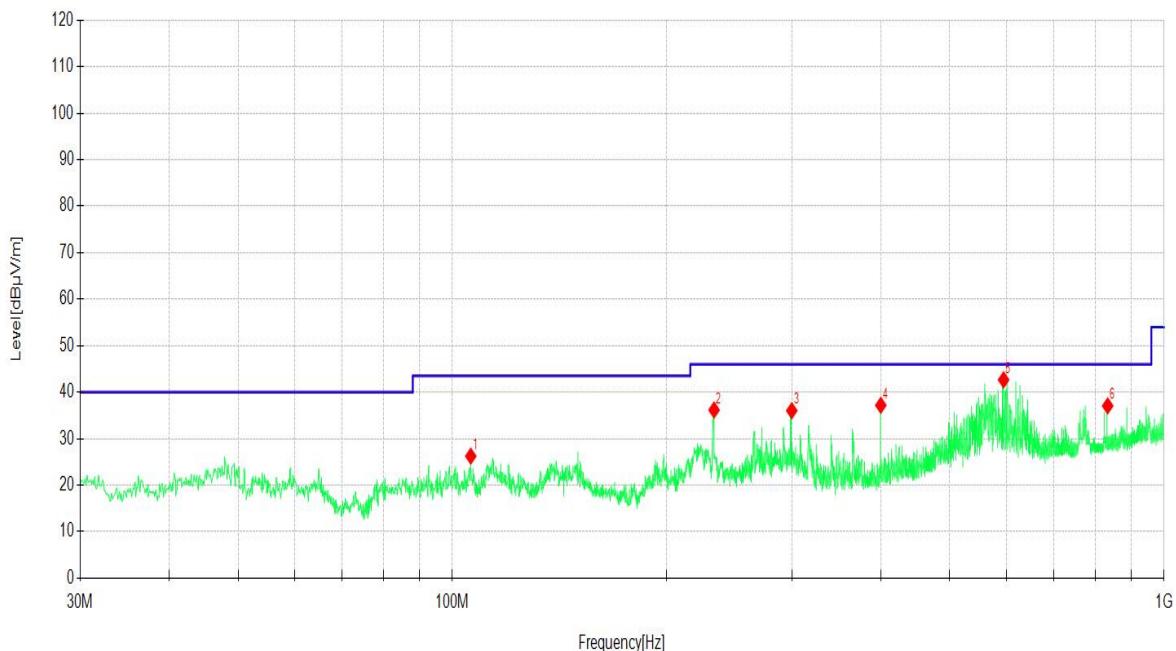


NO.	Freq. [MHz]	Reading [dB μ V]	Factor [dB/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector	Polarity
1	106.15	9.11	17.15	26.26	43.50	17.24	QP	Horizontal
2	233.24	17.81	18.36	36.17	46.00	9.83	QP	Horizontal
3	299.88	15.71	20.32	36.03	46.00	9.97	QP	Horizontal
4	400.00	14.63	22.56	37.19	46.00	8.81	QP	Horizontal
5	595.08	16.07	26.59	42.66	46.00	3.34	QP	Horizontal
6	833.34	7.09	29.97	37.06	46.00	8.94	QP	Horizontal

Remark: 1. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. Margin(dB) = Limit[dB μ V/m] - Level [dB μ V/m]



Test Mode:	62.5GHz	Frequency Range	30MHz-1000MHz
Detector Function	Quasi-Peak(QP)		

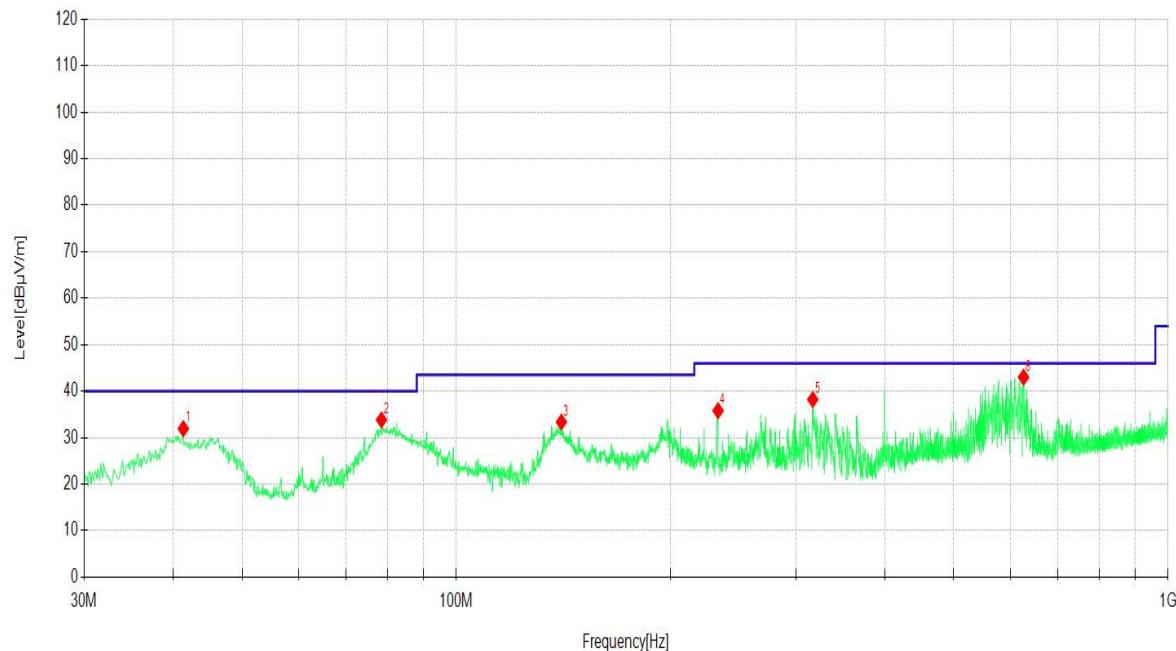


NO.	Freq. [MHz]	Reading [dB μ V]	Factor [dB/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector	Polarity
1	41.35	12.21	19.73	31.94	40.00	8.06	QP	Vertical
2	78.50	18.22	15.61	33.83	40.00	6.17	QP	Vertical
3	140.49	13.13	20.25	33.38	43.50	10.12	QP	Vertical
4	233.24	17.45	18.36	35.81	46.00	10.19	QP	Vertical
5	316.86	17.44	20.77	38.21	46.00	7.79	QP	Vertical
6	626.61	15.66	27.34	43.00	46.00	3.00	QP	Vertical

Remark: 1. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. Margin(dB) = Limit[dB μ V/m] - Level [dB μ V/m]

3.2.6 Test results(1GHz-18GHz)


Test Mode:	62.5GHz	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

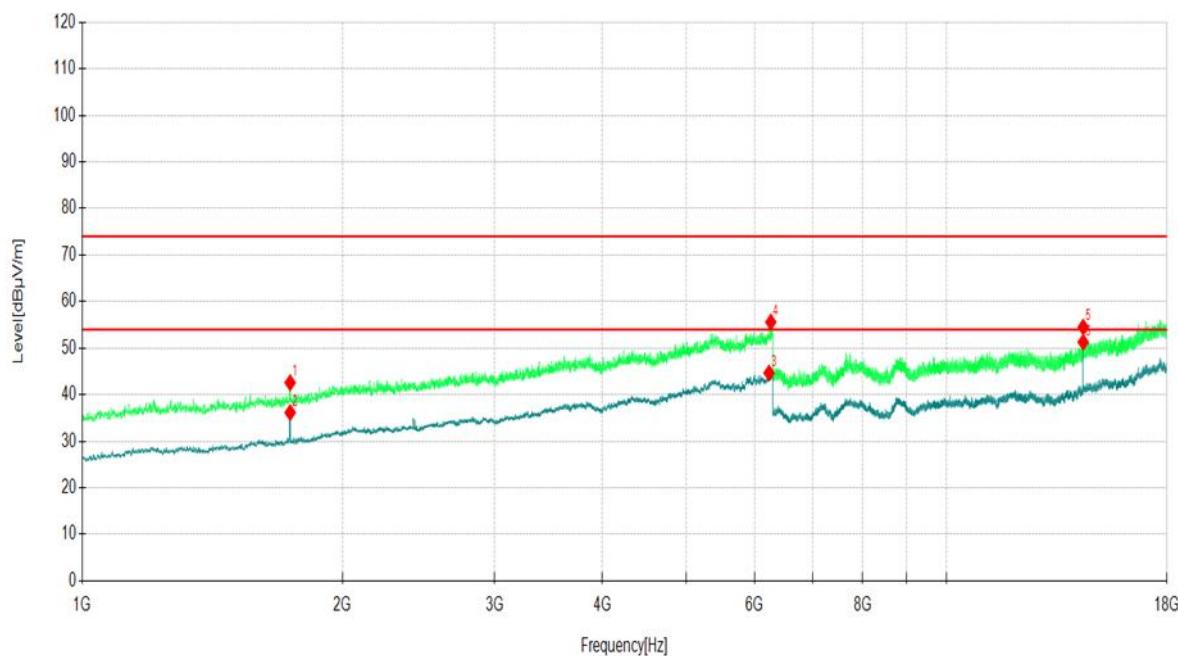

NO.	Freq. [MHz]	Reading [dB μ V]	Factor [dB/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector	Polarity
1	1740.14	48.15	-5.57	42.58	74.00	31.42	PK	Horizontal
2	1740.14	41.73	-5.57	36.16	54.00	17.84	RMS	Horizontal
3	6234.99	33.25	11.40	44.65	54.00	9.35	RMS	Horizontal
4	6263.99	44.81	10.80	55.61	74.00	18.39	PK	Horizontal
5	14400.00	33.01	21.49	54.50	74.00	19.50	PK	Horizontal
6	14400.00	29.79	21.49	51.28	54.00	2.72	RMS	Horizontal
1	1740.14	48.15	-5.57	42.58	74.00	31.42	PK	Horizontal

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit(dB μ V/m) - Level (dB μ V/m)

Test Mode:	62.5GHz	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

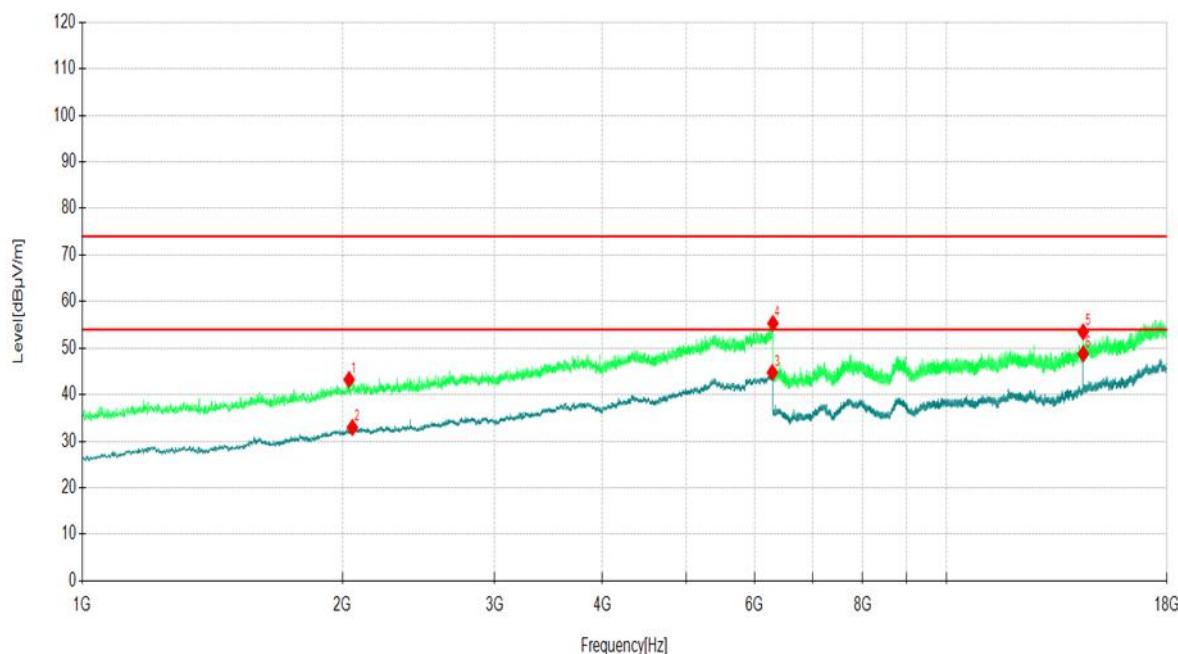


NO.	Freq. [MHz]	Reading [dB μ V]	Factor [dB/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector	Polarity
1	2036.20	46.25	-3.00	43.25	74.00	30.75	PK	Vertical
2	2054.20	35.59	-2.64	32.95	54.00	21.05	RMS	Vertical
3	6289.00	33.00	11.75	44.75	54.00	9.25	RMS	Vertical
4	6299.00	44.15	11.17	55.32	74.00	18.68	PK	Vertical
5	14400.00	32.00	21.49	53.49	74.00	20.51	PK	Vertical
6	14400.00	27.27	21.49	48.76	54.00	5.24	RMS	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit(dB μ V/m) - Level (dB μ V/m)

3.2.7 Test results(18GHz-40GHz)

Test Mode:	62.5GHz	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

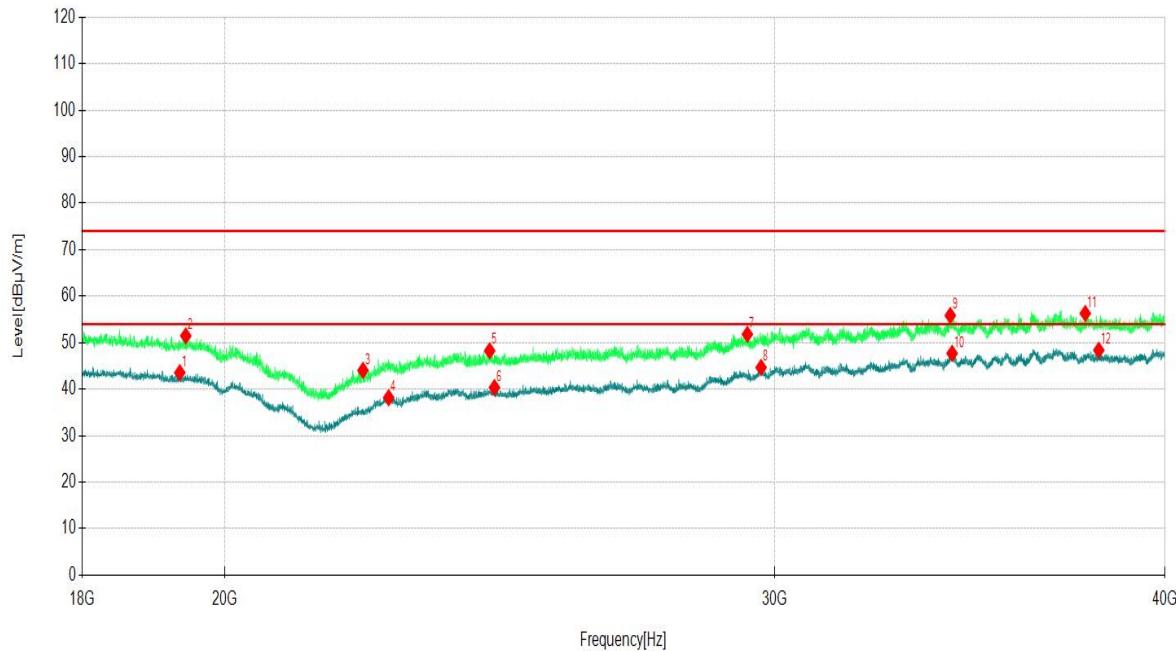

NO.	Freq. [MHz]	Reading [dB μ V]	Factor [dB/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector	Polarity
1	19344.33	48.99	-5.44	43.55	54.00	10.45	AV	Horizontal
2	19430.14	56.85	-5.38	51.47	74.00	22.53	PK	Horizontal
3	22143.01	49.08	-5.03	44.05	74.00	29.95	PK	Horizontal
4	22565.46	43.30	-5.13	38.17	54.00	15.83	AV	Horizontal
5	24310.23	52.85	-4.60	48.25	74.00	25.75	PK	Horizontal
6	24396.04	44.93	-4.58	40.35	54.00	13.65	AV	Horizontal
7	29397.14	54.02	-2.22	51.80	74.00	22.20	PK	Horizontal
8	29696.37	46.80	-2.13	44.67	54.00	9.33	AV	Horizontal
9	34140.81	56.46	-0.62	55.84	74.00	18.16	PK	Horizontal
10	34187.02	48.30	-0.60	47.70	54.00	6.30	AV	Horizontal
11	37713.97	55.72	0.56	56.28	74.00	17.72	PK	Horizontal
12	38092.41	47.49	0.90	48.39	54.00	5.61	AV	Horizontal

Remark:1. The emission levels of other frequencies were greater than 20dB margin.


2. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit(dB μ V/m) - Level (dB μ V/m)



Test Mode:	62.5GHz	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

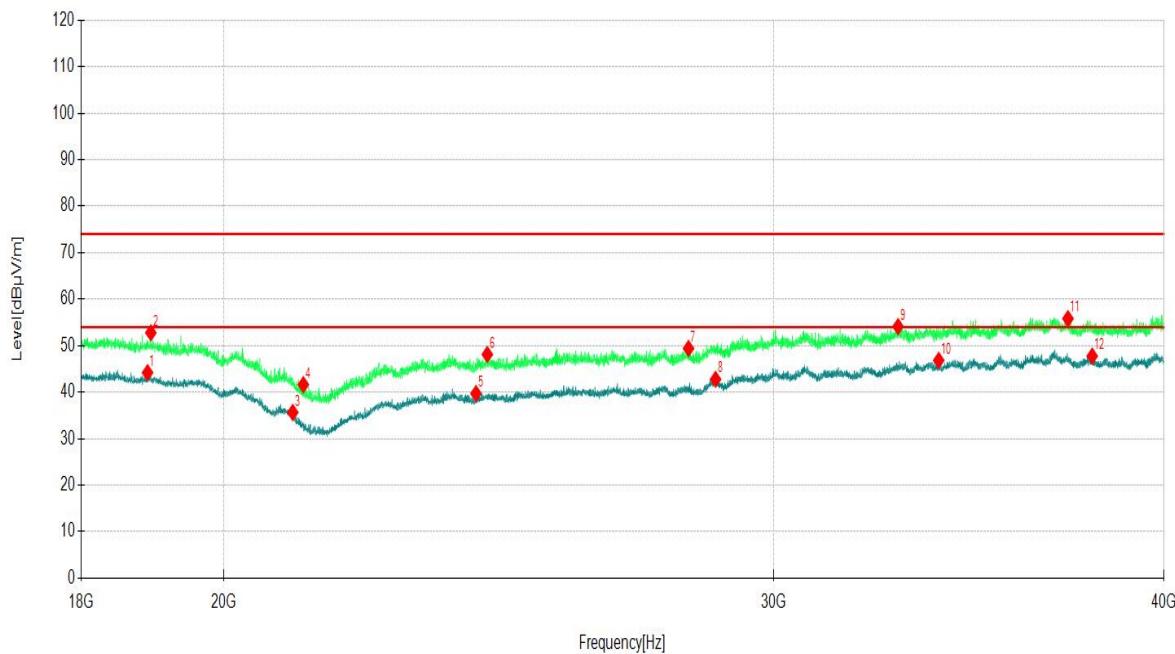

NO.	Freq. [MHz]	Reading [dB μ V]	Factor [dB/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector	Polarity
1	18904.29	49.87	-5.66	44.21	54.00	9.79	AV	Vertical
2	18950.50	58.42	-5.66	52.76	74.00	21.24	PK	Vertical
3	21040.70	40.68	-5.03	35.65	54.00	18.35	AV	Vertical
4	21205.72	46.53	-4.91	41.62	74.00	32.38	PK	Vertical
5	24083.61	44.50	-4.77	39.73	54.00	14.27	AV	Vertical
6	24286.03	52.73	-4.61	48.12	74.00	25.88	PK	Vertical
7	28169.42	52.80	-3.39	49.41	74.00	24.59	PK	Vertical
8	28737.07	45.51	-2.73	42.78	54.00	11.22	AV	Vertical
9	32875.69	55.44	-1.34	54.10	74.00	19.90	PK	Vertical
10	33876.79	47.69	-0.84	46.85	54.00	7.15	AV	Vertical
11	37262.93	55.20	0.61	55.81	74.00	18.19	PK	Vertical
12	37936.19	46.91	0.84	47.75	54.00	6.25	AV	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).


3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit(dB μ V/m) - Level (dB μ V/m)

3.2.8 Test results(40GHz-200GHz)

Only showing the highest value, “worst case” (Vertical polarity)

Frequency	62.5GHz	Frequency Range	40-60GHz
-----------	---------	-----------------	----------

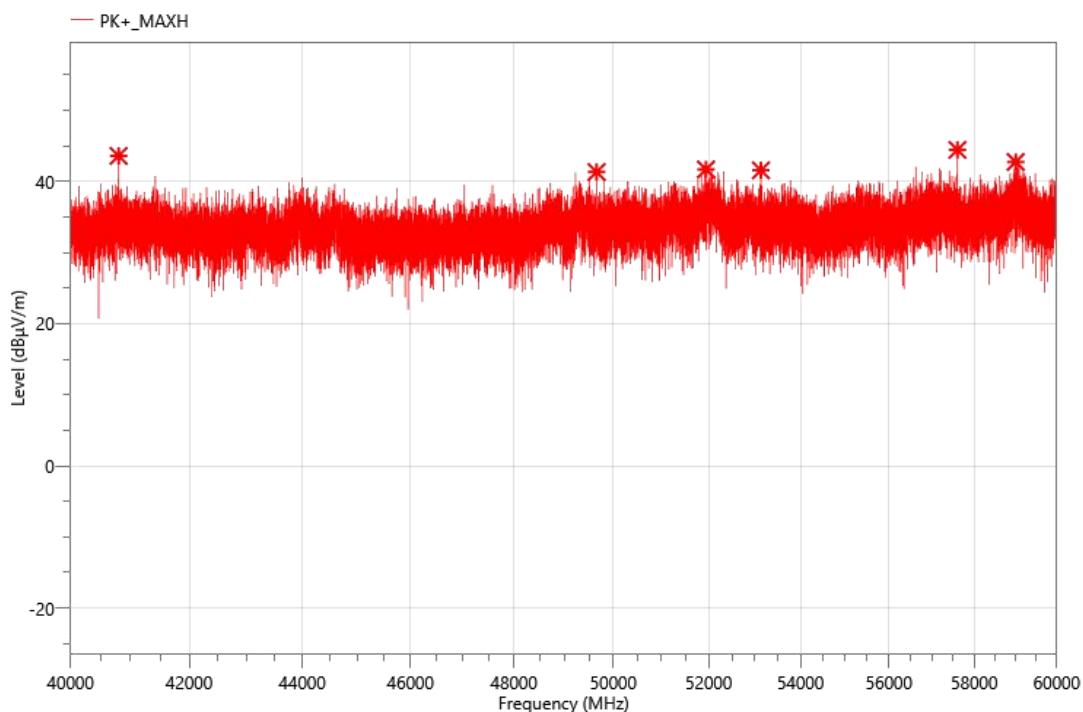


Freq. (MHz)	Reading @1m (dB μ V)	Corr. (dB/m)	Meas. @1m (dB μ V/m)	Meas. @3m (dB μ V/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
40799	24.96	18.65	43.61	34.07	0.001	90	V
49658	24.02	17.32	41.34	31.8	0	90	V
51942.5	21.48	20.23	41.71	32.17	0	90	V
53129	23.58	18	41.58	32.04	0	90	V
57599.5	25.19	19.27	44.46	34.92	0.001	90	V
58995.5	21.55	21.2	42.75	33.21	0.001	90	V

Note:

1. Meas. @1m(dB μ V/m) = Reading@1m(dB μ V) + Corr.(dB/m)
2. Corr.(dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas. @3m = Mea. @1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas. @3m} - 120) / 20]}\}^2$

Only showing the highest value, “worst case” (Vertical polarity)

Frequency	62.5GHz	Frequency Range	64-90GHz
-----------	---------	-----------------	----------

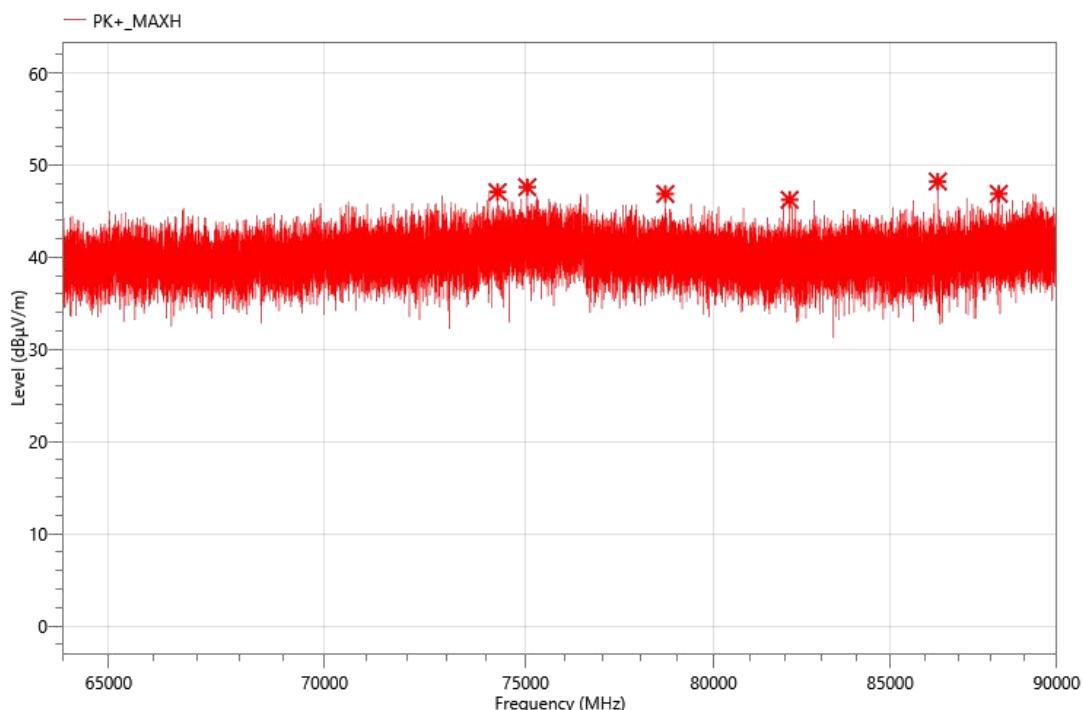


Freq. (MHz)	Reading @1m (dB μ V)	Corr. (dB/m)	Meas. @1m (dB μ V/m)	Meas. @3m (dB μ V/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
74281.05	22.91	24.17	47.08	37.54	0.002	90	V
75042.85	23.23	24.38	47.61	38.07	0.002	90	V
78686.75	23.2	23.68	46.88	37.34	0.001	90	V
82114.2	22.82	23.43	46.25	36.71	0.001	90	V
86399	24	24.23	48.23	38.69	0.002	90	V
88227.45	22.16	24.73	46.89	37.35	0.001	90	V

Note:

1. Meas. @1m(dB μ V/m) = Reading @1m(dB μ V) + Corr.(dB/m)
2. Corr.(dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas. @3m = Mea. @1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas. @3m} - 120) / 20]}\}^2$

Only showing the highest value, “worst case” (Vertical polarity)

Frequency	62.5GHz	Frequency Range	90-140GHz
-----------	---------	-----------------	-----------

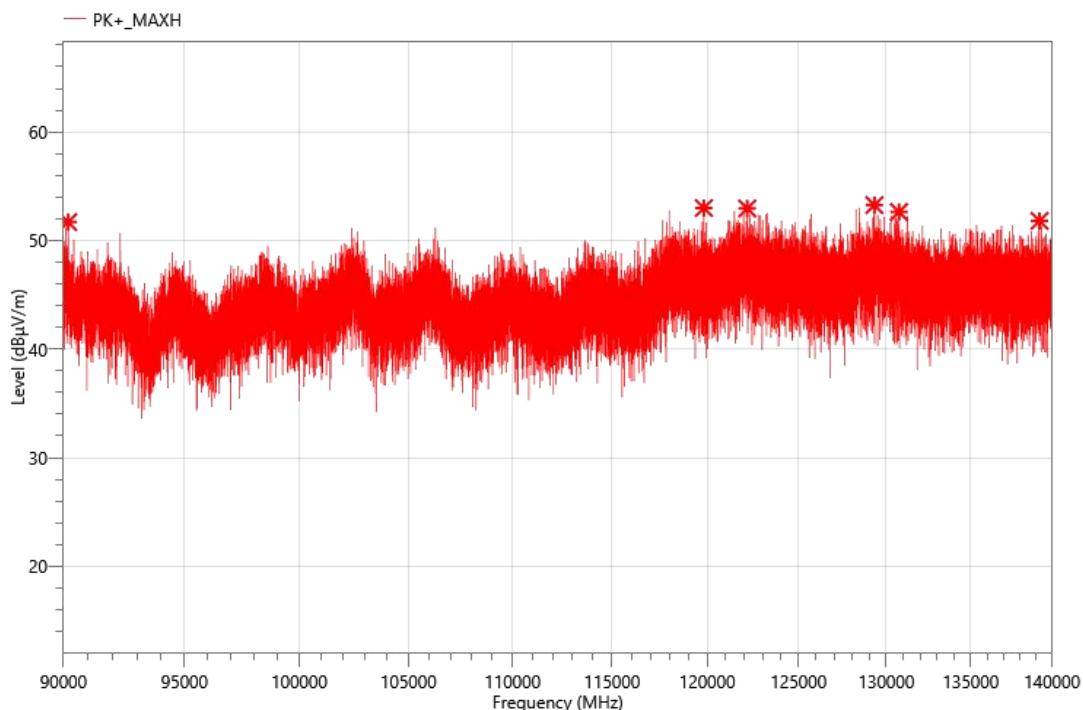


Freq. (MHz)	Reading @1m (dB μ V)	Corr. (dB/m)	Meas. @1m (dB μ V/m)	Meas. @3m (dB μ V/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
90186.25	24.13	27.57	51.7	42.16	0.004	90	V
119822.5	24.59	28.4	52.99	43.45	0.006	90	V
122168.75	23.61	29.34	52.95	43.41	0.006	90	V
129315	23.74	29.52	53.26	43.72	0.006	90	V
130742.5	23.39	29.24	52.63	43.09	0.005	90	V
139220	22.07	29.74	51.81	42.27	0.004	90	V

Note:

1. Meas. @1m (dB μ V/m) = Reading @1m (dB μ V) + Corr. (dB/m)
2. Corr. (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas. @3m = Meas. @1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas. @3m} - 120) / 20]}\}^2$

Only showing the highest value, “worst case” (Vertical polarity)

Frequency	62.5GHz	Frequency Range	140-200GHz
-----------	---------	-----------------	------------

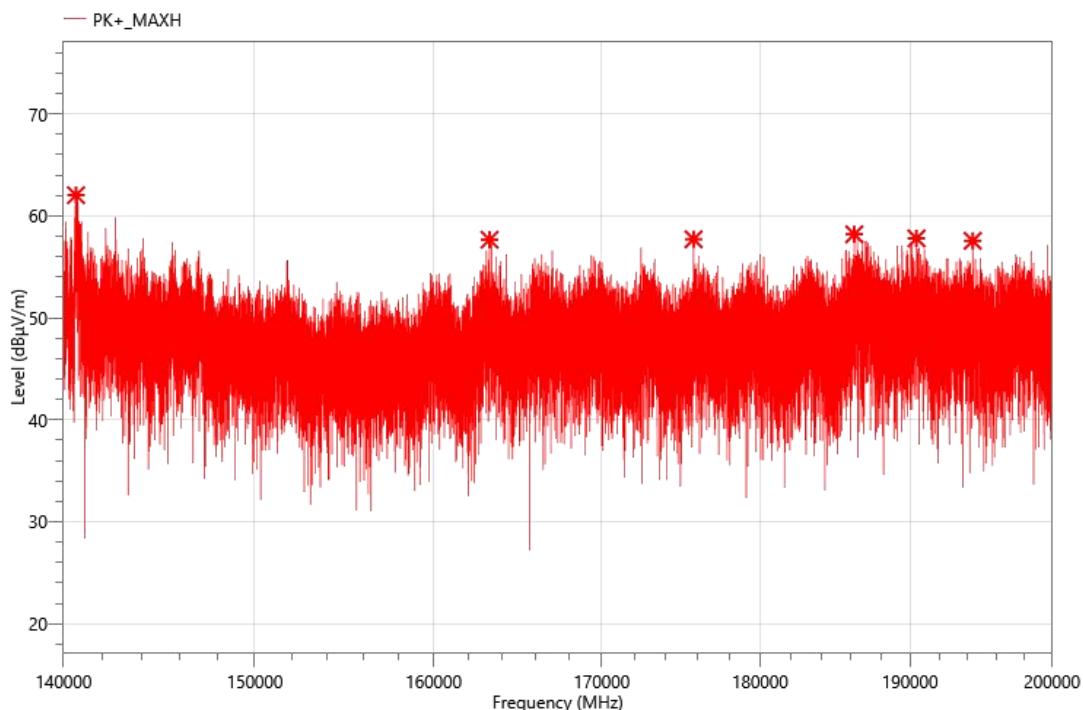

Freq. (MHz)	Reading @1m (dB μ V)	Corr. (dB/m)	Meas. @1m (dB μ V/m)	Meas. @3m (dB μ V/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
140631.5	31.19	30.84	62.03	52.49	0.047	90	V
163262	25.54	32.12	57.66	48.12	0.017	90	V
175736	26.55	31.15	57.7	48.16	0.017	90	V
186227	25.36	32.83	58.19	48.65	0.019	90	V
190452.5	24.99	32.8	57.79	48.25	0.018	90	V
194358.5	25.44	32.11	57.55	48.01	0.017	90	V

Note:

1. Meas.@1m(dB μ V/m) = Reading@1m(dB μ V) + Corr.(dB/m)
2. Corr.(dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas.@3m = Mea.@1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas.}@3m - 120) / 20]}\}^2$



3.3 DUTY CYCLE, OFF TIME REQUIREMENT

3.3.1 Limit

The sum of continuous transmitter off-times of at least two milliseconds shall equal at least 25.5 milliseconds within any contiguous interval of 33 milliseconds, except as specific in paragraph (c)(2)(iii)(B) of this section

3.3.2 Test Procedure

The duty cycle was tested with the spectrum analyzer set to zero-span.

3.3.3 Test setup

See section 2.5 of this report.



3.3.4 Test results

Chirp number in Burst Period(55.03ms)

Chirp Width(us)	Chirp period(us)	Chirp number in Burst Period	Burst Period (ms)	TX ON Time (ms)	TX OFF Time (ms)	TX OFF Time Ratio (%)	TX OFF Time Ratio Limit (%)	Verdict
11.81	89.04	618	55.03	7.3	47.73	86.73	≥77.27	PASS

Chirp number in Burst Period = Burst Period(ms)/Chirp period(us)

Transmission Time = Chirp number in Burst Period * Chirp Width

OFF Time(ms) = Burst Period(ms)-ON Time (ms)

TX OFF Time Ratio = TX OFF Time(ms) /Burst Period(ms)

TX OFF Time Ratio Limit(%) = (25.50ms / 33ms) *100% = 77.27%

Chirp number in 33ms


Chirp Width(us)	Chirp period(us)	Chirp number in Burst Period	Burst Period (ms)	TX ON Time (ms)	TX OFF Time (ms)	TX OFF Limit(ms)	Verdict
11.81	89.04	371	33	4.38	28.62	25.5	PASS

Chirp number in Burst Period = Burst Period(ms)/Chirp period(us)

Transmission Time = Chirp number in Burst Period * Chirp Width

OFF Time(ms) = Burst Period(ms)-ON Time (ms)

TX OFF Time Ratio = TX OFF Time(ms) /Burst Period(ms)

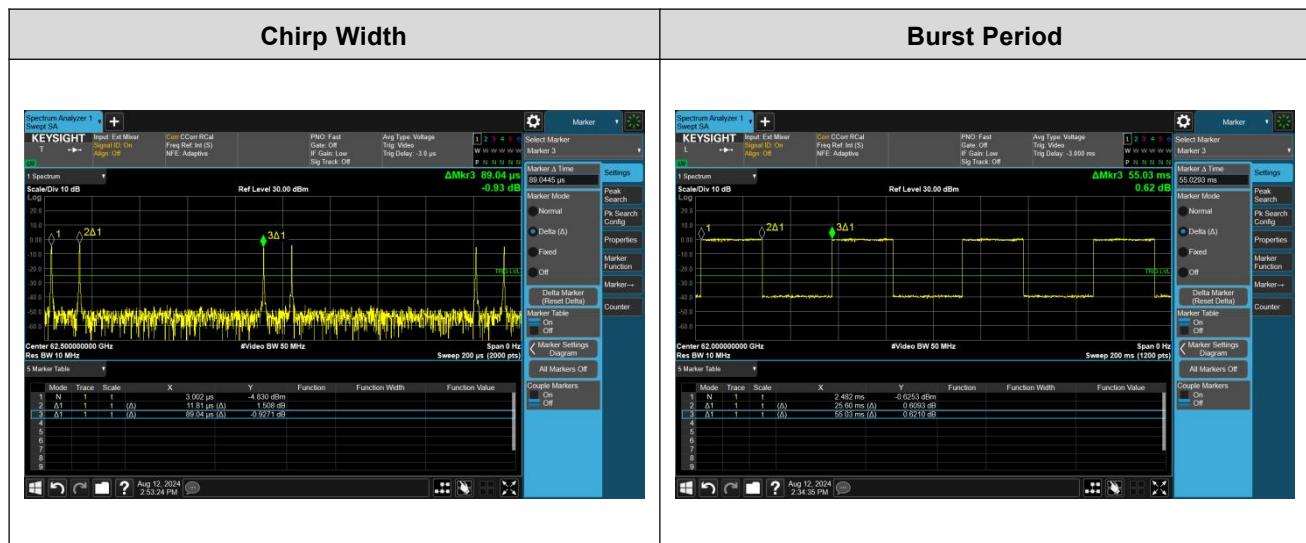



3.4 BANDWIDTH MEASUREMENT

3.4.1 Limits

99% Occupied Bandwidth and 6dB Bandwidth are for reporting only. Limit for 20 dB Bandwidth: Per Part15.215(C), the device shall operate in the 57 - 64 GHz band. The emission bandwidth (EBW) is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least the specified amount below the maximum level of the modulated carrier.

3.4.2 Measurement procedure

MEASUREMENT PARAMETER	
Detector:	Peak
Resolution bandwidth:	8 MHz (The analyzer limits maximum RBW at 8 MHz.)
Video bandwidth:	50 MHz
Trace-Mode:	Max Hold
Sweep	Auto couple.

Measurement procedures: Bandwidth: ANSI C63.10-2020 6.9 / 9.3

Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower)


3.4.3 Test setup

See section 2.5 of this report.

3.4.4 Test results

Center Frequency (GHz)	99% Occupied Bandwidth (GHz)	20dB Bandwidth (GHz)	Verdict
62.5	3.1252	3.2256	Pass
99% Occupied Bandwidth Lower(GHz)	99% Occupied Bandwidth Upper(GHz)	Lower limit (GHz)	Upper limit (GHz)
60.8392	63.9644	57	64

99% Occupied Bandwidth & 20dB Bandwidth

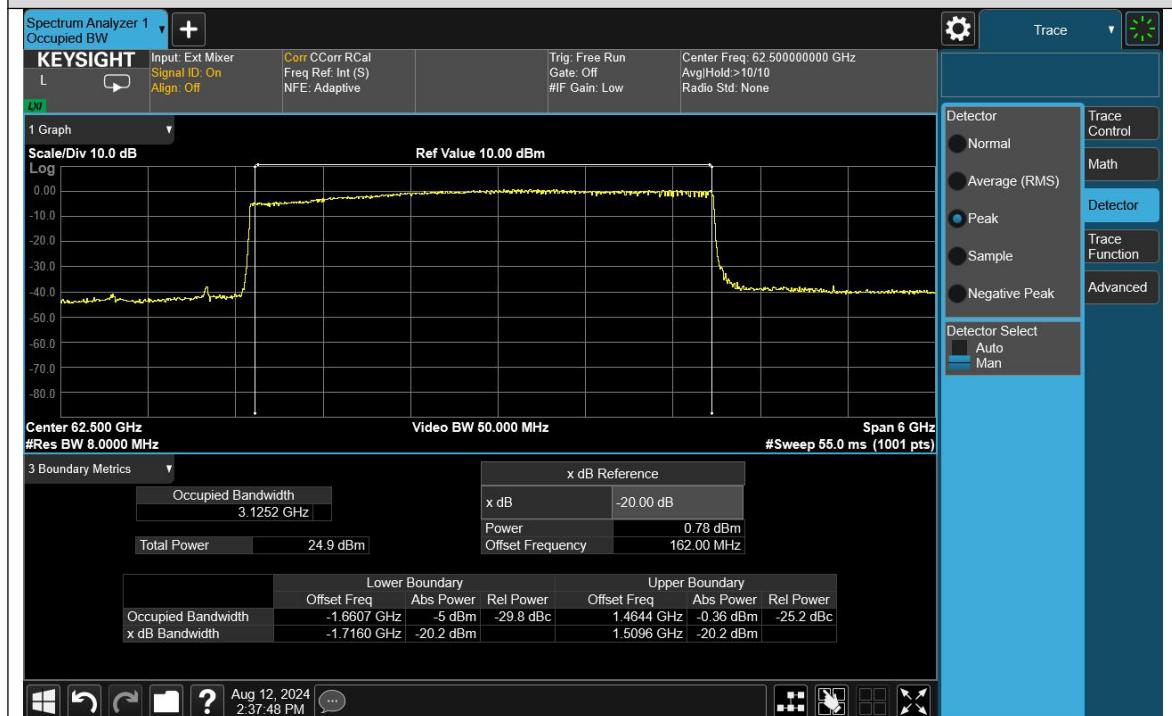

3.5 EIRP POWER MEASUREMENT

3.5.1 Limits

The peak EIRP shall not exceed 14 dBm, and the sum of continuous transmitter off-times of at least two milliseconds shall equal at least 25.5 milliseconds within any contiguous interval of 33 milliseconds, except as specific in paragraph (c)(2)(iii)(A) of this section;

3.5.2 Measurement procedure

Test Settings

1. Radiated power measurements are performed using the signal analyzer's swept mode measurement capability for signals with continuous operation.
2. RBW = 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span as required, enough to observe the fundamental spike around 61.5 GHz
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector and Trace mode = Suitable for peak and average measurements respectively over 100 sweeps
7. The trace was allowed to stabilize

Method of measurement:

Refer as TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment

FMCW desensitization factor:

Desensitization factor and sweep time considerations for measurements of FMCW signals in ANSI C63.10-2020 Annex L

The derivation of the FMCW desensitization factor is given in Keysight Application Note 5952-1039 Appendix B.

3.5.3 Test setup


See section 2.5 of this report.

3.5.4 Test results

Item	Level (dBm)	Desensitization factor (dB)	Result (dBm)	Peak EIRP Limit(dBm)	Marin(dB)	Verdict
Peak EIRP	1.74	0.05	1.79	14	12.21	PASS

Level(dBm) = Mixer Loss(dB) + Cable Loss(dB) + FSPL(dB) - Antenna Gain(dBi) + reading(dBm)

Result(dBm) = desensitization factor (dB) + Level(dBm)

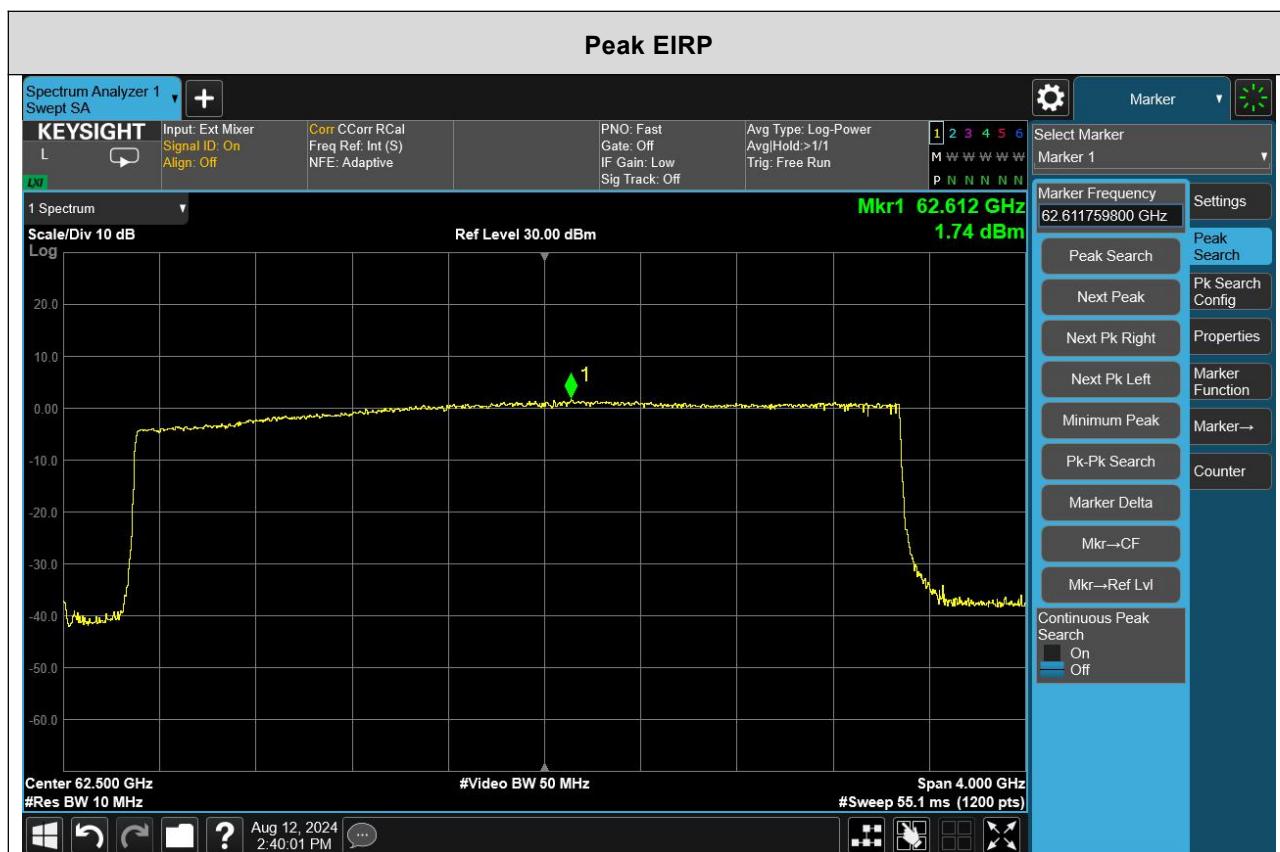

FMCW desensitization factor = $-20 * \log(\alpha) = 0.05\text{dB}$

$$\alpha = \frac{1}{\sqrt{1 + \left(\frac{2\ln(2)}{\pi}\right)^2 \left(\frac{F_s}{T_s B^2}\right)^2}}$$

F_s = Sweep width = 3125.2MHz

T_s = Sweep time = 89.04us

B = 3 dB IF bandwidth = 10MHz



3.6 FREQUENCY STABILITY

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency range, 57GHz – 64GHz.

3.6.2 Measurement Procedure

Method of measurement: Refer as ANSI C63.10-2020 clause 9.5

3.6.3 Test setup

See section 2.5 of this report.

3.6.4 Test results

FREQUENCY STABILITY					
Temperature (°C)	Voltage (Volt)	FL	FH	Limit (GHz)	Result
		(GHz)	(GHz)		
50	Normal Voltage	60.8393	63.9644	57-64GHz	PASS
40		60.8391	63.9636		
30		60.8395	63.9656		
20		60.8397	63.9643		
10		60.8380	63.9654		
0		60.8391	63.9642		
-10		60.8393	63.9634		
-20		60.8396	63.9651		
-30		60.8384	63.9656		
20	115%	60.8384	63.9632		
20	85%	60.8400	63.9633		



4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).



5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).

----- End of the Report -----



Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301-14,16, Guanguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, 518110, P. R. China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>