

4.3 Maximum Conducted Average Output Power

Limit

For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results**U-NII 1**

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	36	11.98	24.0	Pass
	44	11.87		
	48	12.37		
802.11n(HT20)	36	12.16	24.0	Pass
	44	11.67		
	48	12.34		
802.11n(HT40)	38	10.11	24.0	Pass
	46	10.95		
802.11ac(HT20)	36	12.17	24.0	Pass
	44	12.09		
	48	11.56		
802.11ac(HT40)	38	10.94	24.0	Pass
	46	10.72		
802.11ax(HT20)	36	11.74	24.0	Pass
	44	12.15		
	48	12.19		
802.11ax(HT40)	38	10.75	24.0	Pass
	46	10.74		

4.4 Power Spectral Density

Limit

(1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

(3) For the band 5.725 - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.^{note1, note2}


Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 510KHz for U-NII 3 band.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to encompass the entire EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.

Test Configuration




Test Results

U-NII 1


Type	Bands	Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	U-NII 1	36	1.02	11.0	Pass
		44	0.97		
		48	1.81		
802.11n (HT20)	U-NII 1	36	1.04		
		44	0.57		
		48	1.25		
802.11n (HT40)	U-NII 1	38	-3.18		
		46	-2.31		
802.11ac (HT20)	U-NII 1	36	1.37		
		44	0.78		
		48	0.99		
802.11ac (HT40)	U-NII 1	38	-2.28		
		46	-2.28		
802.11ax (HT20)	U-NII 1	36	1.14		
		44	1.05		
		48	1.29		
802.11ax (HT40)	U-NII 1	38	-2.56		
		46	-2.93		

Test plot as follows

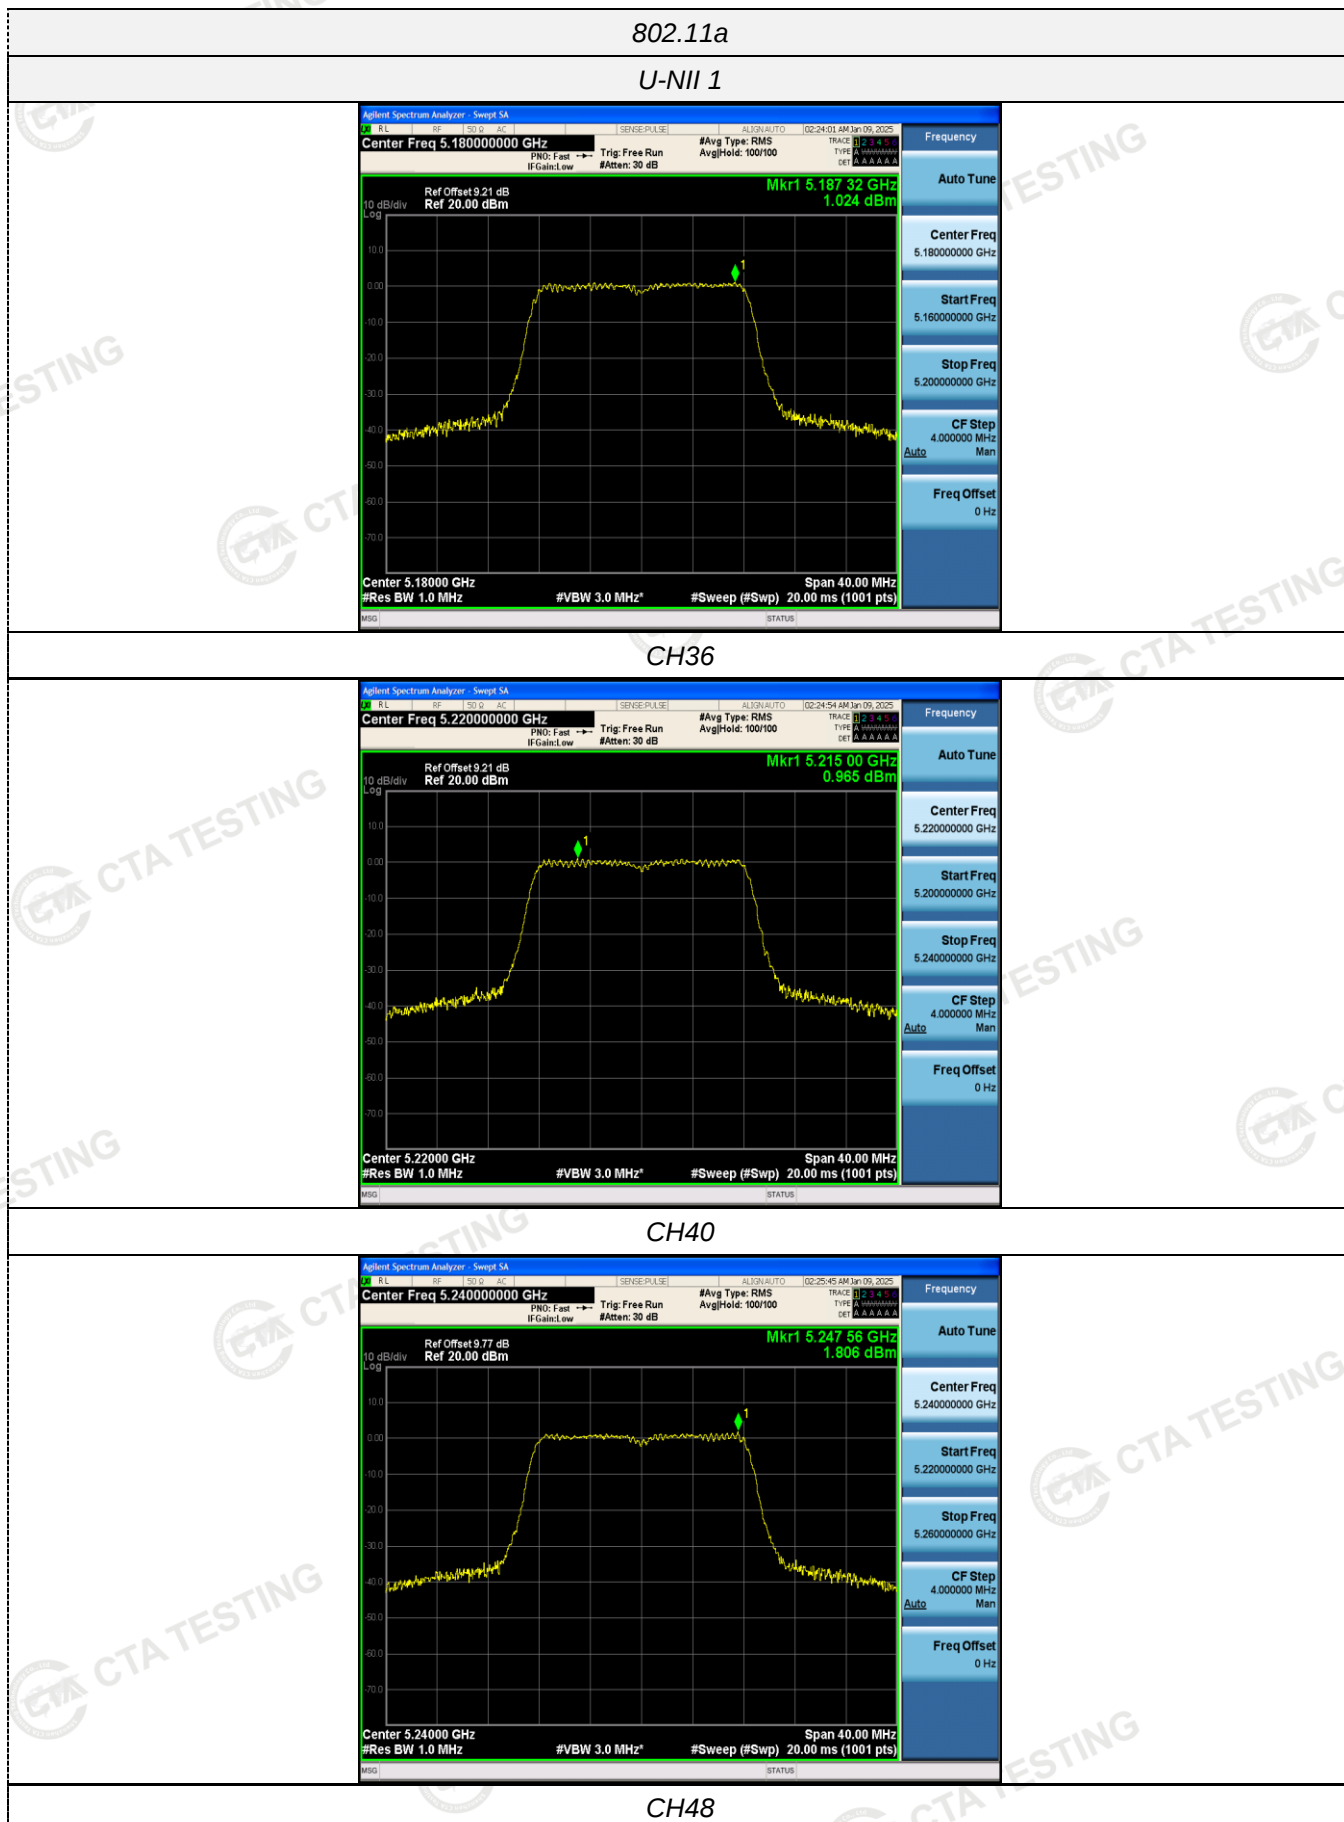


802.11n(HT20)


U-NII 1

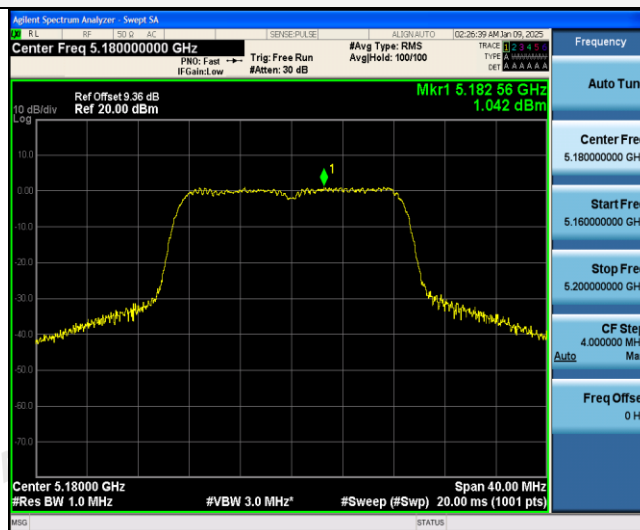

CH36

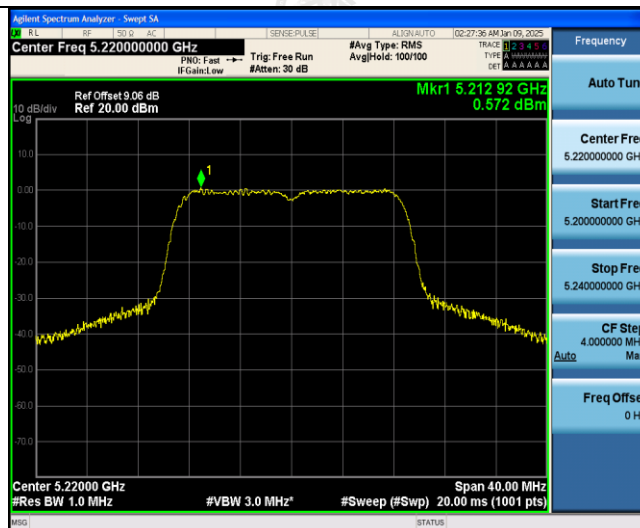

CH40

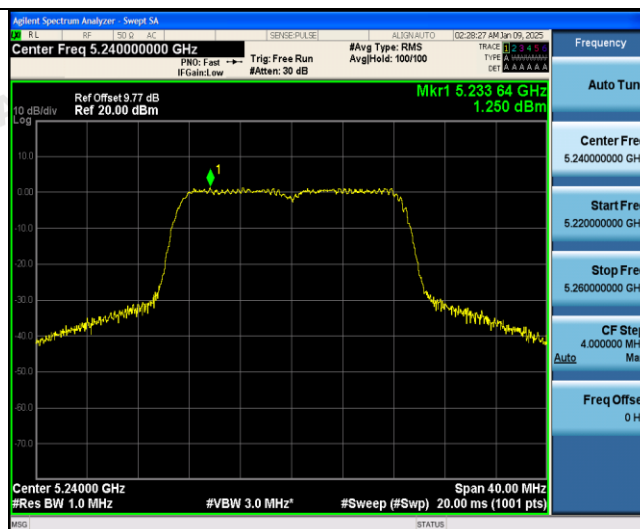


CH48

802.11n(HT40)

U-NII 1




CH38

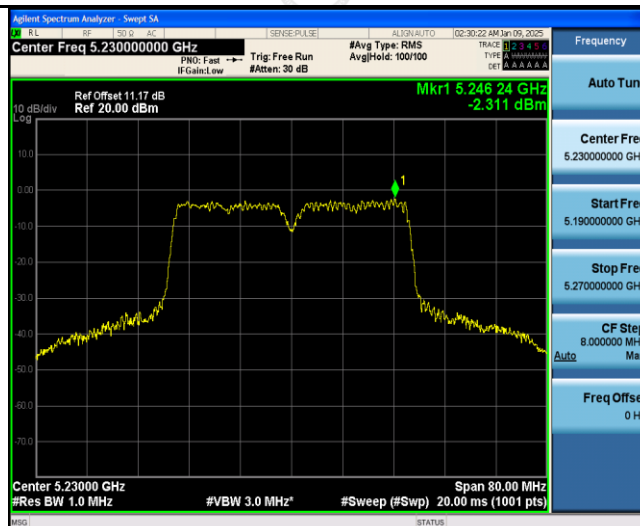


CH46

802.11ac(HT20)


U-NII 1

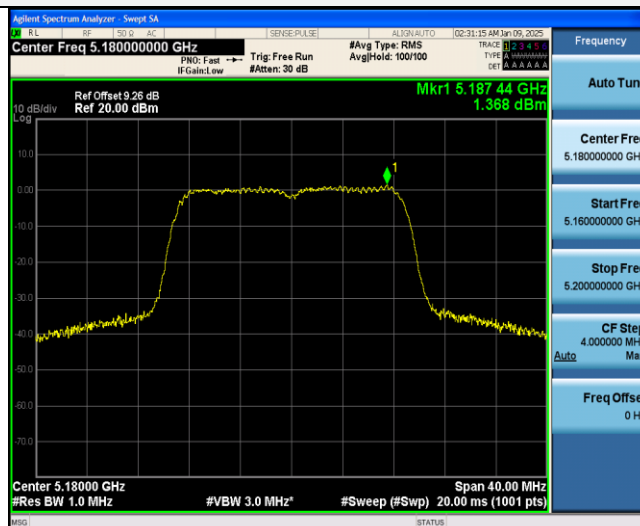

CH36

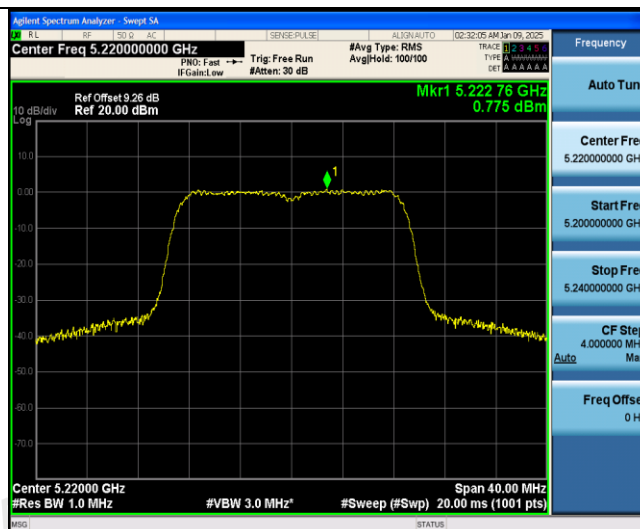


CH40

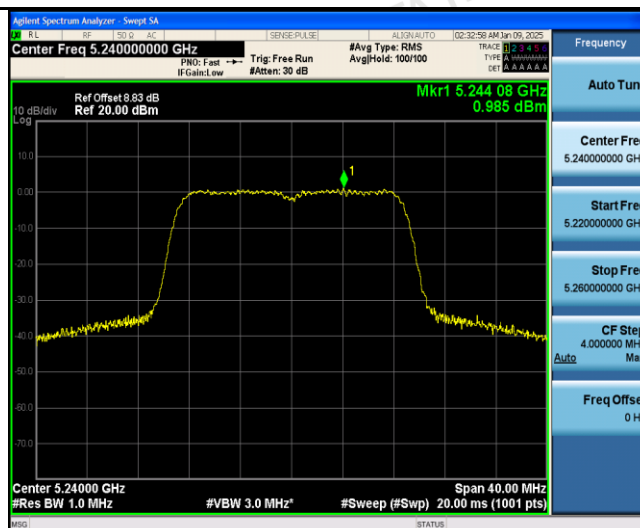


CH48

802.11ac(HT40)

U-NII 1

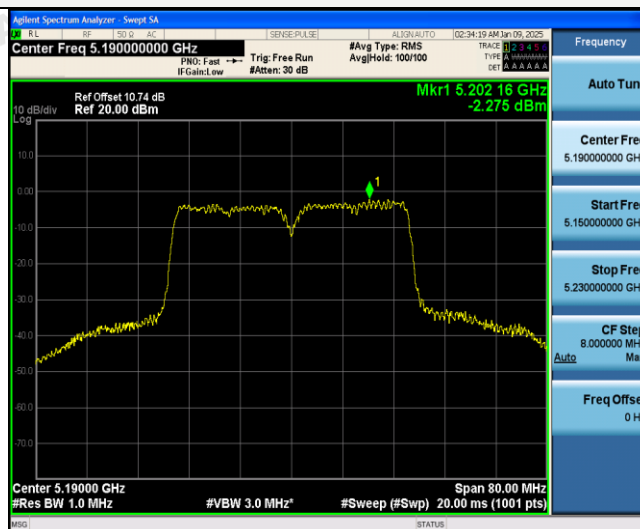


CH38

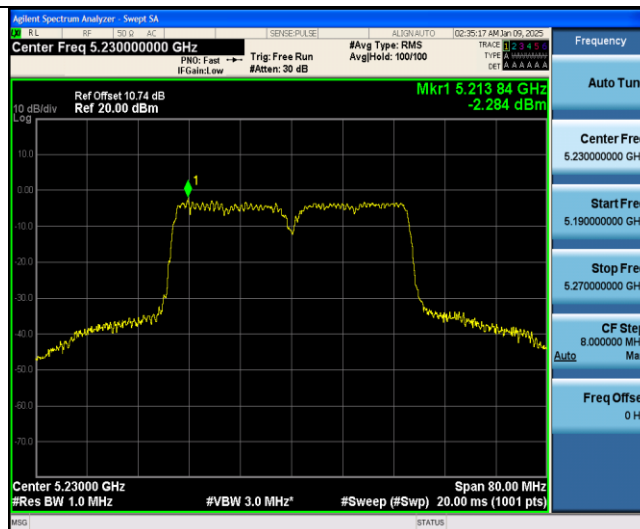


CH46

802.11ax(HT20)


U-NII 1

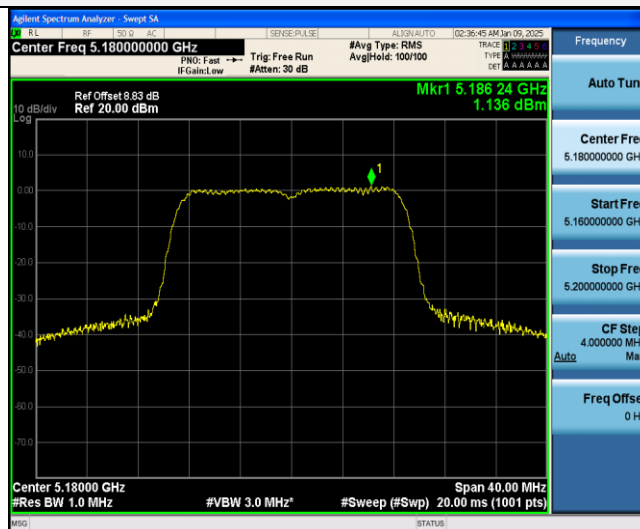

CH36

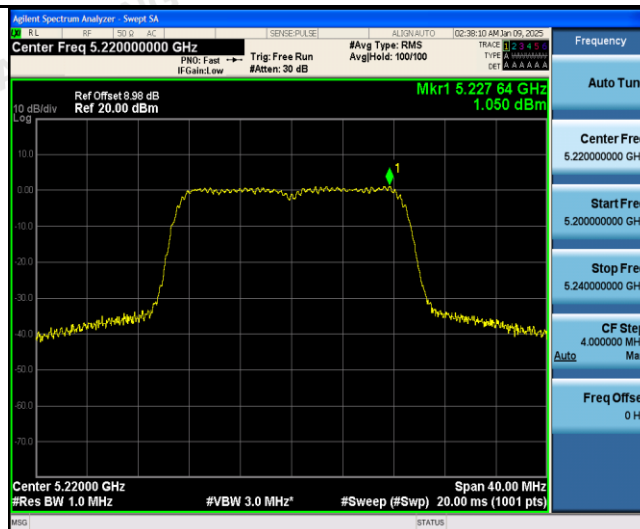


CH40

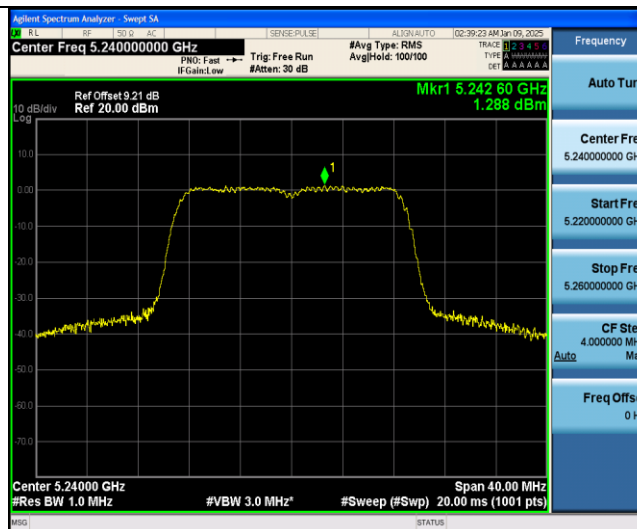


CH48

802.11ax(HT40)

U-NII 1

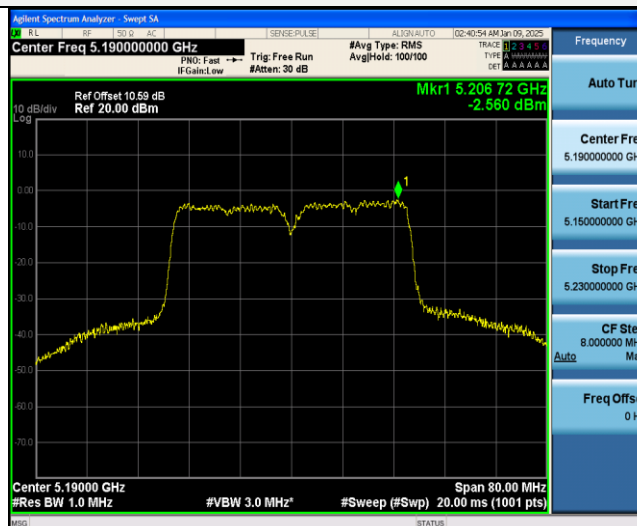

CH38

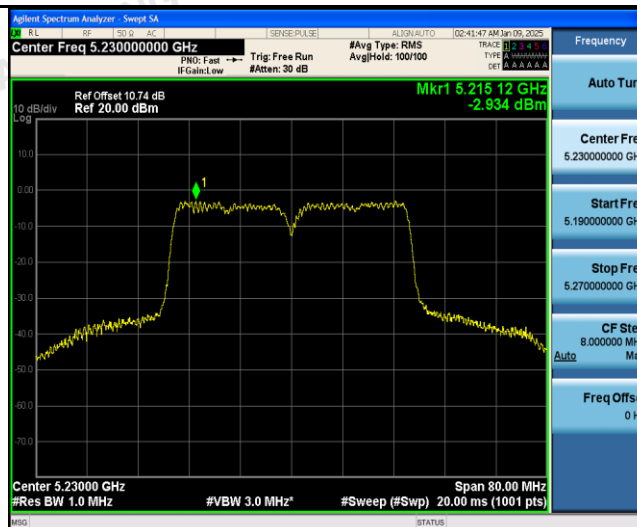

CH46

4.5 Emission Bandwidth (26dB Bandwidth)

Limit

N/A

Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

Test Configuration



Test Results

Type	Bands	Channel	26dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	U-NII 1	36	19.440	N/A	Pass
		40	21.920		
		48	21.720		
802.11n(HT20)	U-NII 1	36	25.600		
		40	24.960		
		48	25.400		
802.11n(HT40)	U-NII 1	38	48.240		
		46	48.800		
802.11ac(HT20)	U-NII 1	36	20.160		
		40	21.520		
		48	20.920		
802.11ac(HT40)	U-NII 1	38	54.000		
		46	49.280		
802.11ax(HT20)	U-NII 1	36	21.000		
		40	21.200		
		48	23.520		
802.11ax(HT40)	U-NII 1	38	49.680		
		46	46.080		

Test plot as follows:


802.11a




802.11n(HT20)




CH36

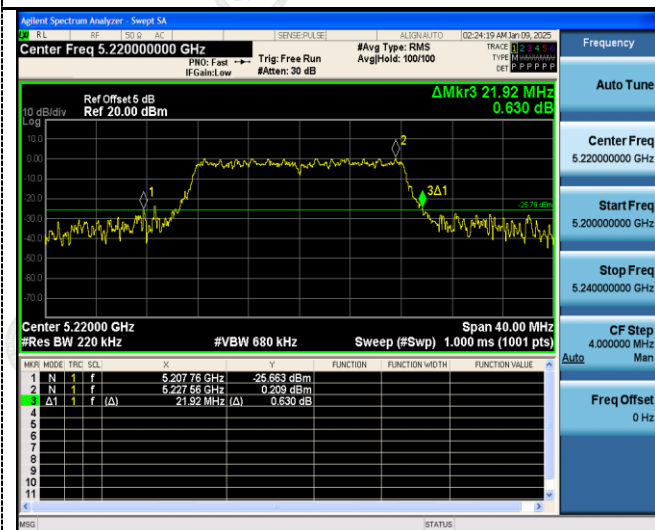

CH36

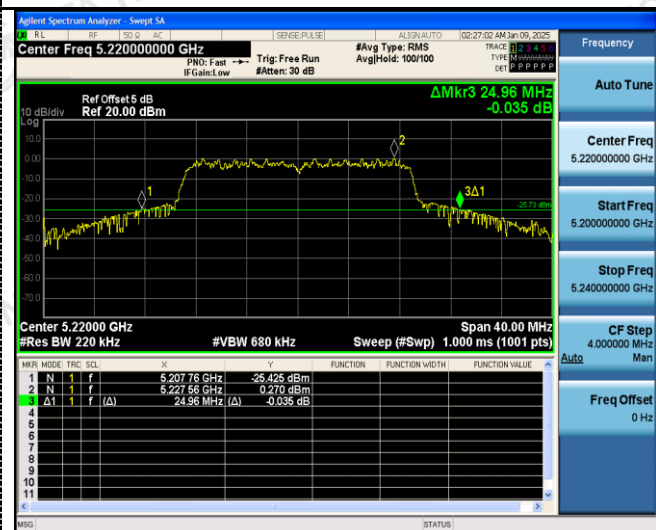

CH40

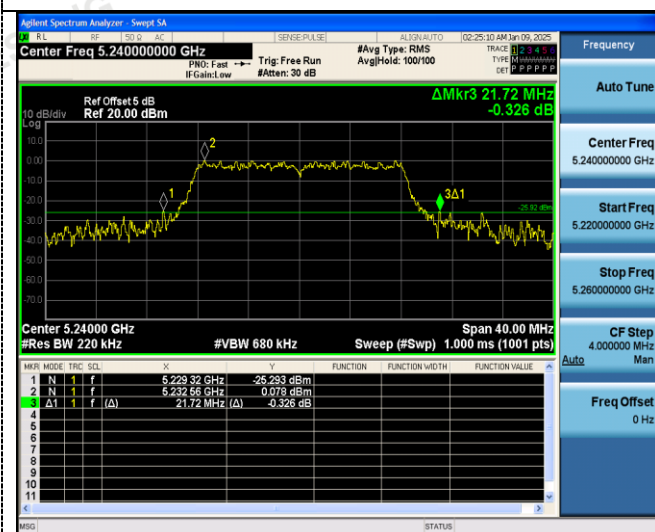

CH40




CH48




CH48




802.11n(HT40)

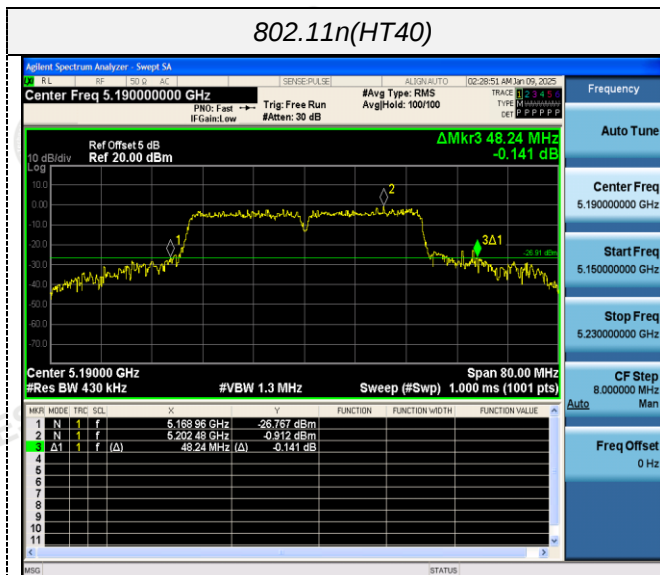


802.11ac(HT20)

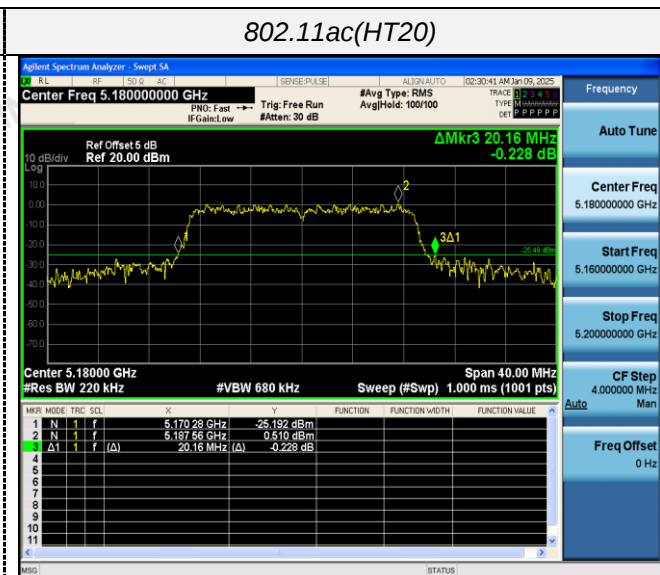


CH38

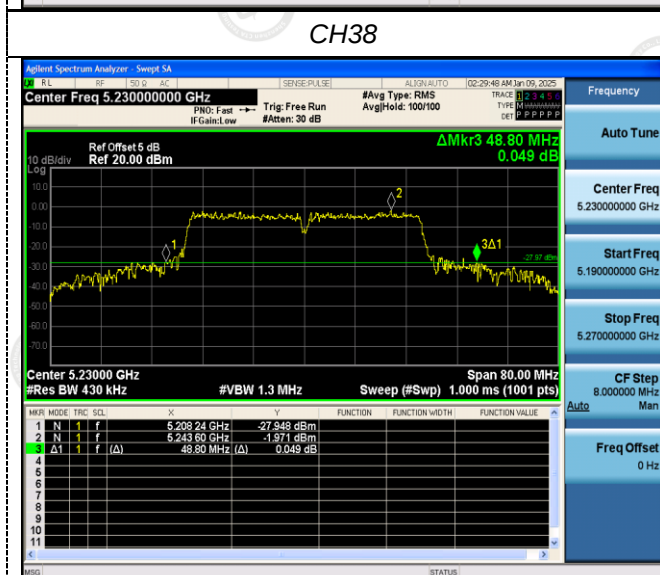


CH36

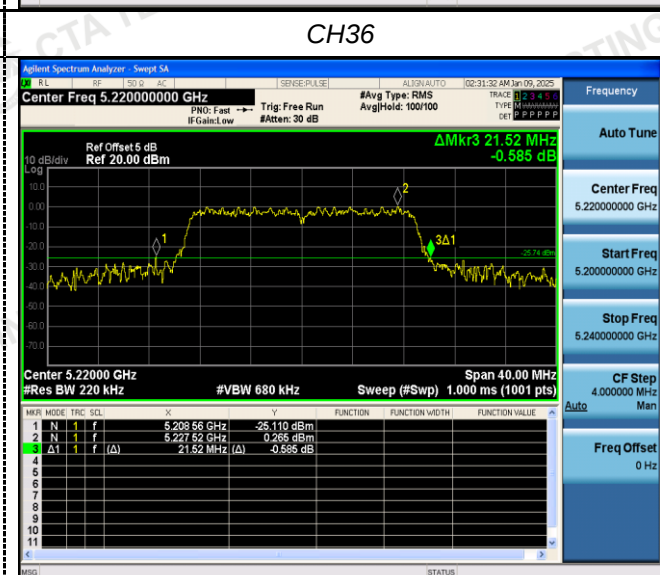

CH46

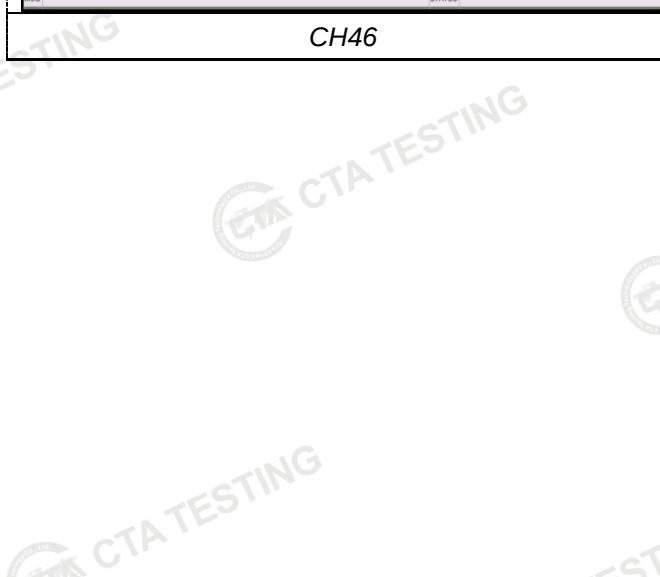


CH40

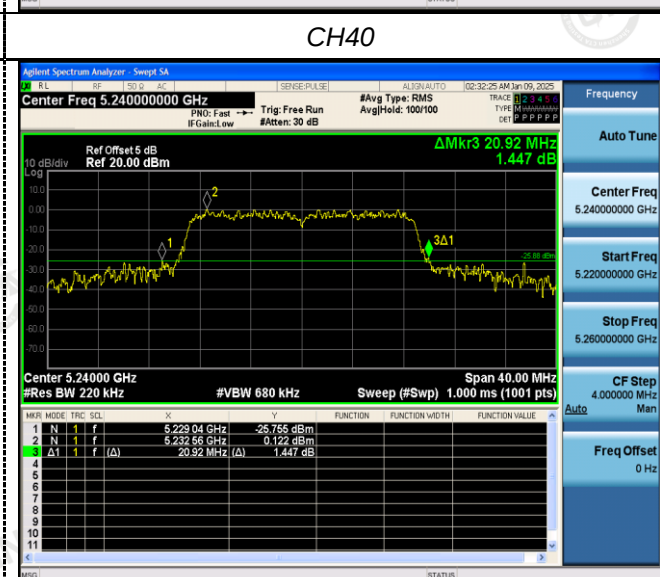


CH48


802.11ac(HT40)

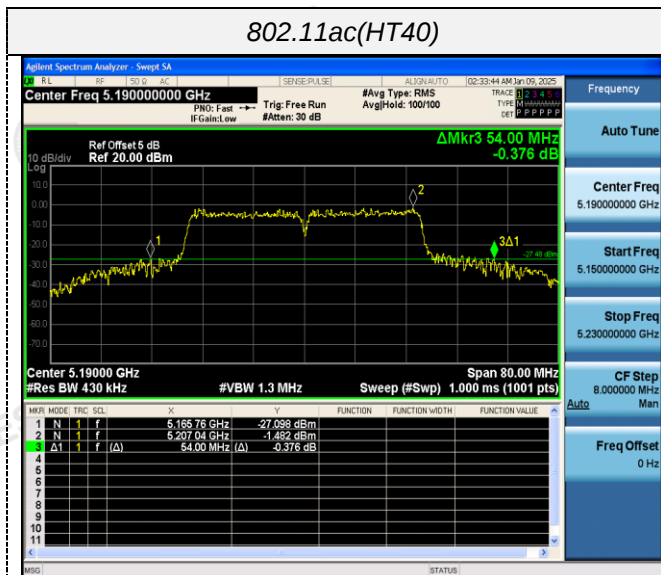


802.11ax(HT20)

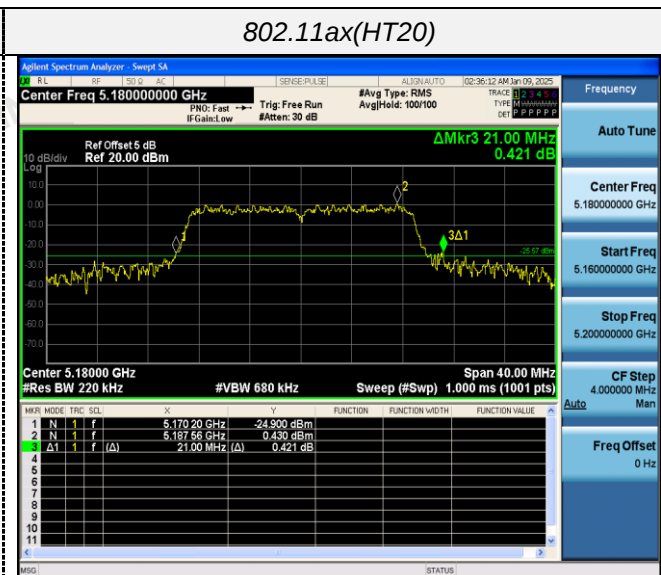


CH38

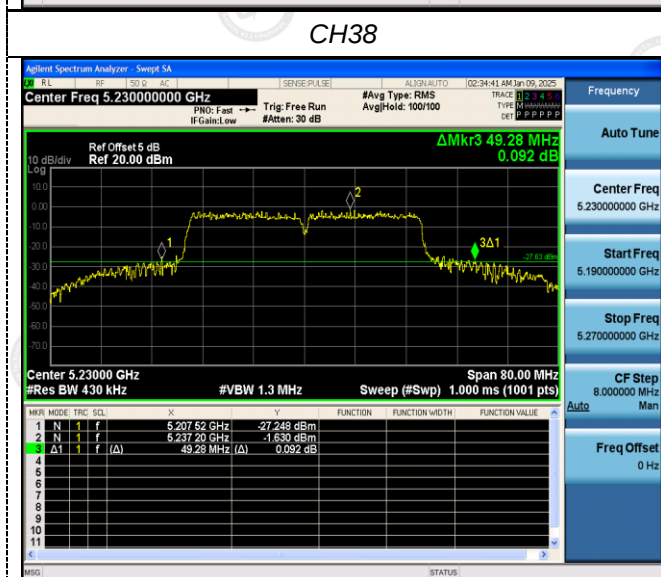


CH36

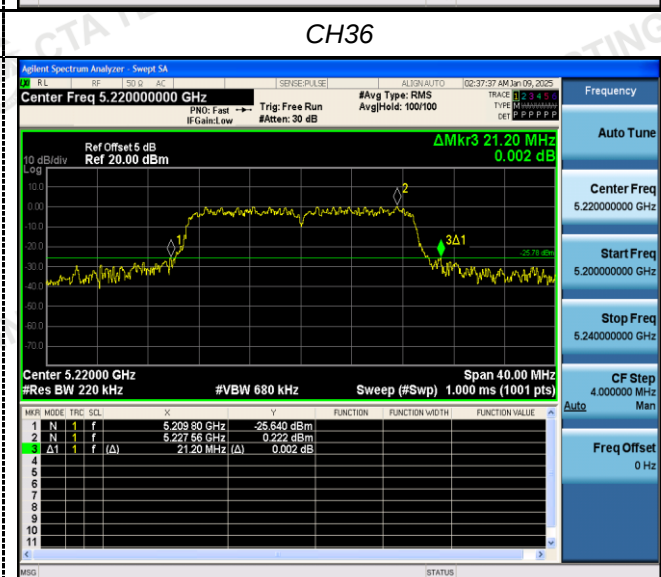

CH46

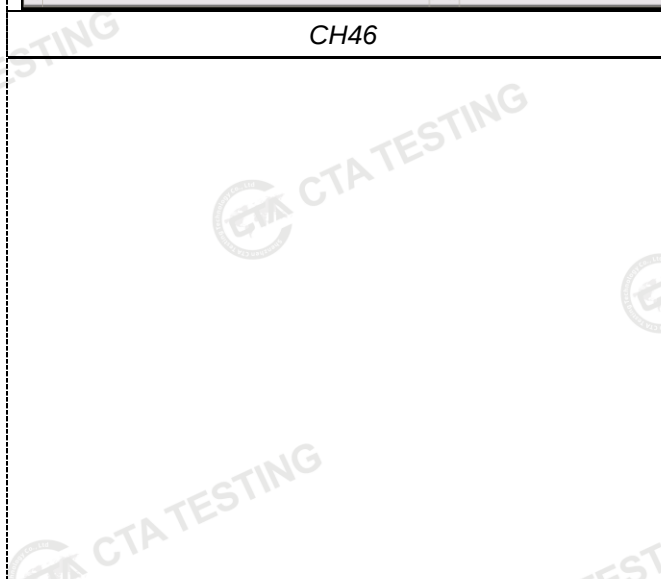


CH40

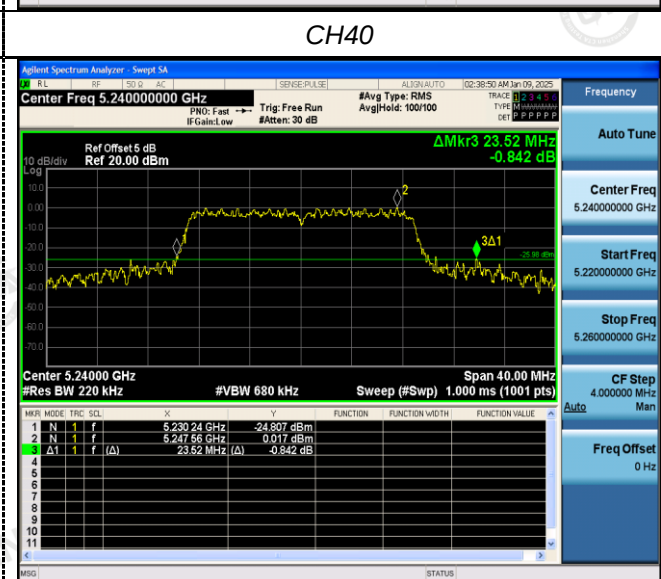

CH48

802.11ax(HT40)

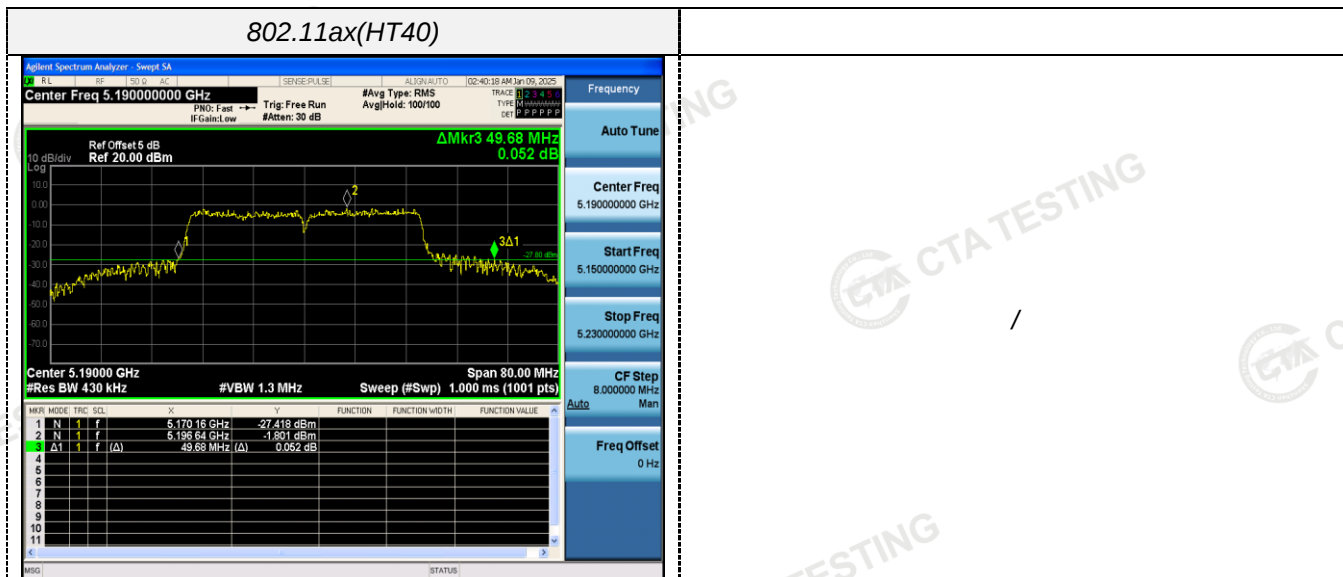

CH38




CH46

4.6 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

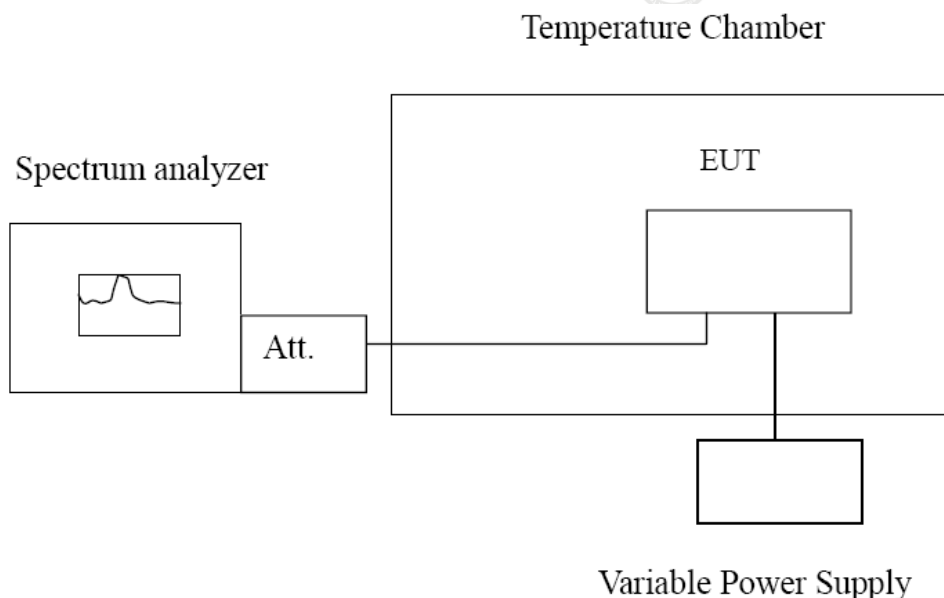

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:


Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 12.0V	-30	110.44	0.021320	Within the band of operation	Pass
	-20	174.69	0.033724		
	-10	145.31	0.028052		
	0	146.41	0.028264		
	10	145.83	0.028153		
	20	99.51	0.019210		
	30	167.36	0.032309		
	40	129.36	0.024973		
	50	128.74	0.024853		
DC 13.2V	25	195.59	0.037759	Within the band of operation	Pass
DC 10.8V	25	118.62	0.022900		

5 Test Setup Photos of the EUT

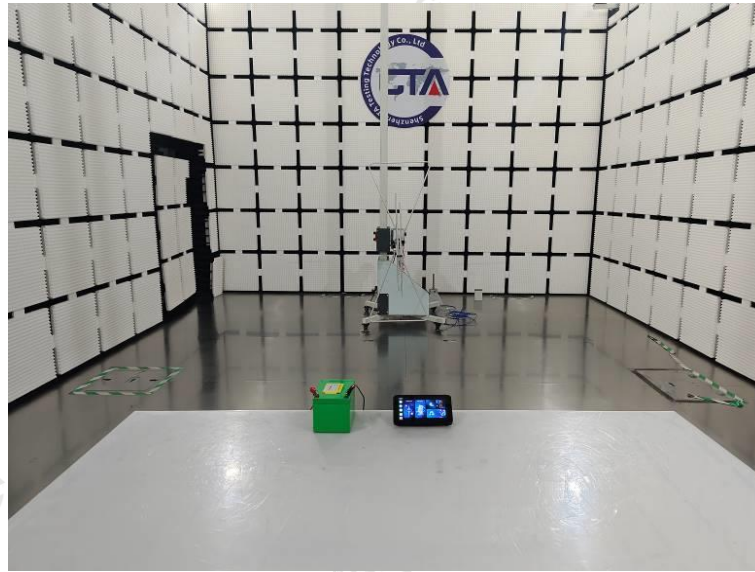

6 Photos of the EUT

Reference to the test report No. CTA24123000401.

***** End of Report *****