

FCC TEST REPORT

FCC ID:2BBRI-MSV086WS

Report Number..... : ZKT-230615L4507E

Date of Test..... June 15, 2023 to June 20, 2023

Date of issue : June 20, 2023

Total number of pages 21

Test Result : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Dongguan Maverick Industrial Co., Ltd.

Address : Zhenhua Industrial Area, QiShi Town,Dongguan city, China

Manufacturer's name : Dongguan Maverick Industrial Co., Ltd.

Address : Zhenhua Industrial Area, QiShi Town,Dongguan city, China

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart C

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No. : TRF-EL-107_V0**Test Report Form(s) Originator** : ZKT Testing**Master TRF** : Dated: Apr. 22, 2022

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name : MagSafe Wireless Notebook with Video Player and USB

Trademark : N/A

Model/Type reference : MK-MSV086ws(15W), MK-066ws, MK-068wss, MK-069ws, MK-070ws, MK-075ws, MK-076ws, MK-079ws, MK-082ws, MK-090ws, MK-MSV086ws, MK-MS087ws, MK-MS088ws, MK-089ws, MK-RMS093ws, MK-L095ws, MK-096ws, MK-MS098ws, MK-L101ws, MK-MS102ws, MK-MS103ws

Ratings..... : Input: 5V 3A;9V 2A;9V 2.22A;12V 1.5A
Output: 15W/10W/7.5W/5W

Testing procedure and testing location:

Testing Laboratory.....: **Shenzhen ZKT Technology Co., Ltd.**

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature): **Alen He**



Reviewer (name + signature).....: **Joe Liu**



Approved (name + signature): **Lake Xie**



TABLE OF CONTENTS

1. VERSION	4
2. TEST SUMMARY	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 Test mode.....	7
3.3 Block Diagram of EUT Configuration	7
3.4 Test Conditions.....	7
3.5 Description Of Support Units (Conducted Mode)	7
3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
4. CONDUCTED EMISSION TEST.....	10
4.1 CONDUCTED EMISSION MEASUREMENT	10
4.2 POWER LINE CONDUCTED EMISSION Limits.....	10
4.3 TEST PROCEDURE.....	10
4.4 DEVIATION FROM TEST STANDARD	10
4.5 TEST SETUP	11
4.6 EUT OPERATING CONDITIONS	11
4.7 Test Result	12
5. RADIATED EMISSION MEASUREMENT	14
5.1 Radiated Emission Limits.....	14
5.2 Anechoic Chamber Test Setup Diagram	15
5.3 Test Procedure	15
5.4 DEVIATION FROM TEST STANDARD	15
5.5 Test Result	16
6. BANDWIDTH TEST	19
7. TEST SETUP PHOTO	21
8. EUT CONSTRUCTIONAL DETAILS	21

1. VERSION

Report No.	Version	Description	Approved
ZKT-230615L4507E	Rev.01	Initial issue of report	June 20, 2023

2. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225
Designation Number: CN1299
IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-0GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59℃
9	Radiated disturbance(30MHz-1000MHz)	U=4.8dB
10	Radiated disturbance(1GHz-6GHz)	U=4.9dB
11	Radiated disturbance(1GHz-18GHz)	U=5.0dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT


Product Name:	MagSafe Wireless Notebook with Video Player and USB
Model No.:	MK-MSV086ws(15W), MK-066ws, MK-068wss, MK-069ws, MK-070ws, MK-075ws, MK-076ws, MK-079ws, MK-082ws, MK-090ws, MK-MSV086ws, MK-MS087ws, MK-MS088ws, MK-089ws, MK-RMS093ws, MK-L095ws, MK-096ws, MK-MS098ws, MK-L101ws, MK-MS102ws, MK-MS103ws
Model Difference:	All the same except model name、colour and shell.
Serial No.:	N/A
Hardware version:	H1.0
Software version:	S1.0
Operation Frequency:	115kHz ~ 205kHz
Modulation type:	ASK
Antenna Type:	Loop Antenna
Antenna gain:	0dBi
Power supply:	Input: 5V 3A;9V 2A; 9V 2.22A;12V 1.5A Output: 15W/10W/7.5W/5W

3.2 Test mode


Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

3.3 Block Diagram of EUT Configuration

Conducted Emission



Radiated Emission



3.4 Test Conditions

Temperature: 23~26℃

Relative Humidity: 54~63 %

3.5 Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	MagSafe Wireless Notebook with Video Player and USB	N/A	MK-MSV086ws(15 W)	N/A	EUT
E2	Adapter	N/A	ZKT-002	N/A	Auxiliary
E3	Load	N/A	iPhone13	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	1.0M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

Operation Frequency each of channel

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	0.115	06	0.140	11	0.165	16	0.190
02	0.120	07	0.145	12	0.170	17	0.195
03	0.125	08	0.150	13	0.175	18	0.200
04	0.130	09	0.155	14	0.180	19	0.205
05	0.135	10	0.160	15	0.185		

Test channel	Frequency (MHz)
CH13	0.175MHz

3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 22, 2022	Sep. 21, 2023
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 22, 2022	Sep. 21, 2023
3	Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Sep. 22, 2022	Sep. 21, 2023
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 22, 2022	Sep. 21, 2023
5	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Sep. 22, 2022	Sep. 21, 2023
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 22, 2022	Sep. 21, 2023
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 22, 2022	Sep. 21, 2023
8	Amplifier (1GHz-40GHz)	全聚达	DLE-161	097	Sep. 22, 2022	Sep. 21, 2023
9	Loop Antenna (9KHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Sep. 22, 2022	Sep. 21, 2023
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 22, 2022	Sep. 21, 2023
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 22, 2022	Sep. 21, 2023
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 22, 2022	Sep. 21, 2023
13	CMW500 Test	R&S	CMW500	106504	Sep. 22, 2022	Sep. 21, 2023
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 22, 2022	Sep. 21, 2023
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 22, 2022	Sep. 21, 2023
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 22, 2022	Sep. 21, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 22, 2022	Sep. 21, 2023
3	Test Cable	N/A	C01	N/A	Sep. 22, 2022	Sep. 21, 2023
4	Test Cable	N/A	C02	N/A	Sep. 22, 2022	Sep. 21, 2023
5	EMI Test Receiver	R&S	ESRP3	101946	Sep. 22, 2022	Sep. 21, 2023
6	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 22, 2022	Sep. 21, 2023

4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.2 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas -peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.4 DEVIATION FROM TEST STANDARD

No deviation

4.5 TEST SETUP

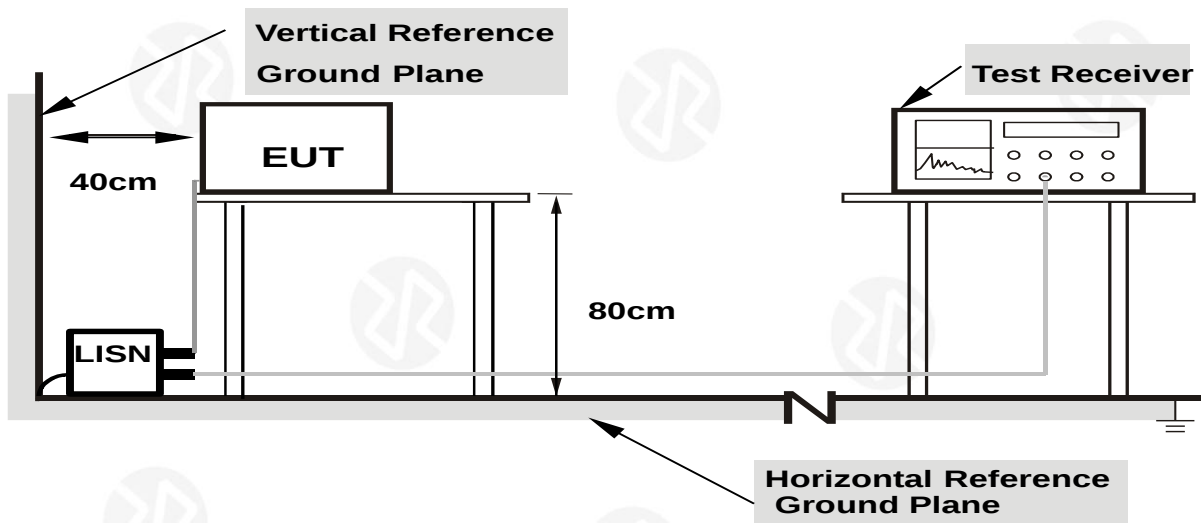

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

4.7 Test Result

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

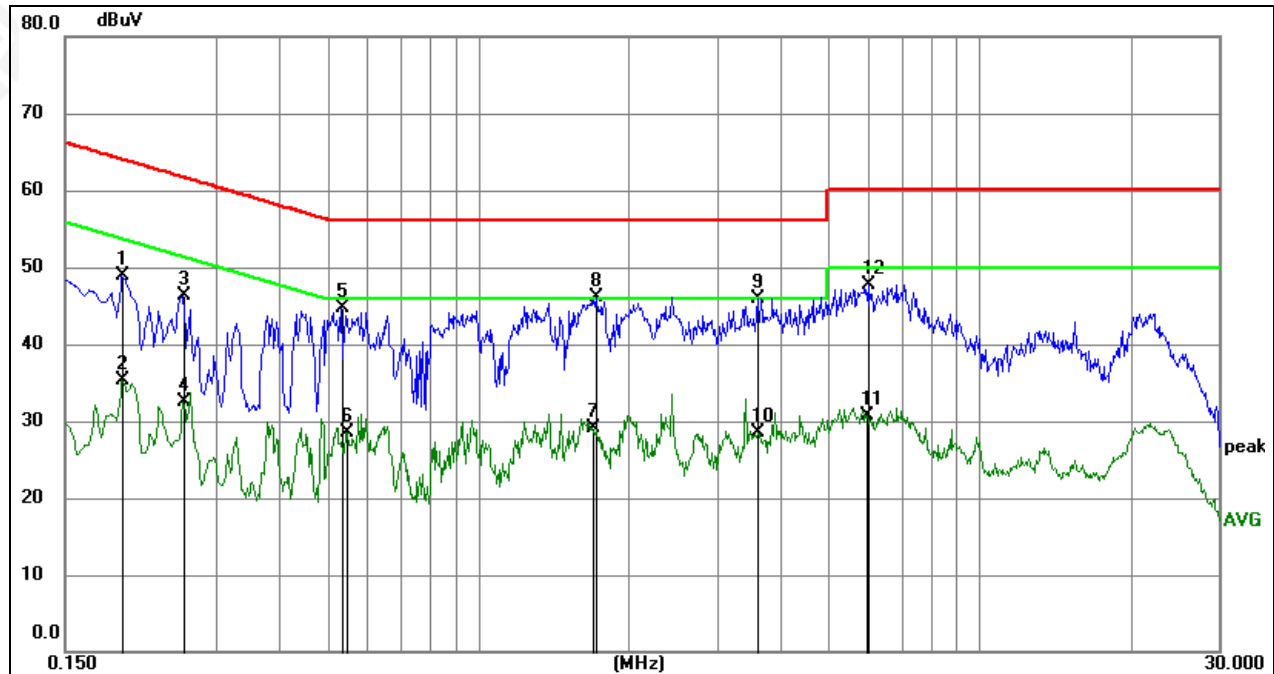


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1949	28.22	20.59	48.81	63.83	-15.02	QP	P
2	0.1949	14.69	20.59	35.28	53.83	-18.55	AVG	P
3	0.2580	25.65	20.62	46.27	61.50	-15.23	QP	P
4	0.2580	11.90	20.62	32.52	51.50	-18.98	AVG	P
5	0.5322	24.06	20.63	44.69	56.00	-11.31	QP	P
6	0.5459	7.94	20.64	28.58	46.00	-17.42	AVG	P
7	1.6934	8.48	20.69	29.17	46.00	-16.83	AVG	P
8	1.7249	25.35	20.69	46.04	56.00	-9.96	QP	P
9	3.6150	25.20	20.77	45.97	56.00	-10.03	QP	P
10	3.6150	7.82	20.77	28.59	46.00	-17.41	AVG	P
11	5.9370	10.01	20.77	30.78	50.00	-19.22	AVG	P
12	5.9954	27.02	20.77	47.79	60.00	-12.21	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

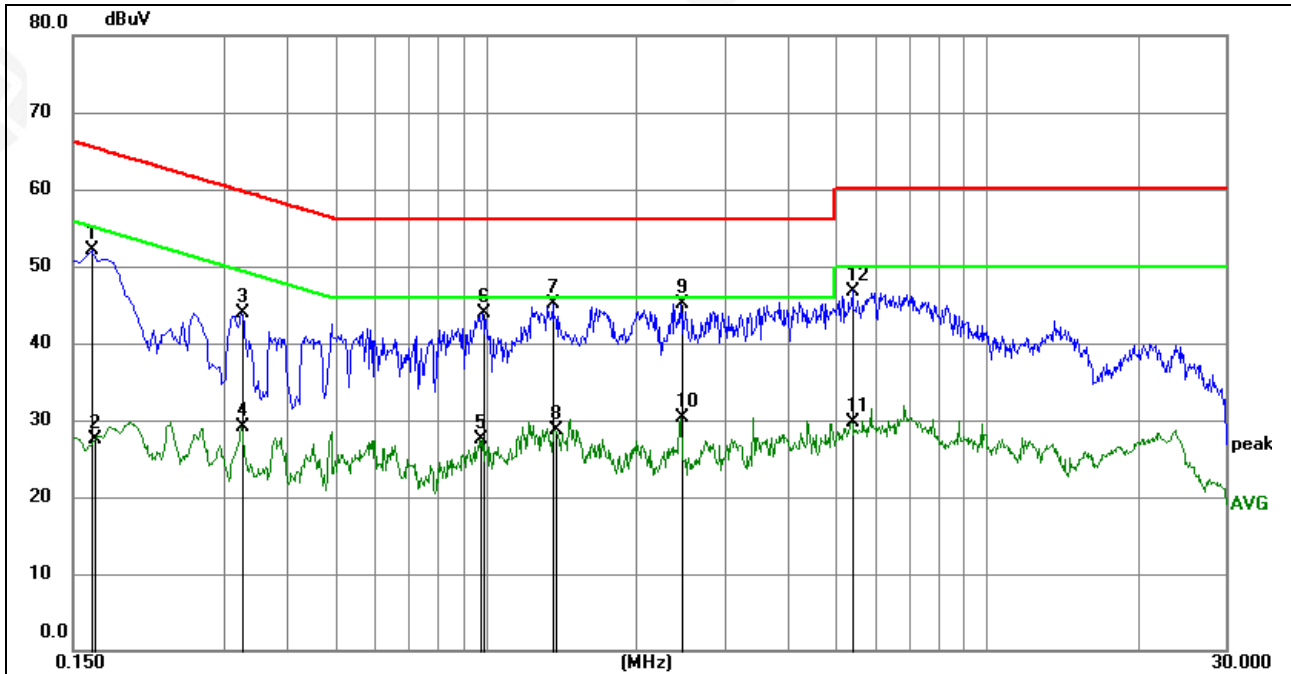

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1635	31.75	20.30	52.05	65.28	-13.23	QP	P
2	0.1658	7.15	20.31	27.46	55.17	-27.71	AVG	P
3	0.3255	23.39	20.51	43.90	59.57	-15.67	QP	P
4	0.3255	8.67	20.51	29.18	49.57	-20.39	AVG	P
5	0.9778	6.88	20.66	27.54	46.00	-18.46	AVG	P
6	0.9868	23.23	20.67	43.90	56.00	-12.10	QP	P
7	1.3604	24.34	20.71	45.05	56.00	-10.95	QP	P
8	1.3784	8.05	20.71	28.76	46.00	-17.24	AVG	P
9	2.4495	24.35	20.78	45.13	56.00	-10.87	QP	P
10	2.4495	9.57	20.78	30.35	46.00	-15.65	AVG	P
11	5.3834	8.92	20.75	29.67	50.00	-20.33	AVG	P
12	5.4059	26.05	20.75	46.80	60.00	-13.20	QP	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor

5. RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 Radiated Emission Limits

Limits for frequency below 30MHz


Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

5.2 Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

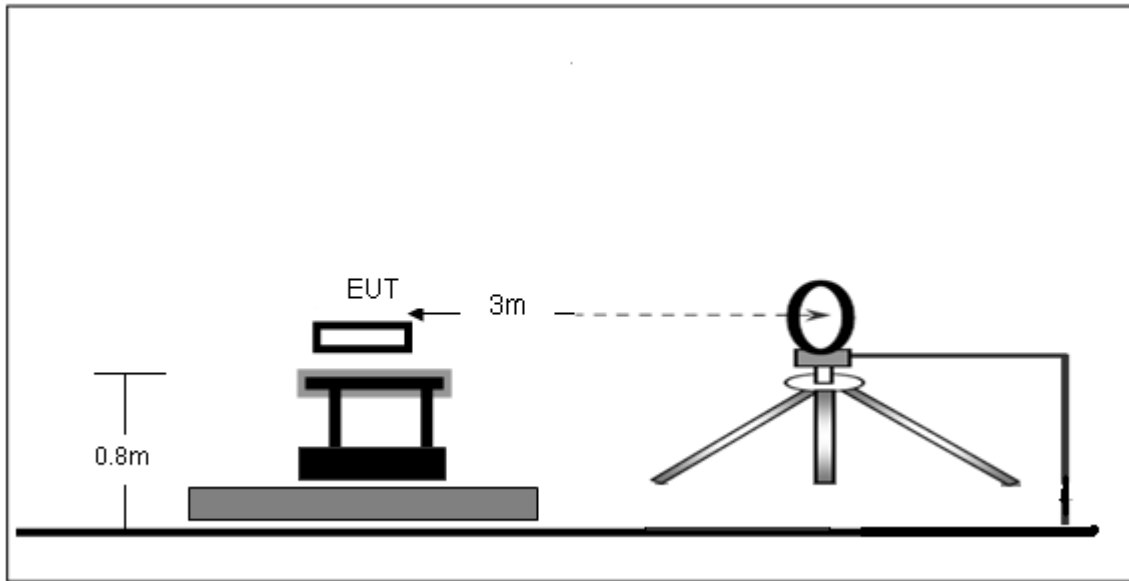

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

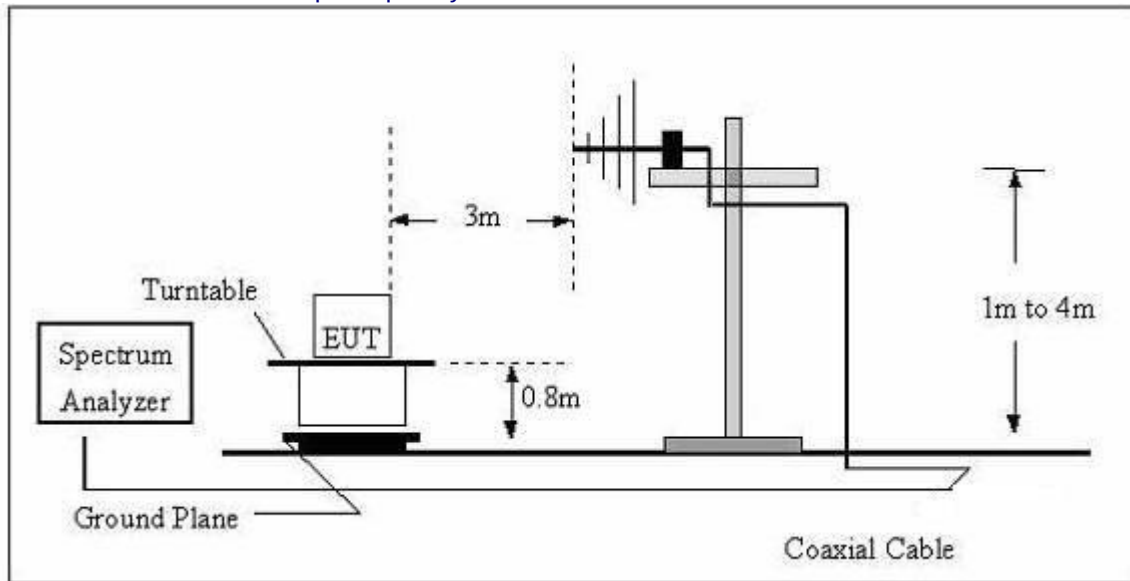

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

5.3 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5 Test Result

Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80
Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(kHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
115.0000	62.28	20.36	82.64	126.39	-43.75	PK
115.0000	53.71	20.36	74.07	106.39	-32.32	AV
160.0000	65.96	20.41	86.37	123.52	-37.15	PK
160.0000	54.35	20.41	74.76	103.52	-28.76	AV
205.0000	63.55	20.46	84.01	121.37	-37.36	PK
205.0000	55.83	20.46	76.29	101.37	-25.08	AV

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(kHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
35.5000	34.63	20.15	54.78	136.6	-81.82	PK
35.5000	31.49	20.15	51.64	116.6	-64.96	AV
58.7000	44.94	20.33	65.27	132.23	-66.96	PK
58.7000	42.07	20.33	62.4	112.23	-49.83	AV
101.2000	47.97	20.55	68.52	107.5	-38.98	QP
188.0000	55.69	21.23	76.92	122.12	-45.2	PK
188.0000	34.52	21.23	55.75	102.12	-46.37	AV
1524.0000	14.13	22.29	36.42	63.94	-27.52	QP

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.


30MHz-1GHz

Temperature:	26℃	Relative Humidity:	60%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

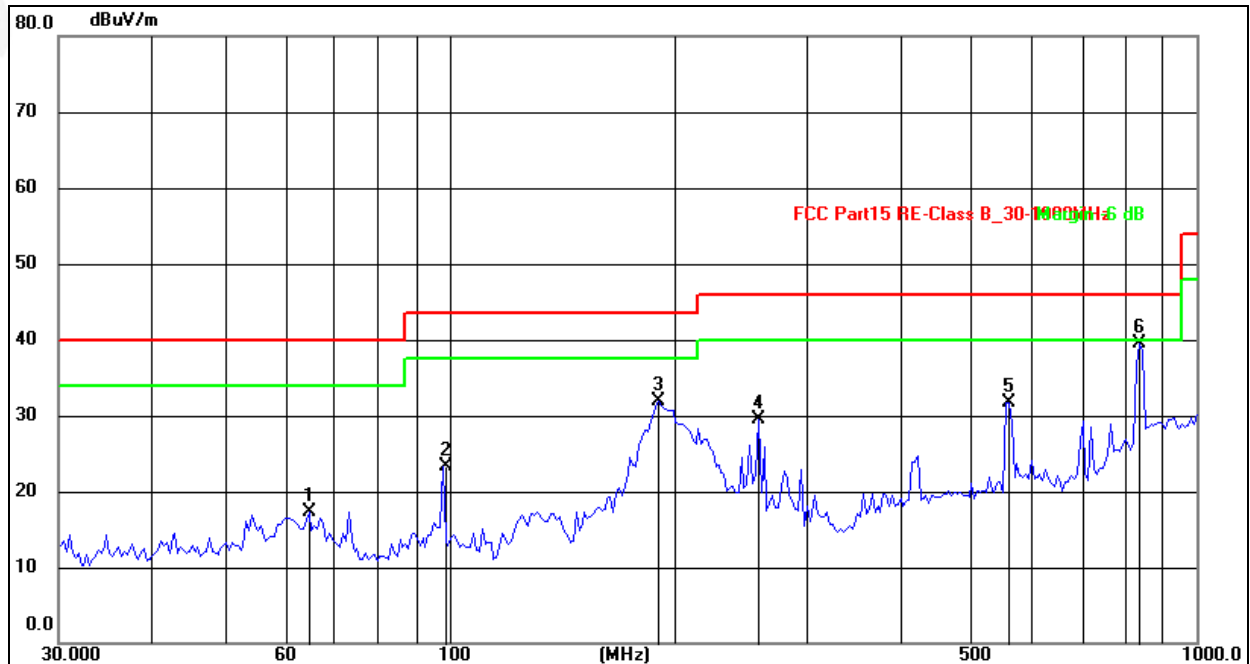

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	64.8863	36.19	-18.82	17.37	40.00	-22.63	QP
2	97.9700	44.55	-21.27	23.28	43.50	-20.22	QP
3	190.7390	52.20	-20.30	31.90	43.50	-11.60	QP
4	259.2336	49.24	-19.68	29.56	46.00	-16.44	QP
5	560.6928	41.06	-9.27	31.79	46.00	-14.21	QP
6	839.1816	42.02	-2.47	39.55	46.00	-6.45	QP

Temperature:	26°C	Relative Humidity:	60%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

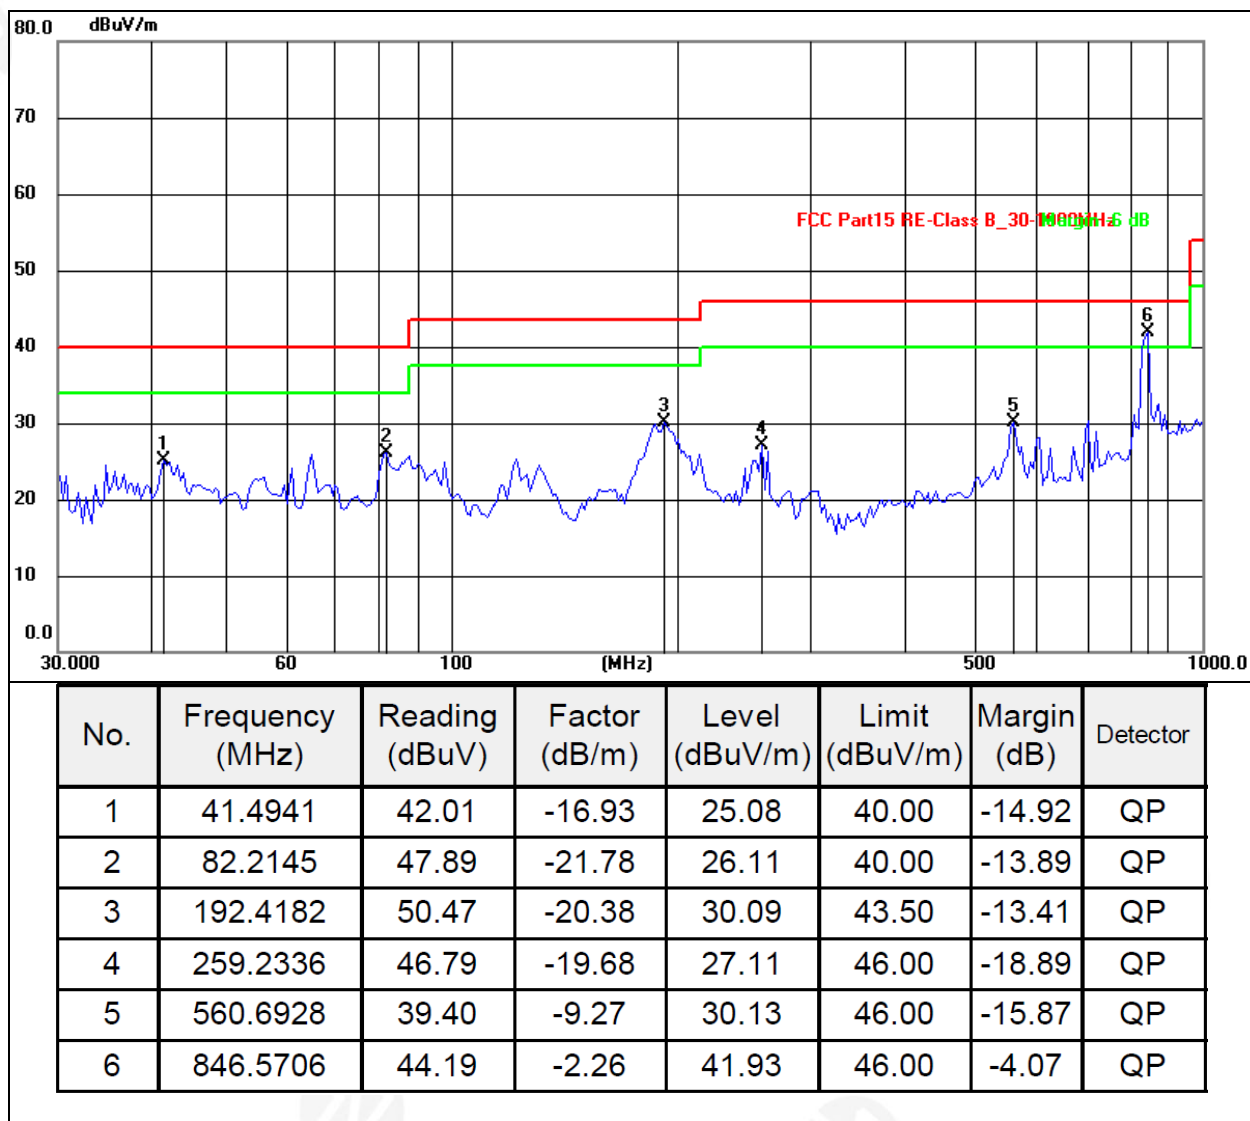


Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.

6. BANDWIDTH TEST


1. Set RBW = 1 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

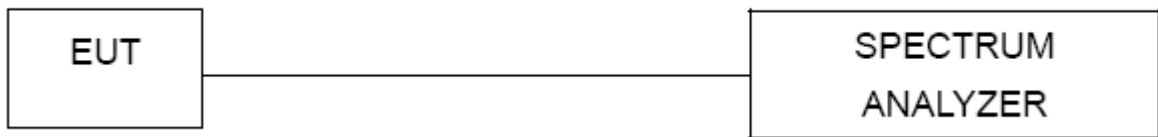

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa		

Frequency (KHz)	20dB bandwidth (KHz)	99% bandwidth (KHz)	Result
175	3.568	3.9589	Pass

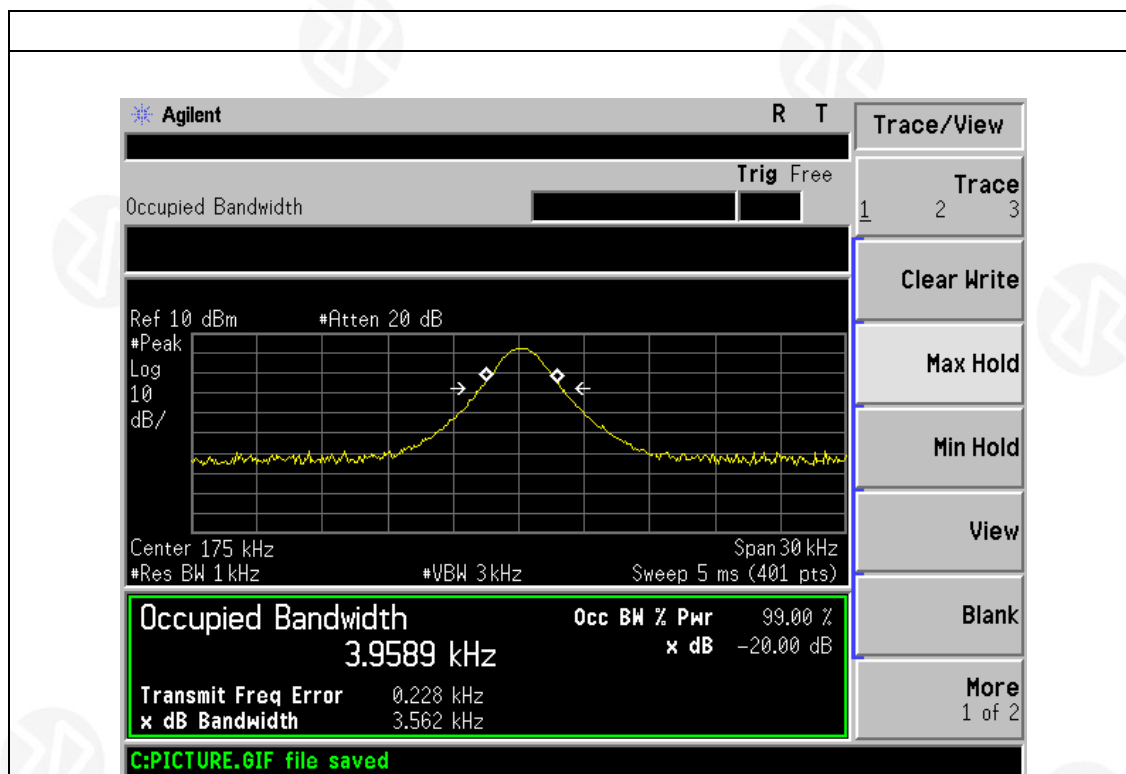

7. TEST SETUP PHOTO

Reference to the appendix I for details.

8. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****