

**TEST REPORT****Report Number: 23061208HKG-005**

Application For Original Grant of 47 CFR Part 15 Certification

Unlicensed Personal Communication Service Devices

(Dongle)

**FCC ID: 2BBS7AWDGLE****Prepared and Checked by:**

Signed on File

Leung Chiu Kuen, Stanley  
Engineer**Approved by:**Tang Kwan Mo, Jess  
Lead Engineer  
Date: July 26, 2023

---

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

## TEST REPORT

### GENERAL INFORMATION

|                                    |   |
|------------------------------------|---|
| <b>Grantee:</b>                    | Agent Headsets Inc  |
| <b>Grantee Address:</b>            | 7901 4th Street North STE 300,<br>St Petersburg, Florida, 33702,<br>United States   |
| <b>FCC Specification Standard:</b> | FCC Part 15, October 1, 2021 Edition  |
| <b>FCC ID:</b>                     | 2BBS7AWDGLE   |
| <b>FCC Model(s):</b>               | AW40,<br>AW30, AWX0   |
| <b>Type of EUT:</b>                | Unlicensed Personal Communications Service Devices  |
| <b>Description of EUT:</b>         | DECT 6.0 Dongle   |
| <b>Sample Receipt Date:</b>        | Jan 19, 2023  |
| <b>Date of Test:</b>               | April 3, 2023 to May 12, 2023   |
| <b>Report Date:</b>                | July 26, 2023   |
| <b>Environmental Conditions:</b>   | Temperature: +10 to 40°C<br>Relative Humidity: 10 to 90%  |
| <b>Conclusion:</b>                 | Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 Certification. |

## TEST REPORT

### TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>1.0 TEST RESULTS SUMMARY &amp; STATEMENT OF COMPLIANCE .....</b> | <b>4</b>  |
| 1.1 Summary of Test Results.....                                    | 4         |
| 1.2 Statement of Compliance .....                                   | 4         |
| <b>2.0 GENERAL DESCRIPTION.....</b>                                 | <b>5</b>  |
| 2.1 Product Description .....                                       | 5         |
| 2.2 Technical Description.....                                      | 5         |
| 2.3 Test Methodology .....  | 5         |
| 2.4 Test Facility.....  | 5         |
| <b>3.0 SYSTEM TEST CONFIGURATION.....</b>                           | <b>6</b>  |
| 3.1 Justification .....   | 6         |
| 3.2 Radiated Emission Test Setup.....                               | 7         |
| 3.3 AC Line Conducted Emission Test Setup.....                      | 8         |
| 3.4 Conducted Emission Test Configuration.....                      | 8         |
| 3.5 Conducted Monitoring and Operational Test Configuration .....   | 9         |
| 3.6 EUT Exercising Software.....                                    | 9         |
| 3.7 Details of EUT and Description of Accessories .....             | 10        |
| 3.8 Measurement Uncertainty.....                                    | 10        |
| <b>4.0 MEASUREMENT RESULTS.....</b>                                 | <b>11</b> |
| 4.1 Antenna Requirement.....  | 11        |
| 4.2 Digital Modulation Techniques.....                              | 11        |
| 4.3 Emission Bandwidth.....   | 11        |
| 4.4 Directional Gain of the Antenna .....                           | 13        |
| 4.5 Peak Transmit Power .....                                       | 14        |
| 4.6 Power Spectral Density .....                                    | 16        |
| 4.7 Automatic Discontinuation of Transmission.....                  | 18        |
| 4.8 Unwanted Emission Inside the Sub-Band .....                     | 19        |
| 4.9 Emissions Outside the Sub-Band .....                            | 22        |
| 4.10 AC Power Line Conducted Emissions.....                         | 29        |
| 4.11 Frame Repetition Stability .....                               | 33        |
| 4.12 Frame Period and Jitter.....                                   | 34        |
| 4.13 Carrier Frequency Stability.....                               | 35        |
| 4.14 Monitoring Threshold Limit .....                               | 36        |
| 4.15 Monitoring Time .....  | 41        |
| 4.16 Maximum Transmit Period .....                                  | 42        |
| 4.17 System Acknowledgement.....                                    | 43        |
| 4.18 Random Waiting.....  | 44        |
| 4.19 Monitoring Bandwidth.....                                      | 45        |
| 4.20 Maximum Reaction Time .....                                    | 46        |
| 4.21 Monitoring Antenna.....  | 46        |
| 4.22 Duplex Connections .....                                       | 47        |
| 4.23 Alternative Monitoring Interval for Co-located Device .....    | 48        |
| 4.24 Fair Access .....  | 48        |
| <b>5.0 EQUIPMENT LIST .....</b>                                     | <b>49</b> |

## TEST REPORT

### 1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

#### 1.1 Summary of Test Results

| Test Items  | General Technical Requirements |                               | Test Procedure<br>ANSI C63.17 /<br>ANSI C63.4* | Results |
|---|--------------------------------|-------------------------------|--|---------|
|   | FCC Part 15<br>Section         |                               |  |         |
| Antenna Requirement                                   | 15.317                         | ---                           | Complied                                       |         |
| Digital Modulation Techniques                         | 15.319(b)                      | 6.1.4                         | Complied                                       |         |
| Occupied/Emission Bandwidth                           | 15.323(a)                      | 6.1.3                         | Complied                                       |         |
| Directional Gain of the Antenna                       | 15.319(e)                      | 4.3.1                         | Complied                                       |         |
| Peak Transmit Power                                   | 15.319(c)                      | 6.1.2                         | Complied                                       |         |
| Power Spectral Density                                | 15.319(d)                      | 6.1.5                         | Complied                                       |         |
| Automatic Discontinuation of Transmission             | 15.319(f)                      | ---                           | Complied                                       |         |
| AC Power Line Conducted Emissions from EUT            | 15.315                         | 7 *                           | Complied                                       |         |
| Security Code Information                             | ---                            | ---                           | Not Applicable                                 |         |
| Specific Requirements for UPCS Device                 |                                |                               |  |         |
| Test Items  | FCC Part 15<br>Section         | Test Procedure<br>ANSI C63.17 | Results  |         |
|   |                                |                               |  |         |
| Unwanted Emission Inside the Sub-Band                 | 15.323(d)                      | 6.1.6.1                       | Complied                                       |         |
| Emissions Outside the Sub-Band                        | 15.323(d)                      | 6.1.6.2                       | Complied                                       |         |
| Frame Repetition Stability                            | 15.323(e)                      | 6.2.2                         | Complied                                       |         |
| Frame Period and Jitter                               | 15.323(e)                      | 6.2.3                         | Complied                                       |         |
| Carrier Frequency Stability                           | 15.323(f)                      | 6.2.1                         | Complied                                       |         |
| Monitoring Threshold Limit                            | 15.323(c2&c9)                  | 7.3.1                         | Not Applicable                                 |         |
| Least Interfered Channel (LIC) Selection              | 15.323(c)(5)                   | 7.3.2                         | Complied                                       |         |
| Least Interfered Channel (LIC) Confirmation           | 15.323(c)(5)                   | 7.3.2                         | Complied                                       |         |
| Maximum Spectrum Occupancy                            | 15.323(c)(5)                   | ---                           | Complied                                       |         |
| Monitoring Time                                       | 15.323(c)(1)                   | 7.3.3                         | Complied                                       |         |
| Maximum Transmit Period                               | 15.323(c)(3)                   | 8.2.2                         | Complied                                       |         |
| System Acknowledgement                                | 15.323(c4)                     | 8.1 or 8.2                    | Complied                                       |         |
| Random Waiting  | 15.323(c)(6)                   | 8.1.2 or 8.1.3                | Complied                                       |         |
| Monitoring Bandwidth                                  | 15.323(c)(7)                   | 7.4                           | Complied                                       |         |
| Maximum Reaction Time                                 | 15.323(c)(7)                   | 7.5                           | Complied                                       |         |
| Monitoring Antenna                                    | 15.323(c)(8)                   | 4                             | Complied                                       |         |
| Duplex Connections                                    | 15.323(c)(10)                  | 8.3                           | Not Applicable                                 |         |
| Alternative Monitoring Interval for Co-located Device | 15.323(c)(11)                  | 8.4                           | Not Applicable                                 |         |
| Fair Access   | 15.323(c)(12)                  | ---                           | Complied                                       |         |

#### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2021 Edition

## TEST REPORT

### 2.0 GENERAL DESCRIPTION

#### 2.1 Product Description

The AW40 is a DECT 6.0 Dongle. It operates at frequency range of 1921.536MHz to 1928.448MHz with 5 channels (1921.536MHz, 1923.264MHz, 1924.992MHz, 1926.720MHz and 1928.448MHz). The Dongle Unit is powered by 5VDC, USB-A port of computer.

The antenna used in dongle unit is integral, and the test sample is a prototype.

Model(s): AW30 and AWX0 are the same as the Model: AW40 in electronics/electrical designs including software & firmware, PCB layout and construction design/physical design/enclosure as declared by client. The only differences between these models are model number, color, cosmetic details, registered with different types of Headset (Binaural, Monaural) to be sold for marketing purpose as declared by client. Suffix ("X" in AWX0) is any alphanumeric character indicates different types of headset (Binaural, Monaural) are sold with the dongle, as declared by client.

#### 2.2 Technical Description

The circuit description and digital modulation techniques description are saved with filename: descri.pdf.

#### 2.3 Test Methodology

The radiated emission measurements for unintentional radiator and AC power line-conducted emission measurements were performed according to the test procedures specified in ANSI C63.4 (2014). The radiated emission measurements for intentional radiator contained in UPCS device, conducted emission measurements, Listen Before Transmit (LBT) tests, Time Frame and Frequency Stability tests were performed according to the test procedures specified in ANSI C63.17 (2013). All radiated measurements were performed in radiated emission test site. Preliminary scans were performed in the radiated emission test site only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **"Justification Section"** of this Application. All other measurements were made in accordance with the procedures in 47 CFR Part 2.

#### 2.4 Test Facility

The radiated emission test site, AC power line conducted measurement facility and antenna port conducted measurement facility used to collect the radiated data, AC Power Line conducted data and conductive data are at Intertek Testing Services Hong Kong Limited, which is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with FCC designation no. "HK0005".

## TEST REPORT

### 3.0 SYSTEM TEST CONFIGURATION

#### 3.1 Justification

For emissions testing, the equipment under test (EUT) was set up to transmit continuously in burst mode with pseudo-random data to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst-case emissions.

The Dongle was powered by 5VDC, USB-A port of computer.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the EUT is attached to accessories, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Detector function was in peak mode. Radiated emissions are taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For UPSC transmitter radiated measurement, the spectrum analyzer resolution bandwidth was approximately 1% of EUT emission bandwidth, unless otherwise specified.

Radiated emission measurements for UPSC transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.


All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst case data is included in this report.


## TEST REPORT

### 3.2 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

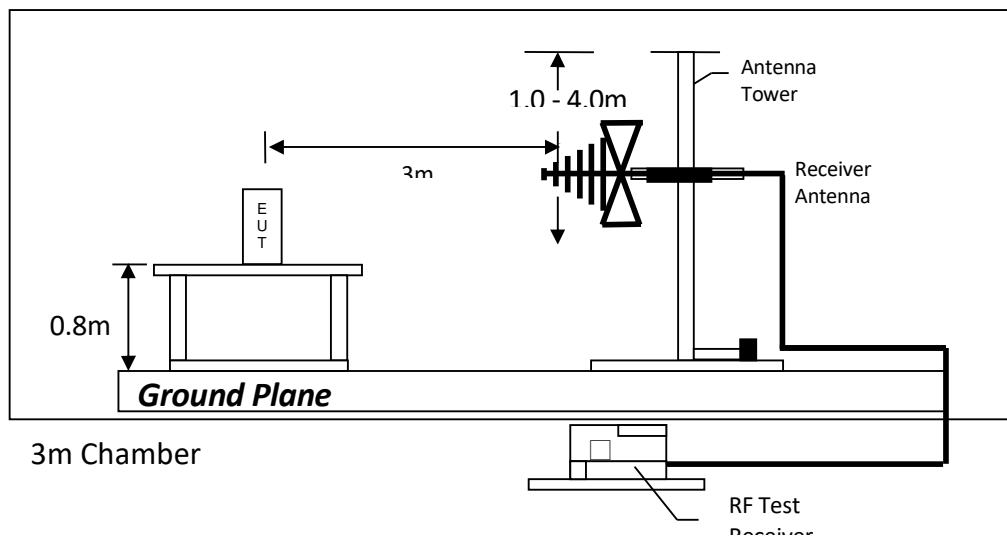

Test setup of radiated emissions up to 1GHz

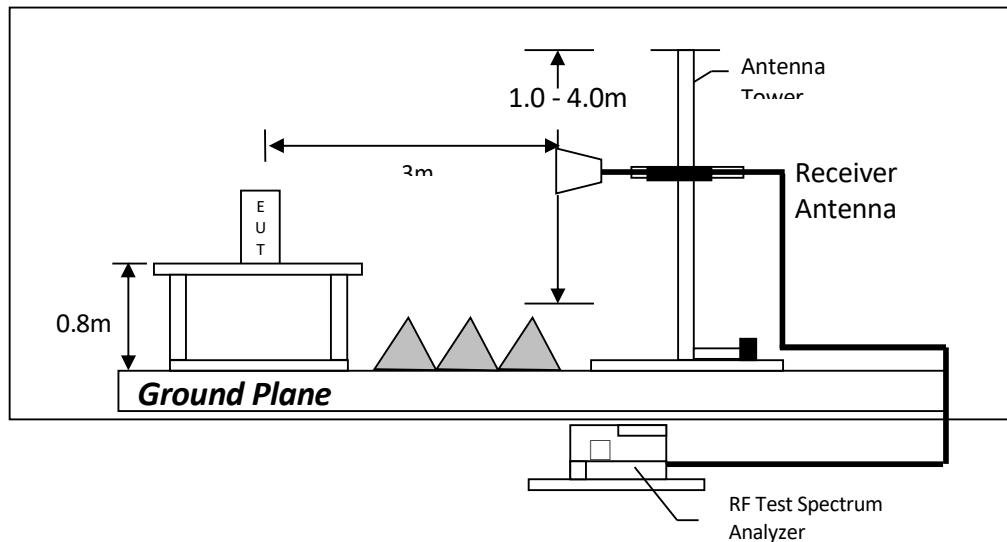

Test setup of radiated emissions above 1GHz

Figure 3.2.1

## TEST REPORT

### 3.3 AC Line Conducted Emission Test Setup

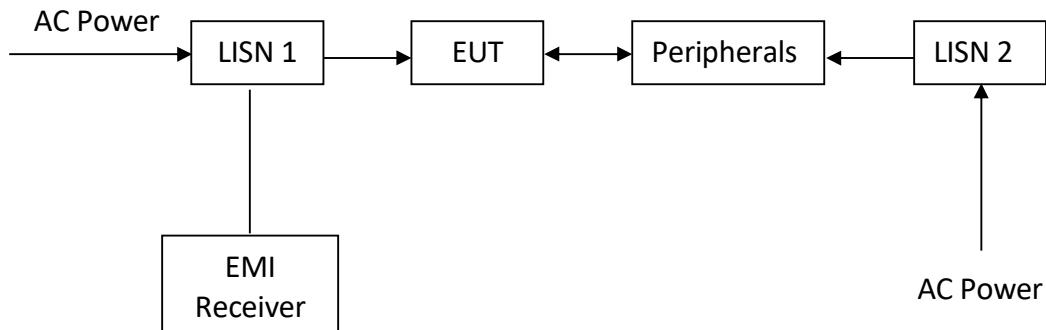


Figure 3.3.1

### 3.4 Conducted Emission Test Configuration

The setup and equipment setting were made in accordance with ANSI C63.17. The antenna of EUT transmitter was replaced by a coaxial cable. The impedance matching of connection, cable loss and external RF attenuator are taken into account. The EUT was arranged to communicate via a fixed carrier frequency between its transmitter and a companion device. The transmission was configured in burst mode with pseudo-random data as typical as normal operation.

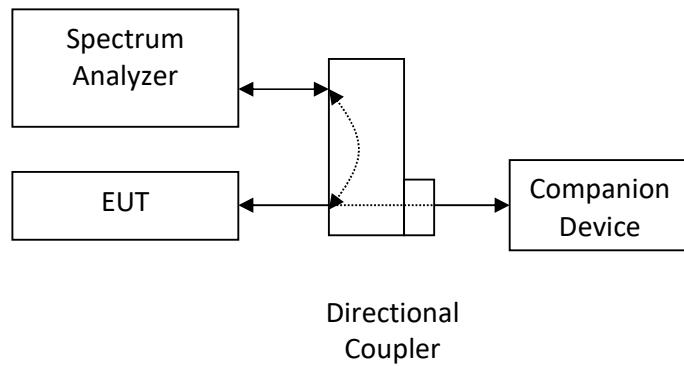


Figure 3.4.1

## TEST REPORT

### 3.5 Conducted Monitoring and Operation Test Configuration

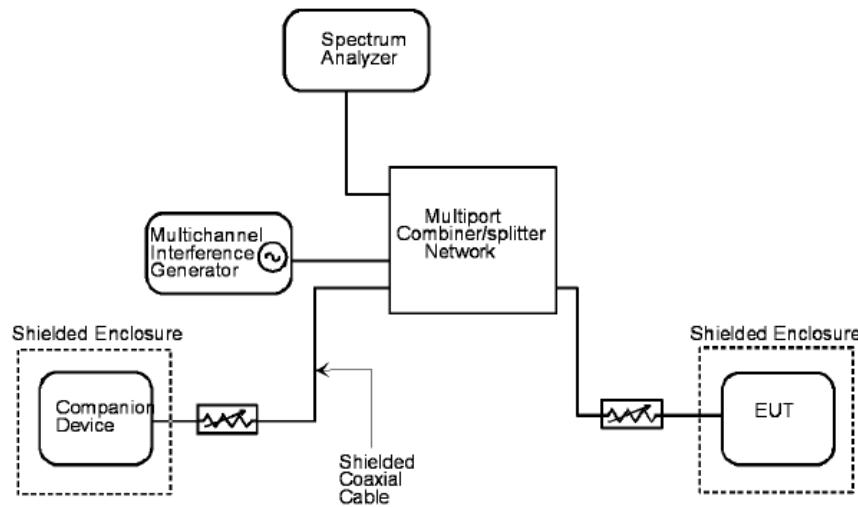


Figure 3.5.1

### 3.6 EUT Exercising Software

The EUT exercise program (VegaJtagAPI, version V2.7.7) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

## TEST REPORT

### 3.7 Details of EUT and Description of Accessories

#### Details of EUT:

The USB-A port of computer was used to power the device.

#### Description of Accessories:

- (1) Headset, Model: AWBHS, FCC ID: 2BBS7AW5H (Provided by Applicant)
- (2) HP Notebook, Model: ProBook 430 G1, S/N: 2CE4250H44 (Provided by Intertek)
- (3) 1 X CAT5 LAN cable with 1.5m long (Provided by Intertek)
- (4) TP-Link Router, Model: TL-WDR4300, S/N: 13972702581 was used for termination (Provided by Intertek)

### 3.8 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level (k=2). In case, the measured value is within guard band region, undetermined decision will be used. The values of the Measurement uncertainty for radiated emission test, AC line conducted emission test and RF conducted test, frequency stability and timing jitter are  $\pm$  5.3dB,  $\pm$  4.2dB,  $\pm$  1dB,  $\pm$  23Hz, 0.1 $\mu$ s respectively.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

**TEST REPORT****4.0 MEASUREMENT RESULTS**

## 4.1 Antenna Requirement, FCC Rule 15.317:

EUT must meet the antenna requirement of FCC Rule 15.203.

- [ x ] EUT uses permanently attached antenna(s) which is considered sufficient to comply with the provisions of this rule. Please refer to internal photos.pdf for more details.
- [ ] EUT uses unique antenna jack(s) or electrical connector(s) which is considered sufficient to comply with the provisions of this rule. Please refer to internal photos.pdf for more details.

## 4.2 Digital Modulation Techniques, FCC Rule 15.319(b):

All transmissions must use only digital modulation techniques.

The requirements are made in accordance with ANSI C63.17 sub-clause 6.1.4.

Attestation:

Please refer to the technical description (descri.pdf) or relevant DECT standards for more details.

## 4.3 Emission Bandwidth, FCC Rule 15.323(a):

Operation shall be contained within the 1920 – 1930 MHz band. The emission bandwidth (B) shall be less than 2.5 MHz and greater than 50 kHz.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.3.

Test setup is shown in section 3.4 Figure 3.4.1.

Test Results:

## I. Dongle Unit - Traffic Carrier


| Channel | Channel Frequency (MHz) | Measuring Signal Level | Measured Emission Bandwidth (MHz) | Results |
|---------|-------------------------|------------------------|-----------------------------------|---------|
| Lowest  | 1921.536                | 26 dB down             | 1.49                              | Pass    |
| Highest | 1928.448                | 26 dB down             | 1.65                              | Pass    |

The plots of emission bandwidth are saved as below.


## TEST REPORT

### PLOTS OF EMISSION BANDWIDTH

Dongle Unit, Lowest Channel, Traffic Carrier

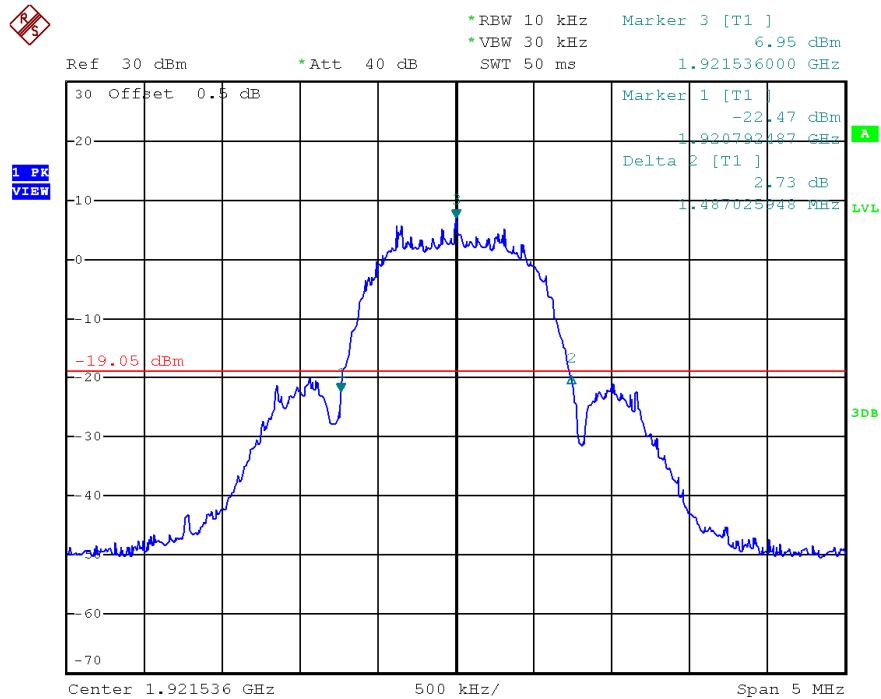

Dongle Unit, Highest Channel, Traffic Carrier

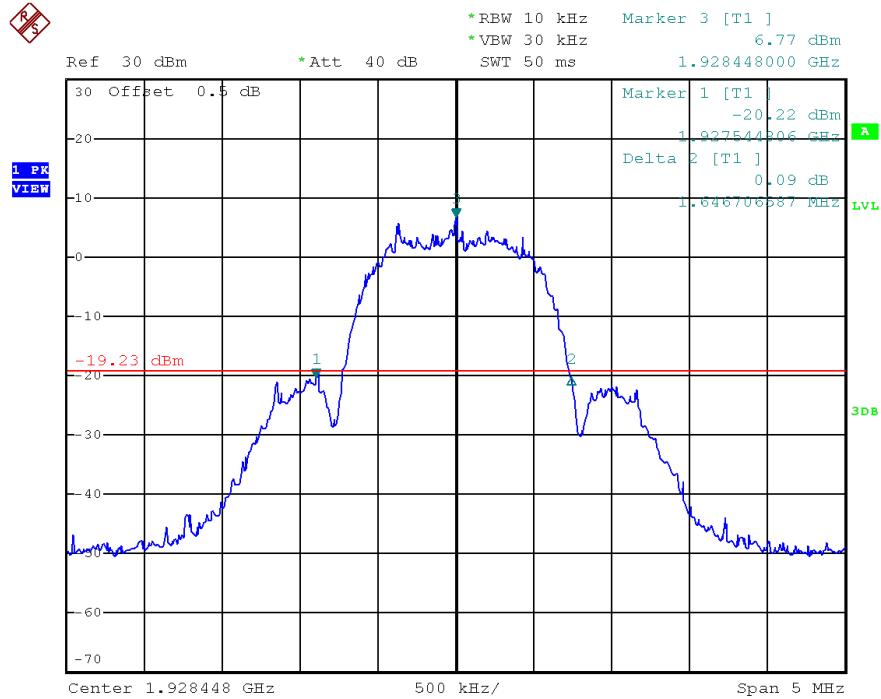

## TEST REPORT

### 4.4 Directional Gain of the Antenna, FCC Rule FCC 15.319(e):

The peak transmit power limit shall be reduced by the amount in dB that the maximum directional gain of the antenna exceeds 3 dBi.

The requirements are made in accordance with ANSI C63.17 sub-clause 4.3.1.

- Manufacturer declares that the directional gain of the antenna is less than or equal to 3dBi. No peak transmit power limit reduction is required.
- Manufacturer declares that the directional gain of the antenna is greater than 3dBi. The peak transmit power limit shall be reduced by \_\_\_\_\_ dB.

**TEST REPORT****4.5 Peak Transmit Power, FCC Rule 15.319(c):**

The peak transmit power ( $P_{EUT}$ ) shall not exceed  $100\mu\text{W}$  multiplied by the square root of the emission bandwidth ( $B$ ) in Hz or  $5 \log_{10} B - 10$  dBm. The peak transmit power limit shall be reduced by the amount in dB that the maximum directional gain of the antenna exceeds 3 dBi.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.2. Test setup is shown in section 3.4 Figure 3.4.1. The cable loss and/or external attenuation are included in OFFSET function of spectrum analyzer.

Calculation of Peak Transmit Power Limit ( $P_{\max}$ ):

$$\begin{aligned} [x] \quad P_{\max} &= 5 \log_{10} B - 10 \text{ dBm} && \text{when } G_A \leq 3 \text{ dBi} \\ [ ] \quad P_{\max} &= 5 \log_{10} B - 10 \text{ dBm} - (G_A - 3 \text{ dBi}) && \text{when } G_A > 3 \text{ dBi} \end{aligned}$$

Where  $G_A$  = EUT Antenna Gain: 0.47 dBi for Dongle Unit

$B$  = Measured Emission Bandwidth

Test Results:

**I. Dongle Unit - Traffic Carrier**


| Channel | Channel Frequency (MHz) | Measured Peak Transmit Power (dBm) | Limit (dBm) | Results |
|---------|-------------------------|------------------------------------|-------------|---------|
| Lowest  | 1921.536                | 14.31                              | 20.86       | Pass    |
| Highest | 1928.448                | 14.28                              | 21.08       | Pass    |

The plots of peak transmit power are saved as below.


## TEST REPORT

## PLOTS OF PEAK TRANSMIT POWER

## Dongle Unit, Lowest Channel, Traffic Carrier

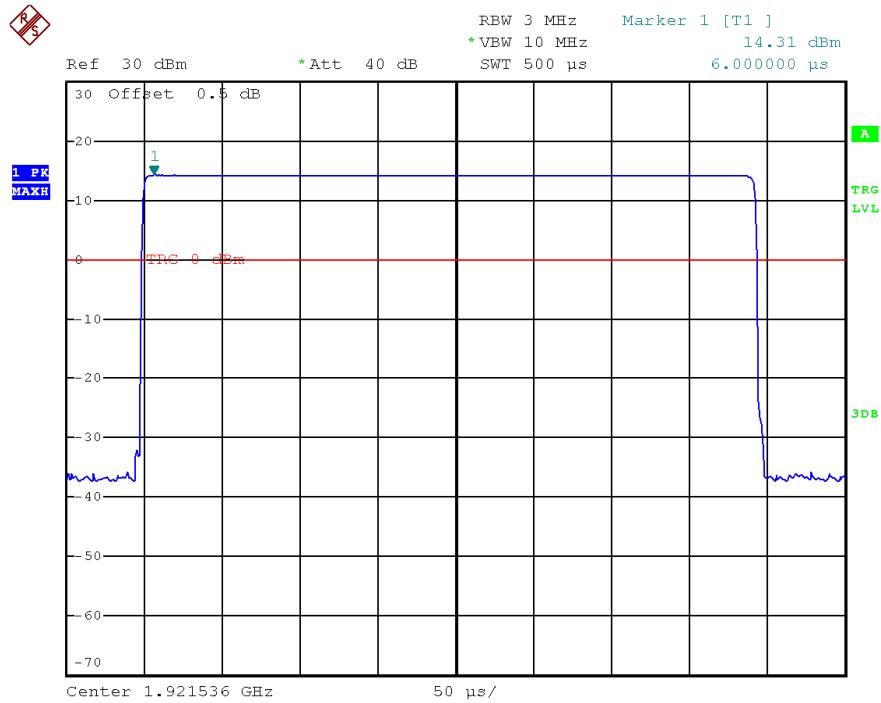

## Dongle Unit, Highest Channel, Traffic Carrier

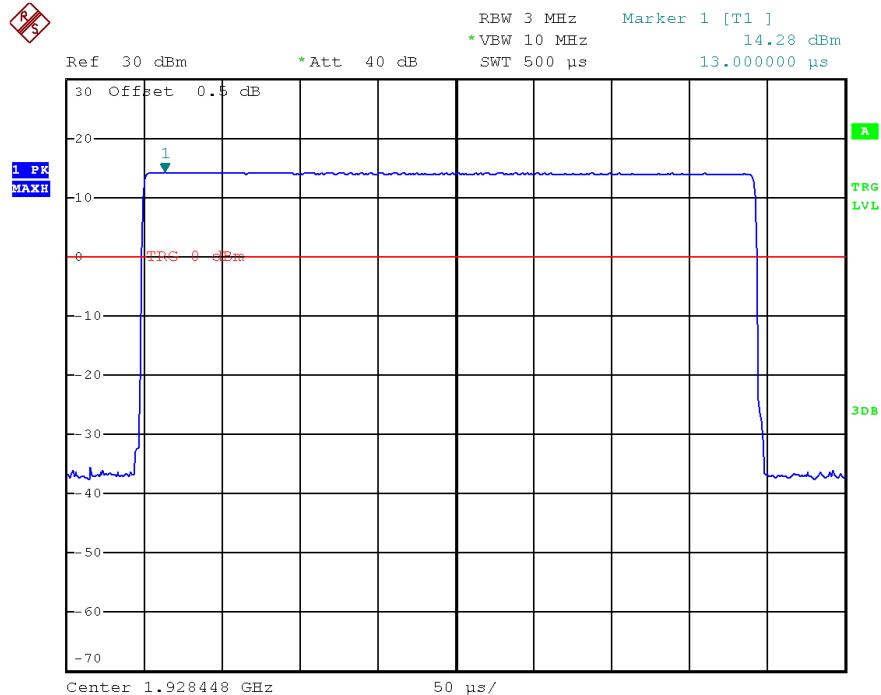

**TEST REPORT****4.6 Power Spectral Density, FCC Rule 15.319(d):**

Power spectral density shall not exceed 3 mW (4.8dBm) in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.5.

Test setup is shown in section 3.4 Figure 3.4.1.

Test Results:

**I. Dongle Unit - Traffic Carrier**


| Channel | Channel Frequency (MHz) | Measured Power Spectral Density (dBm/3kHz) | Limit (dBm/3 kHz) | Results |
|---------|-------------------------|--|-------------------|---------|
| Lowest  | 1921.536                | -9.9                                       | 4.8               | Pass    |
| Highest | 1928.448                | -9.8                                       | 4.8               | Pass    |

The plots of the power spectral density are as below.


## TEST REPORT

## PLOTS OF THE POWER SPECTRAL DENSITY

## Dongle Unit, Lowest Channel, Traffic Carrier

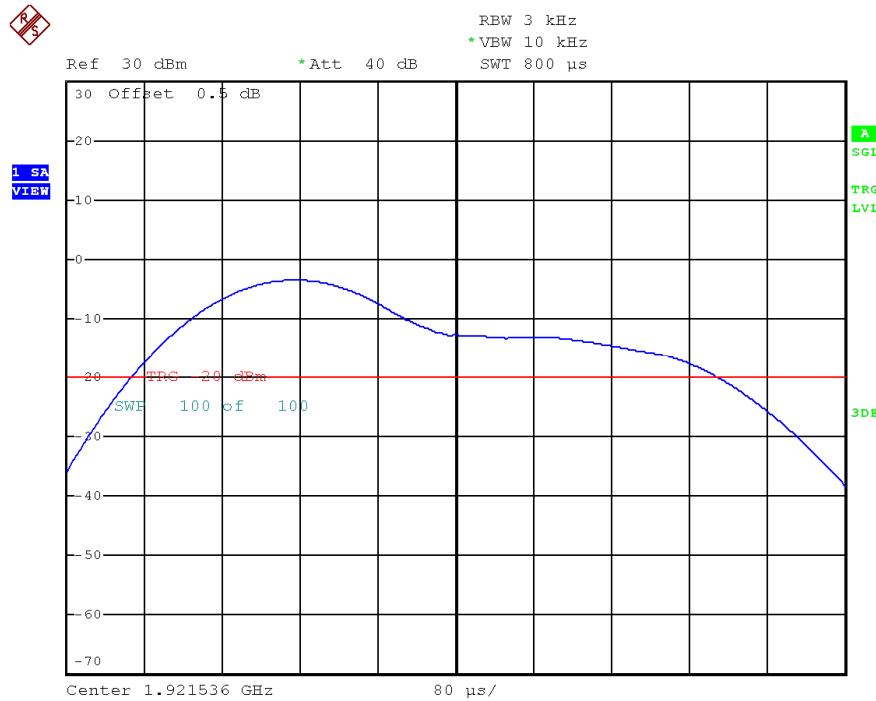

## Dongle Unit, Highest Channel, Traffic Carrier

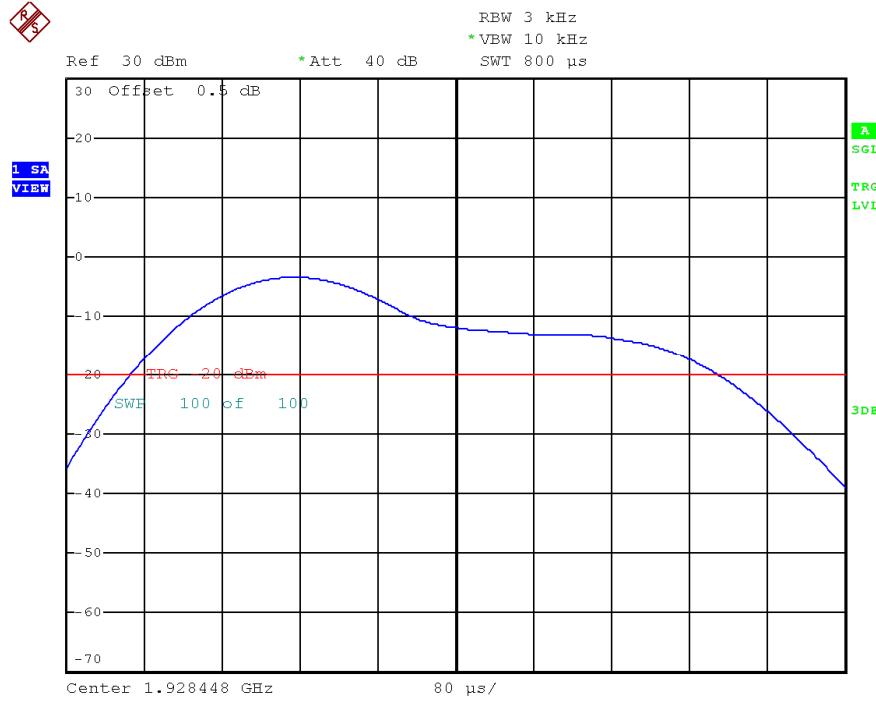

## TEST REPORT

### 4.7 Automatic Discontinuation of Transmission, FCC Rule 15.319(f):

The EUT shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

The manufacturer declares that the EUT can automatically discontinue transmission in case of either absent information to transmit or operational failure. Please refer to the declaration letter for details, which is saved with filename: declaration.pdf.

**TEST REPORT****4.8 Unwanted Emission Inside the Sub-Band, FCC Rule 15.323(d):**

Emissions inside the sub-band must comply with the following emission mask:

- (1) In the bands between  $1B$  and  $2B$  measured from the center of the emission bandwidth, emission shall be at least 30 dB below the permitted peak transmit power.
- (2) In the bands between  $2B$  and  $3B$  measured from the center of the emission bandwidth, emission shall be at least 50 dB below the permitted peak transmit power.
- (3) In the bands between  $3B$  and the band edge, emission shall be at least 60 dB below the permitted peak transmit power.

Where  $B$  = emission bandwidth in Hz

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.6.1.

Test setup is shown in section 3.4 Figure 3.4.1.

Test Results:

**I. Dongle Unit - Traffic Carrier**


| Channel | Channel Frequency (MHz) | Results |
|---------|-------------------------|---------|
| Lowest  | 1921.536                | Pass    |
| Middle  | 1924.992                | Pass    |
| Highest | 1928.448                | Pass    |

The plots of the unwanted emission inside the sub-band are as below.


## TEST REPORT

### PLOTS OF THE UNWANTED EMISSION INSIDE THE SUB-BAND

Dongle Unit, Lowest Channel, Traffic Carrier

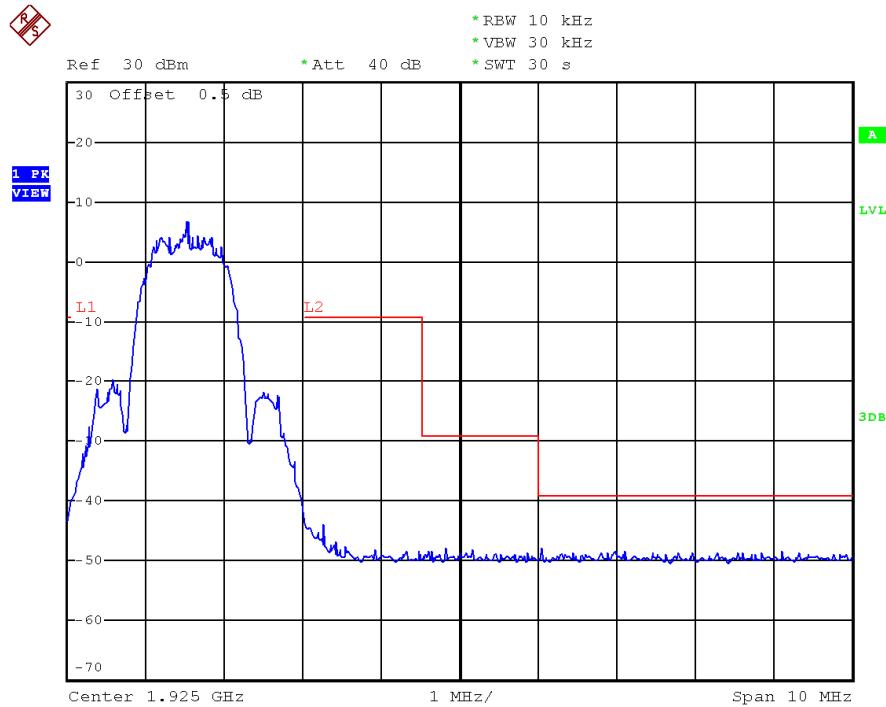


Dongle Unit, Middle Channel, Traffic Carrier

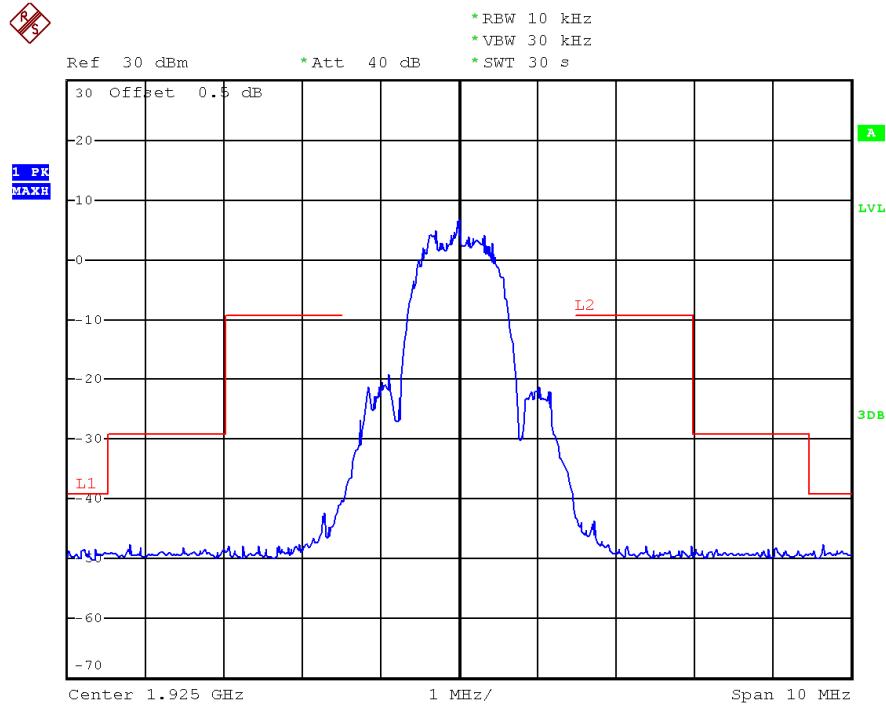

**TEST REPORT****PLOTS OF THE UNWANTED EMISSION INSIDE THE SUB-BAND**

Dongle Unit, Highest Channel, Traffic Carrier

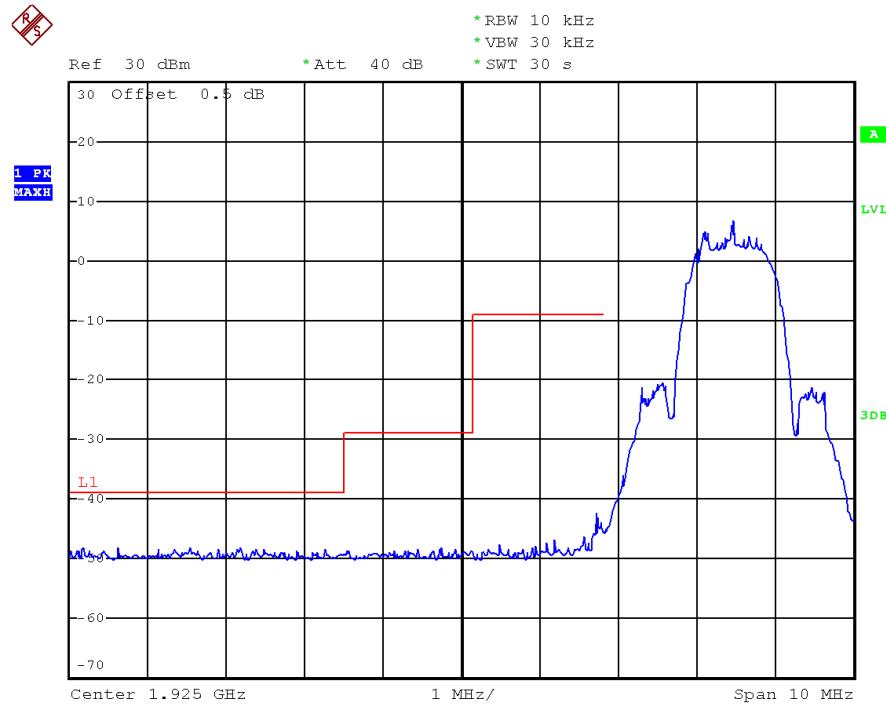

**TEST REPORT****4.9 Emissions Outside the Sub-Band, FCC Rule 15.323(d):**

Emissions outside the sub-band shall be attenuated below a reference power of 112 mW (20.5 dBm) as follows:

- (1) 30 dB between the band edge and 1.25 MHz above or below the band;
- (2) 50 dB between 1.25 and 2.5 MHz above or below the band; and
- (3) 60 dB at 2.5 MHz or greater above or below the band, or shall meet the requirement of FCC Rule 15.319(g) which shall not exceed the limits of FCC Rule 15.209.

Example:

Calculation of Limit for emissions between the band edge and 1.25 MHz (1920.000 – 1918.750 MHz)

The emissions shall not exceed the Limit: 20.5 dBm – 30 dB = -9.5 dBm

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.6.2. Radiated emissions test method is used. Emissions that are directly caused by digital circuits in the transmit path and transmitter portion are measured.

Test setup is shown in section 3.2 Figure 3.2.1

Test Results:

| <b>Channel</b> | <b>Carrier Frequency (MHz)</b> | <b>Measured Band (MHz)</b>             | <b>Limit (dBm)</b>      | <b>Results</b> |
|----------------|--------------------------------|--|-------------------------|----------------|
| Lowest         | 1921.536                       | 1920.000 - 1918.750                    | -9.5                    | Pass           |
|                |                                | 1918.750 - 1917.500                    | -29.5                   | Pass           |
|                |                                | 0.009 - 1917.500 & 1932.500 - 1930.000 | -39.5 / FCC Rule 15.209 | Pass           |
|                |                                | 1930.000 - 1931.250                    | -9.5                    | Pass           |
| Highest        | 1928.448                       | 1931.250 - 1932.500                    | -29.5                   | Pass           |
|                |                                | 0.009 – 1917.500 & 1932.500 - 1930.000 | -39.5 / FCC Rule 15.209 | Pass           |
|                |                                |  |                         |                |

**TEST REPORT****4.9.1 Radiated Emissions Configuration Photographs:**

Worst Case Radiated Emission at

7713.792 MHz

The worst case radiated emission configuration photographs are saved with filename:  
config photos.pdf

**4.9.2 Radiated Emissions Data:**

Data are included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The data in table 1-3 list the significant emission frequencies, the limit and the margin of compliance.

Judgement:

Passed by 12.5 dB margin

**TEST REPORT****RADIATED EMISSIONS DATA**

Mode: DECT Transmission

Table 1

Pursuant to FCC Part 15 Section 15.323(d) Emissions Requirements

Lowest Channel

| Polarization | Frequency (MHz) | Measured Power (dBm) | Power Limit (dBm) | Margin (dB) |
|--------------|-----------------|----------------------|-------------------|-------------|
| H            | 1917.481        | -61.9                | -39.5             | -22.4       |
| H            | 1918.684        | -57.9                | -29.5             | -28.4       |
| H            | 1919.979        | -43.4                | -9.5              | -33.9       |
| V            | 3843.072        | -57.3                | -39.5             | -17.8       |
| V            | 5764.608        | -55.3                | -39.5             | -15.8       |
| V            | 7686.144        | -53.1                | -39.5             | -13.6       |
| V            | 9607.680        | -65.3                | -39.5             | -25.8       |
| V            | 11529.216       | -63.2                | -39.5             | -23.7       |
| V            | 13450.752       | -64.1                | -39.5             | -24.6       |

Notes: 1. Peak detector is used for the emission measurement.  
2. All measurements were made at 3 meters.  
3. Negative value in the margin column shows emission below limit.

**TEST REPORT****RADIATED EMISSIONS DATA**

Mode: DECT Transmission

Table 2

Pursuant to FCC Part 15 Section 15.323(d) Emissions Requirements

Highest Channel

| Polarization | Frequency (MHz) | Measured Power (dBm) | Power Limit (dBm) | Margin (dB) |
|--------------|-----------------|----------------------|-------------------|-------------|
| V            | 1930.101        | -48.4                | -9.5              | -38.9       |
| V            | 1931.472        | -59.7                | -29.5             | -30.2       |
| V            | 1932.700        | -63.5                | -39.5             | -24.0       |
| V            | 3856.896        | -57.6                | -39.5             | -18.1       |
| V            | 5785.344        | -55.0                | -39.5             | -15.5       |
| V            | 7713.792        | -52.0                | -39.5             | -12.5       |
| V            | 9642.240        | -63.4                | -39.5             | -23.9       |
| V            | 11570.688       | -65.4                | -39.5             | -25.9       |
| V            | 13499.416       | -64.0                | -39.5             | -24.5       |

Notes: 1. Peak detector is used for the emission measurement.  
2. All measurements were made at 3 meters.  
3. Negative value in the margin column shows emission below limit.

**TEST REPORT****RADIATED EMISSIONS DATA**

Mode: Talk Mode

Table 3

Pursuant to FCC Part 15 Section 15.323(d) Emissions Requirements

| Polarization | Frequency<br>(MHz) | Measured<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|--------------|--------------------|----------------------------|-------------------------|----------------|
| H            | 30.970             | -77.7                      | -39.5                   | -38.2          |
| H            | 215.998            | -73.1                      | -39.5                   | -33.6          |
| V            | 343.068            | -74.5                      | -39.5                   | -35.0          |
| V            | 381.140            | -70.8                      | -39.5                   | -31.3          |
| H            | 681.598            | -65.2                      | -39.5                   | -25.7          |
| V            | 944.104            | -62.0                      | -39.5                   | -22.5          |

Notes:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

**TEST REPORT****4.9.3 Field Strength Calculation:**

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

AF = Antenna Factor in dB

CF = Cable Attenuation Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example:

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB $\mu$ V/m. This value in dB $\mu$ V/m is converted to its corresponding level in  $\mu$ V/m.

RA = 62.0 dB $\mu$ V

AF = 7.4 dB

CF = 1.6 dB

AG = 29.0 dB

PD = 0.0 dB

AV = -10.0 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

$$\text{Level in dBm (EIRP)} = FS - 95.23 = 32 - 95.23 = -63.23 \text{ dBm}$$

$$\text{Level in dBm (ERP)} = FS - 95.23 - 2.15 = 32 - 95.23 - 2.15 = -65.38 \text{ dBm}$$

**TEST REPORT****4.9.4 Average Factor Calculation and Transmitter ON Time Measurements, FCC Rule 15.35(b, c):**

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SPAN function on the analyzer was set to ZERO. The transmitter ON time was determined from the resultant time-amplitude display:

Please refer to the attached plots for more details:

The plots of Transmitter ON Time Measurements are as below.

Please refer to the attached transmitter timing diagram that are provided by manufacturer.

Not Applicable - No average factor is required.

Please refer to Technical Description (descri.pdf) for more details.

## TEST REPORT

### 4.10 AC Power Line Conducted Emissions, FCC Rule 15.315:

The AC power line conducted emission shall not exceed the limits of FCC Rule 15.207.

Measurements are made in accordance with ANSI C63.4 sub-clause 7. Emissions that are directly caused by digital circuits in the transmit path and transmitter portion are measured.

Test setup is shown in section 3.3 Figure 3.3.1.

- Not Applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line indirectly. Emission Data is listed in following pages.
- Dongle Unit connects to AC power line and has transmission. Headset connects to AC power line (indirectly) but has no transmission. Emission Data of Dongle Unit is listed in following pages.
- Handset connects to AC power line (indirectly) only during charging. Emission Data is listed in following pages.

**TEST REPORT****4.10.1 AC Power Line Conducted Emissions Configuration Photographs:**

Worst Case AC Power Line Conducted Emission at

181.5 kHz

The worst case AC power Line conducted emission configuration photographs are saved with filename: config photos.pdf

**4.10.2 AC Power Line Conducted Emissions Data:**


The plot(s) and data in the following pages list the significant emission frequencies, the limit and the worst case margin of compliance.

Judgement:

Passed by 13.7 dB margin compared with Quasi-Peak limit

**TEST REPORT****CONDUCTED EMISSIONS DATA**

Worst Case: Talk Mode

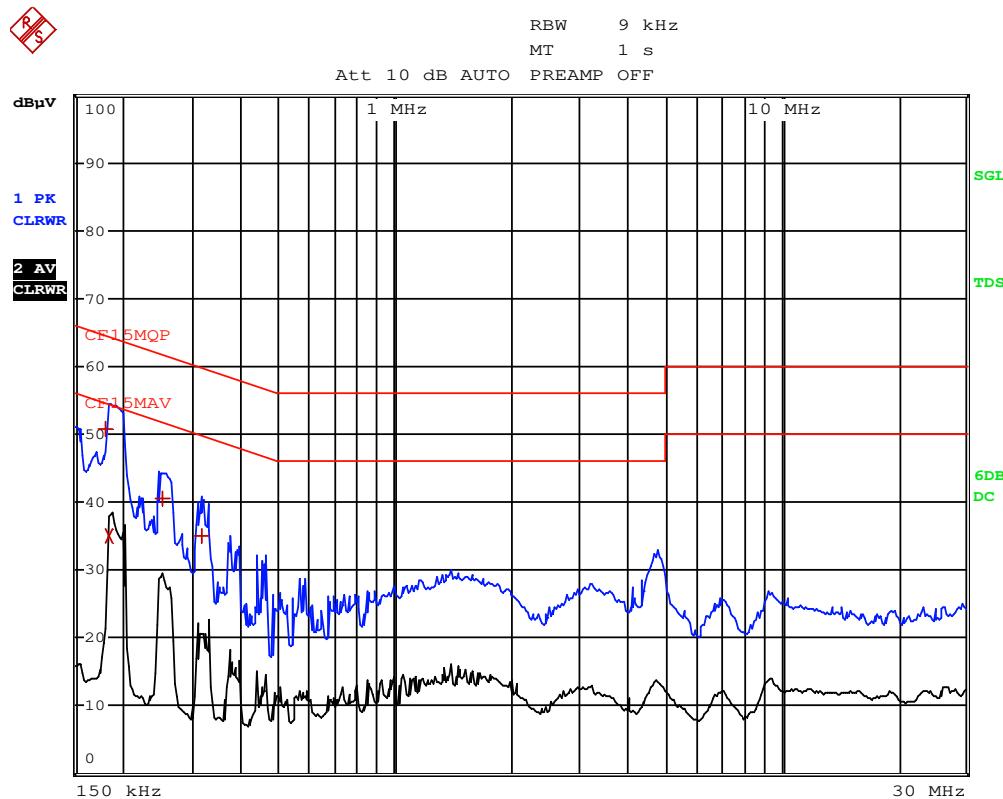

**TEST REPORT****CONDUCTED EMISSIONS DATA**

Worst Case: Talk Mode

| EDIT PEAK LIST (Final Measurement Results) |           |                  |        |          |
|--|-----------|------------------|--------|----------|
| Trace1:                                    | CF15MQP   |                  |        |          |
| Trace2:                                    | CF15MAV   |                  |        |          |
| Trace3:                                    | ---       |                  |        |          |
| TRACE                                      | FREQUENCY | LEVEL dB $\mu$ V | DELTA  | LIMIT dB |
| 1 Quasi Peak                               | 181.5 kHz | 50.71 L1         | -13.70 |          |
| 2 CISPR Average                            | 186 kHz   | 35.02 L1         | -19.19 |          |
| 1 Quasi Peak                               | 253.5 kHz | 40.55 L1         | -21.08 |          |
| 1 Quasi Peak                               | 316.5 kHz | 35.08 L1         | -24.71 |          |

**TEST REPORT****4.11 Frame Repetition Stability, FCC Rule 15.323(e):**

[ ] EUT implements Time Division Duplex (TDD) (not include TDMA) in order to support duplex connection on a given frequency carrier shall maintain a frame repetition rate whereby 3 x standard deviation of the frequency stability shall not exceed 50 ppm, not including a shift of the mean.

[ x ] EUT uses Time Division Multiple Access (TDMA) in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate whereby 3 x standard deviation of the frequency stability shall not exceed 10 ppm, not including a shift of the mean.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.2.2. Test setup is shown in section 3.4 Figure 3.4.1. A spectrum analyzer measures the time duration between rising edges of two consecutive frames over a time period of at least 1000 frame periods. These measurement values are used to compute the 3 x standard deviation of the frequency stability.

**Test Results:****I. Dongle Unit**

| <b>Maximum Frame Repetition Stability<br/>(ppm)</b> | <b>Limit<br/>(ppm)</b> | <b>Results</b> |
|---|------------------------|----------------|
| 0.0905  | ±10                    | Pass           |

**TEST REPORT****4.12 Frame Period and Jitter, FCC Rule 15.323(e):**

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of EUT operating in these sub-bands shall be 20 ms or 10 ms/X where X is a positive whole number.

The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25  $\mu$ s for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for EUT.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.2.3. Test setup is shown in section 3.4 Figure 3.4.1. A spectrum analyzer measures the time duration between the rising edges of two consecutive frames. The measurements are taken over 100,000 frames. These measurement values are used to compute mean value and the difference between any two consecutive frame periods. The mean value is the frame period.

**Test Results:****I. Dongle Unit**

| Measured Maximum Jitter ( $\mu$ s) | Limit ( $\mu$ s) | Results |
|------------------------------------|------------------|---------|
| -0.1431                            | $\pm 25$         | Pass    |

## TEST REPORT

### 4.13 Carrier Frequency Stability, FCC Rule 15.323(f):

The carrier frequency stability of EUT shall be maintained within +/-10 ppm at the following conditions:

1. Over 1 hour at nominal supply voltage and a temperature of +20°C;
2. Over a variation in the primary supply voltage of 85% to 115% of nominal supply voltage at a temperature of +20 °C. This test does not apply to an EUT that is only powered by battery for operation;
3. Over a temperature variation of -20°C to +50°C or at extreme temperatures as declared by manufacturer, and at nominal supply voltage.

For Dongle Unit:

The extreme temperatures of -20°C to +50°C are declared by manufacturer.

Condition 1: The nominal supply voltage to notebook: 115VAC.

Condition 2: The nominal supply voltage to Dongle unit: 5VDC.

Both voltage supply conditions were tested and testing under Condition 1 was the worst case.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.2.1. The EUT and CMD60 is connected with shielded coaxial cable. The EUT is controlled by DECT Radio Communication Tester, CMD60, to use a fixed frequency channel during test as well as record the frequency offset. The transmission of EUT is in burst mode with pseudo-random data. Test setup is shown as follows.



Test Results:

#### I a. Carrier Frequency Stability Over Time

| Supply Voltage | Temperature (°C) | Measured Frequency Offset Over an hour (ppm) |       | Limit (ppm) | Result |
|----------------|------------------|--|-------|-------------|--------|
|                |                  | Max.   | Min.  |             |        |
| Nominal        | +20°C            | 2.07   | -0.52 | ±10         | Pass   |

#### I b. Carrier Frequency Stability Over Power Supply Voltage

| Supply Voltage | Temperature (°C) | Measured Frequency Offset (ppm) | Limit (ppm) | Results |
|----------------|------------------|---------------------------------|-------------|---------|
| 85%            | +20°C            | 0.51                            | ±10         | Pass    |
| 115%           | +20°C            | 0.51                            | ±10         | Pass    |

#### I c. Carrier Frequency Stability Over Temperature

| Supply Voltage | Temperature (°C) | Measured Frequency Offset (ppm) | Limit (ppm) | Results |
|----------------|------------------|---------------------------------|-------------|---------|
| Nominal        | -20°C            | 2.07                            | ±10         | Pass    |
| Nominal        | +50°C            | -3.12                           | ±10         | Pass    |

**TEST REPORT****4.14 Monitoring Threshold Limit:**

Monitoring threshold can be relaxed according to FCC Rule 15.323(c)(9). EUT that has a power output lower than the maximum permitted under FCC Rule 15.319(c) may increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

Calculation of Monitoring Threshold Limit:

$$\begin{aligned}\text{Monitoring Threshold } (T) &\leq -174 + 10 \log_{10} B + M_L + P_{\max} - P_{\text{EUT}} \text{ dBm} \\ &\leq 15 \log_{10} B - 184 + M_L - P_{\text{EUT}} \text{ dBm}\end{aligned}$$

Where  $B$  = Measured Emission Bandwidth of Dongle Unit -  $1.49 \times 10^6$ Hz  
 $M_L$  = Specified by the manufacturer declared in declaration.pdf for Monitoring Threshold ( $T_L$ )  
 $P_{\max}$  =  $5 \log_{10} B - 10$  dBm  
 $P_{\text{EUT}}$  = Measured Peak Transmit Power of Dongle Unit - 14.31 dBm

Test Results:

**I. Dongle Unit**

Monitoring Threshold ( $T_L + U_M$ ) in dBm -69.7

NA – Not Applicable

**TEST REPORT****4.14.1 Monitoring Threshold Limit, FCC Rule 15.323(c)(2):**

[ x ] Not Applicable – EUT supports at least of 20 duplex system access channels and implements Least Interfered Channel (LIC) algorithm. Please refer to the section 4.14.2 for more details.

[ ] The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by EUT.

Measurements are made in accordance with ANSI C63.17 sub-clause 7.3.1. Test setup is shown in section 3.5 Figure 3.5.1. The test is performed on the carrier closest to center of the band. RF signal generators apply uniform CW interference on all EUT carriers each at level  $TL + UM + 10$  dB. Then, the interference level is reduced uniformly on all carriers until the EUT can transmit. The interference level shall be lower than or equal to the threshold limit.

**Test Results:****I. Dongle Unit**

| <b>Measured Maximum Interference Level<br/>(dBm)</b> | <b>Monitoring Threshold Limit (dBm)<br/>(<math>TL + UM</math>)</b> | <b>Results</b> |
|--|--|----------------|
| NA   | -69.7  | NA             |

NA – Not Applicable

**TEST REPORT****4.14.2 Least Interfered Channel, LIC, FCC Rule 15.323(c)(5):**

- [ ] Not implemented – EUT met monitoring threshold requirements. Please refer to the section 4.14.1 for more details.
- [ x ] If access to spectrum is not available as determined by section 4.14.1 and a minimum of 20 duplex system access channels are defined for the EUT, the time and spectrum windows with the lowest power level may be accessed.

|   |      |
|---|------|
| Number of Duplex Channels Per Frequency Channel | = 12 |
| Number of Frequency Channel                     | = 5  |
| Total Duplex Channels                           | = 60 |

## TEST REPORT

### 4.14.2.1 Least Interfered Channel (LIC) Selection, FCC Rule 15.323(c)(5):

The criteria are specified in section 4.14.2. In addition, the power measurement resolution for this comparison must be accurate to within 6 dB.

Measurements are made in accordance with ANSI C63.17 sub-clause 7.3.2. Test setup is shown in section 3.5 Figure 3.5.1. RF signal generators apply uniform CW interference on all EUT carriers except two carriers (designated  $f_1$  and  $f_2$ ), each at level  $T_L + U_M + 14$ dB (cases 1 and 2) and  $T_L + U_M + 8$ dB (cases 3 and 4). EUT can only transmit on  $f_2$  carrier (cases 1 and 3) and  $f_1$  carrier (cases 2 and 4).

#### Test Descriptions and Results:

##### I. LIC Procedure – Dongle Unit

| Test Descriptions  | EUT Transmits on | Results |
|--|------------------|---------|
| 1 Apply interference on $f_1$ at level $T_L + U_M + 7$ dB.<br>Apply interference on $f_2$ at level $T_L + U_M$ .<br>Initiate transmission. Verify transmission on $f_2$ .<br>Terminate transmission. Repeat 5 times.       | $f_2$            | Pass    |
| 2 Apply interference on $f_1$ at level $T_L + U_M$ .<br>Apply interference on $f_2$ at level $T_L + U_M + 7$ dB.<br>Initiate transmission. Verify transmission on $f_1$ .<br>Terminate transmission. Repeat 5 times.       | $f_1$            | Pass    |
| 3 Apply interference on $f_1$ at level $T_L + U_M + 1$ dB.<br>Apply interference on $f_2$ at level $T_L + U_M - 6$ dB.<br>Initiate transmission. Verify transmission on $f_2$ .<br>Terminate transmission. Repeat 5 times. | $f_2$            | Pass    |
| 4 Apply interference on $f_1$ at level $T_L + U_M - 6$ dB.<br>Apply interference on $f_2$ at level $T_L + U_M + 1$ dB.<br>Initiate transmission. Verify transmission on $f_1$ .<br>Terminate transmission. Repeat 5 times. | $f_1$            | Pass    |

NA – Not Applicable

## TEST REPORT

### 4.14.2.2 Least Interfered Channel (LIC) Confirmation, FCC Rule 15.323(c)(5):

EUT utilizing the provision of FCC Rule 15.323(c)(5) must have monitored all access channels defined for its system within the last 10 s and must verify, within the 20 ms (40 ms for EUT designed to use a 20 ms frame period) immediately preceding actual channel access that the detected power of the selected time and spectrum windows is no higher than the previously detected value.

Measurements are made in accordance with ANSI C63.17 sub-clause 7.3.3.

This test is performed in section 4.14.2 and 4.15.

Results:

The tests are reported in section 4.14.2 and 4.15.

### 4.14.2.3 Maximum Spectrum Occupancy, FCC Rule 15.323(c)(5):

No EUT or group of co-operating EUTs located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the EUT.

Attestation:

According to the technical description provided, the total number of the time and spectrum windows defined by the system is  $5*12 = 60$ .

During any frame period, the maximum number of time and spectrum windows occupied by the system will be 12, which is less than one third of the time and spectrum windows defined by the system.

**TEST REPORT****4.15 Monitoring Time, FCC Rule 15.323(c)(1):**

Immediately prior to initiating transmission, EUT must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 ms for EUT designed to use a 10 ms or shorter frame period, or at least 20 ms for EUT designed to use a 20 ms frame period.

Measurements are made in accordance with ANSI C63.17 sub-clause 7.3.3. Test setup is shown in section 3.5 Figure 3.5.1. RF signal generators apply uniform CW interference on all system carriers except two carriers (designated  $f_1$  and  $f_2$ ), each at level  $T_L + U_M + 20\text{dB}$ . EUT can only transmit on these two carriers.

**Test Descriptions and Results:****I. Dongle Unit**


| <b>Test Descriptions</b>  | <b>EUT Transmits on</b> | <b>Results</b> |
|---|-------------------------|----------------|
| 1 Apply interference on $f_1$ at level $T_L + U_M + 20\text{dB}$ , and no interference on $f_2$ .<br>Initiate transmission. Verify transmission on $f_2$ . Then, terminate transmission.  | $f_2$                   | Pass           |
| 2 Apply interference on $f_2$ at level $T_L + U_M + 20\text{dB}$ , and remove interference from $f_1$ immediately.<br>Also immediately initiate transmission but is at least 20 ms after interference on $f_2$ is applied. Verify transmission on $f_1$ . | $f_1$                   | Pass           |

**TEST REPORT****4.16 Maximum Transmit Period, FCC Rule 15.323(c)(3):**

If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a EUT or group of co-operating EUTs continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

EUT establishes a communication channel with its companion device, which occupies the duplex pair combined time and spectrum windows. Reference RF signal generator synchronized with the sample and then generated a pulse as a time frame reference. The centre frequency of spectrum analyzer was set to the carrier frequency and the SPAN was set to ZERO. The spectrum analyzer was used to monitor the time (reference to the time signal) and spectrum of the communication channel. The occupied time or spectrum of the communication channel shall be changed over a period of time no longer than 8 hours. For a EUT with a frame period of  $10/X$  ms, no more than 2,880,000 X frames should be transmitted without a break.

Test setup is shown as follows:

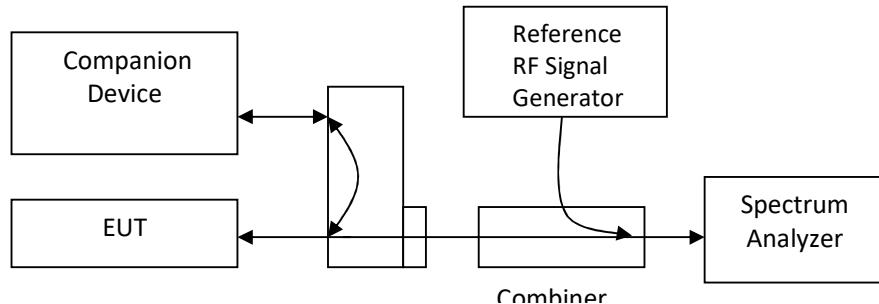

Test Results:

**I. Dongle Unit**

| Measured Maximum Transmission Duration<br>(minutes) | Limit<br>(minutes) | Results |
|---|--------------------|---------|
| 392   | 480                | Pass    |

**TEST REPORT****4.17 System Acknowledgement, FCC Rule 15.323(c)(4):**

Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.

Measurements are made in accordance with ANSI C63.17 sub-clause 8.1.1 and 8.2.1.

Test setup is shown in section 3.5 Figure 3.5.1.

Test Results:

**I. Dongle Unit**

[ x ] Timing for EUTs using control and signaling channel type transmissions:

| Conditions                            | Transmission Duration<br>(seconds) | Limit<br>(seconds) | Results |
|---------------------------------------|------------------------------------|--------------------|---------|
| Time needed to repeat access criteria | 1.26                               | 30                 | Pass    |

[ x ] Timing for EUTs using communications channel type transmissions:

| Conditions                           | Transmission Duration<br>(seconds) | Limit<br>(seconds) | Results |
|--------------------------------------|------------------------------------|--------------------|---------|
| Activate EUT w/ companion device off | NA                                 | 1                  | N/A     |
| Time needed to cease Traffic Channel | 5.3                                | 30                 | Pass    |

NA – Not Applicable

**TEST REPORT****4.18 Random Waiting, FCC Rule 15.323(c)(6):**

If the selected combined time and spectrum windows are unavailable, the EUT may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 ms, commencing when the channel becomes available.

Measurements are made in accordance with ANSI C63.17 sub-clause 8.1.2 or 8.1.3.

Test setup is shown in section 3.5 Figure 3.5.1.

**Test Results:****I. Dongle Unit**

[ x ] Random Waiting is not implemented in the EUT:

| Conditions                                       | Transmit Channel | Results |
|--|------------------|---------|
| Interference applied at operating Channel, $f_1$ | $f_2$            | Pass    |

[ ] Random Waiting is implemented in the EUT:

| Maximum Time Interval from the End of Interference to the Start of the Control Channel | The Distribution of the Measured Time Intervals | Results |
|--|---|---------|
| NA   | NA  | NA      |

NA – Not Applicable

**TEST REPORT****4.19 Monitoring Bandwidth, FCC Rule 15.323(c)(7):**

The monitoring bandwidth must be equal to or greater than the emission bandwidth of the intended transmission.

Measurements are made in accordance with ANSI C63.17 sub-clause 7.4. Test setup is shown in section 3.5 Figure 3.5.1.

Attestation:

Monitoring bandwidth of the EUT is equal to the occupied bandwidth of the intended transmission. Monitoring is made through the radio receiver used by the EUT for communication. Please refer to the section 2.2 Technical Description for more details. Designed bandwidth refers to section 4.3 Emission Bandwidth.

Compliance is demonstrated by Monitoring Bandwidth Tests as shown below.

Test Results:

**Ia. Simple Compliance Test Results – Dongle Unit**

| Interference from Carrier | Reaction of EUT | Results |
|---------------------------|-----------------|---------|
| -30% EBW                  | NA              | NA      |
| +30% EBW                  | NA              | NA      |

**Ib. Detailed Compliance Test Results – Dongle Unit**

| Interference from Carrier | Reaction of EUT | Results |
|---------------------------|-----------------|---------|
| + 6 dB                    | NA              | NA      |
| + 12 dB                   | NA              | NA      |
| - 6 dB                    | NA              | NA      |
| - 12 dB                   | NA              | NA      |

A – Could Transmit  
B – Could Not Transmit  
NA – Not Applicable

\*Remarks: Detailed Compliance Test was used to show the compliance of the EUT.

**TEST REPORT****4.20 Maximum Reaction Time, FCC Rule 15.323(c)(7):**

The monitoring system bandwidth must have a maximum reaction time less than  $50 \times \text{SQRT}(1.25/\text{emission bandwidth } B \text{ in MHz}) \mu\text{s}$  for signals at the applicable threshold level but shall not be required to be less than 50  $\mu\text{s}$ . If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be  $35 \times \text{SQRT}(1.25/\text{emission bandwidth } B \text{ in MHz}) \mu\text{s}$  but shall not be required to be less than 35  $\mu\text{s}$ .

Measurements are made in accordance with ANSI C63.17 sub-clause 7.5.

Test setup is shown in section 3.5 Figure 3.5.1.

Test Results:

| Test   | Reaction of EUT | Results |
|--|-----------------|---------|
| 1 Apply Interference Pulse 50 $\mu\text{s}$ on $f_1$ at pulsed level $T_L + U_m$ ,<br>then apply a CW signal on $f_2$ at the level $T_L$ | $f_2$           | Pass    |
| 2 Change Interference Pulse to 35 $\mu\text{s}$ on $f_1$ at pulsed level $T_L + U_m + 6\text{dB}$  | $f_2$           | Pass    |

**4.21 Monitoring Antenna, FCC Rule 15.323(c)(8):**

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

EUT uses the same antenna used for transmission and monitoring that is in compliance meet above provision.

EUT uses difference antenna used for transmission and monitoring. It must be verified that the monitoring antenna provides coverage equivalent to that of the transmitting antenna. Measurements are made in accordance with ANSI C63.17 sub-clause 4.

## TEST REPORT

### 4.22 Duplex Connections, FCC Rule 15.323(c)(10):

An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit (Tx) and receive (Rx) time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

#### Attestation:

The Headset is the initiating device of the duplex connection.

Measurements are made in accordance with ANSI C63.17 sub-clause 8.3. Test setup is shown in section 3.5 Figure 3.5.1.

#### Test Results:

##### Ia. Dongle Unit

Dual Access Criteria Check for EUT not implemented the LIC algorithm and do not offer at least 20 duplex communications channels:

| Interference                                   | Reaction of EUT | Results |
|--|-----------------|---------|
| All Tx and Rx Window, except one for Rx Window | NA              | NA      |
| All Tx and Rx Window, except one for Tx Window | NA              | NA      |

##### Ib. Dongle Unit

Dual Access Criteria Check for EUT implemented the LIC algorithm and offer at least 20 duplex communications channels:

| Interference   | Reaction of EUT | Results |
|--|-----------------|---------|
| All Tx windows with level $T_L + U_M$ & Rx windows with level $T_L + U_M + 7\text{dB}$ , except one for Tx window & one for Rx window, which are not duplex. | NA              | NA      |
| All Tx windows with level $T_L + U_M + 7\text{dB}$ & Rx windows with level $T_L + U_M$ , except one for Tx window & one for Rx, which are not duplex         | NA              | NA      |

- A – Could be connected on the target Rx window and its duplex mate
- B – Could be connected on the target Tx window and its duplex mate
- C – Connected on window which is not the target Tx/Rx window
- D – Could not be connected
- NA – Not Applicable

## TEST REPORT

### 4.23 Alternative Monitoring Interval for Co-located Device, FCC Rule 15.323(c)(11):

An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 ms. The monitored time and spectrum window must total at least 50 % of the 10 ms frame interval and the monitored spectrum must be within the 1.25 MHz frequency channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

Measurements are made in accordance with ANSI C63.17 sub-clause 8.4.

Attestation:

Appropriate as it is co-located device, in which the monitoring system will be blocked from the transmissions of a co-located (Within one meter) transmitter of the same system. Please refer to attachment, FCC Rule 15.323(c)(11).pdf, for details.

Not appropriate, as the system always monitor both the transmit and receive time/spectrum windows, it is not a co-located device.

### 4.24 Fair Access, FCC Rule 15.323(c)(12):

The provisions of FCC Rule 15.323(c)(10) or FCC Rule 15.323(c)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

Attestation:

The manufacturer declares that the device does not use any mechanisms as provided by Part FCC Rule 15.323(c)(10) or FCC Rule 15.323(c)(11) to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

Please refer to the declaration letter which is saved with filename: declaration.pdf.

## TEST REPORT

### 5.0 EQUIPMENT LIST

#### 1) Radiated Emissions Test

| Equipment            | EMI Test Receiver                                  | Pyramidal Horn Antenna<br>(18.0 - 26.5)GHz   | BiConiLog Antenna<br>(30MHz - 6GHz) |
|----------------------|--|--|-------------------------------------|
| Registration No.     | EW-3156  | EW-0905                                      | EW-3061                             |
| Manufacturer         | ROHDESCHWARZ                                       | EMCO   | EMCO                                |
| Model No.            | ESR26  | 3160-09                                      | 3142E                               |
| Calibration Date     | September 26, 2022                                 | July 20, 2021                                | August 02, 2022                     |
| Calibration Due Date | September 26, 2023                                 | May 20, 2023                                 | February 02, 2024                   |
| Equipment            | 14m Double Shield RF<br>Cable (20MHz - 6GHz)       | 14m Double Shield RF<br>Cable (1GHz - 26GHz) | Double Ridged<br>Guide Antenna      |
| Registration No.     | EW-2074  | EW-2781                                      | EW-1015                             |
| Manufacturer         | RADIALL  | RADIALL                                      | EMCO                                |
| Model No.            | N(m)-RG142-BNC(m) L= 14M                           | SMA(m)-SHF5MPU-SMA(m) R.A 14m, 26G           | 3115                                |
| Calibration Date     | December 10, 2021                                  | December 12, 2021                            | August 26, 2021                     |
| Calibration Due Date | June 10, 2023                                      | December 12, 2023                            | May 26, 2023                        |
| Equipment            | Log Periodic Antenna<br>(200MHz - 2GHz)            | Biconical Antenna<br>(30MHz – 300MHz)        | RF Pre-Amplifier<br>(9kHz to 40GHz) |
| Registration No.     | EW-3243  | EW-3241                                      | EW-3006b                            |
| Manufacturer         | EMCO   | EMCO   | SCHWARZBECK                         |
| Model No.            | 3148B  | 3110C  | BBV 9718                            |
| Calibration Date     | June 30, 2021                                      | May 26, 2021                                 | February 15, 2022                   |
| Calibration Due Date | July 30, 2023                                      | May 26, 2023                                 | May 15, 2023                        |
| Equipment            | Signal and Spectrum<br>Analyzer (10Hz to<br>40GHz) | 1.9GHz Notch Filter                          |                                     |
| Registration No.     | EW-3016  | EW-3434                                      |                                     |
| Manufacturer         | ROHDESCHWARZ                                       | Microwave                                    |                                     |
| Model No.            | FSV40  | N0319501                                     |                                     |
| Calibration Date     | December 13, 2021                                  | December 12, 2022                            |                                     |
| Calibration Due Date | December 13, 2023                                  | December 12, 2023                            |                                     |

## TEST REPORT

### 5.0 EQUIPMENT LIST (CONT'D)

#### 2) Conducted Emissions Test

| Equipment            | EMI Test Receiver  | RF Cable RG142 (9kHz-30MHz) 2.4m length | Artificial Mains Network |
|----------------------|--------------------|---|--------------------------|
| Registration No.     | EW-3156            | EW-2454                                 | EW-2874                  |
| Manufacturer         | ROHDE SCHWARZ      | RADIALL                                 | R&S                      |
| Model No.            | ESR26              | BNC M ST/ 142                           | ENV-216                  |
| Calibration Date     | September 26, 2022 | January 26, 2022                        | January 24, 2022         |
| Calibration Due Date | September 26, 2023 | July 26, 2023                           | July 24, 2023            |

#### 3) Conductive Measurement Test

| Equipment            | Coaxial Directional Coupler | Signal and Spectrum Analyzer (10Hz to 40GHz) | Vector Signal Generator |
|----------------------|-----------------------------|--|-------------------------|
| Registration No.     | EW-2337                     | EW-3016                                      | EW-2320                 |
| Manufacturer         | MAGNA                       | ROHDE SCHWARZ                                | R&S                     |
| Model No.            | 4222-16                     | FSV40  | SMU-200A                |
| Calibration Date     | Nil*                        | December 13, 2021                            | October 26, 2022        |
| Calibration Due Date | Nil*                        | December 13, 2023                            | October 26, 2023        |

| Equipment            | Digital Radiocommunication Tester for DECT | Temperature & Humidity Chamber (with Digital Thermometer) | Digital Thermometer |
|----------------------|--|---|---------------------|
| Registration No.     | EW-2250                                    | EW-2134   | EW-3046             |
| Manufacturer         | ROHDE SCHWARZ                              | GIANT FORCE   | OREGON              |
| Model No.            | CMD60                                      | GTH-750-40-CP-SD  | THG312              |
| Calibration Date     | December 12, 2022                          | Nil*  | December 02, 2022   |
| Calibration Due Date | December 12, 2023                          | Nil*  | December 02, 2023   |

| Equipment            | RF Cable SMA-SMA (18GHz)       | Digital Multimeter |
|----------------------|--------------------------------|--------------------|
| Registration No.     | EW-3126c                       | EW-1183            |
| Manufacturer         | GREATBILLION                   | FLUKE              |
| Model No.            | SMAm st – SMA m ra<br>0.6m 18G | 79-3               |
| Calibration Date     | December 12, 2022              | February 21, 2023  |
| Calibration Due Date | December 12, 2023              | July 18, 2024      |

END OF TEST REPORT