

TEST REPORT

Report No.: 22071098HKG-001

Application For Original Grant of 47 CFR Part 15 Certification

Spare-it, Inc.

902-928MHz Transceiver

FCC ID: 2BBSLLORASCALEV5HK

Prepared and Checked by:

Approved by:

Leung Chun Ning, Peter
Assistant Engineer

Wong Cheuk Ho, Herbert
Assistant Supervisor
Date: August 28, 2023

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

TEST REPORT

GENERAL INFORMATION

Grantee:	Spare-it, Inc.
Grantee Address:	444 Somerville Ave Somerville, Massachusetts 02143 USA
FCC Specification Standard:	FCC Part 15, October 1, 2021 Edition
FCC ID:	2BBSLLORASCALEV5HK
FCC Model(s):	SPT-002
Type of EUT:	Hybrid System
Description of EUT:	Smart Bin Waste Scale with LoRa Transmission (902-928MHz Transceiver)
Sample Receipt Date:	June 10, 2023
Date of Test:	June 10, 2023 to August 20, 2023
Report Date:	August 28, 2023
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15.

TEST REPORT

TABLE OF CONTENTS

EXHIBIT 1	TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE	4
1.1	Summary of Test Results.....	4
1.2	Statement of Compliance	4
EXHIBIT 2	GENERAL DESCRIPTION	5
2.1	Product Description	5
2.2	Test Methodology	5
2.3	Test Facility.....	5
2.4	Related Submittal(s) Grants.....	5
EXHIBIT 3	SYSTEM TEST CONFIGURATION	6
3.1	Justification	6
3.2	EUT Exercising Software.....	7
3.3	Details of EUT and Description of Accessories	8
3.4	Measurement Uncertainty.....	8
EXHIBIT 4	TEST RESULTS.....	9
4.1	Maximum Conducted (Peak) Output Power at Antenna Terminals.....	9
4.2	Minimum 6dB RF Bandwidth and Occupied Bandwidth	12
4.3	Minimum Power Spectral Density	16
4.4	Out of Band Conducted Emissions.....	28
4.5	Radiated Emission Test Setup.....	34
4.6	Field Strength Calculation	35
4.7	Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	36
4.8	AC Power Line Conducted Emission	41
EXHIBIT 5	EQUIPMENT LIST	42

TEST REPORT

EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-210/ RSS-Gen [#]	Results	Details See Section
Antenna Requirement	15.203	7.1.2#	Pass	2.1
Maximum Conducted Output Power at Antenna Terminals	15.247(b)(3)&(4)	5.4(4)	Pass	4.1
Minimum 6dB RF Bandwidth	15.247(a)(2)	5.2(1)	Pass	4.2
99% Occupied Bandwidth	--	4.6.1#	Pass	4.2
Maximum Power Spectral Density Reading	15.247(e)	5.2(2)	Pass	4.3
Minimum Number of Hopping Frequencies	15.247(a)(1)(iii)	5.1(4)	Pass	4.3
Minimum Hopping Channel Carrier Frequency Separation	15.247(a)(1)	5.1(2)	Pass	4.4
Average Channel Occupancy Time	15.247(a)(1)(iii)	5.1(4)	Pass	4.5
Out of Band Conducted Emission	15.247(d)	5.5	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	5.5	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2021 Edition
RSS-247 Issue 2, February 2017
RSS-Gen Issue 5 Amendment 2, February 2021

TEST REPORT

EXHIBIT 2 GENERAL DESCRIPTION

2.1 Product Description

The Equipment Under Test (EUT) Smart Bin Waste Scale with LoRa Transmission (V5) is a 902-928MHz Transceiver.

The Equipment Under Test (EUT) operates at frequency range of 923.2MHz to 924.6MHz with 8 channels in Hybrid mode.

The EUT is powered by 6VDC (4 X size "AAA" battery).

Antenna type: Internal, integral Antenna
Maximum Antenna Gain: 2.9 dBi

2.2 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No. 558074 D01 v05r02 (April 02, 2019) All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 5 Amendment 2, February 2021.

2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042H, CABID is "HKAP01".

2.4 Related Submittal(s) Grants

This is a single application for certification of a transmitter.

TEST REPORT

EXHIBIT 3 SYSTEM TEST CONFIGURATION

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 6VDC (4 X new size “AAA” battery) during test.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209 / RSS-247 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 / RSS-247 Section 5.5 Limits.

TEST REPORT

3.1 Justification (Cont'd)

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst-case data is included in this report.

All data rates were tested under normal mode. Only the worst-case data is shown in the report.

3.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

TEST REPORT

3.3 Details of EUT and Description of Accessories

Details of EUT:

The EUT is powered by 6VDC (4 X size “AAA” battery)

Description of Accessories:

N/A

There are no accessories for compliance of this product.

3.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level ($k=2$). In case, the measured value is within guard band region, undetermined decision will be used. The values of the Measurement uncertainty for radiated emission test, AC line conducted emission test and RF conducted test, frequency stability and timing jitter are $\pm 5.3\text{dB}$, $\pm 4.2\text{dB}$, $\pm 1\text{dB}$, $\pm 23\text{Hz}$, $0.1\mu\text{s}$ respectively.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

TEST REPORT

EXHIBIT 4 TEST RESULTS

4.1 Maximum Conducted Output Power at Antenna Terminals

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ External attenuation and cable loss were compensated for using the OFFSET function of the analyser. The measurement procedure PK1 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

Hybrid mode / Maximum Antenna Gain = 2.9 dBi

	Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel:	923.2	7.38	5.5
Middle Channel:	923.8	7.32	5.4
High Channel:	924.6	7.35	5.4

Cable loss: 0.5 dB

External Attenuation: 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

EUT dBm Max. Output Level = 7.38 dBm


Limits:

- ☒ 0.25W (24.98 dBm) for antennas with gains of 6dBi or less.
- ☐ __0.912__W (__29.6__dBm) for antennas with gains more than 6dBi.


TEST REPORT

PLOTS OF MAXIMUM CONDUCTED OUTPUT POWER AT ANTENNA TERMINALS

Lowest Channel Hybrid mode

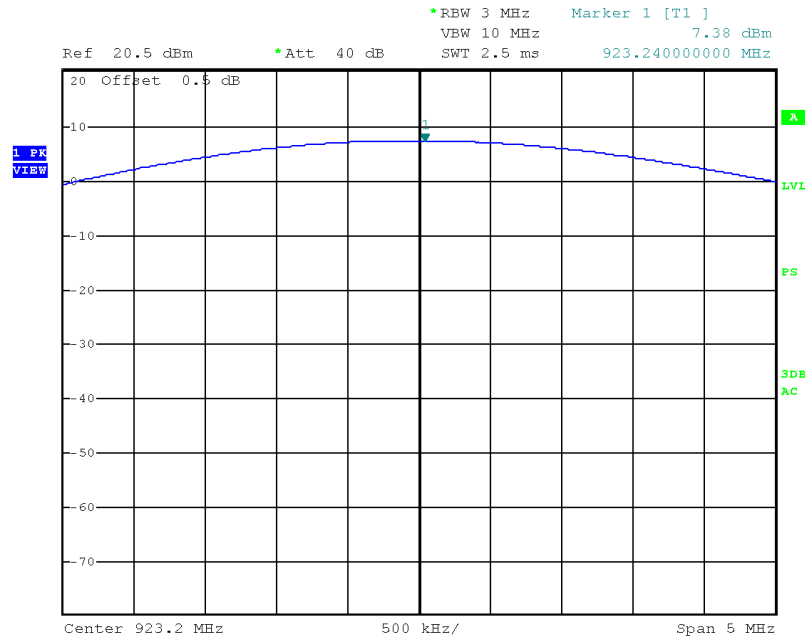


Middle Channel Hybrid mode

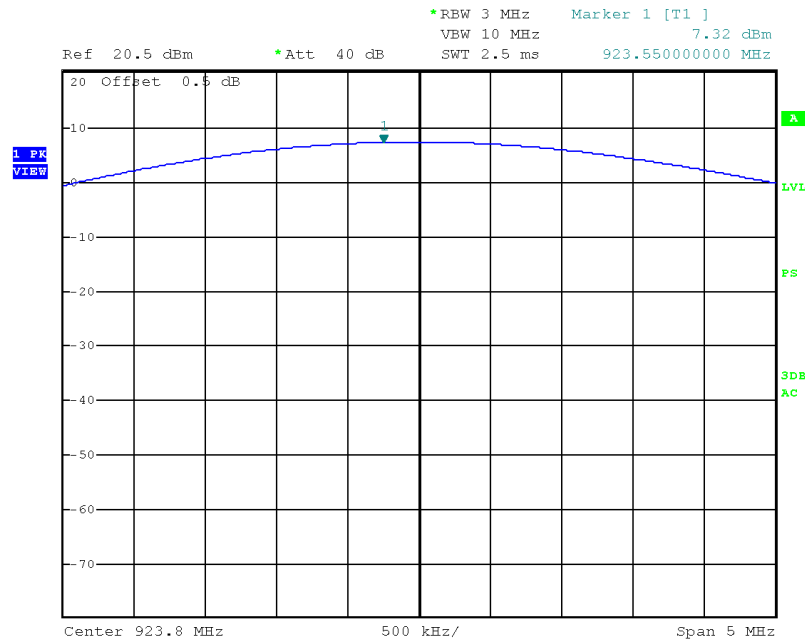

TEST REPORT

PLOTS OF MAXIMUM CONDUCTED OUTPUT POWER AT ANTENNA TERMINALS

Highest Channel Hybrid mode

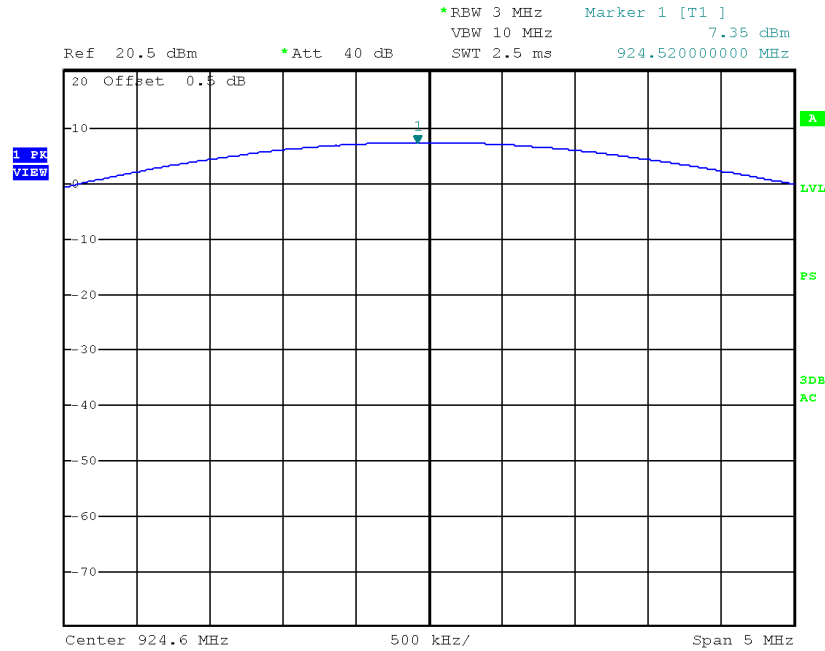

TEST REPORT

4.2 Minimum 6dB RF Bandwidth and Occupied Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

For Industry Canada, the 99% occupied bandwidth was measured, and the procedure under the section 4.6.1 of RSS-GEN was used.

Hybrid mode

Frequency (MHz)		6dB Bandwidth (MHz)
Low Channel:	923.2	0.272
Middle Channel:	923.8	0.272
High Channel:	924.6	0.272

Limits:


N/A for Hybrid system

The plots of 6dB RF bandwidth and occupied bandwidth are saved as below.


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH Hybrid mode

Lowest Channel

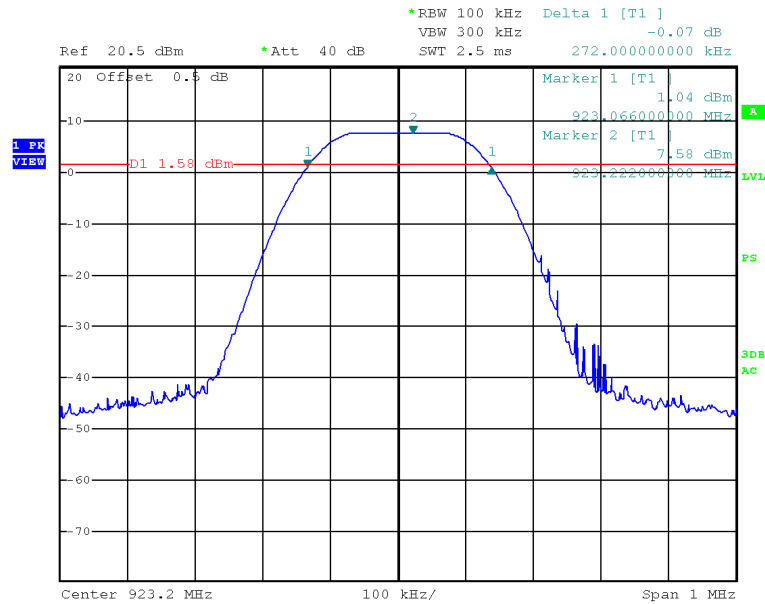


Middle Channel

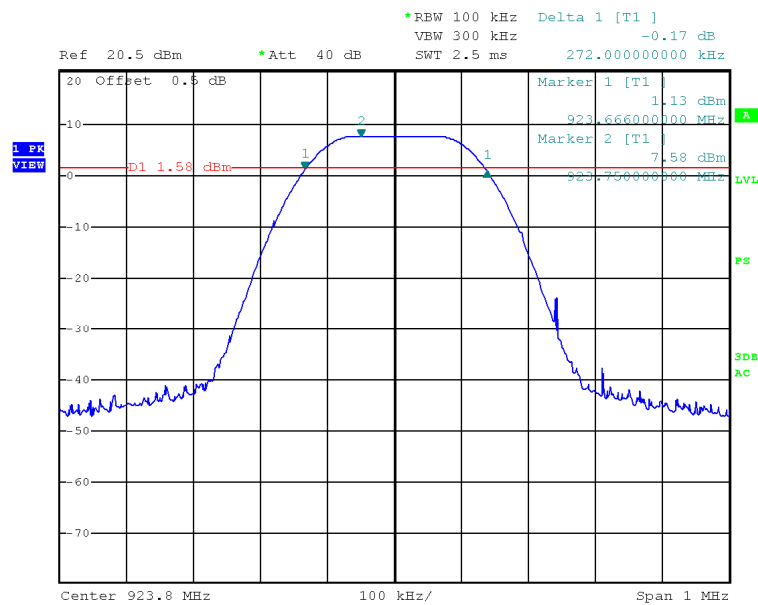

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH Hybrid mode

Highest Channel

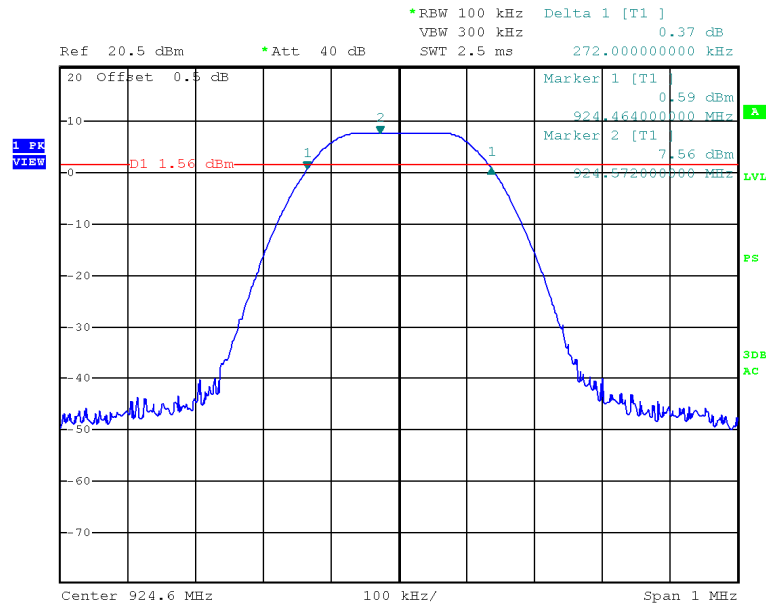


TEST REPORT

Occupied Bandwidth Results: Hybrid mode

Occupied Bandwidth (MHz)		
Low Channel:	923.2	0.128
Middle Channel:	923.8	0.128
High Channel:	924.6	0.128

The worst case is shown as below:

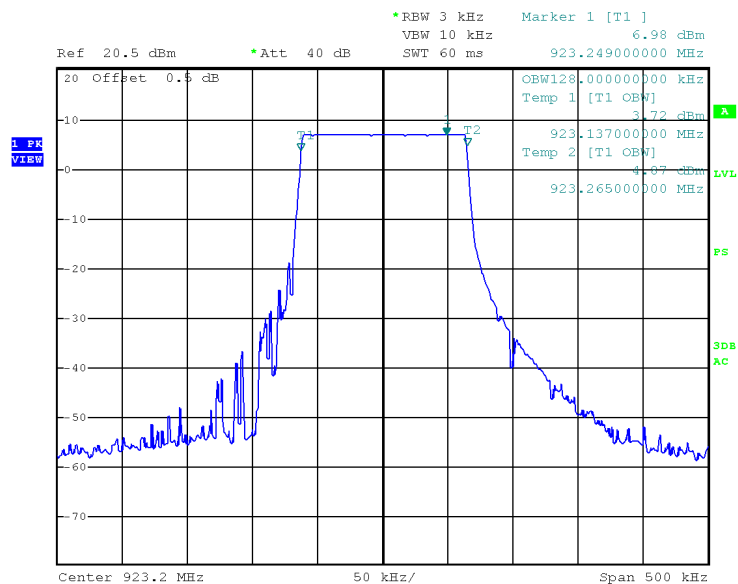

Date: 18.AUG.2023 14:10:17

TEST REPORT

4.3 Minimum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

Hybrid mode

Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	923.2	7.56
Middle Channel:	923.8	7.56
High Channel:	924.6	7.56

Cable Loss: 0.5dB


Limit: 8dBm in 3kHz

The plots of power spectral density are as below.


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY – 100kHz RBW (Hybrid mode)

Lowest Channel

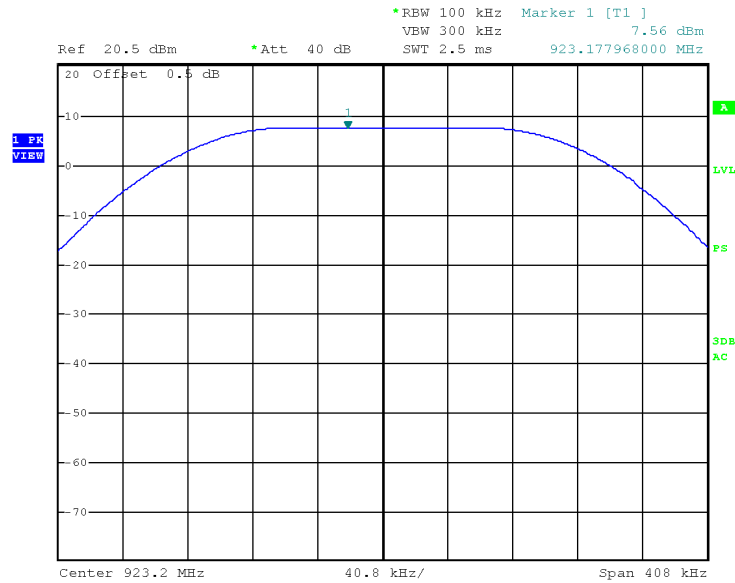


Middle Channel

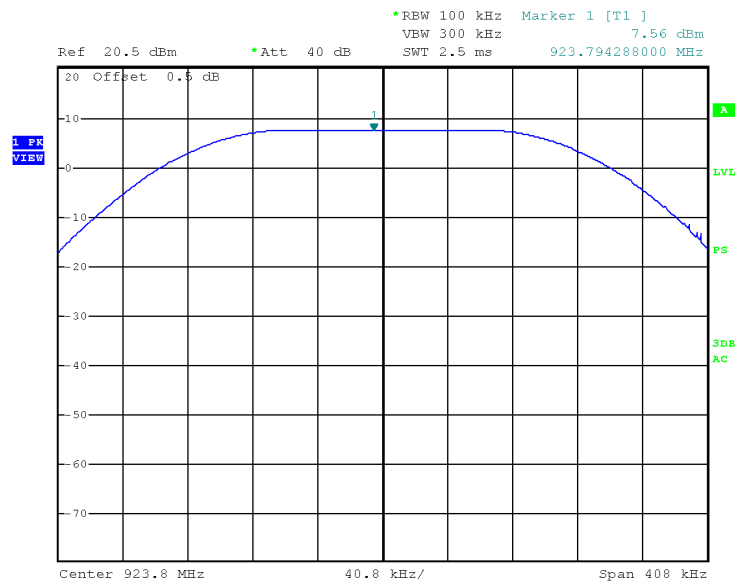

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY – 100kHz RBW (Hybrid mode)

Highest Channel

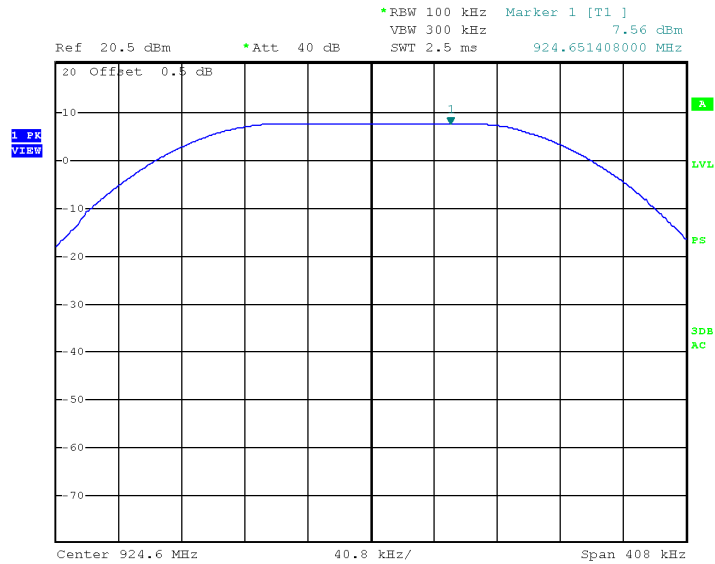

Date: 18.AUG.2023 13:52:45

TEST REPORT

4.4 Hopping Channel 20dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 20dB lower than PEAK level. The 20dB bandwidth was determined from where the channel output spectrum intersected the display line.

(Hybrid mode)

Frequency (MHz)		20dB Bandwidth (kHz)
Low Channel:	923.2	140
Middle Channel:	923.8	140
High Channel:	924.6	140


Limits: $\leq 500\text{kHz}$ for 902-928MHz

The plots of hopping channel 20dB RF bandwidth are saved as below.


TEST REPORT

PLOTS OF HOPPING CHANNEL 20dB RF BANDWIDTH (Hybrid mode)

Lowest Channel

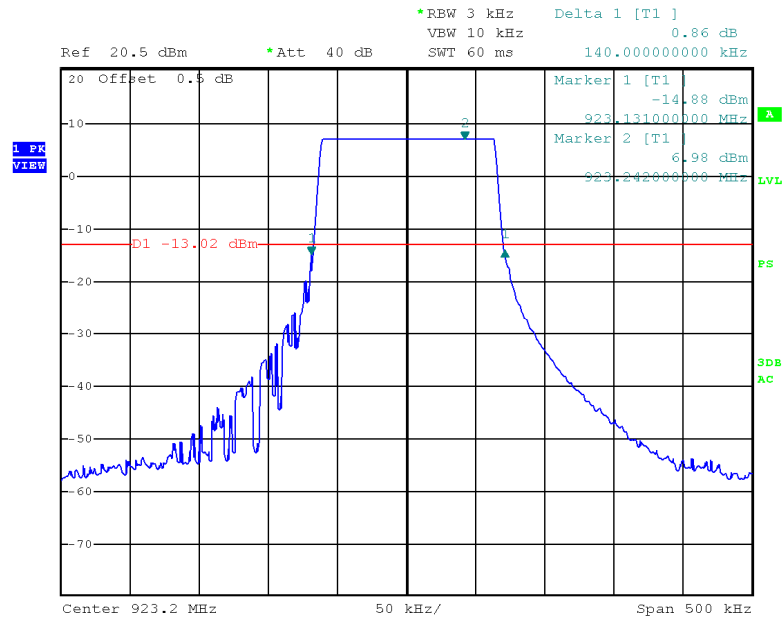


Middle Channel

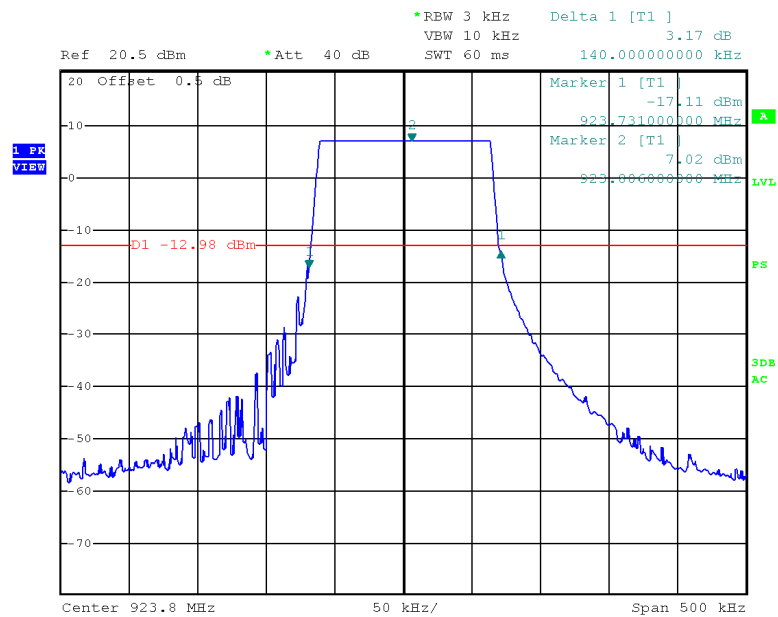

TEST REPORT

PLOTS OF HOPPING CHANNEL 20dB RF BANDWIDTH (Hybrid mode)

Highest Channel

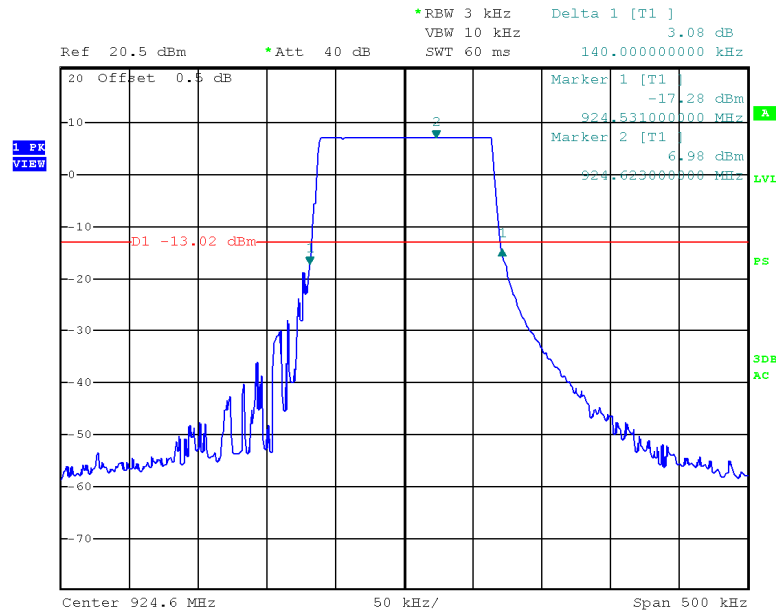

TEST REPORT

4.5 Minimum Number of Hopping Frequencies

With the analyzer set to MAX HOLD readings were taken for 2-3 minutes in each band. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

No. of Hopping Channels: 8


Limits:

N/A for Hybrid system (20dB bandwidth of hopping channel < 250kHz)

The plots of number of hopping frequencies are saved as below.

TEST REPORT

PLOTS OF MINIMUM NUMBER OF HOPPING FREQUENCIES (125kHz – FHSS mode)

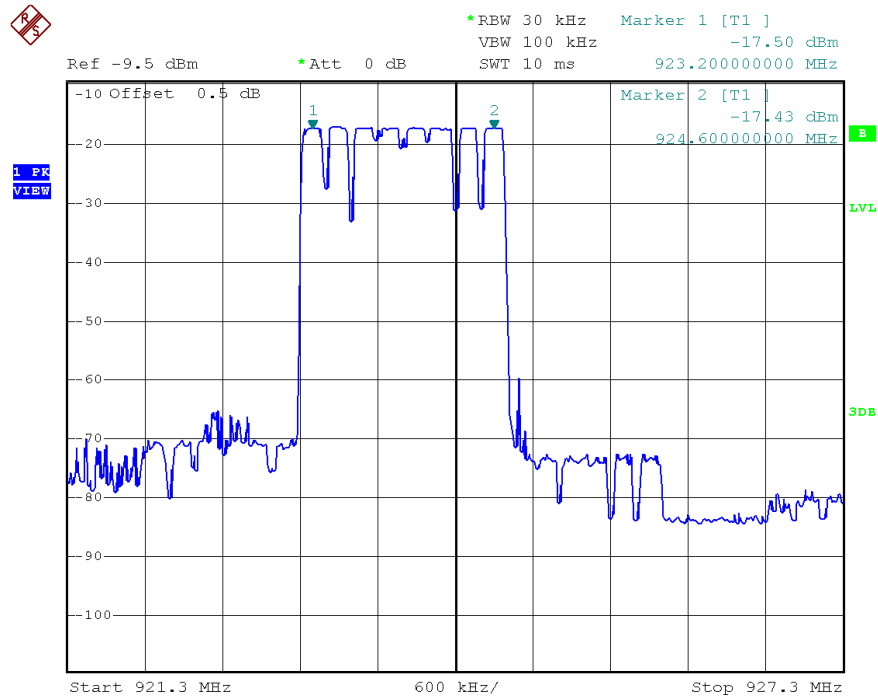

TEST REPORT

4.6 Minimum Hopping Channel Carrier Frequency Separation

Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and met the requirement.

The two adjacent channels being measured	Channel Separation (kHz)
Channel Separation (Channel 5 and Channel 6)	200


Limits:

The channel separation must be larger than:
20dB bandwidth of hopping channel: 140kHz

The plot(s) of hopping channel carrier frequency separation is saved as below.

TEST REPORT

PLOTS OF MINIMUM HOPPING CHANNEL CARRIER FREQUENCY SEPARATION

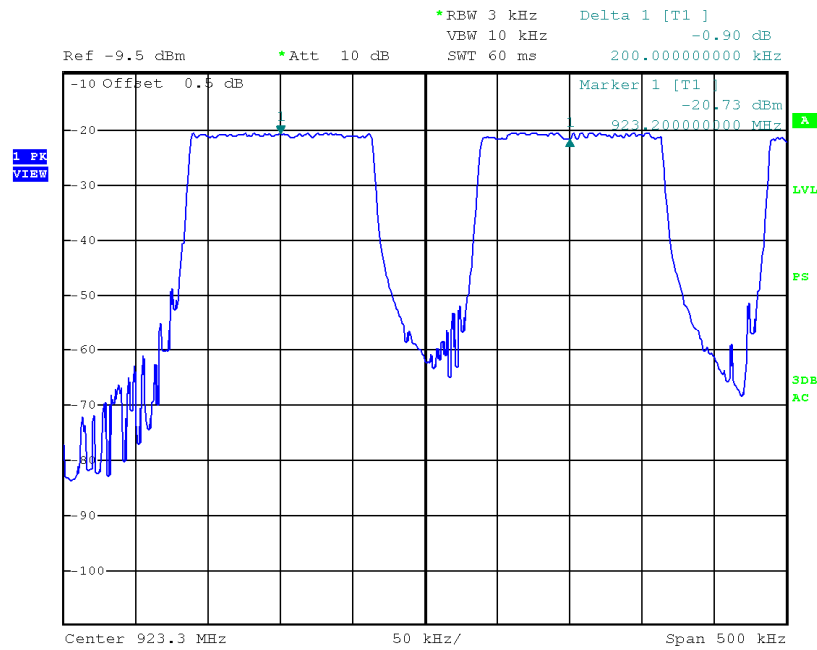

TEST REPORT

4.7 Average Channel Occupancy Time

The spectrum analyzer center frequency was set to one of the known hopping channels. The SWEEP was set to 1ms, the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. The time duration of the transmission so captured was measured with the MARKER DELTA function.

The SWEEP was then set to the time required by the regulation (20 seconds for 902-928 MHz devices, if the 20dB bandwidth is less than 250kHz, 10 seconds for 902-928 MHz if the 20dB bandwidth is or greater than 250kHz, "0.4 seconds x Number of hopping channels employed" seconds for 2400-2483.5 MHz, 30 seconds for 5725-5850 MHz). The analyzer was set to SINGLE SWEEP, the total ON time was added and compared against the limit (0.4 seconds).

Transmitter	
Average Occupancy Time	364.8 ms
(Traffic – in a clear RF environment) =	

Limits:


Average 0.4 seconds maximum occupancy in:
3.2 seconds for Hybrid mode (8 channels X 0.4 seconds)

The plots of average channel occupancy time are saved as below.

TEST REPORT

PLOTS OF AVERAGE CHANNEL OCCUPANCY TIME (Hybrid mode)

Plot A

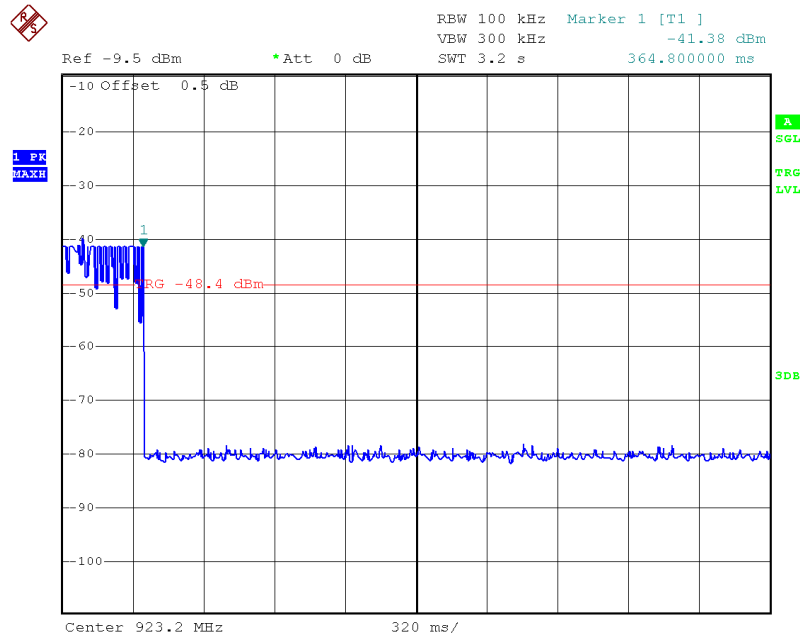

TEST REPORT

4.8 Out of Band Conducted Emissions

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

The measurement procedures under sections 5.4.1.1 and 5.4.1.2 of 558074 D01 v05r02 (April 02, 2019) were used.

Limits:


All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the maximum measured in-band peak PSD level.

The plots of out of band conducted emissions and bandedge are as below.


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS (Hybrid mode)

Lowest Channel, Plot A

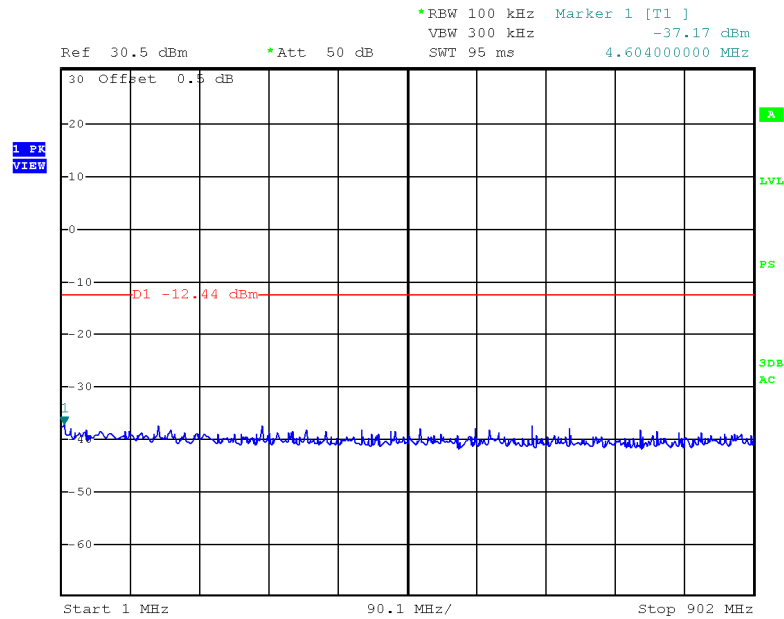


Lowest Channel, Plot B

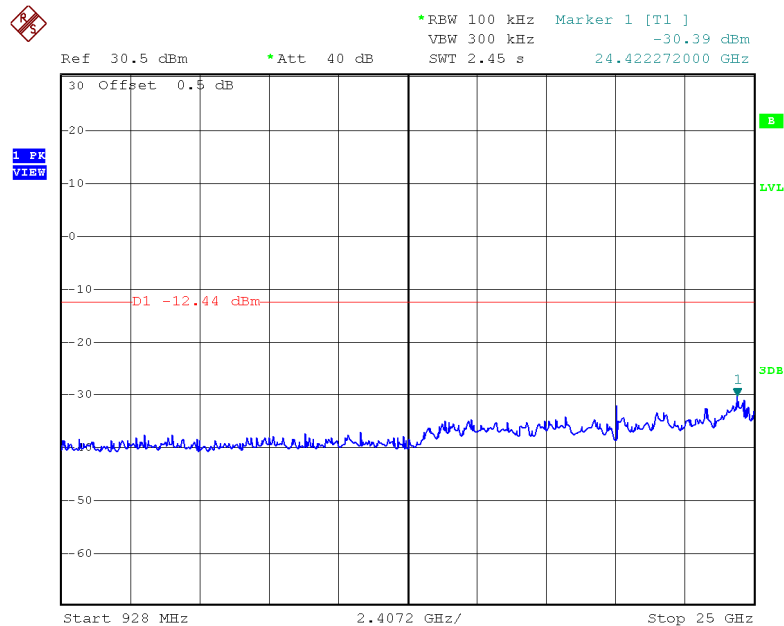


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS (Hybrid mode)

Middle Channel, Plot A

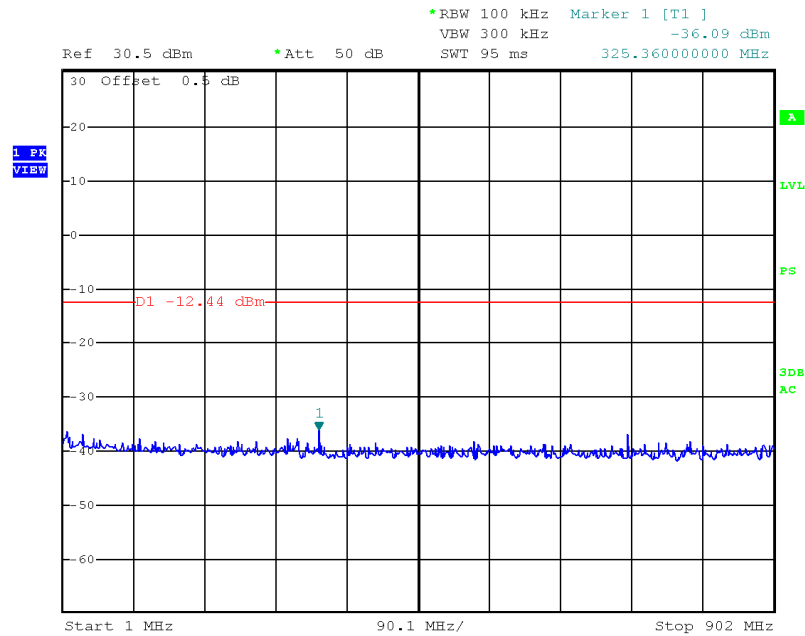


Middle Channel, Plot B

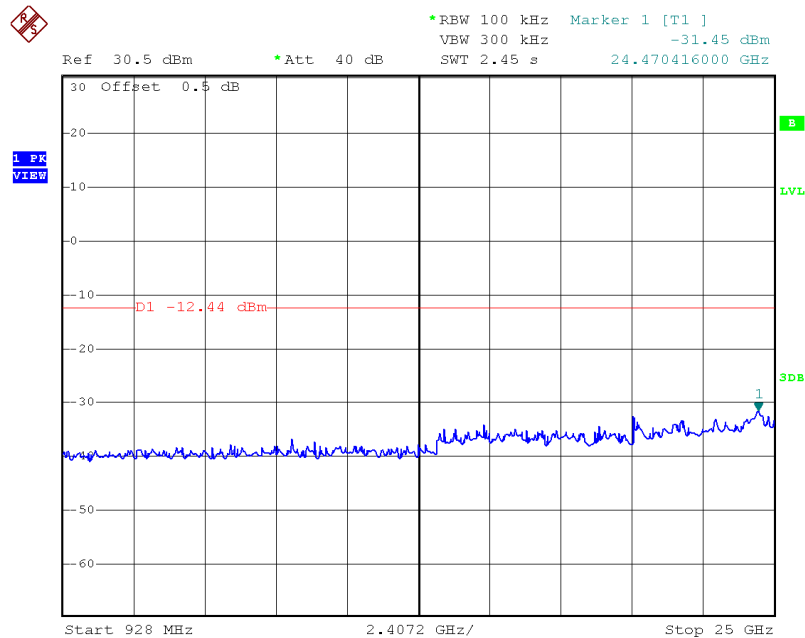


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS (Hybrid mode)

Highest Channel, Plot A

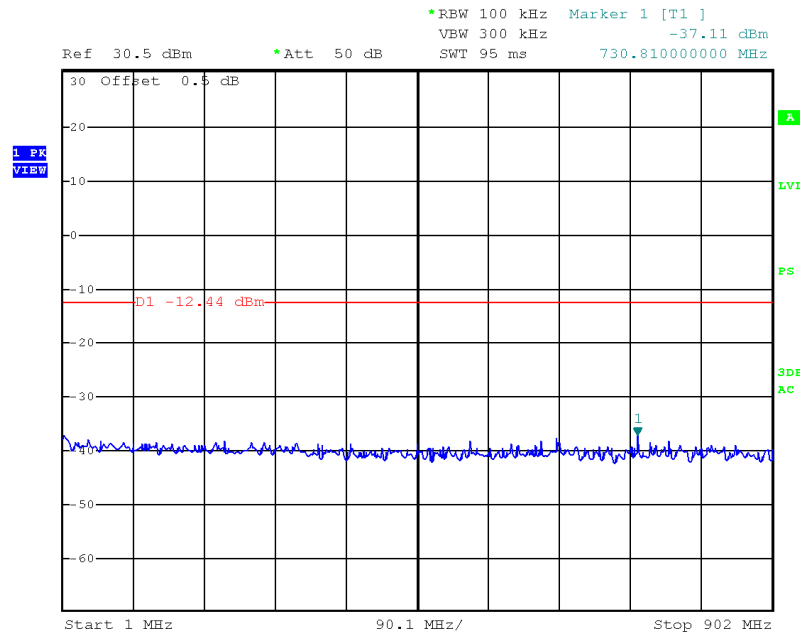


Highest Channel, Plot B

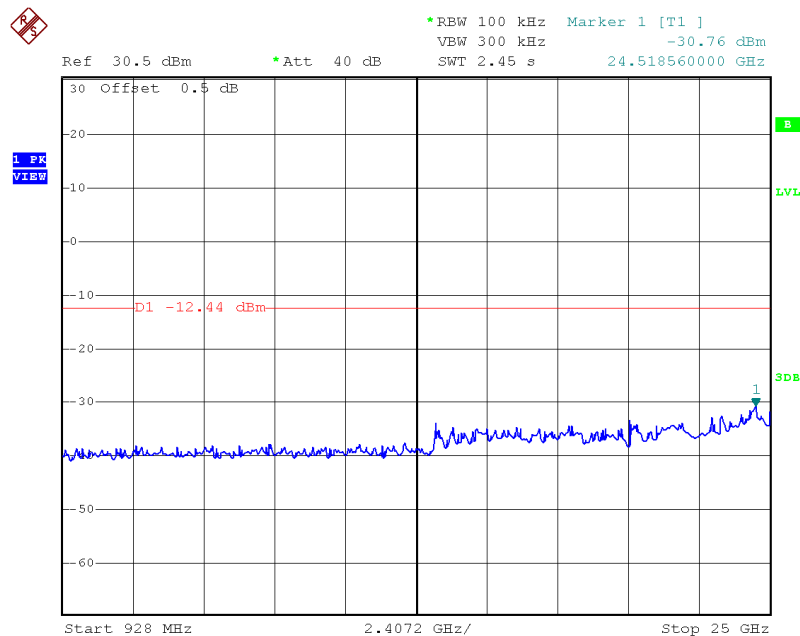


TEST REPORT

PLOTS OF BANDEDGE (HOPPING) (Hybrid mode)

Lowest Channel

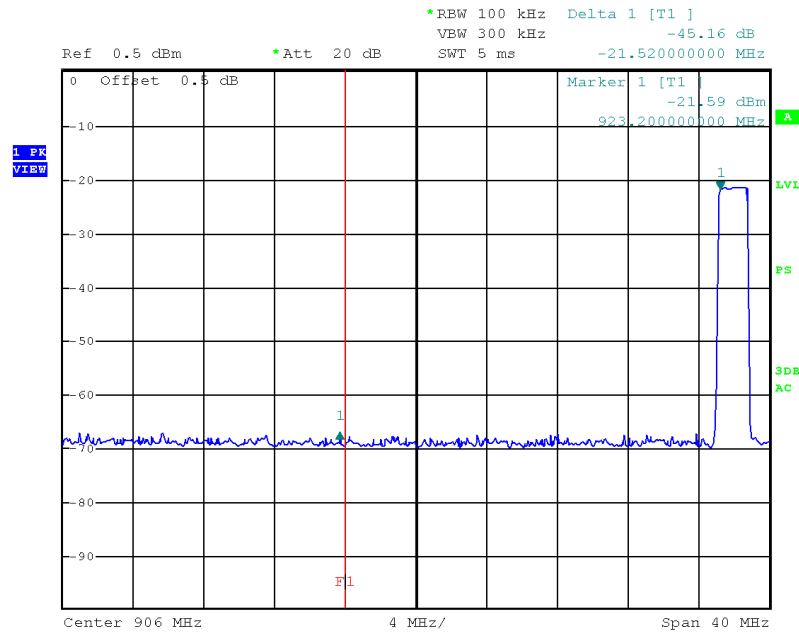


Highest Channel

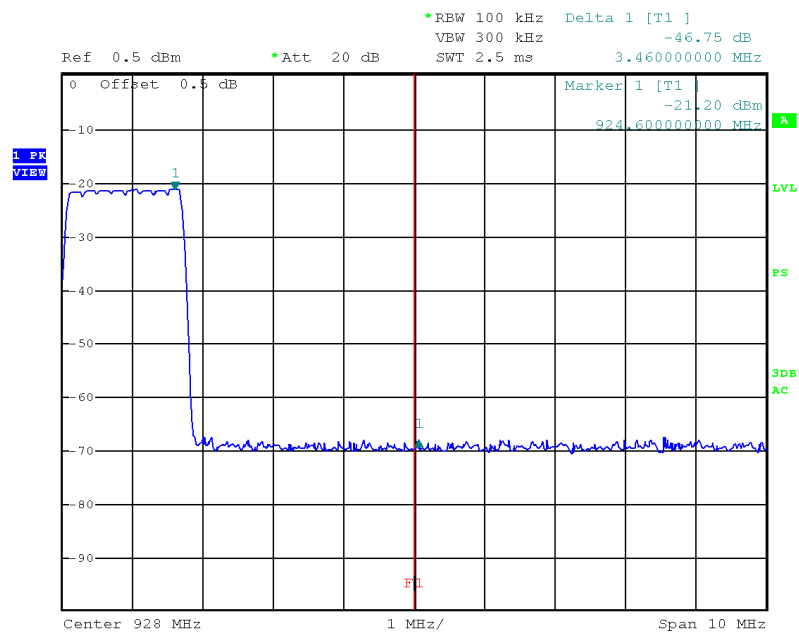


TEST REPORT

PLOTS OF BANDEDGE (HOPPING turn-off) (Hybrid mode)

Lowest Channel, Bandedge

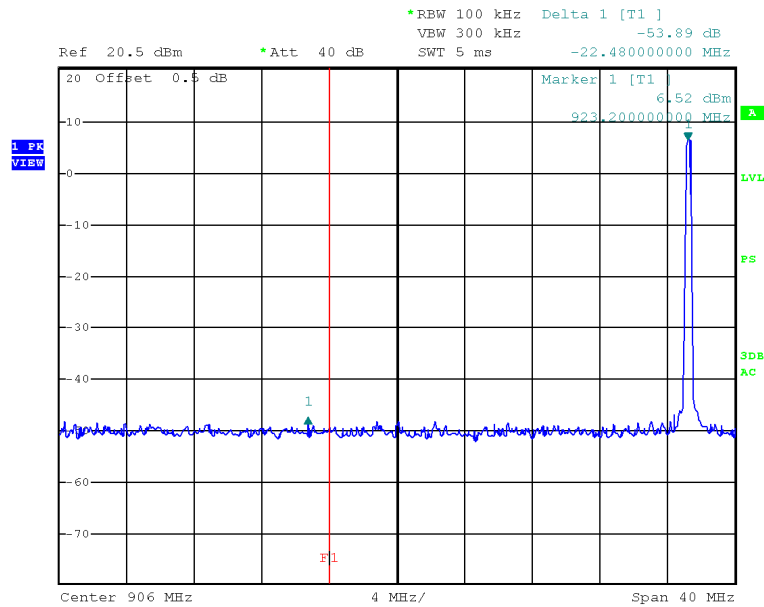


Highest Channel, Bandedge

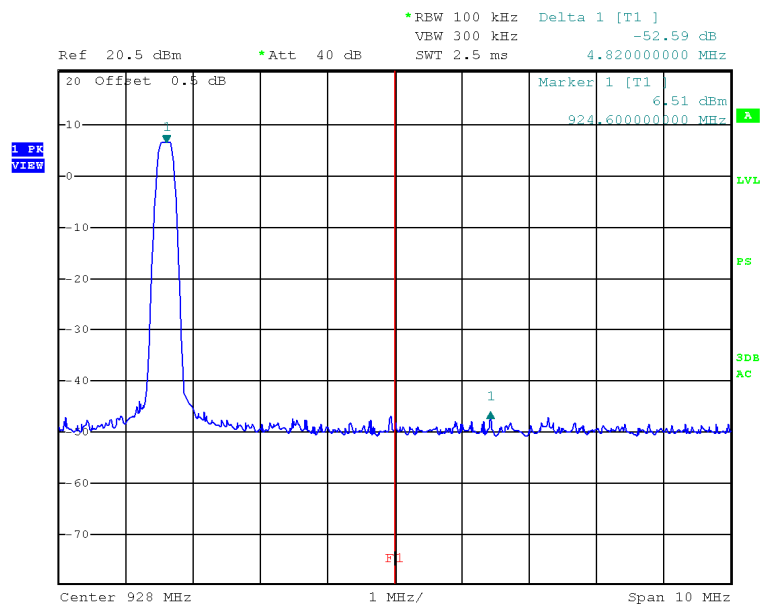


TEST REPORT

4.9 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

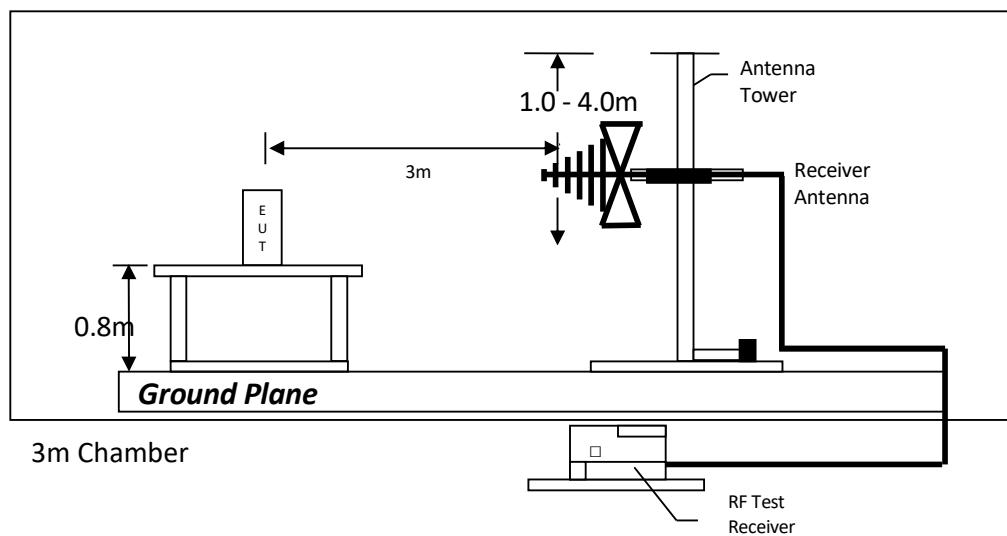

Test setup of radiated emissions up to 1GHz

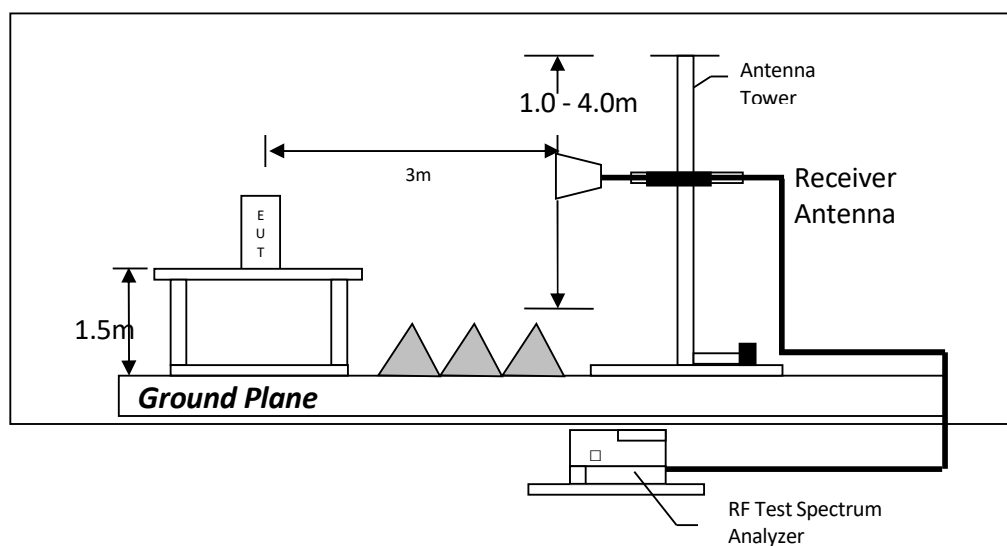

Test setup of radiated emissions above 1GHz

TEST REPORT

4.10 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where

FS	=	Field Strength in dB μ V/m
RA	=	Receiver Amplitude (including preamplifier) in dB μ V
CF	=	Cable Attenuation Factor in dB
AF	=	Antenna Factor in dB
AG	=	Amplifier Gain in dB
PD	=	Pulse Desensitization in dB
AV	=	Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example:

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB μ V/m. This value in dB μ V/m is converted to its corresponding level in μ V/m.

RA	=	62.0 dB μ V
AF	=	7.4 dB
CF	=	1.6 dB
AG	=	29 dB
PD	=	0.0 dB
AV	=	-10 dB
FS	=	$62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0$ dB μ V/m

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

TEST REPORT

4.11 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.11.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission

at 928.000 MHz

The worst-case radiated emission configuration photographs are saved with filename: config photos.pdf

4.11.2 Radiated Emission Data

The data in tables 1-4 list the significant emission frequencies, the limit and the margin of compliance.

Judgement –

Passed by 5.8 dB margin

TEST REPORT

RADIATED EMISSION DATA

Mode: TX (Hybrid mode)

Table 1 Lowest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	1846.400	34.4	33	27.2	28.6	54.0	-25.4
V	2769.600	31.4	33	30.4	28.8	54.0	-25.2
H	3692.800	26.1	33	33.3	26.4	54.0	-27.6
V	4616.000	24.9	33	34.9	26.8	54.0	-27.2
V	5539.200	32.6	33	36.6	36.2	54.0	-17.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	1846.400	52.6	33	27.2	46.8	74.0	-27.2
V	2769.600	50.8	33	30.4	48.2	74.0	-25.8
H	3692.800	49.9	33	33.3	50.2	74.0	-23.8
V	4616.000	44.5	33	34.9	46.4	74.0	-27.6
V	5539.200	51.6	33	36.6	55.2	74.0	-18.8

- NOTES: 1. Peak detector is used for the emission measurement. Average detector is used for the average data of emission measurement
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz
5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX (Hybrid mode)

Table 2 Middle Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	1847.600	32.0	33	27.2	26.2	54.0	-27.8
V	2771.400	26.8	33	30.4	24.2	54.0	-29.8
H	3695.200	28.2	33	33.3	28.5	54.0	-25.5
V	4619.000	28.6	33	34.9	30.5	54.0	-23.5
V	5542.800	29.2	33	36.6	32.8	54.0	-21.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	1847.600	52.3	33	27.2	46.5	74.0	-27.5
V	2771.400	47.1	33	30.4	44.5	74.0	-29.5
H	3695.200	47.9	33	33.3	48.2	74.0	-25.8
V	4619.000	52.3	33	34.9	54.2	74.0	-19.8
V	5542.800	46.9	33	36.6	50.5	74.0	-23.5

- NOTES: 1. Peak detector is used for the emission measurement. Average detector is used for the average data of emission measurement
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz
5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSION DATA

Mode: TX (Hybrid mode)

Table 3 Highest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	1849.200	30.2	33	27.2	24.4	54.0	-29.6
V	2773.800	31.0	33	30.4	28.4	54.0	-25.6
H	3698.400	25.9	33	33.3	26.2	54.0	-27.8
V	4623.000	26.5	33	34.9	28.4	54.0	-25.6
V	5547.600	21.2	33	36.6	24.8	54.0	-29.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	1849.200	54.4	33	27.2	48.6	74.0	-25.4
V	2773.800	50.8	33	30.4	48.2	74.0	-25.8
H	3698.400	48.5	33	33.3	48.8	74.0	-25.2
V	4623.000	42.3	33	34.9	44.2	74.0	-29.8
V	5547.600	45.0	33	36.6	48.6	74.0	-25.4

- NOTES: 1. Peak detector is used for the emission measurement. Average detector is used for the average data of emission measurement
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz
5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSION DATA

Mode: Normal Operation

Table 4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	30.028	26.2	16	10.0	20.2	40.0	-19.8
V	120.025	20.5	16	14.0	18.5	43.5	-25.0
V	140.742	30.8	16	14.0	28.8	43.5	-14.7
H	240.328	22.6	16	19.0	25.6	46.0	-20.4
H	284.024	26.5	16	22.0	32.5	46.0	-13.5
H	306.896	24.8	16	23.0	31.8	46.0	-14.2
H	408.358	24.6	16	24.0	32.6	46.0	-13.4
H	468.684	18.4	16	26.0	28.4	46.0	-17.6
H	902.000	10.8	16	32.0	26.8	46.0	-19.2
H	928.000	23.2	16	33.0	40.2	46.0	-5.8

- NOTES: 1. Quasi-Peak detector is used unless otherwise stated.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10
5. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

4.12 AC Power Line Conducted Emission

- ☒ Not Applicable – EUT is only powered by battery for operation.
- ☐ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.12.1 AC Power Line Conducted Emission Configuration Photograph


N/A

The worst-case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf.

4.12.2 AC Power Line Conducted Emission Data

N/A

4.12.3 Conducted Emission Test Setup

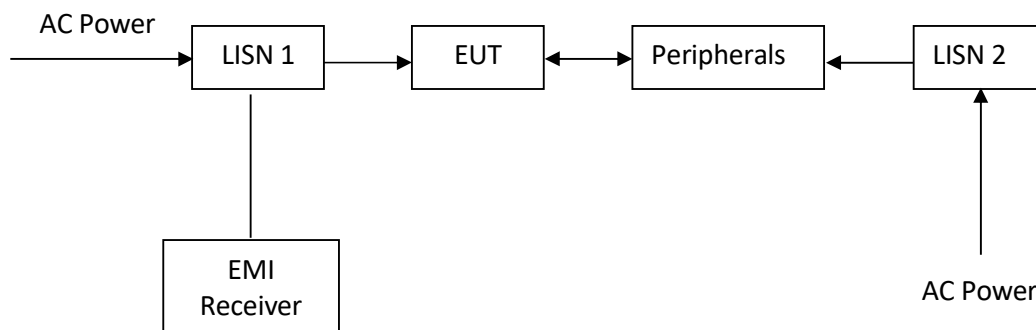

The EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

TEST REPORT

EXHIBIT 5 EQUIPMENT LIST

Radiated Emissions Test

Equipment	Signal and Spectrum Analyzer (10Hz to 40GHz)	Biconical Antenna (30MHz to 300MHz)	EMI Test Receiver 7GHz
Registration No.	EW-3016	EW-3242	EW-3603
Manufacturer	ROHDESCHWARZ	EMCO	ROHDESCHWARZ
Model No.	FSV40	3110C	ESR7
Calibration Date	December 13, 2022	May 26, 2021	December 06, 2022
Calibration Due Date	December 13, 2023	August 26, 2023	December 06, 2023

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna (1GHz - 18GHz)	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-3243	EW-0194	EW-3302
Manufacturer	EMCO	EMCO	EMCO
Model No.	3148B	3115	6502
Calibration Date	June 03, 2021	May 10, 2023	September 08, 2022
Calibration Due Date	September 30, 2023	November 10, 2024	September 08, 2023

Equipment	RF Preamplifier (9kHz to 6000MHz)	Pyramidal Horn Antenna	14m Double Shield RF Cable (9kHz - 6GHz)
Registration No.	EW-3006b	EW-0905	EW-2376
Manufacturer	SCHWARZBECK	EMCO	RADIALL
Model No.	BBV9718	3160-09	n m/br56/bnc m 14m
Calibration Date	February 15, 2022	July 20, 2021	January 26, 2022
Calibration Due Date	November 15, 2023	August 20, 2023	October 26, 2023

Equipment	RF Cable 14m (1GHz to 26.5GHz)	14m Double Shield RF Cable (20MHz to 6GHz)	Pyramidal Horn Antenna
Registration No.	EW-2781	EW-2074	EW-0905
Manufacturer	GREATBILLION	RADIALL	EMCO
Model No.	SMA m/SHF5MPU /SMA m ra14m,26G	N(m)-RG142-BNC(m) L=14M	3160-09
Calibration Date	December 12, 2022	December 10, 2021	July 20, 2021
Calibration Due Date	December 12, 2023	September 10, 2023	August 20, 2023

TEST REPORT

5.0 EQUIPMENT LIST (CONT'D)

Bandedge/Bandwidth Measurement

Equipment	EMI Test Receiver 7GHz	5m RF Cable (40GHz)
Registration No.	EW-3481	EW-2701
Manufacturer	ROHDESCHWARZ	RADIAL
Model No.	ESR7	Sma m-m 5m 40G
Calibration Date	December 21, 2022	November 24, 2021
Calibration Due Date	December 06, 2023	August 24, 2023

TEST REPORT

Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDESCHWARZ
Software version	10.50.40

END OF TEST REPORT