



SAR Test Report

For

Applicant Name:

G-MEE PTY LTD

Address:

2803 Philadelphia Pike B # 4040 Claymont, DE 19703, USA

EUT Name:

4G Smartphone

Model Number:

Connect Pro

Brand Name:

G-Mee

Issued By

Company Name:

BTF Testing Lab (Shenzhen) Co., Ltd.

Address:

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park,
Tantou Community, Songgang Street, Bao'an District, Shenzhen,
China

Report Number:

BTF230625R00101

Test Standards:

47 CFR Part 2.1093 IEEE1528-2013 IEEE C95.1-2019
KDB447498 D01 KDB865664 D01 KDB865664 D02
KDB941225 D01 KDB941225 D05 KDB248227 D01
KDB941225 D06 KDB648474 D04 KDB690783 D01

FCC ID:

2BBTG-CONNECTPRO

Test Conclusion:

Pass

Test Date:

2023-06-25 to 2023-06-27

Date of Issue:

2023-06-28

Prepared By:

Monica Zhou

Date:

Monica Zhou / Project Engineer
2023-06-28

Approved By:

Ryan.CJ

Date:

Ryan.CJ / EMC Manager
2023-06-28



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2023-06-28	Original
<i>Note:</i>		<i>Once the revision has been made, then previous versions reports are invalid.</i>

Table of Contents

1. Introduction	4
1.1 Identification of Testing Laboratory	4
1.2 Identification of the Responsible Testing Location	4
1.3 Laboratory Condition	4
1.4 Announcement	4
2. Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Equipment under Test Ancillary Equipment	5
2.6 Technical Information	5
3. Summary of Test Results	7
3.1 Test Standards	7
3.2 Device Category and SAR Limit	7
3.3 Test Result Summary	8
3.4 Test Uncertainty	9
4. Measurement System	11
4.1 Specific Absorption Rate (SAR) Definition	11
4.2 MVG SAR System	11
5. System Verification	15
5.1 Purpose of System Check	15
5.2 System Check Setup	16
6. TEST POSITION CONFIGURATIONS	16
6.1 Head Exposure Conditions	16
6.2 Body-worn Position Conditions	18
6.3 Hotspot Mode Exposure Position Conditions	19
6.4 Product Specific 10g Exposure Consideration	19
7. Measurement Procedure	20
7.1 Measurement Process Diagram	20
7.2 SAR Scan General Requirement	21
7.3 Measurement Procedure	22
7.4 Area & Zoom Scan Procedure	22
8. Conducted RF Output Power	23
8.1 GSM	23
8.2 WCDMA	24
8.3 LTE	25
8.4 Wi-Fi	37
8.5 Bluetooth	39
8.6 NFC	39
9. Test Exclusion Consideration	40
9.1 SAR Test Exclusion Consideration Table	40
10. Test Result	41
GSM	41
WCDMA	41
LTE	42
Wifi	46
11. SAR Measurement Variability	48
12. Simultaneous Transmission	49
12.1 Simultaneous Transmission Mode Considerations	49
12.2 Sum SAR of Simultaneous Transmission	49
13. Test Equipment List	53
ANNEX A Simulating Liquid Verification Result	54
ANNEX B System Check Result	54
ANNEX C Test Data	77
ANNEX D SAR Test Setup Photos	153
ANNEX E EUT External and Internal Photos	155
ANNEX F Calibration Information	155

1. Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
FCC Registration Number	518915
Designation Number	CN1330

1.3 Laboratory Condition

Ambient Temperature:	21°C to 25°C
Ambient Relative Humidity:	48% to 59%
Ambient Pressure:	100 kPa to 102 kPa

1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Product Information

2.1 Application Information

Company Name:	G-MEE PTY LTD
Address:	2803 Philadelphia Pike B # 4040 Claymont, DE 19703, USA

2.2 Manufacturer Information

Company Name:	Shenzhen Cheng Fong Digital-Tech Limited
Address:	Building A, Weihua Industrial Area, Huaxing road, Dalang, Longhua, Shenzhen, China

2.3 Factory Information

Company Name:	Shenzhen Cheng Fong Digital-Tech Limited
Address:	Building A, Weihua Industrial Area, Huaxing road, Dalang, Longhua, Shenzhen, China

2.4 General Description of Equipment under Test (EUT)

EUT Name	4G Smartphone
Under Test Model Name	Connect Pro
Hardware Version	H612C_MB_V1
Software and FirmWare Version	H612C2.CF.PO575M.4+64.ConnectPro_L.G-mee.US.13.0.V01.2023_05_12
Sample No.	BTFSN230602E002-1/1

2.5 Equipment under Test Ancillary Equipment

Ancillary Equipment 1	Rechargeable Battery	
	Capacity	3000mAh
	Charging Limited Voltage	3.8V

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS 850/1900 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network FDD LTE Band 2/4/5/7/12/17/30/66/71 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/HT40) 5G WIFI 802.11a, 802.11n(HT20/HT40), 802.11ac(VHT20/VHT40/VHT80) BT (EDR+BLE) NFC
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	GSM, WCDMA, LTE, WLAN, Bluetooth		
Frequency Range	GSM 850	824.20MHz-848.80MHz	
	GSM 1900	1850.20MHz-1909.80MHz	
	WCDMA Band 2	TX: 1852.40MHz-1907.60MHz	
	WCDMA Band 4	TX: 1712.4MHz-1752.6MHz	
	WCDMA Band 5	TX: 826.40MHz-846.60MHz	
	LTE Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	LTE Band 4	TX: 1710 ~ 1755 MHz	RX: 2110 ~ 2155 MHz
	LTE Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 7	TX: 2500 ~ 2570 MHz	RX: 2620 ~ 2690 MHz
	LTE Band 12	TX: 698 ~ 716 MHz	RX: 728 ~ 746 MHz
	LTE Band 17	TX: 704 ~ 716 MHz	RX: 734 ~ 746 MHz
	LTE Band 30	TX: 2305 ~ 2315 MHz	RX: 2350 ~ 2360 MHz
	LTE Band 66	TX: 1710 ~ 1780 MHz	RX: 2110 ~ 2200 MHz
	LTE Band 71	TX: 663 ~ 698 MHz	RX: 617 ~ 652 MHz
	802.11b/g/n(HT20)	2412 ~ 2462 MHz	
	802.11n(HT40)	2422 ~ 2452 MHz	
	802.11a/802.11n(HT20/HT40)	5180MHz~5240MHz	
		5260MHz~5320MHz	
		5500MHz~5700MHz	
		5745MHz~5825MHz	
	Bluetooth	2402 ~ 2480 MHz	
	NFC	13.56 MHz	
Antenna Type	WWAN: FPC Antenna WLAN: FPC Antenna BT: FPC Antenna NFC: Coil Antenna		
Hotspot Function	Support		
Power Reduction	Not Support		
Exposure Category	General Population/Uncontrolled exposure		
EUT Stage	Portable Device		
Product	Type		
	☐ Production unit	☒ Identical prototype	

3. Summary of Test Results

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEEE1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate in the Human Head from Wireless Communications Devices: Measurement Techniques
3	IEEE C95.1-2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
4	KDB447498 D01	General RF Exposure Guidance v06
5	KDB865664 D01	SAR measurement 100MHz to 6GHz v01r04
6	KDB865664 D02	RF Exposure Reporting v01r02
7	KDB941225 D01	3G SAR Procedures v03r01
8	KDB941225 D05	SAR for LTE Devices v02r05
9	KDB248227 D01	802.11 Wi-Fi SAR v02r02
10	KDB941225 D06	Hotspot Mode v02r01
11	KDB648474 D04	Handset SAR v01r03
12	KDB690783 D01	SAR Listings on Grant v01r03

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment- related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as follows:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Head 1-g SAR (0 mm Gap)	GSM 850	0.206	PCE	0.629
	GSM 1900	0.156		
	WCDMA Band II	0.181		
	WCDMA Band IV	0.157		
	WCDMA Band V	0.146		
	LTE Band 2	0.196		
	LTE Band 4	0.164		
	LTE Band 5	0.142		
	LTE Band 7	0.242		
	LTE Band 12	0.078		
	LTE Band 17	0.075		
	LTE Band 30	0.185		
	LTE Band 66	0.194		
	LTE Band 71	0.238		
	WLAN 2.4 GHz	0.280		
	WLAN 5.2 GHz	0.532	DTS	
	WLAN 5.4 GHz	0.629		
WLAN 5.6 GHz	0.624			
WLAN 5.8 GHz	0.514			
Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Hotspot(Body) 1-g SAR (10 mm Gap)	GSM 850	0.422	PCB	0.906
	GSM 1900	0.545		
	WCDMA Band II	0.439		
	WCDMA Band IV	0.440		
	WCDMA Band V	0.164		
	LTE Band 2	0.627		
	LTE Band 4	0.602		
	LTE Band 5	0.201		
	LTE Band 7	0.906		
	LTE Band 12	0.203		
	LTE Band 17	0.176		
	LTE Band 30	0.823		
	LTE Band 66	0.630		
	LTE Band 71	0.052		
	WLAN 2.4 GHz	0.110	DTS	
	WLAN 5.2 GHz	0.169	NII	
	WLAN 5.4 GHz	0.236		
WLAN 5.6 GHz	0.156			
WLAN 5.8 GHz	0.192			

This device is in compliance with Specific Absorption Rate(SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC47 CFR part 2(2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

<Highest Reported Simultaneous SAR>

Exposure Position	Simultaneous Configuration	Highest Reported Simultaneous Transmission SAR (W/kg)	Limit (W/kg)	Verdict
Head 1-g SAR (0 mm Gap)	LTE Band 7 + 5G WIFI	0.871	1.6	Pass
Hotspot(Body) 1-g SAR (10 mm Gap)	LTE Band 7 + 5G WIFI	0.827	1.6	Pass

3.4 Test Uncertainty

3.4.1 Measurement uncertainty evaluation for SAR test

Measurement uncertainty evaluation for SAR test (300MHz to 6GHz)

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10 g Ui (+-%)	Vi veff
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	√3	√0.5	√0.5	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	√3	√0.5	√0.5	2.41	2.41	∞
Boundary effect	1.0	R	√3	1	1	0.58	0.58	∞
Linearity	4.7	R	√3	1	1	2.71	2.71	∞
System detection limits	1.0	R	√3	1	1	0.58	0.58	∞
Modulation response	3.0	R	√3	1	1	1.73	1.73	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	√3	1	1	0.00	0.00	∞
Integration Time	1.4	R	√3	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3.0	R	√3	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3.0	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	√3	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3.0	N	1	1	1	3.00	3.00	7
Output power Variation - SAR drift measurement	5.0	R	√3	1	1	2.89	2.89	∞
SAR scaling	2.0	R	√3	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4.0	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	√3	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	√3	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.47	10.34	
Expanded Uncertainty (95% Confidence interval)		k				20.95	20.69	

* This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4.2 Measurement uncertainty evaluation for system check

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10 g)	1g Ui (+-%)	10 g Ui (+-%)	Vi veff
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	1	1	2.02	2.02	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	0	N	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient Conditions - Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Dipole								
Deviation of experimental source from numerical source	5	N	1	1	1	5.00	5.00	∞
Input Power and SAR drift measurement	0.5	R	$\sqrt{3}$	1	1	0.29	0.29	∞
Dipole Axis to Liquid Dist.	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.16	10.03	
Expanded Uncertainty (95% Confidence interval)		k				20.32	20.06	

4. Measurement System

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
 ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 MVG SAR System

4.2.1 SAR system diagram

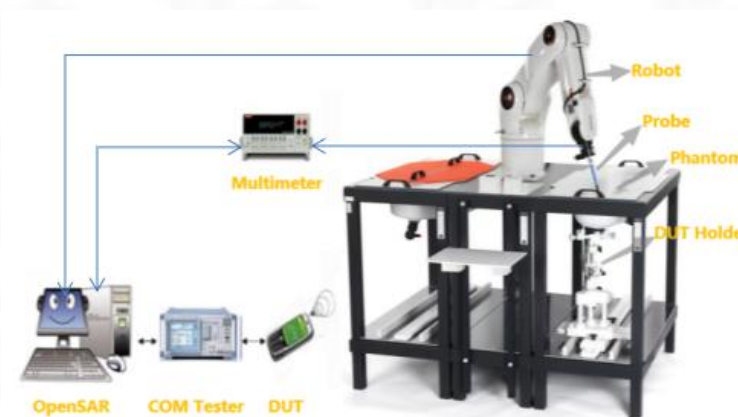

4.2.2 Robot



A standard high precision 6-axis robot (Denso) with teaches pendant with Scanning System

- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
- Must be able to set the probe orthogonal of the surface of the phantom ($\pm 30^\circ$).
- Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

4.2.3 E-Field Probe

For the measurements, the Specific Dosimetric SSE2 E-Field Probe with following specifications is used:

- Dynamic range: 0.01-100 W/kg
- Tip diameter: 2mm for SSE2
- Distance between probe tip and sensor centre: 1mm for SSE2
- Distance between sensor centre and the inner phantom surface: 2mm for $f \geq 4\text{GHz}$.
- Probe linearity: $<0.25\text{dB}$.
- Axial Isotropy: $<0.25\text{dB}$.
- Spherical Isotropy: $<0.50\text{dB}$.
- Calibration range: 150 to 6000 MHz for head & body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than 20° .



4.2.4 Phantoms

SAM Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The probe scanning of the E-Field is done in the 2 halves of the normalized head. The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size. It enables the dosimetric evaluation of left and right-hand phone usage and includes an additional flat phantom part for the simplified body performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



SAM Phantom

The thickness of the phantom amounts to $2\text{ mm} \pm 0.2\text{ mm}$. The materials for the phantom do not affect the radiation of the device under test (DUT) : $\epsilon_r' < 5$
The head is filled with tissue simulating liquid. The hand do not have to be modeled.

TWIN SAM phantom

	Mechanical	Electrical	
Overall thickness	$2 \pm 0.2\text{ mm}$ (except ear area)	Relative permittivity	3.4
Dimensions	1000 mm(L) x 500 mm(W) x 200 mm(H)	Loss tangent	0.02
Maximum volume	27 L		
Material	Fiberglass based		

ELLIPTICAL Phantom

The phantom is for Body performance check filled with tissue-equivalent liquid to a depth of at least 150 mm, whose shell material is resistant to damage or reaction with tissue-equivalent liquid chemicals.




ELLI Phantom

The shape of the phantom is an ellipse with length $600\text{ mm} \pm 5\text{ mm}$ and width $400\text{ mm} \pm 5\text{ mm}$.
The phantom shell is made of low-loss and low-permittivity material, having loss tangent $\tan \delta \leq 0.05$ and relative permittivity:
 $\epsilon_r' \leq 5$ for $f \leq 3\text{ GHz}$
 $3 \leq \epsilon_r' \leq 5$ for $f > 3\text{ GHz}$
The thickness of the bottom-wall of the flat phantom is 2.0 mm with a tolerance of $\pm 0.2\text{ mm}$.

Technical & mechanical characteristics

Shell thickness	$2\text{ mm} \pm 0.2\text{ mm}$
Filling volume	25 L
Dimensions	600 mm x 400 mm x 200mm
Permittivity	4.4
Loss tangent	0.017

4.2.5 Device Holder

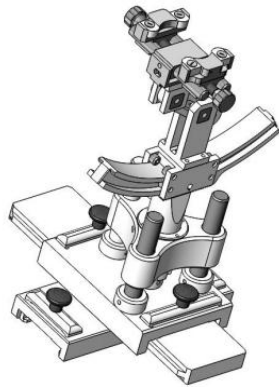

System Material	Permittivity	Loss tangent
Delrin	3.7	0.005

(The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.)

System Material	Permittivity	Loss tangent
PMMA	2.9	0.028


4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

Head Liquid Depth



Body Liquid Depth

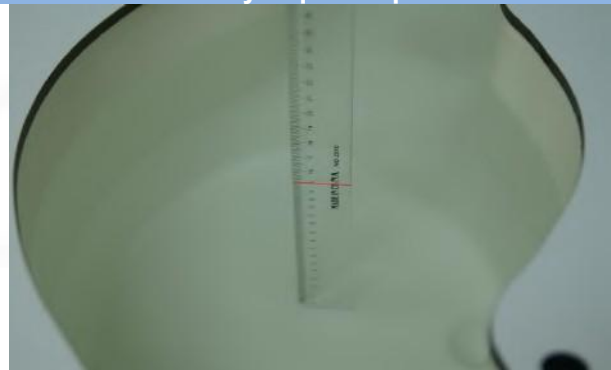

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.


Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20

5. System Verification

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. The setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

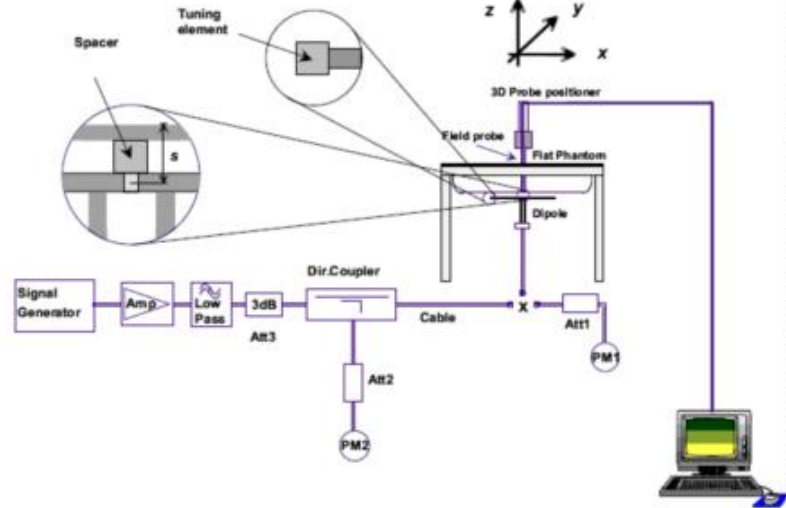

6. TEST POSITION CONFIGURATIONS


According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.

6.1.1 Two Imaginary Lines on the Handset

- The vertical center line passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical center line and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical center line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

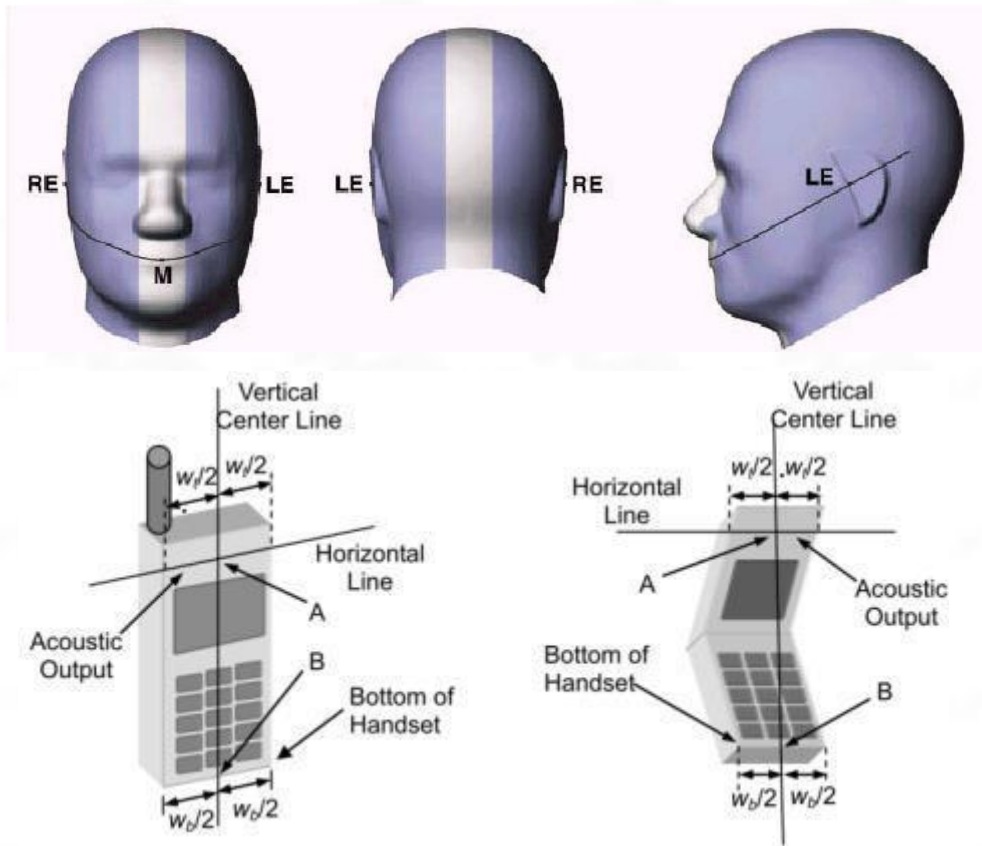


6.1.2 Two Imaginary Lines on the Handset

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.



6.1.3 Titled Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

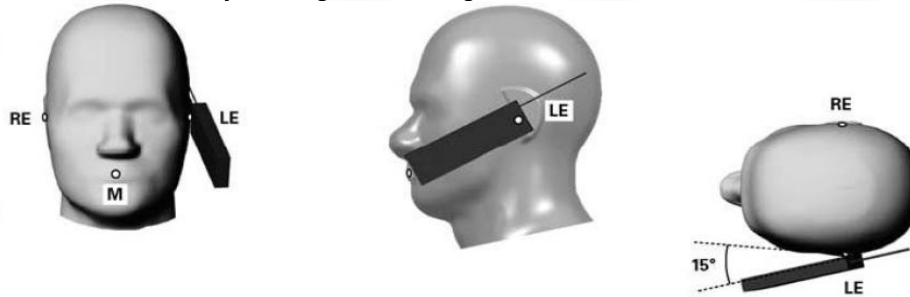


6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

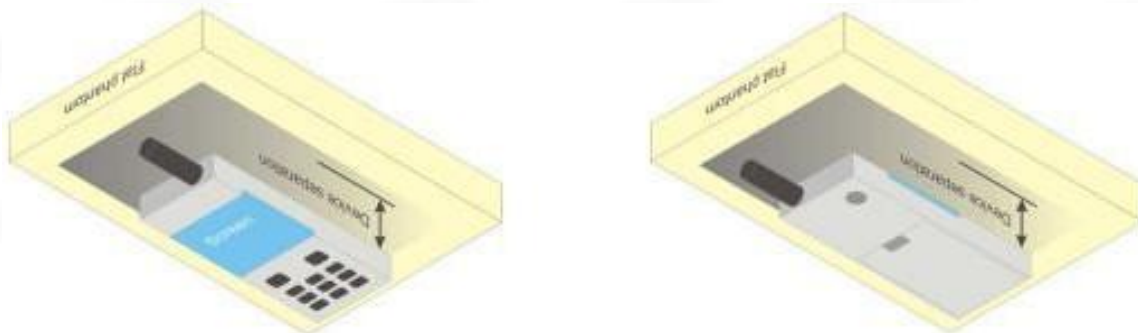

6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

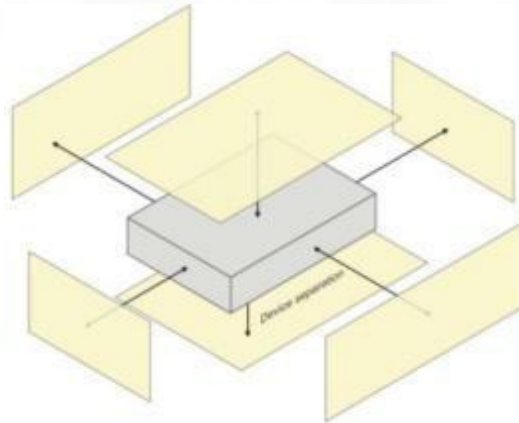

6.4 Product Specific 10g Exposure Consideration


According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

7. Measurement Procedure

7.1 Measurement Process Diagram

Body SAR

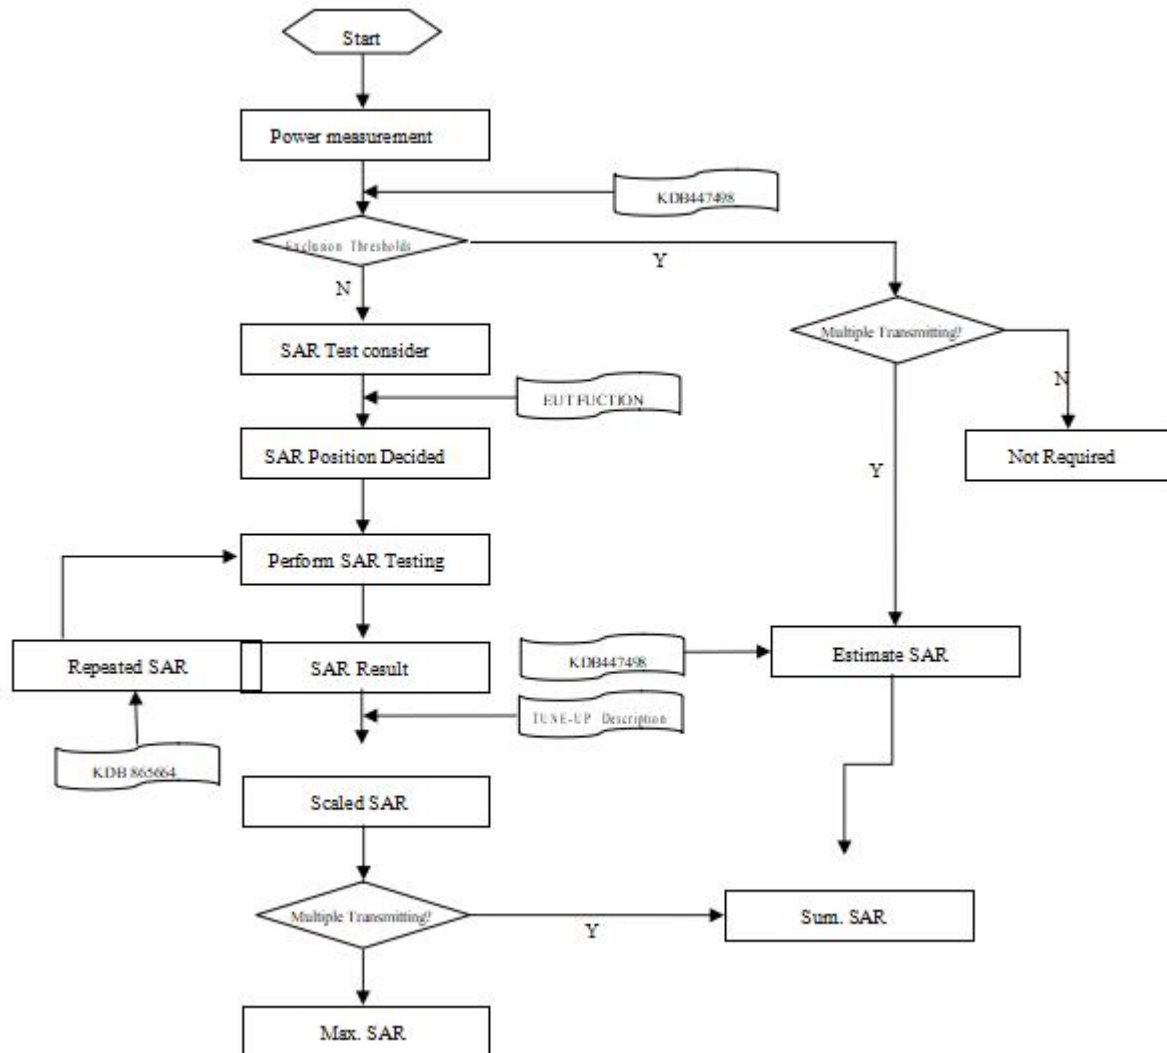

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	½·δ·ln(2)±0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2–3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
				5–6 GHz: ≤ 2 mm
		≤ 1.5·Δz Zoom (n-1)		
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm
Note:				
1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528- 2011 for details.				
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB				
447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8. Conducted RF Output Power

8.1 GSM

Mode: GSM850		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH128	CH190	CH251		CH128	CH190	CH251
			824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM		32.50	31.68	32.08	32.10	-9.03	22.65	23.05	23.07
GPRS (GMSK)	1Tx slot	32.00	31.69	31.90	31.98	-9.03	22.66	22.87	22.95
	2Tx slots	31.50	30.85	31.25	31.34	-6.02	24.83	25.23	25.32
	3Tx slots	29.50	29.00	29.42	29.46	-4.26	24.74	25.16	25.20
	4Tx slots	28.50	27.82	28.24	28.29	-3.01	24.81	25.23	25.28
Mode: GSM1900		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH512	CH661	CH810		CH512	CH661	CH810
			1850.2MHz	1880.0MHz	1909.8MHz		1850.2MHz	1880.0MHz	1909.8MHz
GSM		28.50	27.80	28.03	27.99	-9.03	18.77	19.00	18.96
GPRS (GMSK)	1Tx slot	28.50	27.79	28.05	28.00	-9.03	18.76	19.02	18.97
	2Tx slots	27.00	26.39	26.59	26.65	-6.02	20.37	20.57	20.63
	3Tx slots	24.00	23.75	23.82	23.79	-4.26	19.49	19.56	19.53
	4Tx slots	23.00	22.55	22.60	22.64	-3.01	19.54	19.59	19.63
Note: 1) Division Factors To average the power, the division factor is as follows: 1Tx-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB 2Tx-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB 3Tx-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB 4Tx-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB									

8.2 WCDMA

Mode		Maximum Tune-up(dBm)	WCDMA Band II		
			Conducted Power (dBm)		
			CH9262	CH9400	CH9538
			1852.4	1880.0	1907.6
RMC 12.2K		21.50	20.61	21.09	21.19
HSDPA	Subtest-1	21.50	20.61	21.09	21.19
	Subtest-2	21.00	20.07	20.53	20.63
	Subtest-3	21.00	20.10	20.58	20.63
	Subtest-4	21.00	20.14	20.58	20.69
HSUPA	Subtest-1	19.50	18.69	19.17	19.23
	Subtest-2	20.00	19.15	19.61	19.70
	Subtest-3	20.50	19.67	20.10	20.19
	Subtest-4	19.50	18.74	19.18	19.29
	Subtest-5	21.50	20.68	21.11	21.22
Mode		Maximum Tune-up(dBm)	WCDMA Band IV		
			Conducted Power (dBm)		
			CH1312	CH1413	CH1513
			1712.4	1732.6	1752.6
RMC 12.2K		21.00	20.98	20.78	20.78
HSDPA	Subtest-1	21.00	20.98	20.78	20.78
	Subtest-2	21.00	20.55	20.29	20.35
	Subtest-3	20.50	20.42	20.24	20.26
	Subtest-4	20.50	20.42	20.24	20.24
HSUPA	Subtest-1	19.00	18.80	18.61	18.61
	Subtest-2	19.50	19.30	19.12	19.10
	Subtest-3	20.00	19.81	19.66	19.61
	Subtest-4	19.00	18.83	18.64	18.64
	Subtest-5	21.00	20.78	20.57	20.60
Mode		Maximum Tune-up(dBm)	WCDMA Band V		
			Conducted Power (dBm)		
			CH4132	CH4183	CH4233
			826.4	836.6	846.6
RMC 12.2K		22.00	21.70	21.74	21.70
HSDPA	Subtest-1	22.00	21.70	21.74	21.70
	Subtest-2	21.50	21.26	21.25	21.20
	Subtest-3	21.50	21.24	21.25	21.22
	Subtest-4	21.50	21.24	21.21	21.21
HSUPA	Subtest-1	20.00	19.73	19.74	19.74
	Subtest-2	20.50	20.23	20.28	20.25
	Subtest-3	21.00	20.75	20.79	20.72
	Subtest-4	20.00	19.76	19.78	19.75
	Subtest-5	22.00	21.71	21.70	21.69
Per KDB 941225 D01, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/2$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.					

8.3 LTE

Band 2

LTE-FDD Band 2				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		18607	18900	19193
					1850.7MHz	1880.0MHz	1909.3MHz
1.4MHz	QPSK	1	0	23.00	22.11	22.47	22.58
			2	23.00	22.28	22.63	22.68
			5	22.50	22.05	22.42	22.32
		3	0	23.00	22.20	22.57	22.16
			1	23.00	22.20	22.60	22.17
			3	23.00	22.19	22.56	22.24
		6	0	22.00	21.14	21.56	21.15
	16QAM	1	0	22.00	21.24	21.58	21.69
			2	22.00	21.39	21.73	21.41
			5	22.00	21.19	21.56	21.24
		3	0	21.50	21.07	21.45	21.06
			1	21.50	21.06	21.46	21.04
			3	21.50	21.08	21.41	21.03
		6	0	21.00	20.23	20.56	20.27
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18615	18900	19185
					1851.5MHz	1880.0MHz	1908.5MHz
3MHz	QPSK	1	0	22.50	21.62	22.09	22.11
			8	22.50	21.61	22.05	22.21
			14	22.50	21.63	22.04	22.23
		8	0	21.50	20.75	21.08	21.20
			4	21.50	20.70	21.10	21.22
			7	21.50	20.65	21.04	21.23
		15	0	21.50	20.66	21.03	21.16
	16QAM	1	0	21.50	20.87	21.24	21.01
			8	21.50	20.83	21.19	21.08
			14	21.50	20.83	21.15	21.12
		8	0	20.50	19.73	20.12	20.21
			4	20.50	19.76	20.14	20.24
			7	20.50	19.74	20.10	20.28
		15	0	20.50	19.70	20.00	20.13
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18625	18900	19175
					1852.5MHz	1880.0MHz	1907.5MHz
5MHz	QPSK	1	0	22.00	21.54	21.96	21.98
			12	22.50	21.69	22.10	22.17
			24	22.50	21.49	21.91	22.10
		12	0	21.50	20.61	21.03	21.05
			6	21.50	20.57	21.07	21.01
			13	21.50	20.57	20.93	21.06
		25	0	21.50	20.57	21.03	21.10
	16QAM	1	0	21.50	20.59	21.21	20.90
			12	21.50	20.70	21.28	21.15
			24	21.50	20.55	21.13	21.08
		12	0	20.50	19.57	20.07	20.05
			6	20.50	19.62	20.09	20.06
			13	20.50	19.50	19.96	20.10
		25	0	20.50	19.60	20.01	20.19

LTE-FDD Band 2				Maximum Tune-up(dBm)	Conducted Power(dBm)					
Bandwidth	Modulation	RB allocation	RB offset		18650	18900	19150			
					1855.0MHz	1880.0MHz	1905.0MHz			
10MHz	QPSK	1	0	22.00	21.47	21.92	21.81			
			24	22.50	21.74	22.11	22.08			
			49	22.50	21.49	21.85	22.06			
		25	0	21.50	20.66	21.11	21.07			
			12	21.50	20.68	21.12	21.07			
			25	21.50	20.67	20.99	21.04			
		50	0	21.50	20.66	21.03	21.02			
			16QAM	1	0	21.50	20.75	21.07	20.76	
					24	21.50	20.83	21.33	21.00	
	49	21.50			20.75	21.03	20.96			
	25	0		20.50	19.68	20.20	20.18			
		12		20.50	19.63	20.19	20.19			
		25		20.50	19.65	20.05	20.16			
	50	0		20.50	19.63	20.05	20.07			
		Bandwidth		Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18675	18900	19125
								1857.5MHz	1880.0MHz	1902.5MHz
	15MHz	QPSK	1	0	22.00	21.36	21.76	21.64		
				38	22.00	21.53	21.96	21.88		
74				22.00	21.40	21.62	21.90			
38			0	21.00	20.57	20.98	20.85			
			18	21.00	20.61	20.94	20.87			
			37	21.00	20.59	20.95	20.88			
75			0	21.00	20.55	20.94	20.86			
			16QAM	1	0	21.50	20.60	21.02	20.54	
					38	21.50	20.77	21.22	20.77	
74		21.00			20.70	20.92	20.80			
38		0		21.00	20.58	20.94	20.89			
		18		21.00	20.57	20.94	20.88			
		37		21.00	20.61	20.94	20.87			
75		0		20.00	19.52	19.97	19.84			
		Bandwidth		Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18700	18900	19100
								1860.0MHz	1880.0MHz	1900.0MHz
20MHz		QPSK	1	0	22.00	21.28	21.62	21.36		
				49	22.50	21.65	22.18	21.80		
	99			22.00	21.53	21.52	21.62			
	50		0	21.50	20.55	21.03	20.66			
			25	21.50	20.53	21.05	20.65			
			50	21.00	20.71	20.84	20.68			
	100		0	21.00	20.59	20.94	20.66			
			16QAM	1	0	21.00	20.33	20.79	20.46	
					49	21.50	20.71	21.32	20.94	
	99	21.00			20.57	20.72	20.78			
	50	0		20.50	19.49	20.06	19.71			
		25		20.50	19.52	20.10	19.75			
		50		20.00	19.71	19.93	19.75			
	100	0		20.00	19.61	19.98	19.72			

Band 4

LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		19957	20175	20393
					1710.7MHz	1732.5MHz	1754.3MHz
1.4MHz	QPSK	1	0	21.50	21.34	21.21	21.13
			2	21.50	21.45	21.36	21.26
			5	21.50	21.32	21.18	21.10
		3	0	21.50	21.46	21.29	21.19
			1	21.50	21.40	21.26	21.19
			3	21.50	21.47	21.29	21.21
		6	0	20.50	20.41	20.22	20.16
	16QAM	1	0	20.50	20.49	20.12	20.26
			2	21.00	20.65	20.29	20.37
			5	20.50	20.48	20.11	20.25
		3	0	20.50	20.35	20.10	20.09
			1	20.50	20.35	20.10	20.07
			3	20.50	20.30	20.05	20.09
		6	0	19.50	19.28	19.24	19.25
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19965	20175	20385
					1711.5MHz	1732.5MHz	1753.5MHz
3MHz	QPSK	1	0	21.50	21.43	21.30	21.31
			8	21.50	21.42	21.35	21.28
			14	21.50	21.41	21.25	21.28
		8	0	20.50	20.42	20.31	20.28
			4	20.50	20.41	20.30	20.29
			7	20.50	20.43	20.22	20.25
		15	0	20.50	20.44	20.27	20.27
	16QAM	1	0	21.00	20.63	20.58	20.17
			8	21.00	20.59	20.43	20.13
			14	21.00	20.57	20.42	20.21
		8	0	19.50	19.47	19.27	19.28
			4	19.50	19.44	19.28	19.29
			7	19.50	19.46	19.30	19.28
		15	0	19.50	19.42	19.18	19.15
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19976	20175	20375
					1712.5MHz	1732.5MHz	1752.5MHz
5MHz	QPSK	1	0	21.50	21.26	21.20	21.18
			12	21.50	21.40	21.29	21.34
			24	21.50	21.33	21.11	21.21
		12	0	20.50	20.30	20.20	20.16
			6	20.50	20.34	20.21	20.13
			13	20.50	20.37	20.12	20.18
		25	0	20.50	20.34	20.22	20.15
	16QAM	1	0	20.50	20.36	20.40	20.17
			12	20.50	20.43	20.48	20.31
			24	20.50	20.36	20.35	20.17
		12	0	19.50	19.32	19.19	19.16
			6	19.50	19.28	19.21	19.19
			13	19.50	19.34	19.17	19.19
		25	0	19.50	19.39	19.12	19.23

LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		20000	20175	20350		
					1715.0MHz	1732.5MHz	1750.0MHz		
10MHz	QPSK	1	0	21.50	21.33	21.26	21.03		
			24	21.50	21.49	21.29	21.28		
			49	21.50	21.37	21.03	21.19		
		25	0	20.50	20.40	20.30	20.14		
			12	20.50	20.38	20.28	20.17		
			25	20.50	20.49	20.20	20.21		
		50	0	20.50	20.37	20.22	20.17		
			16QAM	1	0	20.50	20.48	20.41	19.91
					24	21.00	20.75	20.40	20.20
	49	21.00			20.56	20.20	20.06		
	25	0		19.50	19.35	19.31	19.20		
		12		19.50	19.36	19.30	19.19		
		25		19.50	19.45	19.24	19.23		
	50	0		19.50	19.36	19.23	19.20		
	Bandwidth	Modulation		RB allocation	RB offset	Maximum Tune-up(dBm)	20025	20175	20325
							1717.5MHz	1732.5MHz	1747.5MHz
15MHz	QPSK	1	0	21.50	21.15	21.13	20.91		
			38	21.50	21.40	21.22	21.16		
			74	21.50	21.10	20.85	21.05		
		38	0	20.50	20.33	20.18	20.05		
			18	20.50	20.32	20.19	20.07		
			37	20.50	20.34	20.15	20.10		
		75	0	20.50	20.30	20.20	20.06		
		16QAM	1	0	20.50	20.34	20.47	19.80	
				38	21.00	20.56	20.46	20.03	
	74			20.50	20.31	20.13	19.90		
	38		0	20.50	20.32	20.20	20.07		
			18	20.50	20.34	20.22	20.05		
			37	20.50	20.30	20.20	20.03		
	75		0	19.50	19.28	19.14	18.99		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20050	20175	20300	
						1720.0MHz	1732.5MHz	1745.0MHz	
20MHz	QPSK	1	0	21.50	21.09	21.11	20.68		
			49	22.00	21.60	21.37	21.09		
			99	21.50	21.09	20.83	20.84		
		50	0	20.50	20.29	20.30	20.03		
			25	20.50	20.29	20.30	20.06		
			50	20.50	20.32	20.16	20.14		
		100	0	20.50	20.24	20.24	20.09		
		16QAM	1	0	20.50	20.11	20.26	19.77	
				49	21.00	20.64	20.50	20.17	
	99			20.50	20.04	20.04	19.88		
	50		0	19.50	19.27	19.34	19.11		
			25	19.50	19.32	19.35	19.09		
			50	19.50	19.30	19.17	19.16		
	100		0	19.50	19.28	19.17	19.04		

Band 5

LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20407	20525	20643
					824.7MHz	836.5MHz	848.3MHz
1.4MHz	QPSK	1	0	22.50	22.28	22.30	22.23
			2	22.50	22.38	22.42	22.37
			5	22.50	22.28	22.24	22.21
		3	0	22.50	22.38	22.39	22.33
			1	22.50	22.39	22.37	22.30
			3	22.50	22.39	22.39	22.38
		6	0	21.50	21.37	21.31	21.32
	16QAM	1	0	21.50	21.21	21.40	21.38
			2	22.00	21.36	21.49	21.52
			5	21.50	21.21	21.39	21.33
		3	0	21.50	21.21	21.25	21.20
			1	21.50	21.18	21.26	21.19
			3	21.50	21.17	21.23	21.20
		6	0	20.50	20.34	20.35	20.19
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20415	20525	20635
					825.5MHz	836.5MHz	847.5MHz
3MHz	QPSK	1	0	22.50	22.37	22.36	22.43
			8	22.50	22.42	22.39	22.42
			14	22.50	22.34	22.33	22.39
		8	0	21.50	21.44	21.41	21.44
			4	21.50	21.41	21.39	21.45
			7	21.50	21.40	21.37	21.41
		15	0	21.50	21.41	21.39	21.37
	16QAM	1	0	22.00	21.56	21.60	21.32
			8	22.00	21.56	21.53	21.34
			14	21.50	21.49	21.49	21.23
		8	0	20.50	20.44	20.39	20.42
			4	20.50	20.46	20.42	20.44
			7	20.50	20.43	20.36	20.36
		15	0	20.50	20.39	20.30	20.24

LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20425	20525	20625
					826.5MHz	836.5MHz	846.5MHz
5MHz	QPSK	1	0	22.50	22.29	22.29	22.31
			12	22.50	22.36	22.40	22.41
			24	22.50	22.25	22.27	22.28
		12	0	21.50	21.27	21.32	21.35
			6	21.50	21.27	21.39	21.33
			13	21.50	21.27	21.24	21.25
		25	0	21.50	21.31	21.36	21.28
	16QAM	1	0	21.50	21.30	21.47	21.26
			12	22.00	21.32	21.57	21.36
			24	21.50	21.19	21.45	21.23
		12	0	20.50	20.25	20.40	20.30
			6	20.50	20.26	20.38	20.31
			13	20.50	20.24	20.32	20.25
		25	0	20.50	20.29	20.35	20.34

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20450	20525	20600
					829.0MHz	836.5MHz	844.0MHz
10MHz	QPSK	1	0	22.50	22.30	22.29	22.28
			24	22.50	22.46	22.45	22.40
			49	22.50	22.26	22.30	22.27
		25	0	21.50	21.29	21.49	21.43
			12	22.00	21.33	21.50	21.39
			25	21.50	21.37	21.38	21.32
		50	0	21.50	21.32	21.39	21.32
	16QAM	1	0	21.50	21.47	21.48	21.18
			24	22.00	21.50	21.63	21.33
			49	21.50	21.47	21.46	21.16
		25	0	21.00	20.30	20.52	20.45
			12	20.50	20.29	20.47	20.46
			25	20.50	20.31	20.41	20.38
		50	0	20.50	20.28	20.43	20.38

Band 7

LTE-FDD Band 7				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20775	21100	21425
					2502.5MHz	2535.0MHz	2567.5MHz
5MHz	QPSK	1	0	23.00	22.50	22.41	22.30
			12	23.00	22.59	22.08	21.95
			24	23.00	22.50	21.67	21.80
		12	0	22.50	21.58	21.98	22.01
			6	22.50	21.56	21.91	22.00
			13	22.00	21.58	21.75	21.89
		25	0	22.00	21.57	21.82	21.94
	16QAM	1	0	22.50	21.69	22.00	21.83
			12	22.00	21.84	21.77	21.71
			24	22.00	21.67	21.51	21.47
		12	0	21.50	20.52	20.93	21.14
			6	21.50	20.52	20.88	21.15
			13	21.50	20.67	20.83	21.11
		25	0	21.50	20.55	20.89	21.14
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20800	21100	21400
					2505.0MHz	2535.0MHz	2565.0MHz
10MHz	QPSK	1	0	23.00	22.44	22.48	22.81
			24	23.00	22.68	21.72	21.94
			49	23.00	22.53	21.60	21.66
		25	0	22.50	21.57	21.86	22.25
			12	22.50	21.59	21.85	22.28
			25	22.00	21.77	21.58	21.91
		50	0	22.50	21.67	21.71	22.07
	16QAM	1	0	22.50	21.69	22.01	22.05
			24	22.00	21.86	21.58	21.70
			49	22.00	21.73	21.62	21.36
		25	0	21.50	20.59	21.05	21.40
			12	21.50	20.54	21.07	21.40
			25	21.50	20.74	21.03	21.27
		50	0	21.50	20.65	21.03	21.25

LTE-FDD Band 7				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20825	21100	21375
					2507.5MHz	2535.0MHz	2562.5MHz
15MHz	QPSK	1	0	23.00	22.37	22.71	22.90
			38	23.00	22.61	21.77	22.40
			74	23.00	22.50	21.87	21.70
		38	0	22.50	21.75	21.87	22.41
			18	22.50	21.73	21.81	22.38
			37	22.50	21.75	21.80	22.35
		75	0	22.50	21.75	21.78	22.34
	16QAM	1	0	22.50	21.54	22.03	21.87
			38	22.00	21.76	21.71	21.96
			74	22.00	21.66	21.99	21.36
		38	0	22.50	21.74	21.83	22.38
			18	22.50	21.75	21.81	22.36
			37	22.50	21.75	21.79	22.34
		75	0	21.50	20.63	20.99	21.33
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20850	21100	21350
					2510.0MHz	2535.0MHz	2560.0MHz
20MHz	QPSK	1	0	23.00	22.30	22.62	22.58
			49	23.00	22.80	21.96	22.74
			99	23.00	22.60	22.36	21.74
		50	0	22.50	21.47	22.09	22.32
			25	22.50	21.46	22.08	22.29
			50	22.50	21.66	21.88	22.06
		100	0	22.50	21.57	22.06	22.25
	16QAM	1	0	22.00	21.33	21.81	21.71
			49	22.50	21.87	21.74	22.21
			99	22.00	21.65	21.76	21.59
		50	0	21.50	20.40	21.12	21.34
			25	21.50	20.40	21.04	21.30
			50	21.50	20.64	20.96	21.07
		100	0	21.50	20.58	21.04	21.21

Band 12

LTE-FDD Band 12				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		23017	23095	23173
					699.7MHz	707.5MHz	715.3MHz
1.4MHz	QPSK	1	0	23.00	22.63	22.67	22.60
			2	23.00	22.83	22.78	22.63
			5	23.00	22.62	22.69	22.60
		3	0	23.00	22.73	22.73	22.69
			1	23.00	22.72	22.72	22.70
			3	23.00	22.71	22.74	22.78
		6	0	22.00	21.69	21.76	21.78
	16QAM	1	0	22.00	21.80	21.79	21.55
			2	22.50	21.91	22.03	21.74
			5	22.00	21.77	21.79	21.50
		3	0	22.00	21.64	21.69	21.57
			1	22.00	21.66	21.67	21.60
			3	22.00	21.61	21.72	21.50
		6	0	21.00	20.75	20.67	20.77

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23025	23095	23165
					700.5MHz	707.5MHz	714.5MHz
3MHz	QPSK	1	0	23.00	22.66	22.82	22.75
			8	23.00	22.67	22.76	22.75
			14	23.00	22.69	22.77	22.74
		8	0	22.00	21.72	21.84	21.86
			4	22.00	21.70	21.85	21.89
			7	22.00	21.82	21.82	21.85
		15	0	22.00	21.79	21.82	21.80
			0	22.50	21.97	22.03	21.74
			8	22.00	21.89	21.94	21.71
	16QAM	1	14	22.00	21.91	21.92	21.65
			0	21.00	20.78	20.84	20.85
			4	21.00	20.78	20.86	20.84
		8	7	21.00	20.85	20.78	20.83
			0	21.00	20.79	20.73	20.70
			0	22.50	21.97	22.03	21.74
			8	22.00	21.89	21.94	21.71
			14	22.00	21.91	21.92	21.65
			0	21.00	20.78	20.84	20.85
			4	21.00	20.78	20.86	20.84
			7	21.00	20.85	20.78	20.83
			0	21.00	20.79	20.73	20.70
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23035	23095	23155
					701.5MHz	707.5MHz	713.5MHz
5MHz	QPSK	1	0	23.00	22.55	22.57	22.62
			12	23.00	22.67	22.78	22.76
			24	23.00	22.64	22.67	22.67
		12	0	22.00	21.59	21.78	21.63
			6	22.00	21.57	21.72	21.64
			13	22.00	21.76	21.71	21.63
		25	0	22.00	21.71	21.74	21.70
			0	22.00	21.62	21.91	21.69
			12	22.50	21.77	22.04	21.80
	16QAM	1	24	22.00	21.75	21.92	21.65
			0	21.00	20.52	20.77	20.68
			6	21.00	20.62	20.78	20.67
		12	13	21.00	20.68	20.77	20.66
			0	21.00	20.67	20.71	20.76
			0	22.50	21.77	22.04	21.80
			12	22.00	21.75	21.92	21.65
			0	21.00	20.52	20.77	20.68
			6	21.00	20.62	20.78	20.67
			13	21.00	20.68	20.77	20.66
			0	21.00	20.67	20.71	20.76
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23060	23095	23130
					704.0MHz	707.5MHz	711.0MHz
10MHz	QPSK	1	0	23.00	22.53	22.56	22.68
			24	23.00	22.88	22.89	22.82
			49	23.00	22.65	22.63	22.70
		25	0	22.00	21.67	21.86	21.94
			12	22.00	21.70	21.83	21.93
			25	22.00	21.73	21.78	21.86
		50	0	22.00	21.72	21.83	21.87
			0	22.00	21.84	21.86	21.64
			24	22.50	21.99	22.04	21.80
	16QAM	1	49	22.00	21.86	21.83	21.61
			0	21.00	20.66	20.87	20.97
			12	21.00	20.65	20.86	20.96
		25	25	21.00	20.75	20.83	20.85
			0	21.00	20.67	20.81	20.89
			0	22.00	21.72	21.83	21.87
			0	22.00	21.70	21.83	21.93
			0	22.00	21.73	21.78	21.86
			0	22.00	21.67	21.86	21.94
			0	22.00	21.72	21.83	21.87

Band 17

LTE-FDD Band 17				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		23755	23790	23825
					706.5MHz	710.0MHz	713.5MHz
5MHz	QPSK	1	0	23.00	22.68	22.63	22.64
			12	23.00	22.77	22.67	22.71
			24	23.00	22.61	22.56	22.60
		12	0	22.00	21.71	21.79	21.66
			6	22.00	21.68	21.72	21.63
			13	22.00	21.61	21.65	21.66
		25	0	22.00	21.66	21.69	21.68
	16QAM	1	0	22.00	21.65	21.89	21.65
			12	22.00	21.77	21.96	21.78
			24	22.00	21.71	21.80	21.61
		12	0	21.00	20.67	20.79	20.62
			6	21.00	20.70	20.74	20.64
			13	21.00	20.65	20.68	20.66
		25	0	21.00	20.69	20.65	20.73
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23780	23790	23800
					709.0MHz	710.0MHz	711.0MHz
10MHz	QPSK	1	0	23.00	22.50	22.56	22.64
			24	23.00	22.90	22.89	22.82
			49	23.00	22.56	22.55	22.60
		25	0	22.00	21.80	21.87	21.92
			12	22.00	21.85	21.89	21.92
			25	22.00	21.79	21.82	21.83
		50	0	22.00	21.82	21.82	21.84
	16QAM	1	0	22.00	21.78	21.81	21.63
			24	22.50	21.96	22.00	21.72
			49	22.00	21.74	21.76	21.59
		25	0	21.00	20.83	20.90	20.95
			12	21.00	20.84	20.90	20.92
			25	21.00	20.81	20.84	20.89
		50	0	21.00	20.82	20.86	20.86

Band 30

LTE-FDD Band 30				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		27685	27710	27735
					2307.5MHz	2310MHz	2312.5MHz
5MHz	QPSK	1	0	23.00	22.87	22.90	22.85
			12	23.50	23.02	23.02	23.00
			24	23.00	22.88	22.91	22.90
		12	0	22.00	21.91	21.94	21.90
			6	22.00	21.91	21.97	21.91
			13	22.00	21.91	21.90	21.88
		25	0	22.00	21.90	21.90	21.90
	16QAM	1	0	22.50	22.05	21.91	21.87
			12	22.50	22.14	22.00	21.96
			24	22.50	22.06	21.85	21.87
		12	0	21.00	20.90	20.93	20.87
			6	21.00	20.96	20.92	20.87
			13	21.00	20.92	20.84	20.79
		25	0	21.00	20.90	20.93	20.88

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	27710
					2310MHz
10MHz	QPSK	1	0	23.00	22.85
			24	23.50	23.09
			49	23.00	22.89
		25	0	22.50	22.03
			12	22.50	22.03
			25	22.00	21.94
		50	0	22.00	21.94
	16QAM	1	0	22.00	21.99
			24	22.50	22.24
			49	22.50	22.04
		25	0	21.50	21.03
			12	21.00	20.94
			25	21.00	20.92
		50	0	21.00	20.93

Band 66

LTE-FDD Band 66				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		131979	132322	132665
					1710.7MHz	1745.0MHz	1779.3MHz
1.4MHz	QPSK	1	0	22.00	21.97	21.70	21.32
			2	22.50	22.04	21.84	21.46
			5	22.00	21.94	21.68	21.33
		3	0	22.50	22.01	21.74	21.45
			1	22.50	22.01	21.75	21.45
			3	22.50	22.09	21.77	21.44
		6	0	21.50	21.05	20.71	20.44
	16QAM	1	0	21.50	21.08	20.60	20.50
			2	21.50	21.25	20.70	20.68
			5	21.50	21.13	20.56	20.51
		3	0	21.00	20.95	20.57	20.34
			1	21.00	20.95	20.58	20.33
			3	21.00	20.94	20.56	20.33
		6	0	20.00	19.90	19.72	19.48
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	131987
1711.5MHz	1745.0MHz						1778.5MHz
3MHz	QPSK	1	0	22.50	22.06	21.81	21.59
			8	22.50	22.06	21.82	21.52
			14	22.50	22.13	21.80	21.50
		8	0	21.50	21.09	20.80	20.54
			4	21.50	21.11	20.78	20.55
			7	21.50	21.10	20.80	20.54
		15	0	21.50	21.05	20.76	20.51
	16QAM	1	0	21.50	21.28	20.99	20.46
			8	21.50	21.25	20.91	20.47
			14	21.50	21.32	20.95	20.48
		8	0	20.50	20.11	19.81	19.51
			4	20.50	20.09	19.80	19.55
			7	20.50	20.14	19.73	19.51
		15	0	20.50	20.04	19.69	19.46

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	131997	132322	132647
					1712.5MHz	1745.0MHz	1777.5MHz
5MHz	QPSK	1	0	22.00	21.89	21.67	21.44
			12	22.50	22.11	21.81	21.54
			24	22.50	22.02	21.69	21.36
		12	0	21.00	20.98	20.68	20.52
			6	21.00	20.94	20.72	20.50
			13	21.50	21.06	20.70	20.44
		25	0	21.00	20.98	20.70	20.47
			0	21.50	21.00	20.86	20.48
			12	21.50	21.14	21.00	20.61
	16QAM	1	24	21.50	21.00	20.88	20.40
			0	20.00	19.93	19.71	19.48
			6	20.00	19.90	19.69	19.49
		12	13	20.50	20.00	19.69	19.43
			0	20.00	19.98	19.69	19.52
			0	20.00	19.98	19.69	19.52
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	132022	132322	132622
					1715.0MHz	1745.0MHz	1775.0MHz
10MHz	QPSK	1	0	22.00	21.91	21.65	21.53
			24	22.50	22.15	21.82	21.67
			49	22.50	22.04	21.78	21.44
		25	0	21.50	21.05	20.80	20.64
			12	21.50	21.05	20.82	20.65
			25	21.50	21.11	20.75	20.49
		50	0	21.50	21.06	20.77	20.53
			0	21.50	21.17	20.85	20.50
			24	21.50	21.44	21.04	20.57
	16QAM	1	49	21.50	21.20	20.89	20.38
			0	20.50	20.05	19.82	19.71
			12	20.50	20.03	19.85	19.67
		25	25	20.50	20.08	19.79	19.57
			0	20.50	20.09	19.81	19.54
			0	20.50	20.09	19.81	19.54

LTE-FDD Band 66				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		132047	132322	132597
15MHz	QPSK	1	0	22.00	21.85	21.57	21.61
			38	22.50	22.10	21.69	21.64
			74	22.00	21.88	21.63	21.27
		38	0	21.50	21.05	20.78	20.57
			18	21.50	21.04	20.73	20.59
			37	21.50	21.08	20.73	20.57
		75	0	21.50	21.03	20.73	20.61
			0	21.50	21.03	20.90	20.52
			38	21.50	21.27	21.00	20.50
	16QAM	1	74	21.50	21.06	20.89	20.25
			0	21.50	21.00	20.72	20.62
			18	21.50	21.04	20.72	20.60
		38	37	21.50	21.02	20.73	20.58
			0	20.00	19.96	19.75	19.55
			0	20.00	19.96	19.75	19.55

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	132072	132322	132572
					1720.0MHz	1745.0MHz	1770.0MHz
20MHz	QPSK	1	0	22.00	21.73	21.54	21.40
			49	22.50	22.26	21.85	21.62
			99	22.00	21.76	21.58	21.08
		50	0	21.00	20.95	20.73	20.79
			25	21.00	20.96	20.72	20.80
			50	21.00	20.99	20.70	20.46
		100	0	21.00	20.91	20.74	20.62
			0	21.00	20.76	20.70	20.51
			49	21.50	21.19	20.99	20.78
	16QAM	1	99	21.00	20.73	20.77	20.20
		50	0	20.50	20.01	19.80	19.80
			25	20.00	19.91	19.75	19.79
			50	20.00	19.93	19.76	19.53
		100	0	20.00	19.95	19.74	19.60

Band 71

LTE-FDD Band 71				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		133147	133297	133447
5MHz	QPSK	1	0	23.00	22.99	22.98	22.88
			12	23.50	23.14	23.10	22.99
			24	23.50	23.07	22.92	22.94
		12	0	22.50	22.06	22.00	21.99
			6	22.50	22.03	22.02	22.01
			13	22.50	22.12	22.00	22.00
		25	0	22.50	22.07	22.00	22.01
	16QAM	1	0	22.50	22.21	22.06	21.94
			12	22.50	22.41	22.18	22.05
			24	22.50	22.29	22.01	21.95
		12	0	21.50	21.05	21.03	21.01
			6	21.50	21.07	21.02	20.98
			13	21.50	21.07	21.00	20.93
		25	0	21.50	21.12	21.06	21.07
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	133172	133297	133422
					668.0MHz	680.5MHz	693.0MHz
10MHz	QPSK	1	0	23.00	22.86	22.97	22.82
			24	23.50	23.26	23.20	23.04
			49	23.00	22.96	22.91	22.93
		25	0	22.50	22.16	22.20	22.20
			12	22.50	22.15	22.19	22.15
			25	22.50	22.28	22.14	21.98
		50	0	22.50	22.24	22.16	22.10
	16QAM	1	0	22.50	22.10	21.98	22.12
			24	22.50	22.37	22.08	22.25
			49	22.50	22.18	21.90	22.18
		25	0	21.50	21.14	21.27	21.16
			12	21.50	21.12	21.26	21.18
			25	21.50	21.33	21.20	20.98
		50	0	21.50	21.27	21.17	21.00

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	133197	133297	133397
					670.5MHz	680.5MHz	690.5MHz
15MHz	QPSK	1	0	23.00	22.76	22.80	22.74
			38	23.50	23.00	23.06	22.87
			74	23.00	22.84	22.78	22.81
		38	0	22.50	22.12	21.77	21.93
			18	22.50	22.29	21.94	22.12
			37	22.50	22.17	21.77	21.98
		75	0	22.50	22.05	22.07	21.91
			0	22.50	22.11	21.78	21.97
			38	22.50	22.32	21.98	22.13
	16QAM	1	74	22.50	22.18	21.82	22.05
			0	22.50	22.11	21.79	21.93
			18	22.50	22.29	21.96	22.06
		38	37	22.50	22.16	21.76	22.02
			0	21.50	21.00	21.06	20.86
			0	21.50	21.00	21.06	20.86
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	133222	133322	133372
					673.0MHz	683.0MHz	688.0MHz
20MHz	QPSK	1	0	23.00	22.66	22.62	22.51
			49	23.50	23.03	23.04	22.98
			99	23.00	22.76	22.62	22.58
		50	0	22.50	21.79	22.19	21.79
			25	22.50	21.83	22.22	21.81
			50	22.50	21.85	22.20	21.82
		100	0	22.50	21.84	22.22	21.83
			0	22.00	21.70	21.92	21.68
			49	22.50	22.17	22.30	22.07
	16QAM	1	99	22.00	21.82	21.96	21.73
			0	21.50	20.74	21.26	20.86
			25	21.50	20.79	21.21	20.85
		50	50	21.50	20.83	21.19	20.86
			0	21.50	20.75	21.19	20.86
			0	21.50	20.75	21.19	20.86

8.4 Wi-Fi

2.4G

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	14.68	15.00	Yes
		6	2437	14.24	14.50	No
		11	2462	13.88	14.00	No
	802.11g	1	2412	11.93	12.00	No
		6	2437	12.21	12.50	No
		11	2462	11.85	12.00	No
	802.11n(HT20)	1	2412	12.02	12.50	No
		6	2437	11.96	12.00	No
		11	2462	11.58	12.00	No
	802.11n(HT40)	3	2422	11.03	11.50	No
		6	2437	11.27	11.50	No
		9	2452	11.05	11.50	No

Note: SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$.

5G

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11a	36	5180	8.17	8.50	No
		40	5200	11.33	11.50	No
		48	5240	11.52	12.00	Yes
	802.11n(HT20)	36	5180	11.39	11.50	No
		40	5200	11.30	11.50	No
		48	5240	11.39	11.50	No
	802.11ac(VHT20)	36	5180	9.03	9.50	No
		40	5200	8.89	9.00	No
		48	5240	9.51	10.00	No
	802.11n(HT40)	38	5190	11.29	11.50	No
		46	5230	9.98	10.00	No
	802.11ac(VHT40)	38	5190	10.62	11.00	No
		46	5230	9.52	10.00	No
	802.11ac(VHT80)	42	5210	9.61	10.00	No

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2a (5.250~5.350)	802.11a	52	5260	11.86	12.00	No
		56	5280	12.09	12.50	No
		64	5320	13.34	13.50	Yes
	802.11n(HT20)	52	5260	11.64	12.00	No
		56	5280	12.11	12.50	No
		64	5320	13.22	13.50	No
	802.11ac(VHT20)	52	5260	8.11	8.50	No
		56	5280	10.65	11.00	No
		64	5320	11.88	12.00	No
	802.11n(HT40)	54	5270	10.45	10.50	No
		62	5310	11.50	12.00	No
	802.11ac(VHT40)	54	5270	10.38	10.50	No
		62	5310	11.86	12.00	No
	802.11ac(VHT80)	58	5290	9.70	10.00	No

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2c (5.470~5.725)	802.11a	100	5500	10.57	11.00	No
		116	5580	11.96	12.00	No
		140	5700	14.10	14.50	Yes
	802.11n(HT20)	100	5500	10.40	10.50	No
		116	5580	11.81	12.00	No
		140	5700	14.09	14.50	No
	802.11ac(VHT20)	100	5500	8.57	9.00	No
		116	5580	12.01	12.50	No
		140	5700	12.64	13.00	No
	802.11n(HT40)	102	5510	9.18	9.50	No
		110	5550	9.61	10.00	No
	802.11ac(VHT40)	102	5510	8.89	9.00	No
		110	5550	9.68	10.00	No
	802.11ac(VHT80)	106	5530	7.72	8.00	No

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-3 (5.725~5.850)	802.11a	149	5745	13.72	14.00	No
		157	5785	13.28	13.50	No
		165	5825	13.04	13.50	No
	802.11n(HT20)	149	5745	13.68	14.00	No
		157	5785	13.22	13.50	No
		165	5825	12.97	13.00	No
	802.11ac(VHT20)	149	5745	13.75	14.00	Yes
		157	5785	13.51	14.00	No
		165	5825	13.21	13.50	No
	802.11n(HT40)	151	5755	12.19	12.50	No
		159	5795	11.80	12.00	No
	802.11ac(VHT40)	151	5755	12.33	12.50	No
		159	5795	12.05	12.50	No
	802.11ac(VHT80)	155	5775	10.47	10.50	No

8.5 Bluetooth

EDR	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)		
			0	39	78
			2402MHz	2441MHz	2480MHz
	GFSK	6.00	5.77	4.73	5.72
	$\pi/4$ QPSK	5.00	4.69	3.68	4.86
	8DPSK	5.00	4.70	3.64	4.85
BLE	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)		
			0	20	39
			2402MHz	2440MHz	2480MHz
	1Mbps	-4.50	-5.21	-4.63	-5.64
	2Mbps	-4.50	-5.26	-4.66	-5.68

8.6 NFC

Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)
	13.56MHz
-42.00	-42.39

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Exclusion thresholds for 1-g SAR(mW)	RF exposure evaluation required
0	2.402	6.00	3.98	0	10	No
0	2.402	6.00	3.98	10	19	No
/	0.01356	-42.00	6.31x10-5	0	71	No

Note

- Per KDB 447498 D01 General RF Exposure Guidance v06, the 1-g SAR test exclusion thresholds for 300 MHz to 6 GHz at *test separation distances* ≤ 40 cm are determined by:


MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

*When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine estimated SAR.

- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.

9. Test Exclusion Consideration

Antenna information:

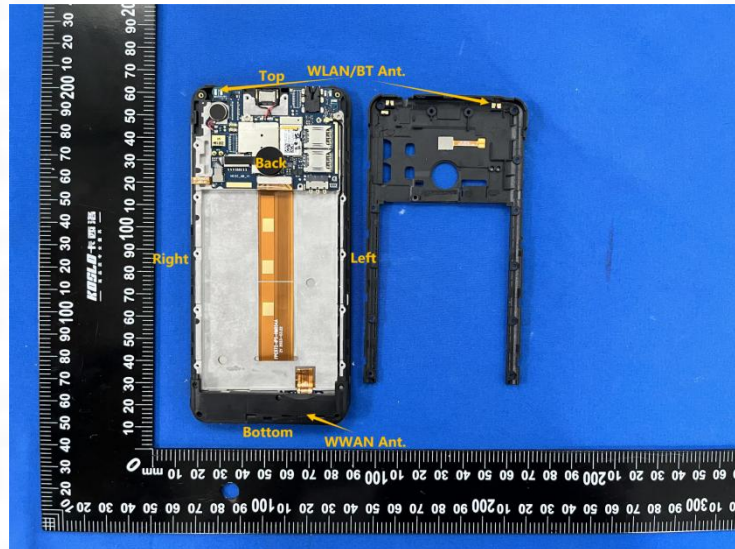

WWAN Main Antenna	GSM/WCDMA/LTE TX/RX
WLAN/BT Antenna	WLAN/BT TX/RX
Note: 1. KDB 447498 D01v06, particular DUT edges were not required to be evaluated for SAR if the antenna-to-edge distance is greater than 2.5cm. 2. Per KDB648474 D04, 10-g extremity SAR is not required when Body-Worn mode 1-g reported SAR<1.2W/Kg.	

Distance of The Antenna to the EUT surface and edge (mm)						
Antenna	Front Side (mm)	Back Side (mm)	Left Edge (mm)	Right Edge (mm)	Top Edge (mm)	Bottom Edge (mm)
WWAN	<25	<25	<25	45	148	<25
BT/Wifi	<25	<25	57	<25	<25	146
Positions for SAR tests						
Antenna	Front Side (mm)	Back Side (mm)	Left Edge (mm)	Right Edge (mm)	Top Edge (mm)	Bottom Edge (mm)
WWAN	Yes	Yes	No	Yes	No	Yes
BT/Wifi	Yes	Yes	Yes	No	Yes	No

9.1 SAR Test Exclusion Consideration Table

Per KDB 447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following format to determine simultaneous transmission SAR test exclusion:

$$(\text{max.power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

0.4 W/Kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

Mode	Channel	Frequency (GHz)	Max tune-up power (dBm)	Max. Power (mW)	Exposure Position	Head	Body-worn
					Test Dist.(mm)	5	10
BT	0	2.402	6.00	3.98	Estimated SAR(W/kg)	0.164	0.082
NFC	/	0.01356	-42.00	6.31x10-5		5.02x10-7	5.02x10-7
According to the NFC estimated result, the value is too small, which scarcely influence the SAR simultaneous condition, so we don't prepare to consider it into simultaneous transmission, if you have different suggestion, please notice us to modify.							

10. Test Result

GSM

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 850 (voice)	Left Cheek	251	848.8	0.300	0.180	100.00	1.000	32.10	32.50	1.096	0.197	/
	Left Tilt	251	848.8	-2.800	0.070	100.00	1.000	32.10	32.50	1.096	0.077	/
	Right Cheek	251	848.8	-2.120	0.188	100.00	1.000	32.10	32.50	1.096	0.206	1#
	Right Tilt	251	848.8	1.510	0.075	100.00	1.000	32.10	32.50	1.096	0.082	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GPRS 850+2slots	Front	251	848.8	-2.040	0.407	100.00	1.000	31.34	31.50	1.038	0.422	2#
	Back	251	848.8	2.760	0.373	100.00	1.000	31.34	31.50	1.038	0.387	/
	Left	251	848.8	-1.050	0.254	100.00	1.000	31.34	31.50	1.038	0.264	/
	Bottom	251	848.8	-2.520	0.336	100.00	1.000	31.34	31.50	1.038	0.349	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 1900 (voice)	Left Cheek	661	1880.0	1.200	0.136	100.00	1.000	28.03	28.50	1.114	0.152	/
	Left Tilt	661	1880.0	2.050	0.075	100.00	1.000	28.03	28.50	1.114	0.084	/
	Right Cheek	661	1880.0	-1.820	0.140	100.00	1.000	28.03	28.50	1.114	0.156	3#
	Right Tilt	661	1880.0	1.540	0.079	100.00	1.000	28.03	28.50	1.114	0.088	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GPRS 1900+2slots	Front	810	1909.8	-0.240	0.201	100.00	1.000	26.65	27.00	1.084	0.218	/
	Back	810	1909.8	-2.680	0.178	100.00	1.000	26.65	27.00	1.084	0.193	/
	Left	810	1909.8	4.180	0.086	100.00	1.000	26.65	27.00	1.084	0.093	/
	Bottom	810	1909.8	2.800	0.503	100.00	1.000	26.65	27.00	1.084	0.545	4#

WCDMA

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 2 (RMC*)	Left Cheek	9538	1907.6	-1.250	0.160	100.00	1.000	22.13	22.50	1.089	0.174	/
	Left Tilt	9538	1907.6	0.408	0.081	100.00	1.000	22.13	22.50	1.089	0.088	/
	Right Cheek	9538	1907.6	-2.660	0.166	100.00	1.000	22.13	22.50	1.089	0.181	5#
	Right Tilt	9538	1907.6	2.600	0.085	100.00	1.000	22.13	22.50	1.089	0.093	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 2 (RMC*)	Front	9538	1907.6	1.870	0.301	100.00	1.000	22.13	22.50	1.089	0.328	/
	Back	9538	1907.6	-0.062	0.278	100.00	1.000	22.13	22.50	1.089	0.303	/
	Left	9538	1907.6	0.138	0.186	100.00	1.000	22.13	22.50	1.089	0.203	/
	Bottom	9538	1907.6	0.300	0.403	100.00	1.000	22.13	22.50	1.089	0.439	6#

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 4 (RMC*)	Left Cheek	1312	1712.4	1.470	0.142	100.00	1.000	22.18	22.50	1.076	0.153	/
	Left Tilt	1312	1712.4	1.800	0.070	100.00	1.000	22.18	22.50	1.076	0.075	/
	Right Cheek	1312	1712.4	1.280	0.146	100.00	1.000	22.18	22.50	1.076	0.157	7#
	Right Tilt	1312	1712.4	-0.608	0.072	100.00	1.000	22.18	22.50	1.076	0.077	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 4 (RMC*)	Front	1312	1712.4	0.135	0.308	100.00	1.000	22.18	22.50	1.076	0.331	/
	Back	1312	1712.4	-0.070	0.284	100.00	1.000	22.18	22.50	1.076	0.306	/
	Left	1312	1712.4	0.920	0.193	100.00	1.000	22.18	22.50	1.076	0.208	/
	Bottom	1312	1712.4	3.450	0.409	100.00	1.000	22.18	22.50	1.076	0.440	8#

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 5 (RMC*)	Left Cheek	4132	826.4	2.250	0.135	100.00	1.000	22.76	23.00	1.057	0.143	/
	Left Tilt	4132	826.4	2.018	0.070	100.00	1.000	22.76	23.00	1.057	0.074	/
	Right Cheek	4132	826.4	3.990	0.138	100.00	1.000	22.76	23.00	1.057	0.146	9#
	Right Tilt	4132	826.4	-2.820	0.076	100.00	1.000	22.76	23.00	1.057	0.080	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 5 (RMC*)	Front	4132	826.4	-0.110	0.155	100.00	1.000	22.76	23.00	1.057	0.164	10#
	Back	4132	826.4	1.600	0.123	100.00	1.000	22.76	23.00	1.057	0.130	/
	Left	4132	826.4	2.250	0.054	100.00	1.000	22.76	23.00	1.057	0.057	/
	Bottom	4132	826.4	-0.155	0.046	100.00	1.000	22.76	23.00	1.057	0.049	/

LTE

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 2 (BW: 20MHz)	1RB	Left Cheek	18900	1880.0	-0.865	0.178	100.00	1.000	22.18	22.50	1.076	0.192	/
		Left Tilt	18900	1880.0	-0.930	0.085	100.00	1.000	22.18	22.50	1.076	0.091	/
		Right Cheek	18900	1880.0	-0.080	0.182	100.00	1.000	22.18	22.50	1.076	0.196	11#
		Right Tilt	18900	1880.0	-0.935	0.090	100.00	1.000	22.18	22.50	1.076	0.097	/
	50%RB	Left Cheek	18900	1880.0	0.870	0.150	100.00	1.000	21.05	21.50	1.109	0.166	/
		Left Tilt	18900	1880.0	-0.938	0.060	100.00	1.000	21.05	21.50	1.109	0.067	/
		Right Cheek	18900	1880.0	-0.862	0.152	100.00	1.000	21.05	21.50	1.109	0.169	/
		Right Tilt	18900	1880.0	-0.924	0.064	100.00	1.000	21.05	21.50	1.109	0.071	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 2 (BW: 20MHz)	1RB	Front	18900	1880.0	1.865	0.282	100.00	1.000	22.18	22.50	1.076	0.303	/
		Back	18900	1880.0	-1.930	0.258	100.00	1.000	22.18	22.50	1.076	0.278	/
		Left	18900	1880.0	-1.080	0.167	100.00	1.000	22.18	22.50	1.076	0.180	/
		Bottom	18900	1880.0	2.060	0.583	100.00	1.000	22.18	22.50	1.076	0.627	12#
	50%RB	Front	18900	1880.0	0.130	0.227	100.00	1.000	21.05	21.50	1.109	0.252	/
		Back	18900	1880.0	-1.938	0.203	100.00	1.000	21.05	21.50	1.109	0.225	/
		Left	18900	1880.0	1.862	0.112	100.00	1.000	21.05	21.50	1.109	0.124	/
		Bottom	18900	1880.0	-1.924	0.528	100.00	1.000	21.05	21.50	1.109	0.586	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 4 (BW: 20MHz)	1RB	Left Cheek	20050	1720.0	-0.135	0.146	100.00	1.000	21.60	22.00	1.096	0.160	/
		Left Tilt	20050	1720.0	0.070	0.077	100.00	1.000	21.60	22.00	1.096	0.084	/
		Right Cheek	20050	1720.0	4.140	0.150	100.00	1.000	21.60	22.00	1.096	0.164	13#
		Right Tilt	20050	1720.0	-0.065	0.082	100.00	1.000	21.60	22.00	1.096	0.090	/
	50%RB	Left Cheek	20050	1720.0	1.870	0.124	100.00	1.000	20.32	20.50	1.042	0.129	/
		Left Tilt	20050	1720.0	0.062	0.057	100.00	1.000	20.32	20.50	1.042	0.059	/
		Right Cheek	20050	1720.0	-0.138	0.128	100.00	1.000	20.32	20.50	1.042	0.133	/
		Right Tilt	20050	1720.0	0.076	0.059	100.00	1.000	20.32	20.50	1.042	0.061	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 4 (BW: 20MHz)	1RB	Front	20050	1720.0	-0.800	0.248	100.00	1.000	21.60	22.00	1.096	0.272	/
		Back	20050	1720.0	0.923	0.224	100.00	1.000	21.60	22.00	1.096	0.246	/
		Left	20050	1720.0	-0.080	0.133	100.00	1.000	21.60	22.00	1.096	0.146	/
		Bottom	20050	1720.0	-1.580	0.549	100.00	1.000	21.60	22.00	1.096	0.602	14#
	50%RB	Front	20050	1720.0	0.845	0.198	100.00	1.000	20.32	20.50	1.042	0.206	/
		Back	20050	1720.0	-1.700	0.174	100.00	1.000	20.32	20.50	1.042	0.181	/
		Left	20050	1720.0	0.946	0.083	100.00	1.000	20.32	20.50	1.042	0.086	/
		Bottom	20050	1720.0	-1.054	0.499	100.00	1.000	20.32	20.50	1.042	0.520	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 5 (BW: 10MHz)	1RB	Left Cheek	20450	829.0	1.200	0.135	100.00	1.000	22.46	22.50	1.009	0.136	/
		Left Tilt	20450	829.0	1.920	0.062	100.00	1.000	22.46	22.50	1.009	0.063	/
		Right Cheek	20450	829.0	-2.650	0.141	100.00	1.000	22.46	22.50	1.009	0.142	15#
		Right Tilt	20450	829.0	-2.000	0.069	100.00	1.000	22.46	22.50	1.009	0.070	/
	50%RB	Left Cheek	20450	829.0	1.205	0.115	100.00	1.000	21.37	21.50	1.030	0.118	/
		Left Tilt	20450	829.0	0.300	0.050	100.00	1.000	21.37	21.50	1.030	0.052	/
		Right Cheek	20450	829.0	-2.046	0.121	100.00	1.000	21.37	21.50	1.030	0.125	/
		Right Tilt	20450	829.0	0.946	0.052	100.00	1.000	21.37	21.50	1.030	0.054	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 5 (BW: 10MHz)	1RB	Front	20600	844.0	0.610	0.107	100.00	1.000	22.46	22.50	1.009	0.108	/
		Back	20600	844.0	0.890	0.199	100.00	1.000	22.46	22.50	1.009	0.201	16#
		Left	20600	844.0	-2.080	0.102	100.00	1.000	22.46	22.50	1.009	0.103	/
		Bottom	20600	844.0	2.000	0.185	100.00	1.000	22.46	22.50	1.009	0.187	/
	50%RB	Front	20600	844.0	1.155	0.085	100.00	1.000	21.37	21.50	1.030	0.088	/
		Back	20600	844.0	-3.700	0.166	100.00	1.000	21.37	21.50	1.030	0.171	/
		Left	20600	844.0	1.054	0.080	100.00	1.000	21.37	21.50	1.030	0.082	/
		Bottom	20600	844.0	-3.010	0.151	100.00	1.000	21.37	21.50	1.030	0.156	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 7 (BW: 20MHz)	1RB	Left Cheek	20850	2510.0	1.120	0.214	100.00	1.000	22.80	23.00	1.047	0.224	/
		Left Tilt	20850	2510.0	-1.188	0.105	100.00	1.000	22.80	23.00	1.047	0.110	/
		Right Cheek	20850	2510.0	-2.690	0.231	100.00	1.000	22.80	23.00	1.047	0.242	17#
		Right Tilt	20850	2510.0	-0.338	0.118	100.00	1.000	22.80	23.00	1.047	0.124	/
	50%RB	Left Cheek	20850	2510.0	0.612	0.195	100.00	1.000	21.66	22.00	1.081	0.211	/
		Left Tilt	20850	2510.0	-1.196	0.082	100.00	1.000	21.66	22.00	1.081	0.089	/
		Right Cheek	20850	2510.0	1.120	0.202	100.00	1.000	21.66	22.00	1.081	0.218	/
		Right Tilt	20850	2510.0	-1.182	0.086	100.00	1.000	21.66	22.00	1.081	0.093	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 7 (BW: 20MHz)	1RB	Front	20850	2510.0	0.123	0.564	100.00	1.000	22.80	23.00	1.047	0.591	/
		Back	20850	2510.0	-0.188	0.540	100.00	1.000	22.80	23.00	1.047	0.565	/
		Left	20850	2510.0	0.662	0.449	100.00	1.000	22.80	23.00	1.047	0.470	/
		Bottom	20850	2510.0	-1.780	0.865	100.00	1.000	22.80	23.00	1.047	0.906	18#
		Bottom-repeated	20850	2510.0	-1.250	0.860	100.00	1.000	22.80	23.00	1.047	0.900	/
		Bottom	21100	2535.0	2.800	0.789	100.00	1.000	21.96	22.00	1.009	0.796	/
		Bottom	21350	2560.0	3.060	0.833	100.00	1.000	22.74	23.00	1.062	0.885	/
	50%RB	Front	20850	2510.0	1.612	0.405	100.00	1.000	21.66	22.00	1.081	0.438	/
		Back	20850	2510.0	-0.196	0.381	100.00	1.000	21.66	22.00	1.081	0.412	/
		Left	20850	2510.0	0.120	0.290	100.00	1.000	21.66	22.00	1.081	0.313	/
		Bottom	20850	2510.0	-0.182	0.706	100.00	1.000	21.66	22.00	1.081	0.763	/

Head(0mm gap)														
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
Band 12 (BW: 10MHz)	1RB	Left Cheek	23095	707.5	-0.962	0.070	100.00	1.000	22.89	23.00	1.026	0.072	/	
		Left Tilt	23095	707.5	-1.273	0.048	100.00	1.000	22.89	23.00	1.026	0.049	/	
		Right Cheek	23095	707.5	-1.320	0.076	100.00	1.000	22.89	23.00	1.026	0.078	19#	
		Right Tilt	23095	707.5	-1.085	0.050	100.00	1.000	22.89	23.00	1.026	0.051	/	
	50%RB	Left Cheek	23095	707.5	0.527	0.062	100.00	1.000	21.86	22.00	1.033	0.064	/	
		Left Tilt	23095	707.5	-1.281	0.045	100.00	1.000	21.86	22.00	1.033	0.046	/	
		Right Cheek	23095	707.5	-0.965	0.066	100.00	1.000	21.86	22.00	1.033	0.068	/	
		Right Tilt	23095	707.5	1.260	0.048	100.00	1.000	21.86	22.00	1.033	0.050	/	
Body(hotspot open, 10mm Gap)														
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
Band 12 (BW: 10MHz)	1RB	Front	23095	707.5	-1.220	0.076	100.00	1.000	22.89	23.00	1.026	0.078	/	
		Back	23095	707.5	-0.670	0.198	100.00	1.000	22.89	23.00	1.026	0.203	20#	
		Left	23095	707.5	-2.085	0.092	100.00	1.000	22.89	23.00	1.026	0.094	/	
		Bottom	23095	707.5	1.000	0.175	100.00	1.000	22.89	23.00	1.026	0.180	/	
	50%RB	Front	23095	707.5	2.612	0.065	100.00	1.000	21.86	22.00	1.033	0.067	/	
		Back	23095	707.5	-0.804	0.156	100.00	1.000	21.86	22.00	1.033	0.161	/	
		Left	23095	707.5	1.120	0.070	100.00	1.000	21.86	22.00	1.033	0.072	/	
		Bottom	23095	707.5	3.345	0.141	100.00	1.000	21.86	22.00	1.033	0.146	/	

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 17 (BW: 10MHz)	1RB	Left Cheek	23780	709.0	1.123	0.070	100.00	1.000	22.90	23.00	1.023	0.072	/
		Left Tilt	23780	709.0	0.812	0.038	100.00	1.000	22.90	23.00	1.023	0.039	/
		Right Cheek	23780	709.0	-2.790	0.073	100.00	1.000	22.90	23.00	1.023	0.075	21#
		Right Tilt	23780	709.0	3.800	0.040	100.00	1.000	22.90	23.00	1.023	0.041	/
	50%RB	Left Cheek	23780	709.0	0.506	0.055	100.00	1.000	21.85	22.00	1.035	0.057	/
		Left Tilt	23780	709.0	-1.779	0.030	100.00	1.000	21.85	22.00	1.035	0.031	/
		Right Cheek	23780	709.0	2.694	0.058	100.00	1.000	21.85	22.00	1.035	0.060	/
		Right Tilt	23780	709.0	-3.014	0.032	100.00	1.000	21.85	22.00	1.035	0.033	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 17 (BW: 10MHz)	1RB	Front	23780	709.0	0.490	0.072	100.00	1.000	22.90	23.00	1.023	0.074	/
		Back	23780	709.0	-1.370	0.172	100.00	1.000	22.90	23.00	1.023	0.176	22#
		Left	23780	709.0	0.957	0.088	100.00	1.000	22.90	23.00	1.023	0.090	/
		Bottom	23780	709.0	-0.128	0.149	100.00	1.000	22.90	23.00	1.023	0.152	/
	50%RB	Front	23780	709.0	1.484	0.061	100.00	1.000	21.85	22.00	1.035	0.063	/
		Back	23780	709.0	-0.324	0.130	100.00	1.000	21.85	22.00	1.035	0.135	/
		Left	23780	709.0	0.108	0.066	100.00	1.000	21.85	22.00	1.035	0.068	/
		Bottom	23780	709.0	2.200	0.115	100.00	1.000	21.85	22.00	1.035	0.119	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 30 (BW: 10MHz)	1RB	Left Cheek	27710	2310.0	-0.054	0.162	100.00	1.000	23.09	23.50	1.099	0.178	/
		Left Tilt	27710	2310.0	-2.910	0.080	100.00	1.000	23.09	23.50	1.099	0.088	/
		Right Cheek	27710	2310.0	-0.300	0.168	100.00	1.000	23.09	23.50	1.099	0.185	23#
		Right Tilt	27710	2310.0	-1.057	0.085	100.00	1.000	23.09	23.50	1.099	0.093	/
	50%RB	Left Cheek	27710	2310.0	4.800	0.148	100.00	1.000	22.03	22.50	1.114	0.165	/
		Left Tilt	27710	2310.0	-3.036	0.047	100.00	1.000	22.03	22.50	1.114	0.052	/
		Right Cheek	27710	2310.0	1.076	0.152	100.00	1.000	22.03	22.50	1.114	0.169	/
		Right Tilt	27710	2310.0	0.608	0.050	100.00	1.000	22.03	22.50	1.114	0.056	/

Body(hotspot open, 10mm Gap)														
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
Band 30 (BW: 10MHz)	1RB	Front	27710	2310.0	0.612	0.448	100.00	1.000	23.09	23.50	1.099	0.492	/	
		Back	27710	2310.0	-2.244	0.424	100.00	1.000	23.09	23.50	1.099	0.466	/	
		Left	27710	2310.0	0.666	0.333	100.00	1.000	23.09	23.50	1.099	0.366	/	
		Bottom	27710	2310.0	2.680	0.749	100.00	1.000	23.09	23.50	1.099	0.823	24#	
	50%RB	Front	27710	2310.0	-0.391	0.387	100.00	1.000	22.03	22.50	1.114	0.431	/	
		Back	27710	2310.0	-2.370	0.363	100.00	1.000	22.03	22.50	1.114	0.404	/	
		Left	27710	2310.0	1.742	0.272	100.00	1.000	22.03	22.50	1.114	0.303	/	
		Bottom	27710	2310.0	-1.270	0.688	100.00	1.000	22.03	22.50	1.114	0.766	/	

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 66 (BW: 20MHz)	1RB	Left Cheek	132072	1720.0	-0.391	0.180	100.00	1.000	22.26	22.50	1.057	0.190	/
		Left Tilt	132072	1720.0	0.201	0.090	100.00	1.000	22.26	22.50	1.057	0.095	/
		Right Cheek	132072	1720.0	1.460	0.184	100.00	1.000	22.26	22.50	1.057	0.194	25#
		Right Tilt	132072	1720.0	0.255	0.092	100.00	1.000	22.26	22.50	1.057	0.097	/
	50%RB	Left Cheek	132072	1720.0	-0.802	0.160	100.00	1.000	20.99	21.00	1.002	0.160	/
		Left Tilt	132072	1720.0	2.781	0.076	100.00	1.000	20.99	21.00	1.002	0.076	/
		Right Cheek	132072	1720.0	1.331	0.165	100.00	1.000	20.99	21.00	1.002	0.165	/
		Right Tilt	132072	1720.0	-1.681	0.080	100.00	1.000	20.99	21.00	1.002	0.080	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 66 (BW: 20MHz)	1RB	Front	132072	1720.0	1.200	0.295	100.00	1.000	22.26	22.50	1.057	0.312	/
		Back	132072	1720.0	-1.656	0.271	100.00	1.000	22.26	22.50	1.057	0.286	/
		Left	132072	1720.0	1.254	0.180	100.00	1.000	22.26	22.50	1.057	0.190	/
		Bottom	132072	1720.0	-1.450	0.596	100.00	1.000	22.26	22.50	1.057	0.630	26#
	50%RB	Front	132072	1720.0	0.197	0.234	100.00	1.000	20.99	21.00	1.002	0.234	/
		Back	132072	1720.0	-1.782	0.210	100.00	1.000	20.99	21.00	1.002	0.210	/
		Left	132072	1720.0	2.330	0.119	100.00	1.000	20.99	21.00	1.002	0.119	/
		Bottom	132072	1720.0	-0.682	0.535	100.00	1.000	20.99	21.00	1.002	0.536	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 71 (BW: 20MHz)	1RB	Left Cheek	133322	683.0	1.687	0.208	100.00	1.000	23.04	23.50	1.112	0.231	/
		Left Tilt	133322	683.0	-1.503	0.101	100.00	1.000	23.04	23.50	1.112	0.112	/
		Right Cheek	133322	683.0	1.600	0.214	100.00	1.000	23.04	23.50	1.112	0.238	27#
		Right Tilt	133322	683.0	-2.690	0.108	100.00	1.000	23.04	23.50	1.112	0.120	/
	50%RB	Left Cheek	133322	683.0	-0.650	0.189	100.00	1.000	22.22	22.50	1.067	0.202	/
		Left Tilt	133322	683.0	0.557	0.082	100.00	1.000	22.22	22.50	1.067	0.087	/
		Right Cheek	133322	683.0	-3.560	0.192	100.00	1.000	22.22	22.50	1.067	0.205	/
		Right Tilt	133322	683.0	-1.600	0.089	100.00	1.000	22.22	22.50	1.067	0.095	/

Body(hotspot open, 10mm Gap)														
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
Band 71 (BW: 20MHz)	1RB	Front	133322	683.0	0.260	0.047	100.00	1.000	23.04	23.50	1.112	0.052	38#	
		Back	133322	683.0	4.110	0.039	100.00	1.000	23.04	23.50	1.112	0.043	/	
		Left	133322	683.0	-0.535	0.037	100.00	1.000	23.04	23.50	1.112	0.041	/	
		Bottom	133322	683.0	-3.725	0.042	100.00	1.000	23.04	23.50	1.112	0.047	/	
	50%RB	Front	133322	683.0	2.872	0.040	100.00	1.000	22.22	22.50	1.067	0.043	/	
		Back	133322	683.0	-1.665	0.032	100.00	1.000	22.22	22.50	1.067	0.034	/	
		Left	133322	683.0	0.782	0.030	100.00	1.000	22.22	22.50	1.067	0.032	/	
		Bottom	133322	683.0	-3.820	0.036	100.00	1.000	22.22	22.50	1.067	0.038	/	

Wifi

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
2.4g (2.4~2.4835)	Left Cheek	1	2412	0.500	0.253	100.00	1.000	14.68	15.00	1.076	0.272	/
	Left Tilt	1	2412	1.150	0.228	100.00	1.000	14.68	15.00	1.076	0.245	/
	Right Cheek	1	2412	-2.810	0.260	100.00	1.000	14.68	15.00	1.076	0.280	29#
	Right Tilt	1	2412	-0.980	0.234	100.00	1.000	14.68	15.00	1.076	0.252	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
2.4g (2.4~2.4835)	Front	1	2412	4.200	0.102	100.00	1.000	14.68	15.00	1.076	0.110	30#
	Back	1	2412	-2.270	0.091	100.00	1.000	14.68	15.00	1.076	0.098	/
	Right	1	2412	-2.700	0.083	100.00	1.000	14.68	15.00	1.076	0.089	/
	Top	1	2412	-1.840	0.050	100.00	1.000	14.68	15.00	1.076	0.054	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-1 (5.150~5.250) 802.11a	Left Cheek	48	5240	-3.600	0.470	100.00	1.000	11.52	12.00	1.117	0.525	/
	Left Tilt	48	5240	3.400	0.408	100.00	1.000	11.52	12.00	1.117	0.456	/
	Right Cheek	48	5240	-1.390	0.476	100.00	1.000	11.52	12.00	1.117	0.532	31#
	Right Tilt	48	5240	0.650	0.420	100.00	1.000	11.52	12.00	1.117	0.469	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-1 (5.150~5.250) 802.11a	Front	48	5240	-1.790	0.151	100.00	1.000	11.52	12.00	1.117	0.169	32#
	Back	48	5240	2.080	0.130	100.00	1.000	11.52	12.00	1.117	0.145	/
	Right	48	5240	-0.800	0.122	100.00	1.000	11.52	12.00	1.117	0.136	/
	Top	48	5240	-1.055	0.092	100.00	1.000	11.52	12.00	1.117	0.103	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2a (5.250~5.350) 802.11a	Left Cheek	64	5320	4.150	0.598	100.00	1.000	13.34	13.50	1.038	0.621	/
	Left Tilt	64	5320	-2.300	0.538	100.00	1.000	13.34	13.50	1.038	0.558	/
	Right Cheek	64	5320	-1.740	0.606	100.00	1.000	13.34	13.50	1.038	0.629	33#
	Right Tilt	64	5320	2.560	0.550	100.00	1.000	13.34	13.50	1.038	0.571	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2a (5.250~5.350) 802.11a	Front	64	5320	1.490	0.227	100.00	1.000	13.34	13.50	1.038	0.236	34#
	Back	64	5320	0.031	0.200	100.00	1.000	13.34	13.50	1.038	0.208	/
	Right	64	5320	1.680	0.175	100.00	1.000	13.34	13.50	1.038	0.182	/
	Top	64	5320	-3.400	0.140	100.00	1.000	13.34	13.50	1.038	0.145	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2c (5.470~5.725) 802.11a	Left Cheek	140	5700	1.550	0.560	100.00	1.000	14.10	14.50	1.096	0.614	/
	Left Tilt	140	5700	1.260	0.515	100.00	1.000	14.10	14.50	1.096	0.564	/
	Right Cheek	140	5700	-1.540	0.569	100.00	1.000	14.10	14.50	1.096	0.624	35#
	Right Tilt	140	5700	-2.900	0.520	100.00	1.000	14.10	14.50	1.096	0.570	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2c (5.470~5.725) 802.11a	Front	140	5700	-2.700	0.142	100.00	1.000	14.10	14.50	1.096	0.156	36#
	Back	140	5700	2.080	0.122	100.00	1.000	14.10	14.50	1.096	0.134	/
	Right	140	5700	0.058	0.110	100.00	1.000	14.10	14.50	1.096	0.121	/
	Top	140	5700	2.600	0.080	100.00	1.000	14.10	14.50	1.096	0.088	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-3 (5.725~5.850) 802.11ac	Left Cheek	149	5745	-0.080	0.482	100.00	1.000	13.75	14.00	1.059	0.510	/
	Left Tilt	149	5745	1.120	0.420	100.00	1.000	13.75	14.00	1.059	0.445	/
	Right Cheek	149	5745	3.430	0.485	100.00	1.000	13.75	14.00	1.059	0.514	37#
	Right Tilt	149	5745	1.560	0.432	100.00	1.000	13.75	14.00	1.059	0.457	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-3 (5.725~5.850) 802.11ac	Front	149	5745	-3.610	0.181	100.00	1.000	13.75	14.00	1.059	0.192	38#
	Back	149	5745	2.460	0.160	100.00	1.000	13.75	14.00	1.059	0.169	/
	Right	149	5745	4.150	0.155	100.00	1.000	13.75	14.00	1.059	0.164	/
	Top	149	5745	-2.108	0.098	100.00	1.000	13.75	14.00	1.059	0.104	/

Note:

- The maximum SAR Value of each test band is marked bold.
- SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR $\leq 0.8\text{W/kg}$, other channels SAR testing is not necessary.
- Per KDB 447498 D01 v06, head/body-worn use is evaluated with the device positioned at 0mm/10 mm from a head/flat phantom respectively filled with head tissue-equivalent medium.
- Per KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9\text{ cm} \times 5\text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.
- Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor= $10^{[(\text{tune-up limit power(dBm)} - \text{Ave.power power (dBm)})/10]}$, where tune-up limit is the maximum rated power among all production units.
Reported SAR(W/kg)=Measured SAR (W/kg)*Scaling Factor.

11. SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Note: For 1g SAR, the highest measured 1g SAR is $0.865 > 0.80$ W/kg, repeated measurement is as below.

Mode	Position	Ch.	Freq. (MHz)	1g Meas SAR (W/kg)	the ratio of largest to smallest SAR for the original and first repeated measurements
LTE Band 7 (BW: 20MHz) 1RB	Bottom	20850	2510.0	0.865	1.006
	Bottom-repeated	20850	2510.0	0.860	
According to the above ratio result, we don't need to perform a second measurement.					

12. Simultaneous Transmission

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

12.1 Simultaneous Transmission Mode Considerations

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The device has 2 Tx antennas, WWAN main antenna, Wifi/BT antenna supports 2.4G/5G Wi-Fi and BT. The 2 antennas can always transmit simultaneously. The work mode combination is showed as below table.

Application Simultaneous Transmission information:

NO.	Configuration	Head	Body-worn
1	WWAN+WIFI(2.4g)	Yes	Yes
2	WWAN+WIFI(5g)	Yes	Yes
3	WWAN+BT	Yes	Yes

12.2 Sum SAR of Simultaneous Transmission

Head

Band	Test Position	Scaled SAR				Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
		WWAN	WIFI 2.4G	WIFI 5G	BT					
GSM850 (voice)	Left Cheek	0.197	0.272	0.621	0.164	0.469	0.818	0.361	N/A	N/A
	Left Tilt	0.077	0.245	0.558	0.164	0.322	0.635	0.241	N/A	N/A
	Right Cheek	0.206	0.280	0.629	0.164	0.486	0.835	0.370	N/A	N/A
	Right Tilt	0.082	0.252	0.571	0.164	0.334	0.653	0.246	N/A	N/A
GSM1900 (voice)	Left Cheek	0.152	0.272	0.621	0.164	0.424	0.773	0.316	N/A	N/A
	Left Tilt	0.084	0.245	0.558	0.164	0.329	0.642	0.248	N/A	N/A
	Right Cheek	0.156	0.280	0.629	0.164	0.436	0.785	0.320	N/A	N/A
	Right Tilt	0.088	0.252	0.571	0.164	0.340	0.659	0.252	N/A	N/A
WCDMA Band II	Left Cheek	0.174	0.272	0.621	0.164	0.446	0.795	0.338	N/A	N/A
	Left Tilt	0.088	0.245	0.558	0.164	0.333	0.646	0.252	N/A	N/A
	Right Cheek	0.181	0.280	0.629	0.164	0.461	0.810	0.345	N/A	N/A
	Right Tilt	0.093	0.252	0.571	0.164	0.345	0.664	0.257	N/A	N/A
WCDMA Band IV	Left Cheek	0.153	0.272	0.621	0.164	0.425	0.774	0.317	N/A	N/A
	Left Tilt	0.075	0.245	0.558	0.164	0.320	0.633	0.239	N/A	N/A
	Right Cheek	0.157	0.280	0.629	0.164	0.437	0.786	0.321	N/A	N/A
	Right Tilt	0.077	0.252	0.571	0.164	0.329	0.648	0.241	N/A	N/A
WCDMA Band V	Left Cheek	0.143	0.272	0.621	0.164	0.415	0.764	0.307	N/A	N/A
	Left Tilt	0.074	0.245	0.558	0.164	0.319	0.632	0.238	N/A	N/A
	Right Cheek	0.146	0.280	0.629	0.164	0.426	0.775	0.310	N/A	N/A
	Right Tilt	0.080	0.252	0.571	0.164	0.332	0.651	0.244	N/A	N/A

Band	Test Position	RB allocation	Scaled				Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	WIFI 2.4G	WIFI 5G	Bluetooth					
LTE Band 2 QPSK (20MHz)	Left Cheek	1RB	0.192	0.272	0.621	0.164	0.464	0.813	0.356	N/A	N/A
	Left Tilt		0.091	0.245	0.558	0.164	0.336	0.649	0.255	N/A	N/A
	Right Cheek		0.196	0.280	0.629	0.164	0.476	0.825	0.360	N/A	N/A
	Right Tilt		0.097	0.252	0.571	0.164	0.349	0.668	0.261	N/A	N/A
	Left Cheek	50%RB	0.166	0.272	0.621	0.164	0.438	0.787	0.330	N/A	N/A
	Left Tilt		0.067	0.245	0.558	0.164	0.312	0.625	0.231	N/A	N/A
	Right Cheek		0.169	0.280	0.629	0.164	0.449	0.798	0.333	N/A	N/A
	Right Tilt		0.071	0.252	0.571	0.164	0.323	0.642	0.235	N/A	N/A

LTE Band 4 QPSK (20MHz)	Left Cheek	1RB	0.160	0.272	0.621	0.164	0.432	0.781	0.324	N/A	N/A
	Left Tilt		0.084	0.245	0.558	0.164	0.329	0.642	0.248	N/A	N/A
	Right Cheek		0.164	0.280	0.629	0.164	0.444	0.793	0.328	N/A	N/A
	Right Tilt	50%RB	0.090	0.252	0.571	0.164	0.342	0.661	0.254	N/A	N/A
	Left Cheek		0.129	0.272	0.621	0.164	0.401	0.750	0.293	N/A	N/A
	Left Tilt		0.059	0.245	0.558	0.164	0.304	0.617	0.223	N/A	N/A
LTE Band 5 QPSK (10MHz)	Right Cheek		0.133	0.280	0.629	0.164	0.413	0.762	0.297	N/A	N/A
	Right Tilt		0.061	0.252	0.571	0.164	0.313	0.632	0.225	N/A	N/A
	Left Cheek	1RB	0.136	0.272	0.621	0.164	0.408	0.757	0.300	N/A	N/A
	Left Tilt		0.063	0.245	0.558	0.164	0.308	0.621	0.227	N/A	N/A
	Right Cheek		0.142	0.280	0.629	0.164	0.422	0.771	0.306	N/A	N/A
	Right Tilt	50%RB	0.070	0.252	0.571	0.164	0.322	0.641	0.234	N/A	N/A
LTE Band 7 QPSK (20MHz)	Left Cheek		0.118	0.272	0.621	0.164	0.390	0.739	0.282	N/A	N/A
	Left Tilt		0.052	0.245	0.558	0.164	0.297	0.610	0.216	N/A	N/A
	Right Cheek		0.125	0.280	0.629	0.164	0.405	0.754	0.289	N/A	N/A
	Right Tilt		0.054	0.252	0.571	0.164	0.306	0.625	0.218	N/A	N/A
	Left Cheek	1RB	0.224	0.272	0.621	0.164	0.496	0.845	0.388	N/A	N/A
	Left Tilt		0.110	0.245	0.558	0.164	0.355	0.668	0.274	N/A	N/A
LTE Band 12 QPSK (10MHz)	Right Cheek		0.242	0.280	0.629	0.164	0.522	0.871	0.406	N/A	N/A
	Right Tilt	50%RB	0.124	0.252	0.571	0.164	0.376	0.695	0.288	N/A	N/A
	Left Cheek		0.211	0.272	0.621	0.164	0.483	0.832	0.375	N/A	N/A
	Left Tilt		0.089	0.245	0.558	0.164	0.334	0.647	0.253	N/A	N/A
	Right Cheek		0.218	0.280	0.629	0.164	0.498	0.847	0.382	N/A	N/A
	Right Tilt		0.093	0.252	0.571	0.164	0.345	0.664	0.257	N/A	N/A
LTE Band 17 QPSK (10MHz)	Left Cheek	1RB	0.072	0.272	0.621	0.164	0.344	0.693	0.236	N/A	N/A
	Left Tilt		0.049	0.245	0.558	0.164	0.294	0.607	0.213	N/A	N/A
	Right Cheek		0.078	0.280	0.629	0.164	0.358	0.707	0.242	N/A	N/A
	Right Tilt	50%RB	0.051	0.252	0.571	0.164	0.303	0.622	0.215	N/A	N/A
	Left Cheek		0.064	0.272	0.621	0.164	0.336	0.685	0.228	N/A	N/A
	Left Tilt		0.046	0.245	0.558	0.164	0.291	0.604	0.210	N/A	N/A
LTE Band 30 QPSK (10MHz)	Right Cheek		0.068	0.280	0.629	0.164	0.348	0.697	0.232	N/A	N/A
	Right Tilt		0.050	0.252	0.571	0.164	0.302	0.621	0.214	N/A	N/A
	Left Cheek	1RB	0.072	0.272	0.621	0.164	0.344	0.693	0.236	N/A	N/A
	Left Tilt		0.039	0.245	0.558	0.164	0.284	0.597	0.203	N/A	N/A
	Right Cheek		0.075	0.280	0.629	0.164	0.355	0.704	0.239	N/A	N/A
	Right Tilt	50%RB	0.041	0.252	0.571	0.164	0.293	0.612	0.205	N/A	N/A
LTE Band 66 QPSK (20MHz)	Left Cheek		0.057	0.272	0.621	0.164	0.329	0.678	0.221	N/A	N/A
	Left Tilt		0.031	0.245	0.558	0.164	0.276	0.589	0.195	N/A	N/A
	Right Cheek		0.060	0.280	0.629	0.164	0.340	0.689	0.224	N/A	N/A
	Right Tilt		0.033	0.252	0.571	0.164	0.285	0.604	0.197	N/A	N/A
	Left Cheek	1RB	0.178	0.272	0.621	0.164	0.450	0.799	0.342	N/A	N/A
	Left Tilt		0.088	0.245	0.558	0.164	0.333	0.646	0.252	N/A	N/A
LTE Band 71 QPSK (20MHz)	Right Cheek		0.185	0.280	0.629	0.164	0.465	0.814	0.349	N/A	N/A
	Right Tilt	50%RB	0.093	0.252	0.571	0.164	0.345	0.664	0.257	N/A	N/A
	Left Cheek		0.165	0.272	0.621	0.164	0.437	0.786	0.329	N/A	N/A
	Left Tilt		0.052	0.245	0.558	0.164	0.297	0.610	0.216	N/A	N/A
	Right Cheek		0.169	0.280	0.629	0.164	0.449	0.798	0.333	N/A	N/A
	Right Tilt		0.056	0.252	0.571	0.164	0.308	0.627	0.220	N/A	N/A
GSM850 (GPRS 2slots)	Left Cheek	1RB	0.190	0.272	0.621	0.164	0.462	0.811	0.354	N/A	N/A
	Left Tilt		0.095	0.245	0.558	0.164	0.340	0.653	0.259	N/A	N/A
	Right Cheek		0.194	0.280	0.629	0.164	0.474	0.823	0.358	N/A	N/A
	Right Tilt	50%RB	0.097	0.252	0.571	0.164	0.349	0.668	0.261	N/A	N/A
	Left Cheek		0.160	0.272	0.621	0.164	0.432	0.781	0.324	N/A	N/A
	Left Tilt		0.076	0.245	0.558	0.164	0.321	0.634	0.240	N/A	N/A
GSM1900 (GPRS 2slots)	Right Cheek		0.165	0.280	0.629	0.164	0.445	0.794	0.329	N/A	N/A
	Right Tilt		0.080	0.252	0.571	0.164	0.332	0.651	0.244	N/A	N/A
	Left Cheek	1RB	0.231	0.272	0.621	0.164	0.503	0.852	0.395	N/A	N/A
	Left Tilt		0.112	0.245	0.558	0.164	0.357	0.670	0.276	N/A	N/A
	Right Cheek		0.238	0.280	0.629	0.164	0.518	0.867	0.402	N/A	N/A
	Right Tilt	50%RB	0.120	0.252	0.571	0.164	0.372	0.691	0.284	N/A	N/A
WCDMA Band II	Left Cheek		0.202	0.272	0.621	0.164	0.474	0.823	0.366	N/A	N/A
	Left Tilt		0.087	0.245	0.558	0.164	0.332	0.645	0.251	N/A	N/A
	Right Cheek		0.205	0.280	0.629	0.164	0.485	0.834	0.369	N/A	N/A
	Right Tilt		0.095	0.252	0.571	0.164	0.347	0.666	0.259	N/A	N/A

Hotspot(body-worn)

Band	Test Position	Scaled SAR				Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
		WWAN	WIFI 2.4G	WIFI 5G	BT					
GSM850 (GPRS 2slots)	Front	0.422	0.110	0.236	0.082	0.532	0.658	0.504	N/A	N/A
	Back	0.387	0.098	0.208	0.082	0.485	0.595	0.469	N/A	N/A
	Left	0.264	/	/	/	0.264	0.264	0.264	N/A	N/A
	Right	/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top	/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom	0.349	/	/	/	0.349	0.349	0.349	N/A	N/A
GSM1900 (GPRS 2slots)	Front	0.218	0.110	0.236	0.082	0.328	0.454	0.300	N/A	N/A
	Back	0.193	0.098	0.208	0.082	0.291	0.401	0.275	N/A	N/A
	Left	0.093	/	/	/	0.093	0.093	0.093	N/A	N/A
	Right	/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top	/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom	0.545	/	/	/	0.545	0.545	0.545	N/A	N/A
WCDMA Band II	Front	0.328	0.110	0.236	0.082	0.438	0.564	0.410	N/A	N/A
	Back	0.303	0.098	0.208	0.082	0.401	0.511	0.385	N/A	N/A
	Left	0.203	/	/	/	0.203	0.203	0.203	N/A	N/A
	Right	/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top	/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom	0.439	/	/	/	0.439	0.439	0.439	N/A	N/A

WCDMA Band IV	Front	0.331	0.110	0.236	0.082	0.441	0.567	0.413	N/A	N/A
	Back	0.306	0.098	0.208	0.082	0.404	0.514	0.388	N/A	N/A
	Left	0.208	/	/	/	0.208	0.208	0.208	N/A	N/A
	Right	/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top	/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom	0.440	/	/	/	0.440	0.440	0.440	N/A	N/A
WCDMA Band V	Front	0.164	0.110	0.236	0.082	0.274	0.400	0.246	N/A	N/A
	Back	0.130	0.098	0.208	0.082	0.228	0.338	0.212	N/A	N/A
	Left	0.057	/	/	/	0.057	0.057	0.057	N/A	N/A
	Right	/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top	/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom	0.049	/	/	/	0.049	0.049	0.049	N/A	N/A

Band	Test Position	RB allocation	Scaled				Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	WIFI 2.4G	WIFI 5G	Bluetooth					
LTE Band 2 QPSK (20MHz)	Front	1RB	0.303	0.110	0.236	0.082	0.413	0.539	0.385	N/A	N/A
	Back		0.278	0.098	0.208	0.082	0.376	0.486	0.360	N/A	N/A
	Left		0.180	/	/	/	0.180	0.180	0.180	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.627	/	/	/	0.627	0.627	0.627	N/A	N/A
	Front	50%RB	0.252	0.110	0.236	0.082	0.362	0.488	0.334	N/A	N/A
	Back		0.225	0.098	0.208	0.082	0.323	0.433	0.307	N/A	N/A
	Left		0.124	/	/	/	0.124	0.124	0.124	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.586	/	/	/	0.586	0.586	0.586	N/A	N/A
LTE Band 4 QPSK (20MHz)	Front	1RB	0.272	0.110	0.236	0.082	0.382	0.508	0.354	N/A	N/A
	Back		0.246	0.098	0.208	0.082	0.344	0.454	0.328	N/A	N/A
	Left		0.146	/	/	/	0.146	0.146	0.146	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.602	/	/	/	0.602	0.602	0.602	N/A	N/A
	Front	50%RB	0.206	0.110	0.236	0.082	0.316	0.442	0.288	N/A	N/A
	Back		0.181	0.098	0.208	0.082	0.279	0.389	0.263	N/A	N/A
	Left		0.086	/	/	/	0.086	0.086	0.086	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.520	/	/	/	0.520	0.520	0.520	N/A	N/A
LTE Band 5 QPSK (10MHz)	Front	1RB	0.108	0.110	0.236	0.082	0.218	0.344	0.190	N/A	N/A
	Back		0.201	0.098	0.208	0.082	0.299	0.409	0.283	N/A	N/A
	Left		0.103	/	/	/	0.103	0.103	0.103	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.187	/	/	/	0.187	0.187	0.187	N/A	N/A
	Front	50%RB	0.088	0.110	0.236	0.082	0.198	0.324	0.170	N/A	N/A
	Back		0.171	0.098	0.208	0.082	0.269	0.379	0.253	N/A	N/A
	Left		0.082	/	/	/	0.082	0.082	0.082	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.156	/	/	/	0.156	0.156	0.156	N/A	N/A
LTE Band 7 QPSK (20MHz)	Front	1RB	0.591	0.110	0.236	0.082	0.701	0.827	0.673	N/A	N/A
	Back		0.565	0.098	0.208	0.082	0.663	0.773	0.647	N/A	N/A
	Left		0.470	/	/	/	0.470	0.470	0.470	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.906	/	/	/	0.906	0.906	0.906	N/A	N/A
	Front	50%RB	0.438	0.110	0.236	0.082	0.548	0.674	0.520	N/A	N/A
	Back		0.412	0.098	0.208	0.082	0.510	0.620	0.494	N/A	N/A
	Left		0.313	/	/	/	0.313	0.313	0.313	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.763	/	/	/	0.763	0.763	0.763	N/A	N/A
LTE Band 12 QPSK (10MHz)	Front	1RB	0.078	0.110	0.236	0.082	0.188	0.314	0.160	N/A	N/A
	Back		0.203	0.098	0.208	0.082	0.301	0.411	0.285	N/A	N/A
	Left		0.094	/	/	/	0.094	0.094	0.094	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.180	/	/	/	0.180	0.180	0.180	N/A	N/A
	Front	50%RB	0.067	0.110	0.236	0.082	0.177	0.303	0.149	N/A	N/A
	Back		0.161	0.098	0.208	0.082	0.259	0.369	0.243	N/A	N/A
	Left		0.072	/	/	/	0.072	0.072	0.072	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.146	/	/	/	0.146	0.146	0.146	N/A	N/A
LTE Band 17 QPSK (10MHz)	Front	1RB	0.074	0.110	0.236	0.082	0.184	0.310	0.156	N/A	N/A
	Back		0.176	0.098	0.208	0.082	0.274	0.384	0.258	N/A	N/A
	Left		0.090	/	/	/	0.090	0.090	0.090	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.152	/	/	/	0.152	0.152	0.152	N/A	N/A
	Front	50%RB	0.063	0.110	0.236	0.082	0.173	0.299	0.145	N/A	N/A
	Back		0.135	0.098	0.208	0.082	0.233	0.343	0.217	N/A	N/A
	Left		0.068	/	/	/	0.068	0.068	0.068	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.152	/	/	/	0.152	0.152	0.152	N/A	N/A

LTE Band 30 QPSK (10MHz)	Right	1RB	/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.119	/	/	/	0.119	0.119	0.119	N/A	N/A
	Front		0.492	0.110	0.236	0.082	0.602	0.728	0.574	N/A	N/A
	Back		0.466	0.098	0.208	0.082	0.564	0.674	0.548	N/A	N/A
	Left		0.366	/	/	/	0.366	0.366	0.366	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.823	/	/	/	0.823	0.823	0.823	N/A	N/A
	Front	50%RB	0.431	0.110	0.236	0.082	0.541	0.667	0.513	N/A	N/A
	Back		0.404	0.098	0.208	0.082	0.502	0.612	0.486	N/A	N/A
	Left		0.303	/	/	/	0.303	0.303	0.303	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.766	/	/	/	0.766	0.766	0.766	N/A	N/A
	Front		0.312	0.110	0.236	0.082	0.422	0.548	0.394	N/A	N/A
	Back		0.286	0.098	0.208	0.082	0.384	0.494	0.368	N/A	N/A
LTE Band 66 QPSK (20MHz)	Left	1RB	0.190	/	/	/	0.190	0.190	0.190	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.630	/	/	/	0.630	0.630	0.630	N/A	N/A
	Front		0.234	0.110	0.236	0.082	0.344	0.470	0.316	N/A	N/A
	Back		0.210	0.098	0.208	0.082	0.308	0.418	0.292	N/A	N/A
	Left		0.119	/	/	/	0.119	0.119	0.119	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top	50%RB	/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.536	/	/	/	0.536	0.536	0.536	N/A	N/A
	Front		0.052	0.110	0.236	0.082	0.162	0.288	0.134	N/A	N/A
	Back		0.043	0.098	0.208	0.082	0.141	0.251	0.125	N/A	N/A
	Left		0.041	/	/	/	0.041	0.041	0.041	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.047	/	/	/	0.047	0.047	0.047	N/A	N/A
LTE Band 71 QPSK (20MHz)	Front	1RB	0.043	0.110	0.236	0.082	0.153	0.279	0.125	N/A	N/A
	Back		0.034	0.098	0.208	0.082	0.132	0.242	0.116	N/A	N/A
	Left		0.032	/	/	/	0.032	0.032	0.032	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.038	/	/	/	0.038	0.038	0.038	N/A	N/A
	Front	50%RB	0.043	0.110	0.236	0.082	0.153	0.279	0.125	N/A	N/A
	Back		0.034	0.098	0.208	0.082	0.132	0.242	0.116	N/A	N/A
	Left		0.032	/	/	/	0.032	0.032	0.032	N/A	N/A
	Right		/	0.089	0.182	0.082	0.089	0.182	0.082	N/A	N/A
	Top		/	0.054	0.145	0.082	0.054	0.145	0.082	N/A	N/A
	Bottom		0.038	/	/	/	0.038	0.038	0.038	N/A	N/A

13. Test Equipment List

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
E-Field Probe	MVG	SSE2	04/22 EPG0365	2023/02/06	2024/02/05
6 1/2 Digital Multimeter	Keithley	DMM6500	4527164	2022/11/24	2023/11/23
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	161997	2022/11/24	2023/11/23
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2022/11/24	2023/11/23
E-Series Avg. Power Sensor	KEYSIGHT	E9300A	MY55050017	2023/03/24	2024/03/23
EPM Series Power Meter	KEYSIGHT	E4418B	MY41293435	2023/03/24	2024/03/23
10dB Attenuator	MIDWEST MICROWAVE	263-10dB	/	2023/03/24	2024/03/23
Coupler	MERRIMAC	CWM-10R-10.8G	LOT-83391	2023/03/24	2024/03/23
750MHz Validation Dipole	MVG	SID750	07/22 DIP 0G835-655	2023/02/06	2024/02/05
835MHz Validation Dipole	MVG	SID835	07/22 DIP 0G835-656	2023/02/06	2024/02/05
1800MHz Validation Dipole	MVG	SID1800	07/22 DIP 1G800-657	2023/02/06	2024/02/05
1900MHz Validation Dipole	MVG	SID1900	07/22 DIP 1G900-658	2023/02/06	2024/02/05
2300MHz Validation Dipole	MVG	SID2300	07/22 DIP 2G300-661	2023/02/06	2024/02/05
2450MHz Validation Dipole	MVG	SID2450	07/22 DIP 2G450-662	2023/02/06	2024/02/05
2600MHz Validation Dipole	MVG	SID2600	07/22 DIP 2G600-663	2023/02/06	2024/02/05
5200MHz-5800MHz Validation Dipole	MVG	SID5000	07/22 DIP5G000-670	2023/02/06	2024/02/05
LIMESAR Dielectric Probe	MVG	SCLMP	06/22 OCPG88	/	/
ENA Series Network Analyzer	Agilent	E5071B	MY42301221	2022/11/24	2023/11/23
Thermometer	Riters	DT-232	21A11	2023/03/24	2024/03/23
Antenna network emulator	MVG	ANTA 74	07/22 ANTA 74	/	/
SAM Phantom	MVG	SAM	07/22 SAM149	/	/
Mobile Phone Positioning System	MVG	MSH 118	07/22 MSH 118	/	/
Mechanical Calibration Kit	PNA	/	/	/	/
Open SAR test software	MVG	/	V5.3.5	/	/
Note: For dipole antennas, BTF has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria: 1. There is no physical damage on the dipole; 2. System validation with specific dipole is within 10% of calibrated value; 3. Return-loss in within 20% of calibrated measurement. 4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.					

ANNEX A Simulating Liquid Verification Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Dielectric performance of tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (s/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
750	41.90	41.80	0.89	0.86	0.24%	3.37%	±5%	20.0	25/6/2023
835	41.50	41.41	0.90	0.87	0.22%	3.33%	±5%	20.0	25/6/2023
1800	40.00	39.91	1.40	1.37	0.23%	2.14%	±5%	20.0	26/6/2023
1900	40.00	39.88	1.40	1.41	0.30%	-0.71%	±5%	20.0	26/6/2023
2300	39.50	39.30	1.67	1.69	-0.51%	1.20%	±5%	20.0	27/6/2023
2450	39.20	39.08	1.80	1.81	0.31%	-0.56%	±5%	20.0	27/6/2023
2600	39.00	38.88	1.96	1.97	0.31%	-0.51%	±5%	20.0	27/6/2023
5200	36.00	35.88	4.66	4.70	0.33%	-0.86%	±5%	20.0	27/6/2023
5400	35.8	35.68	4.86	4.90	0.34%	-0.82%	±5%	20.0	27/6/2023
5600	35.5	35.38	5.07	5.11	0.34%	-0.79%	±5%	20.0	27/6/2023
5800	35.30	35.18	5.27	5.31	0.34%	-0.76%	±5%	20.0	27/6/2023

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

ANNEX B System Check Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %(for 10 g).

Frequency (MHz)	Input Power (mW)	1g SAR (W/Kg)	10g SAR (W/Kg)	1g SAR 1W input power normalized (W/Kg)	10g SAR 1W input power normalized (W/Kg)	1g SAR Standard target (1W) (W/Kg)	10g SAR Standard target (1W) (W/Kg)	1g SAR Deviation	10g SAR Deviation
750	16	0.138	0.092	8.63	5.75	8.25	5.38	4.55%	6.88%
835	16	0.163	0.106	10.19	6.63	9.79	6.17	4.06%	7.37%
1800	16	0.588	0.312	36.75	19.50	39.33	20.61	-6.56%	-5.39%
1900	16	0.630	0.322	39.38	20.13	40.97	20.7	-3.89%	-2.78%
2300	16	0.749	0.340	46.81	21.25	50.35	22.84	-7.03%	-6.96%
2450	16	0.793	0.352	49.56	22.00	54.4	23.86	-8.89%	-7.80%
2600	16	0.866	0.421	54.13	26.31	57.14	24.48	-5.28%	7.49%
5200	13	0.998	0.294	76.77	22.62	73.88	21.29	3.91%	6.23%
5400	13	1.120	0.327	86.15	25.15	81.47	23.23	5.75%	8.28%
5600	13	1.084	0.314	83.38	24.15	78.71	22.64	5.94%	6.69%
5800	13	1.023	0.280	78.69	21.54	74.21	21.50	6.04%	0.18%

System Performance Check Data (750 MHz)

System check at 750 MHz

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	750.000
Relative permittivity (real part)	41.800
Relative permittivity (imaginary part)	21.460
Conductivity (S/m)	0.860

C. SAR Surface and Volume

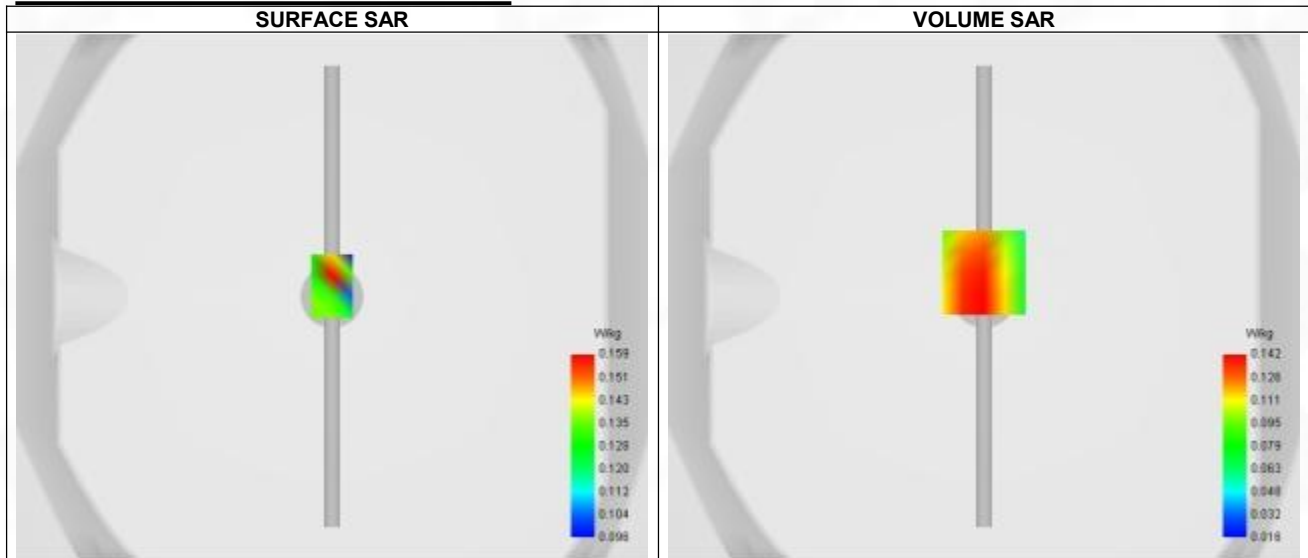

Maximum location: X=0.00, Y=9.00 ; SAR Peak: 0.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.092
SAR 1g (W/Kg)	0.138
Variation (%)	-2.190
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.287	0.142	0.092	0.073	0.042



F. 3D Image

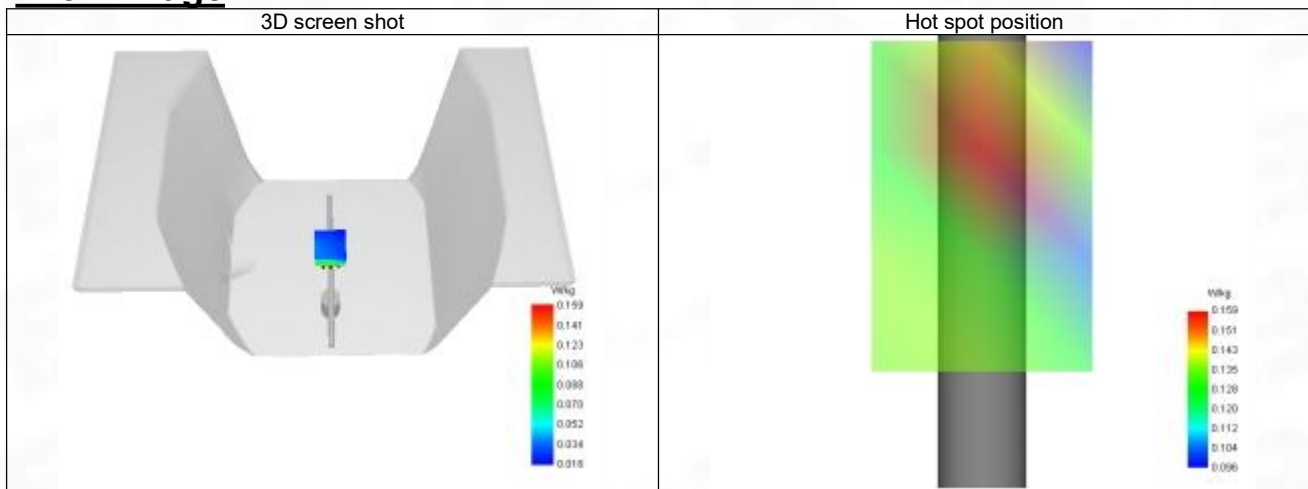

System Performance Check Data (835 MHz)

System check at 835 MHz

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	835.000
Relative permittivity (real part)	41.410
Relative permittivity (imaginary part)	19.490
Conductivity (S/m)	0.870

C. SAR Surface and Volume

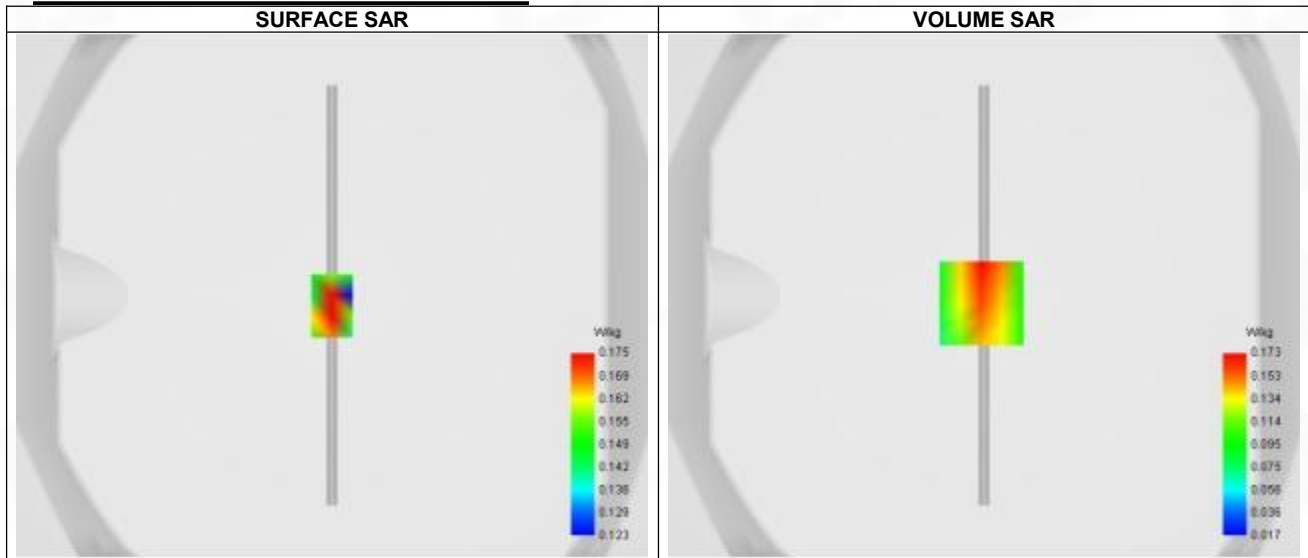


Maximum location: X=-1.00, Y=-3.00 ; SAR Peak: 0.26 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.106
SAR 1g (W/Kg)	0.163
Variation (%)	-3.390
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.059	0.173	0.115	0.061	0.072

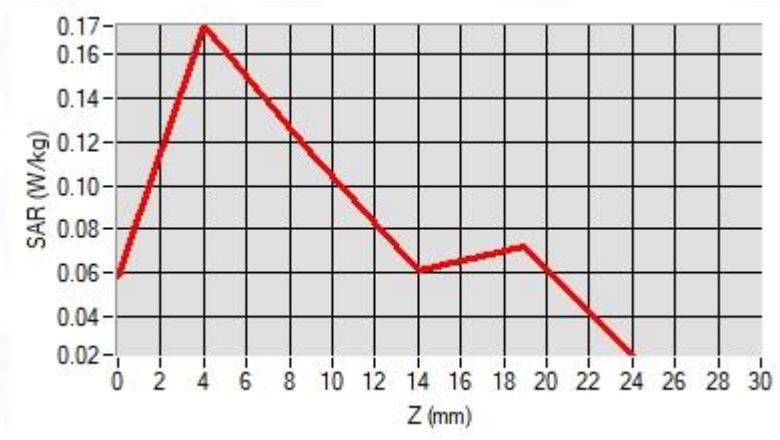

F. 3D Image

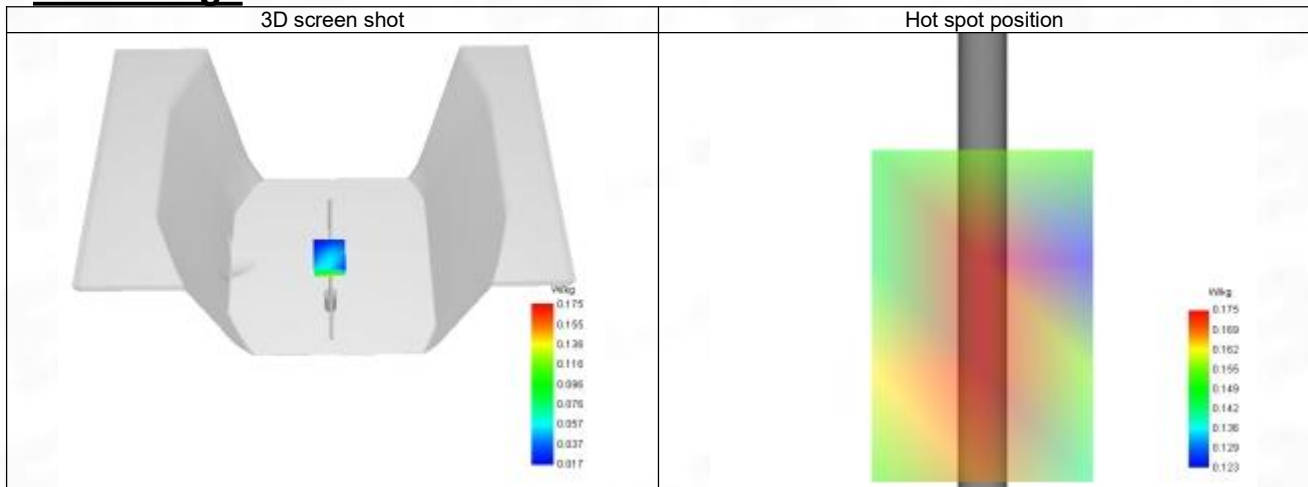

System Performance Check Data (1800 MHz)

System check at 1800 MHz

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	1800.000
Relative permittivity (real part)	39.910
Relative permittivity (imaginary part)	14.090
Conductivity (S/m)	1.370

C. SAR Surface and Volume

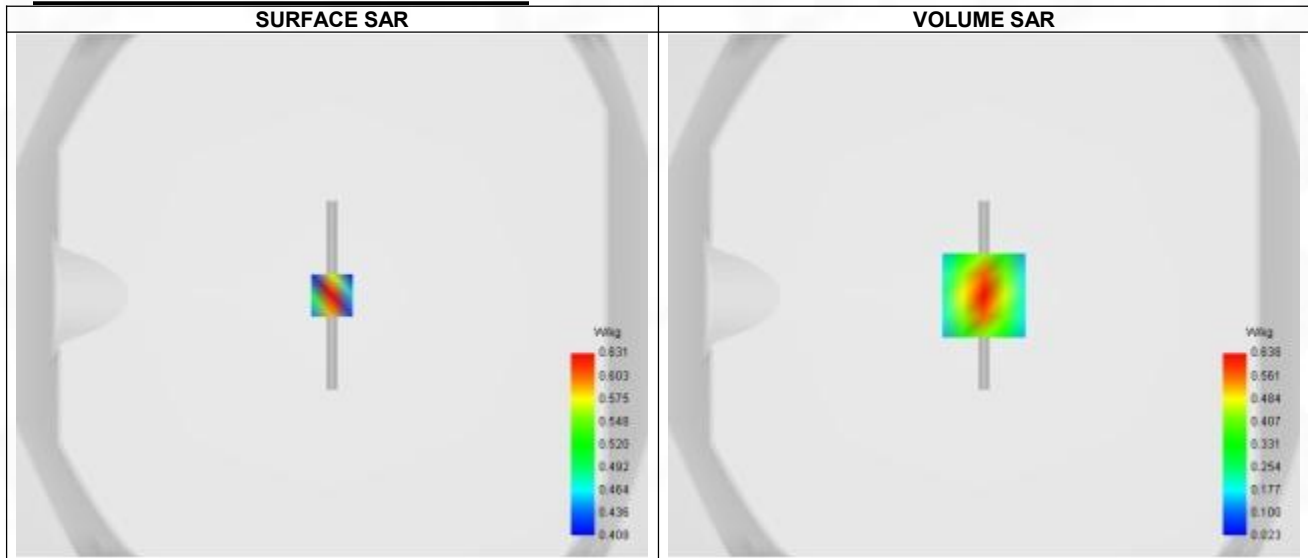


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.00 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.312
SAR 1g (W/Kg)	0.588
Variation (%)	-0.250
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.003	0.638	0.356	0.204	0.127

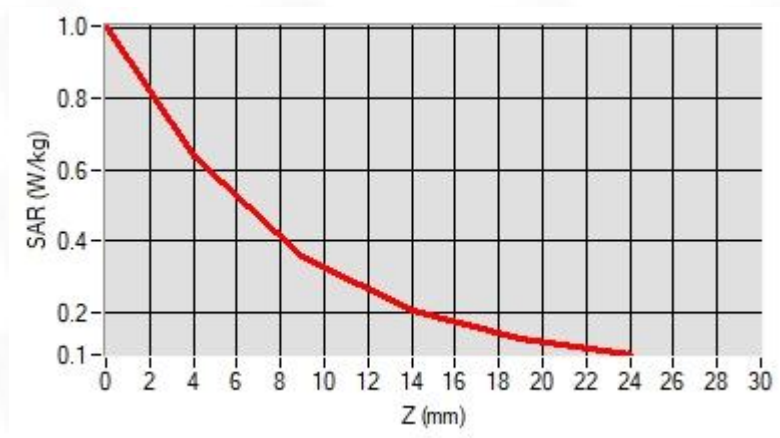

F. 3D Image

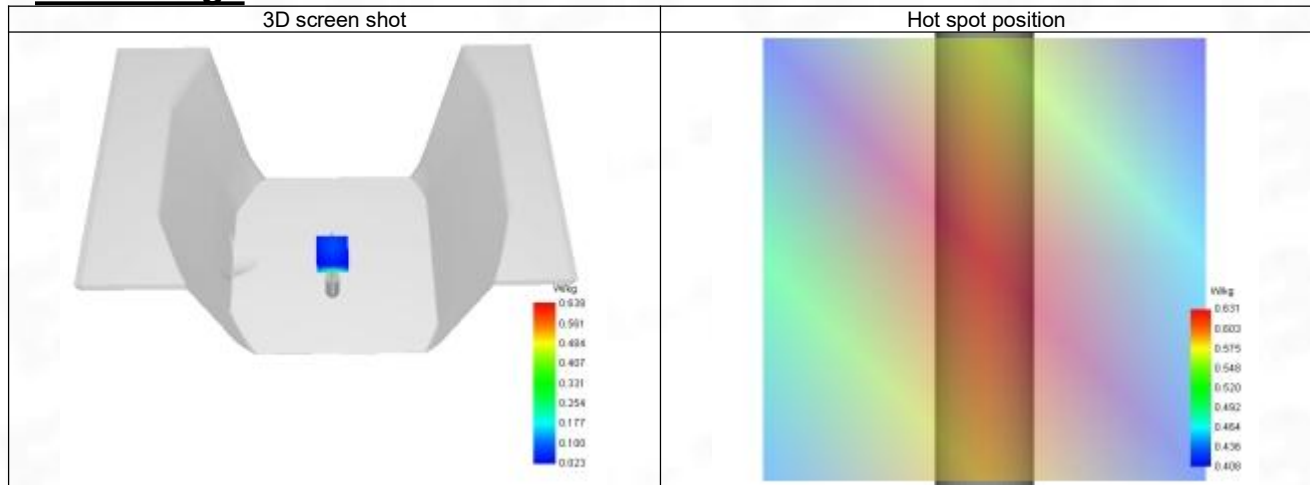

System Performance Check Data (1900 MHz)

System check at 1900 MHz

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	1900.000
Relative permittivity (real part)	39.880
Relative permittivity (imaginary part)	13.380
Conductivity (S/m)	1.410

C. SAR Surface and Volume

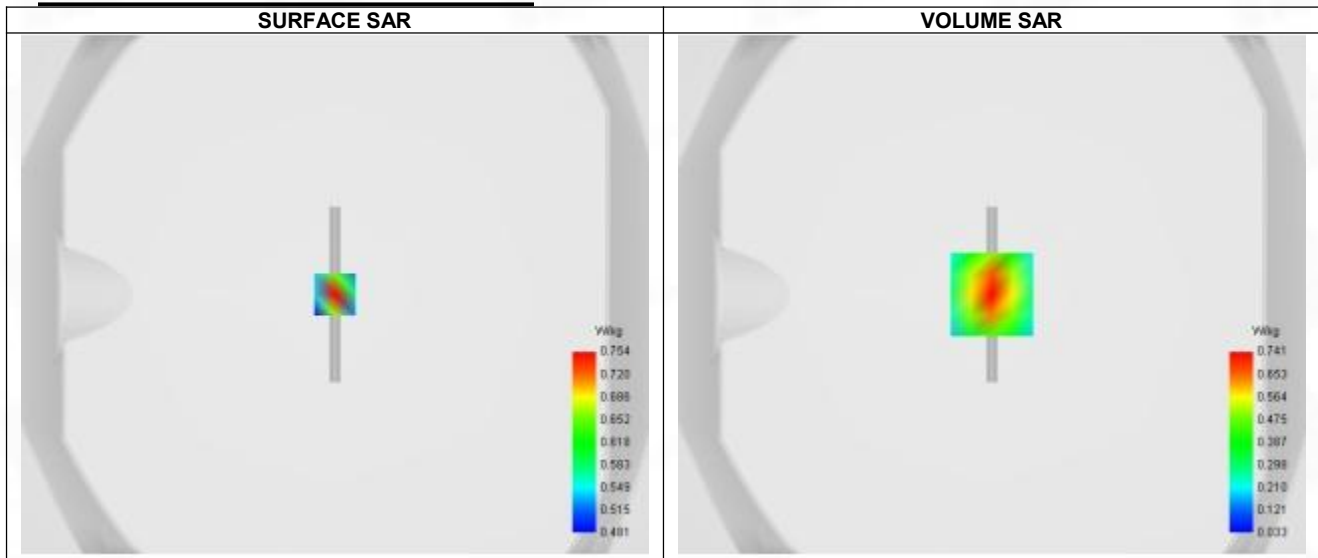


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.18 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.630
Variation (%)	-2.080
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.201	0.759	0.402	0.239	0.156

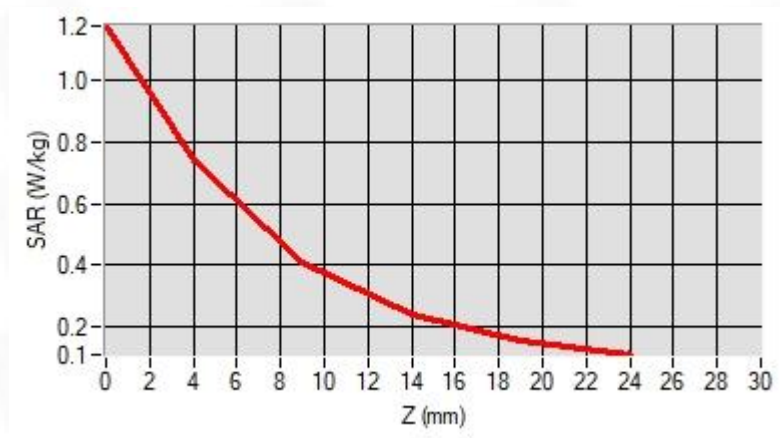

F. 3D Image

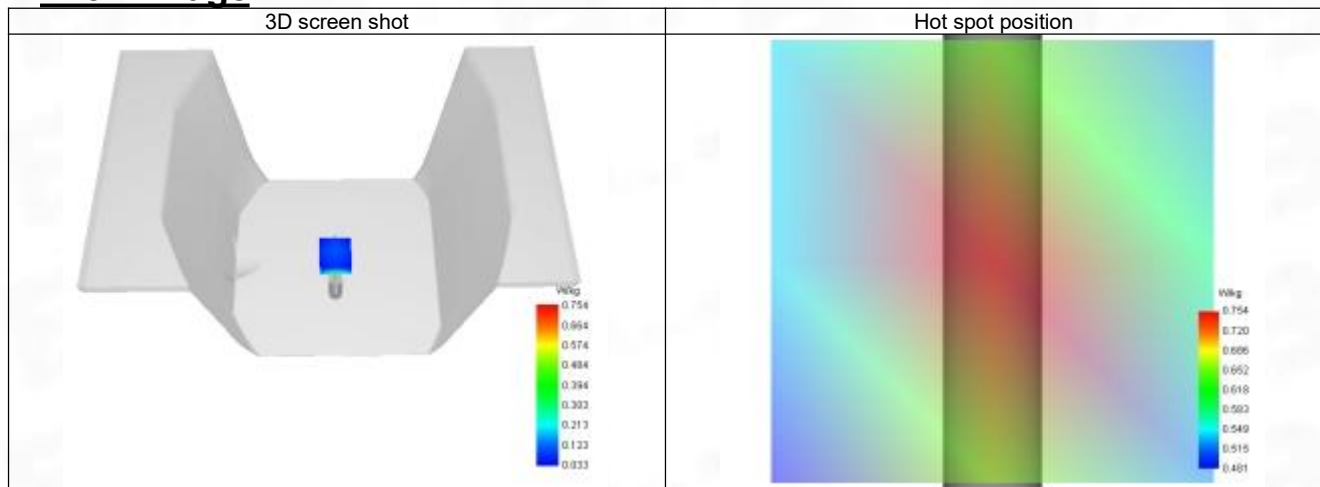

System Performance Check Data (2300 MHz)

System check at 2300 MHz

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2300
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	2300.000
Relative permittivity (real part)	39.303
Relative permittivity (imaginary part)	13.356
Conductivity (S/m)	1.690

C. SAR Surface and Volume

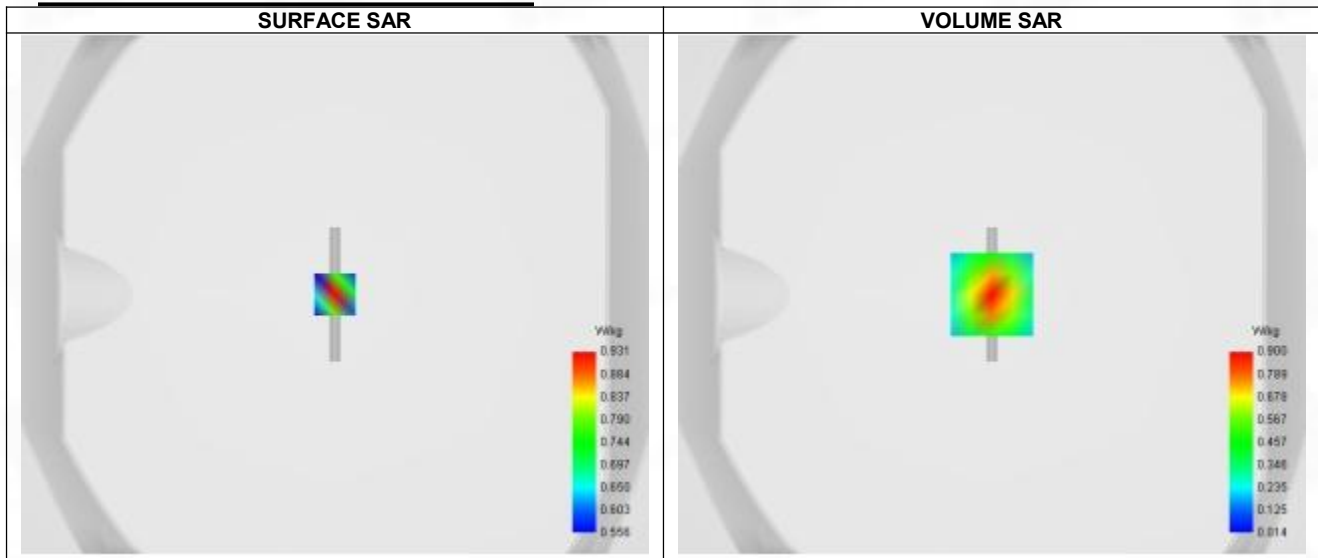


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.40 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.340
SAR 1g (W/Kg)	0.749
Variation (%)	-2.880
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.400	0.900	0.477	0.261	0.150

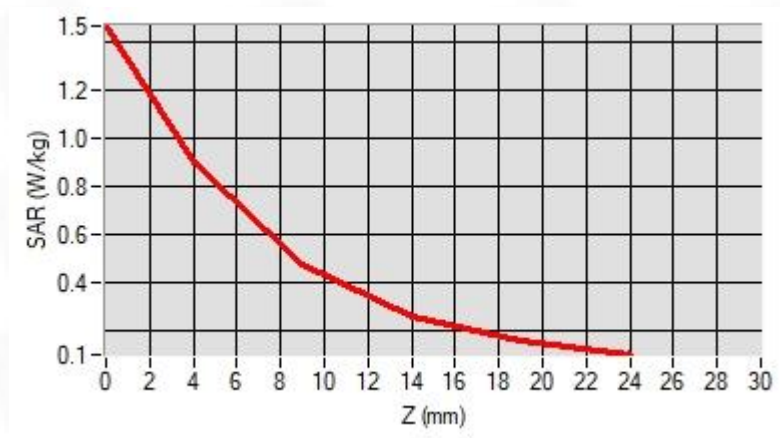

F. 3D Image

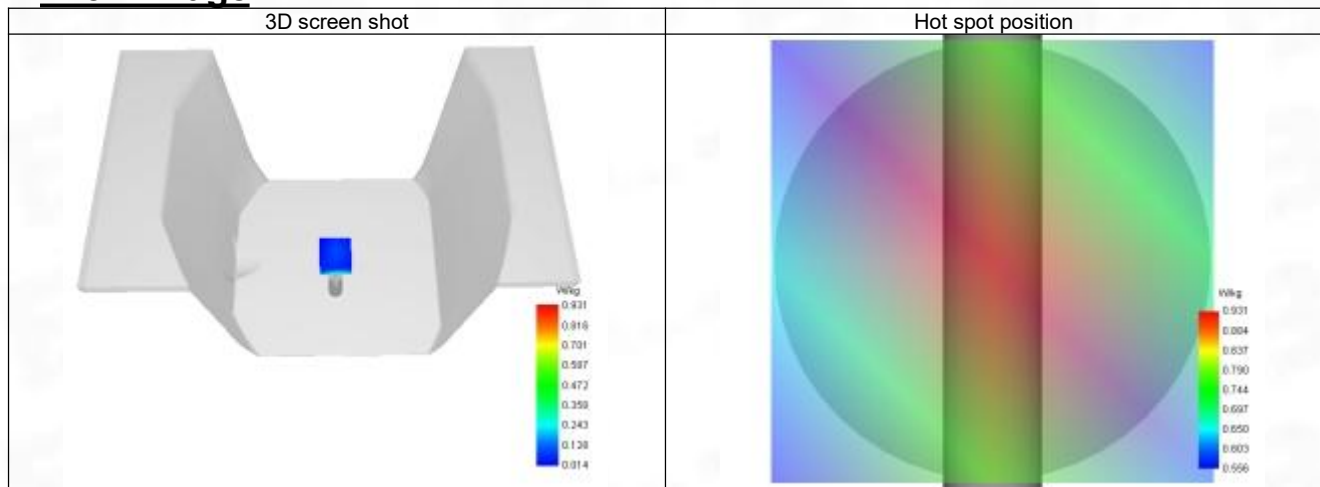

System Performance Check Data (2450 MHz)

System check at 2450 MHz

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	2450.000
Relative permittivity (real part)	39.080
Relative permittivity (imaginary part)	13.340
Conductivity (S/m)	1.810

C. SAR Surface and Volume

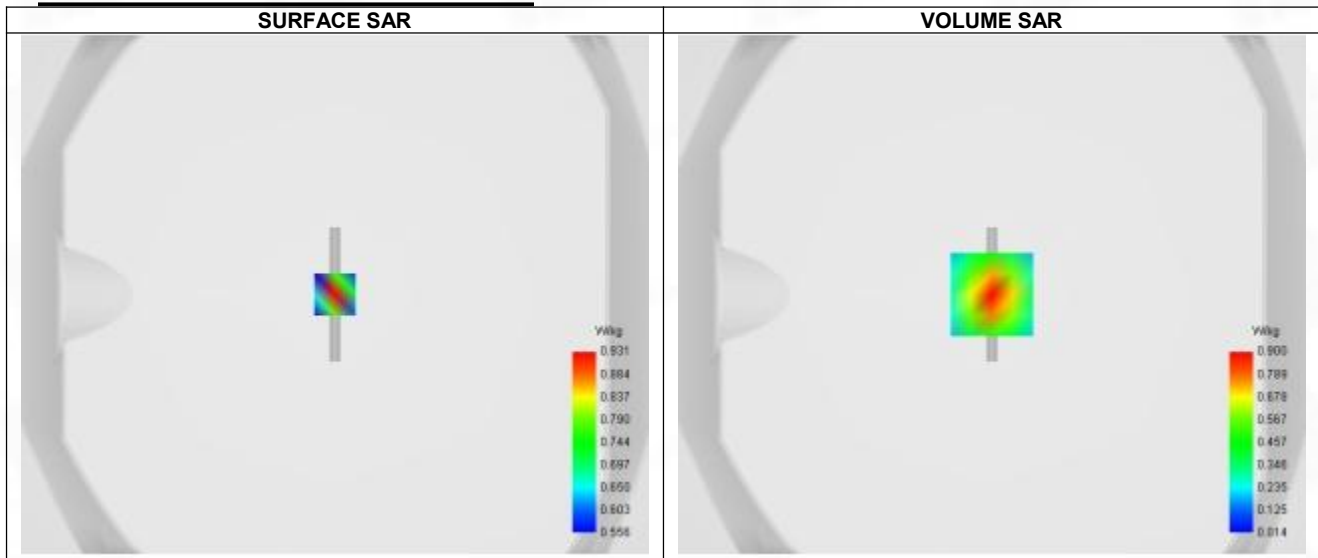


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.47 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.352
SAR 1g (W/Kg)	0.793
Variation (%)	-2.570
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.466	0.900	0.477	0.261	0.158

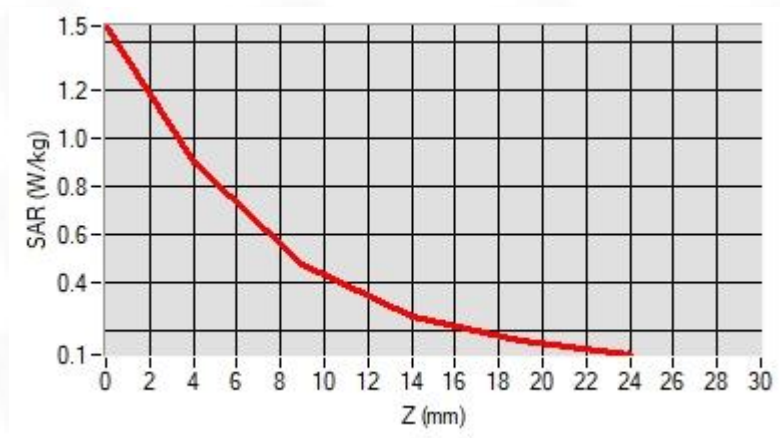

F. 3D Image

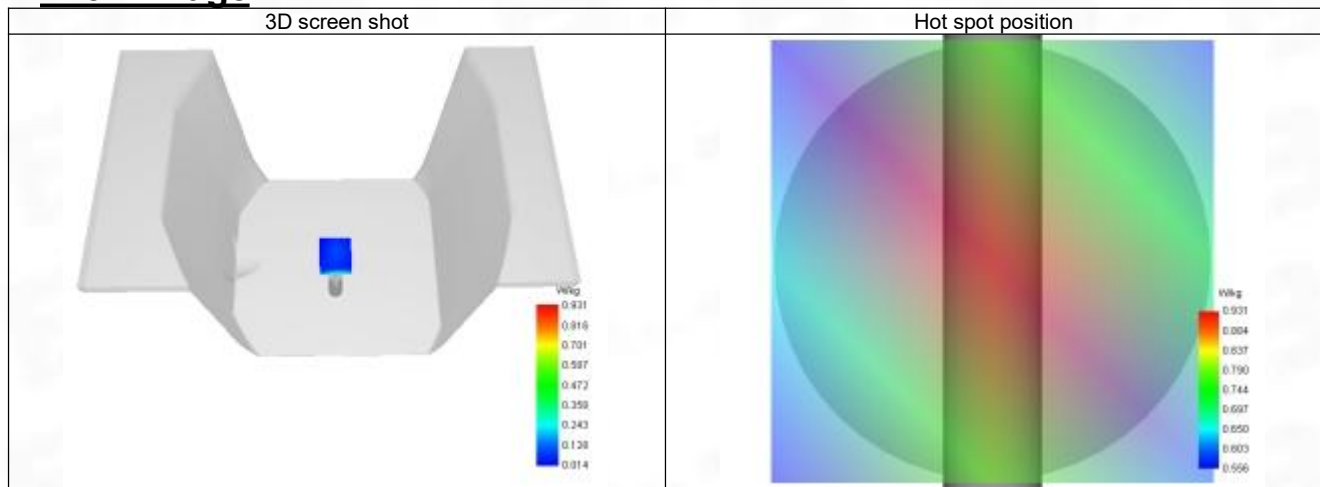

System Performance Check Data (2600 MHz)

System check at 2600 MHz

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	2600.000
Relative permittivity (real part)	38.880
Relative permittivity (imaginary part)	12.690
Conductivity (S/m)	1.970

C. SAR Surface and Volume

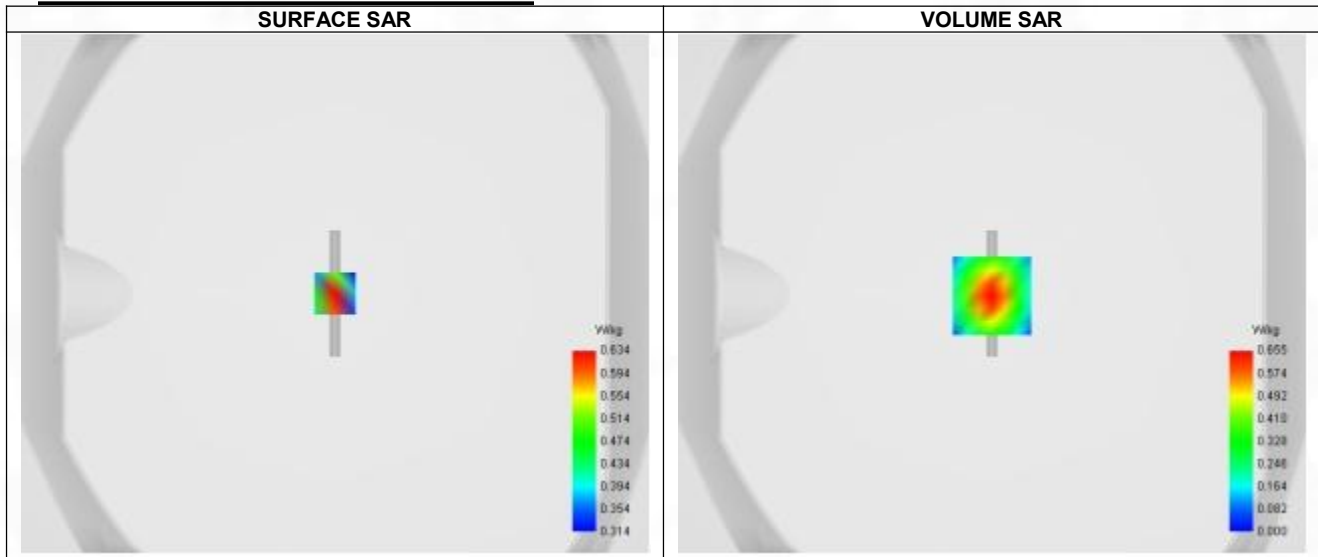


Maximum location: X=0.00, Y=-1.00 ; SAR Peak: 1.02 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.421
SAR 1g (W/Kg)	0.866
Variation (%)	2.980
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.020	0.655	0.359	0.187	0.091

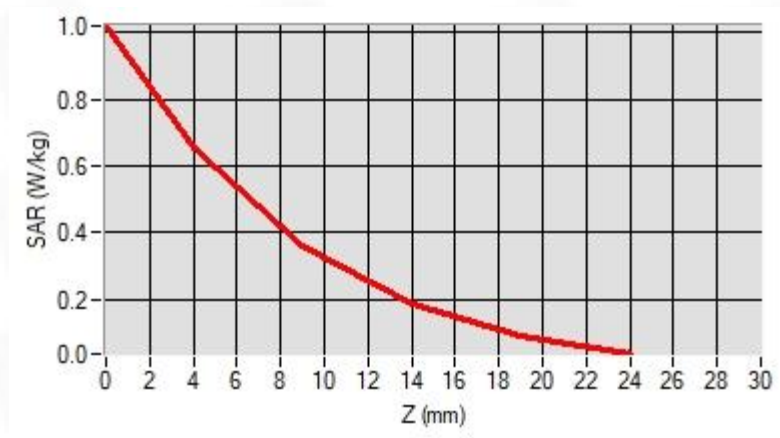

F. 3D Image

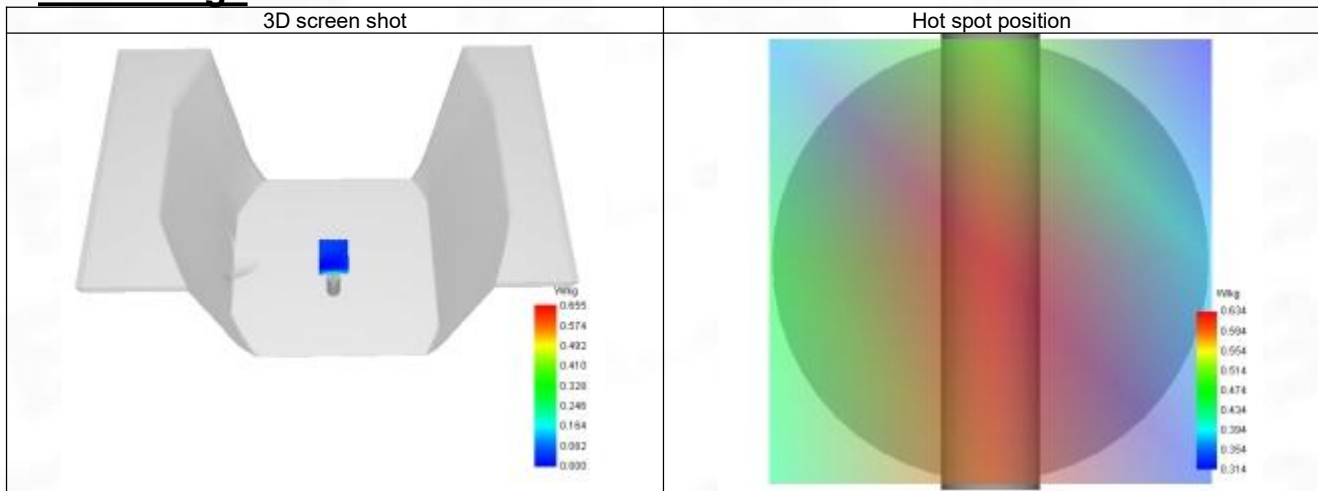

System Performance Check Data (5200 MHz)

System check at 5200 MHz

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5200.000
Relative permittivity (real part)	35.880
Relative permittivity (imaginary part)	16.250
Conductivity (S/m)	4.700

C. SAR Surface and Volume

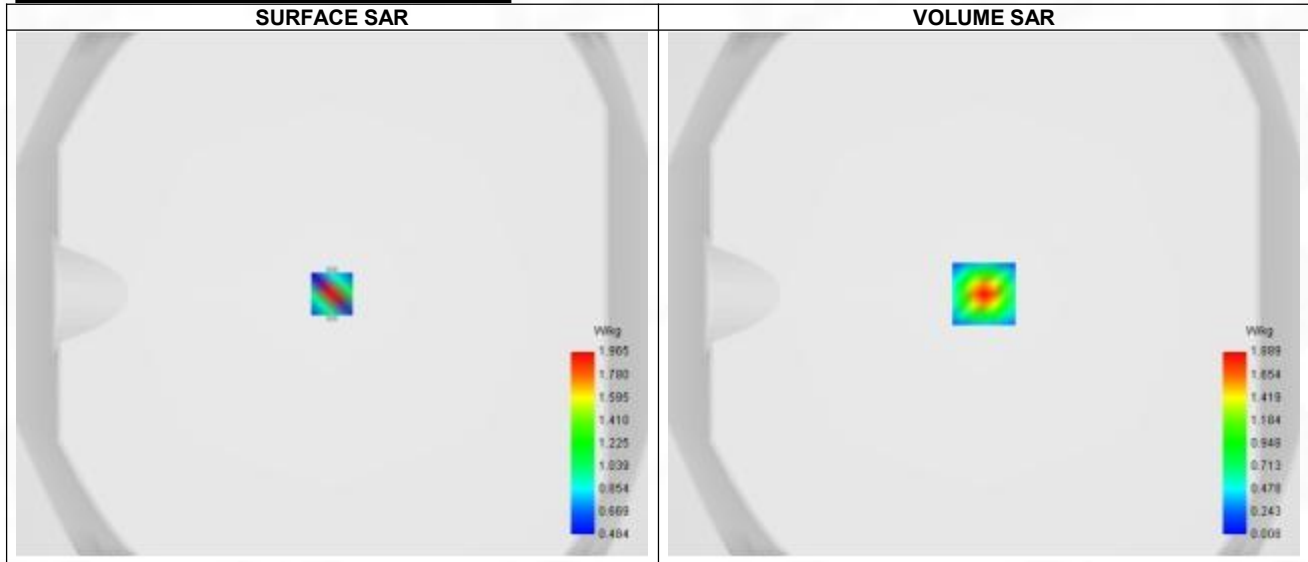


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.38 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.294
SAR 1g (W/Kg)	0.998
Variation (%)	-3.400
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.268	1.889	1.021	0.523	0.266	0.142	0.085	0.060	0.052

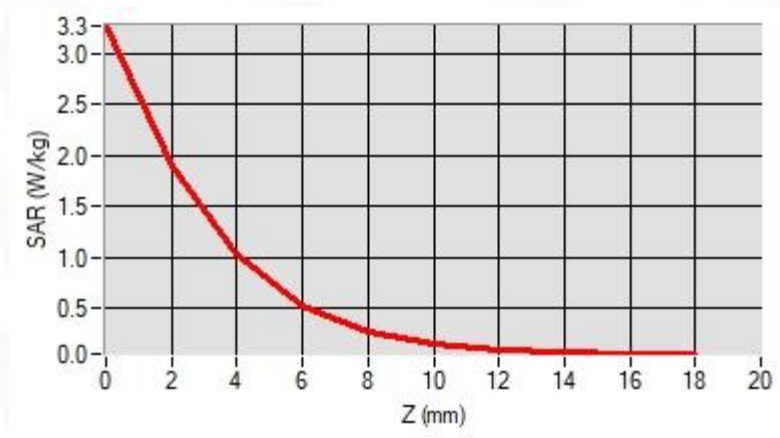

F. 3D Image

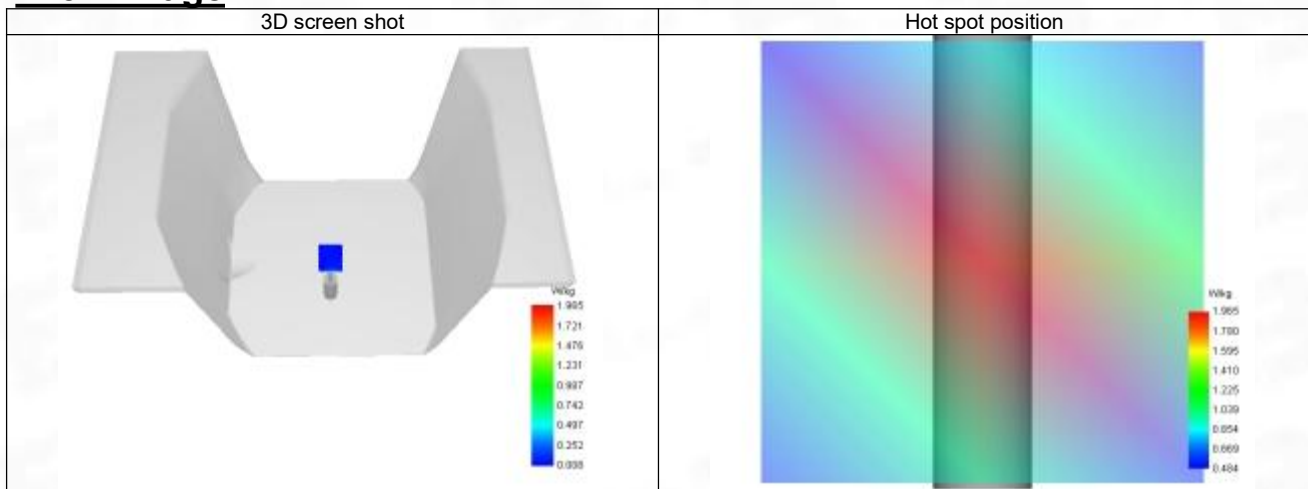

System Performance Check Data (5400 MHz)

System check at 5400 MHz

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.12
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5400.000
Relative permittivity (real part)	35.800
Relative permittivity (imaginary part)	16.200
Conductivity (S/m)	4.860

C. SAR Surface and Volume

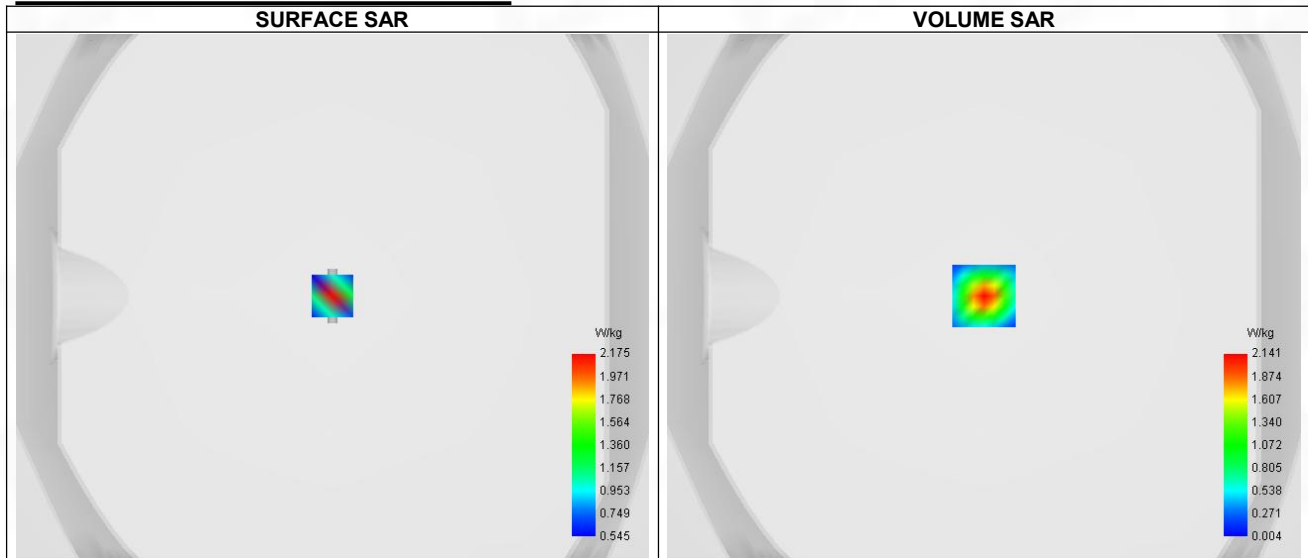


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.78 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.327
SAR 1g (W/Kg)	1.120
Variation (%)	-4.610
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.660	2.141	1.177	0.614	0.317	0.169	0.098	0.065	0.050

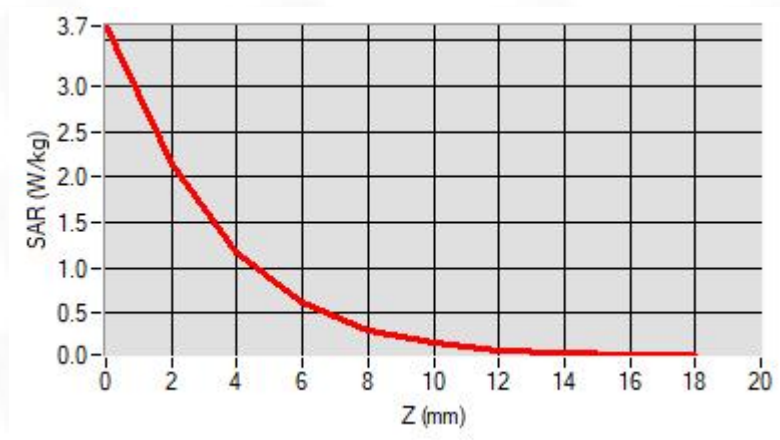

F. 3D Image

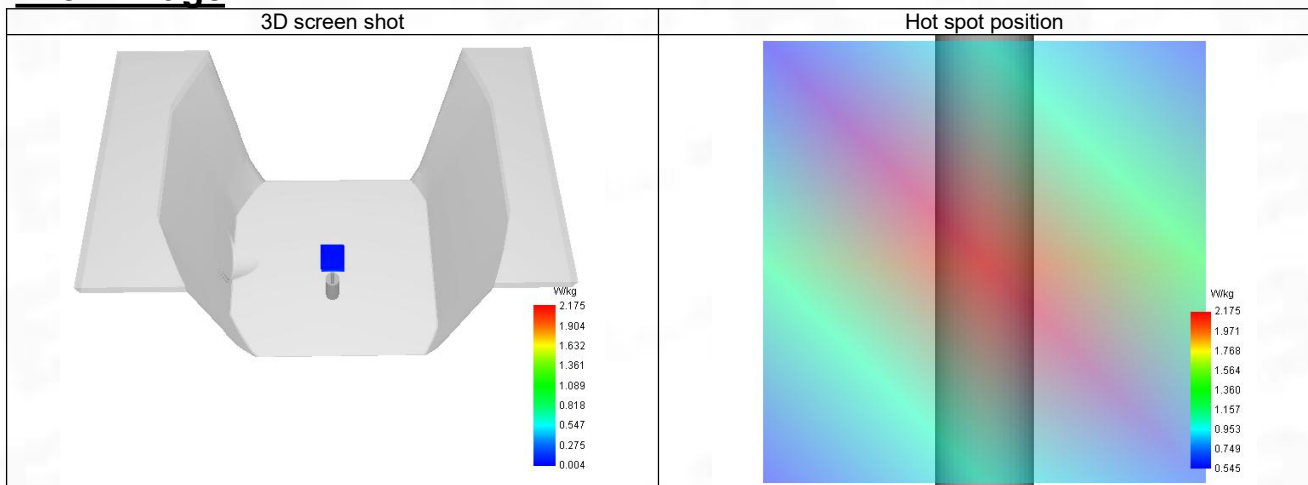

System Performance Check Data (5600 MHz)

System check at 5600 MHz

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.18
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5600.000
Relative permittivity (real part)	35.500
Relative permittivity (imaginary part)	16.300
Conductivity (S/m)	5.071

C. SAR Surface and Volume

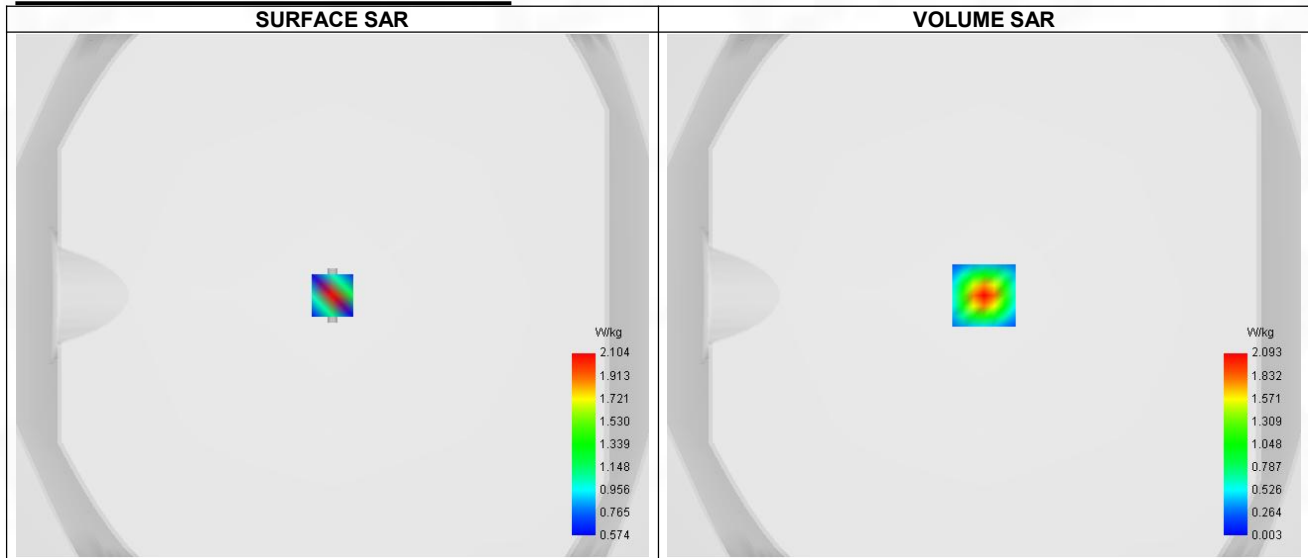


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.90 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.314
SAR 1g (W/Kg)	1.084
Variation (%)	-0.190
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.748	2.093	1.074	0.514	0.243	0.122	0.072	0.056	0.056

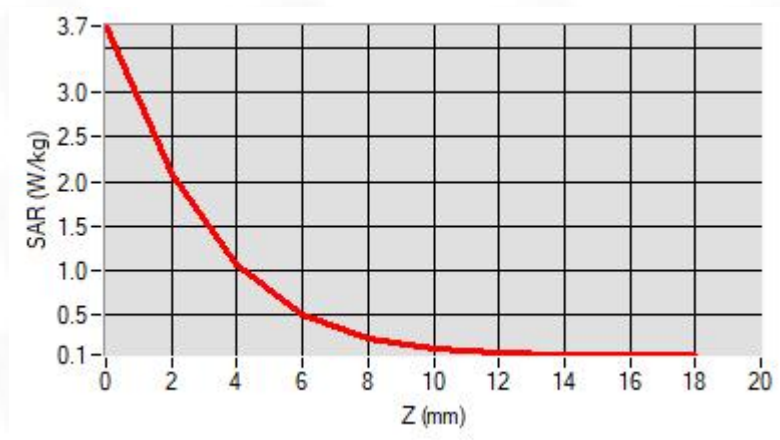

F. 3D Image

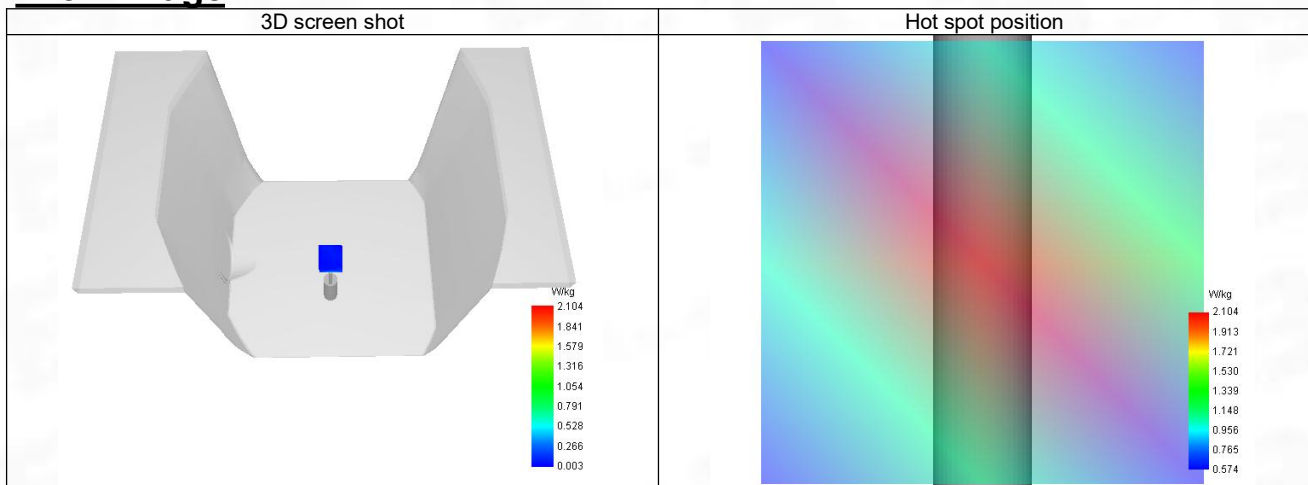

System Performance Check Data (5800 MHz)

System check at 5800 MHz

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.04
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5800.000
Relative permittivity (real part)	35.180
Relative permittivity (imaginary part)	16.480
Conductivity (S/m)	5.310

C. SAR Surface and Volume

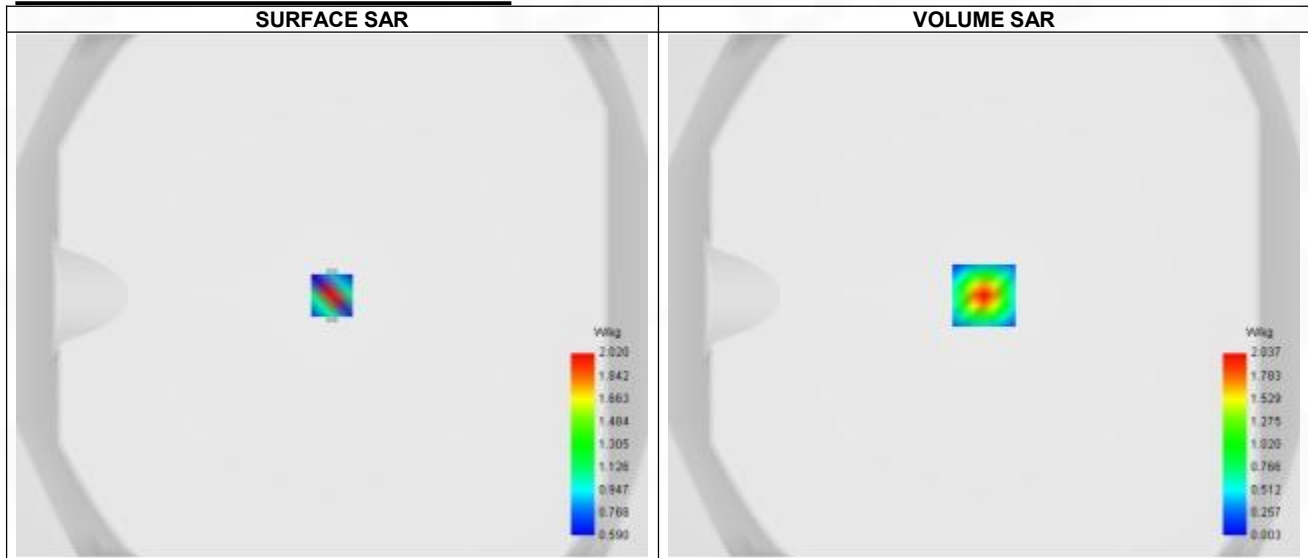


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 4.17 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.280
SAR 1g (W/Kg)	1.023
Variation (%)	0.490
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.948	2.037	0.915	0.361	0.135	0.055	0.033	0.037	0.059

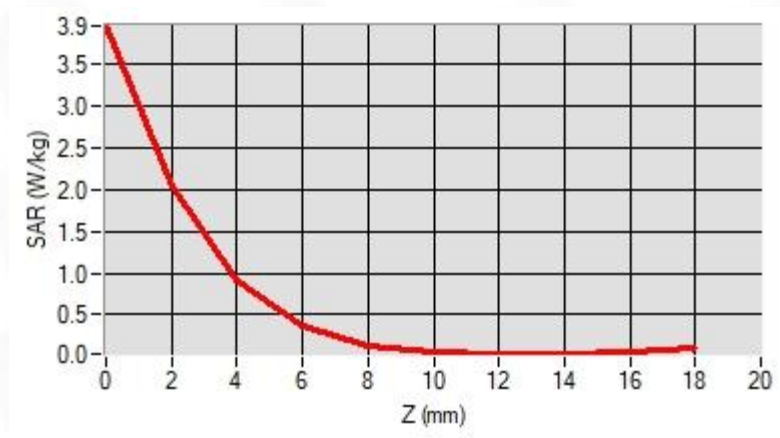

F. 3D Image

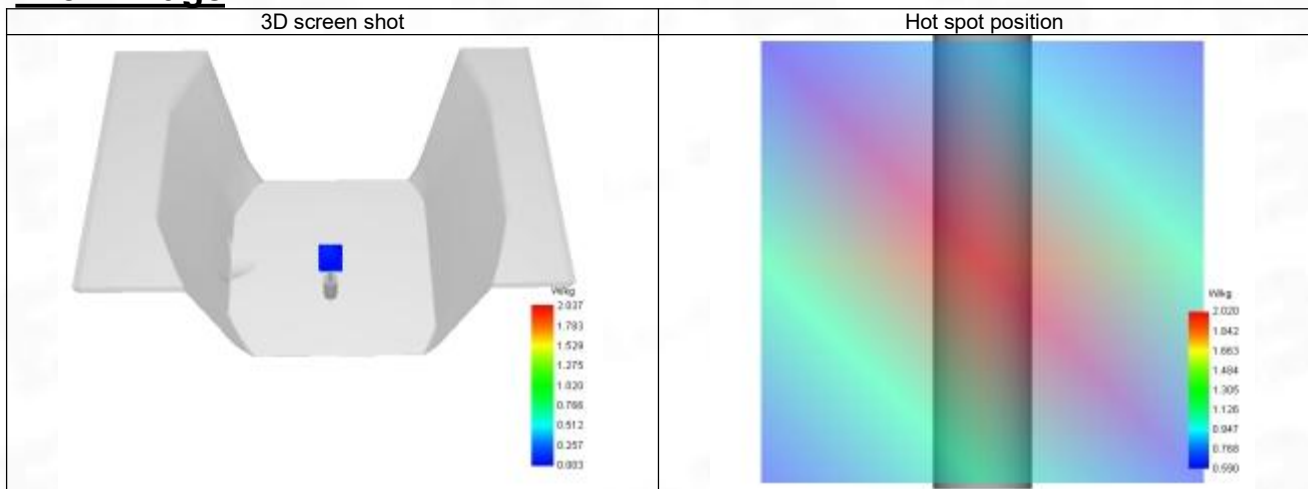

ANNEX C Test Data

1-Head with front position in dist. 0mm on Channel 251 in GSM850 voice

SAR Measurement at GSM850 (Cheek, Right)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Higher (251)
Signal	TDMA (GSM)
Modulation	GMSK

B. Permittivity

Frequency (MHz)	848.800
Relative permittivity (real part)	41.389
Relative permittivity (imaginary part)	19.511
Conductivity (S/m)	0.877

C. SAR Surface and Volume

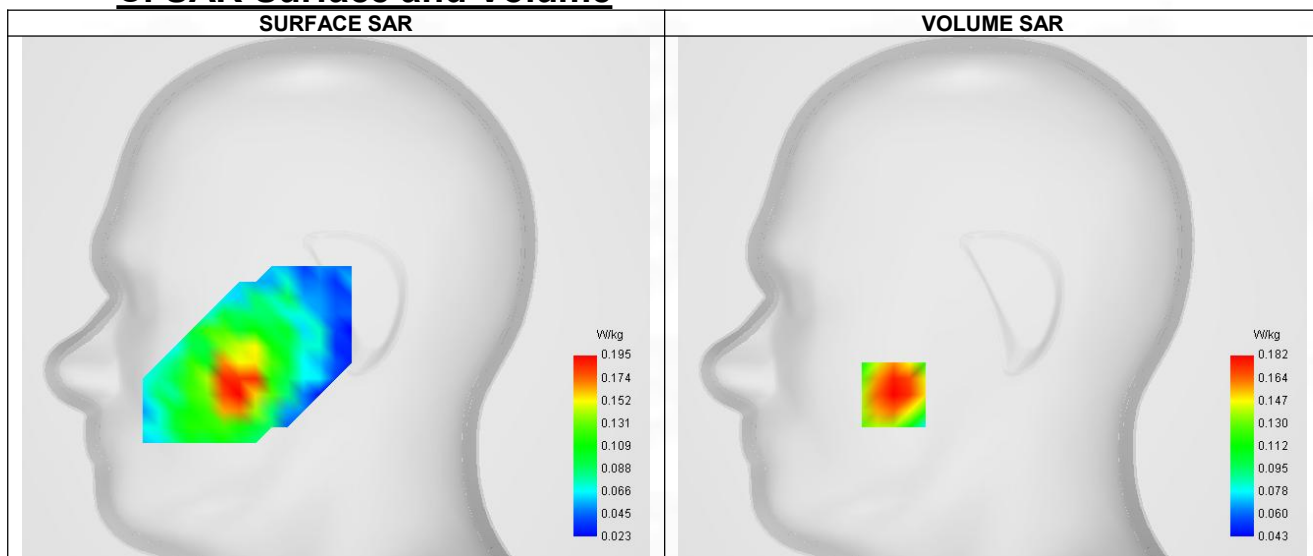


Maximum location: X=-49.00, Y=-48.00 ; SAR Peak: 0.26 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.130
SAR 1g (W/Kg)	0.188
Variation (%)	-2.120
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.262	0.182	0.118	0.084	0.067

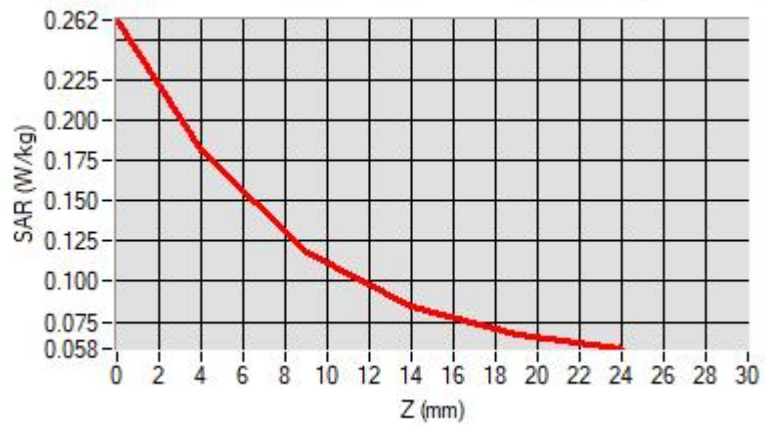

F. 3D Image

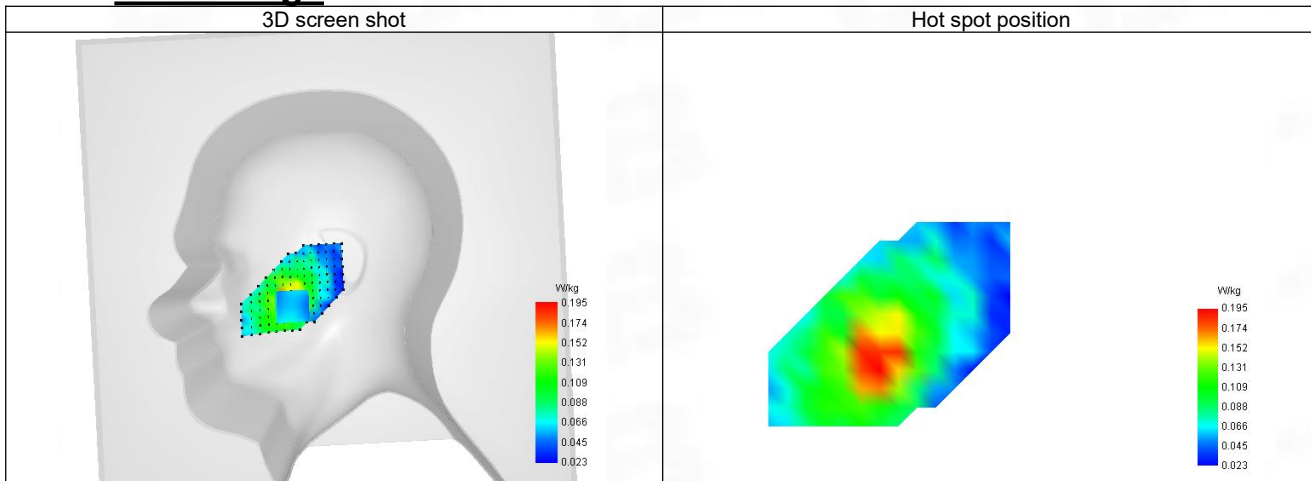

2-Body with front position in dist. 10mm on Channel 251 in GPRS850+2slots

SAR Measurement at GPRS850 (Body, Validation Plane)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS850
Channels	Higher (251)
Signal	TDMA (GPRS)
Modulation	GMSK (CS-1)
TX-slots	2

B. Permittivity

Frequency (MHz)	848.800
Relative permittivity (real part)	41.389
Relative permittivity (imaginary part)	19.511
Conductivity (S/m)	0.877

C. SAR Surface and Volume

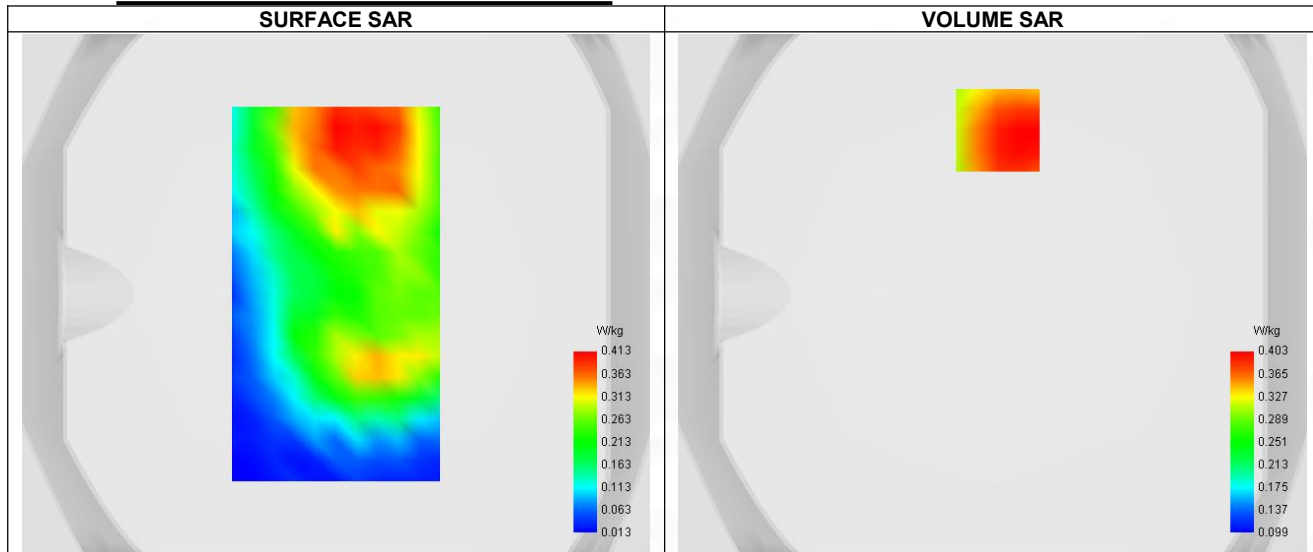


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.298
SAR 1g (W/Kg)	0.407
Variation (%)	-2.040
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.719	0.403	0.276	0.229	0.169

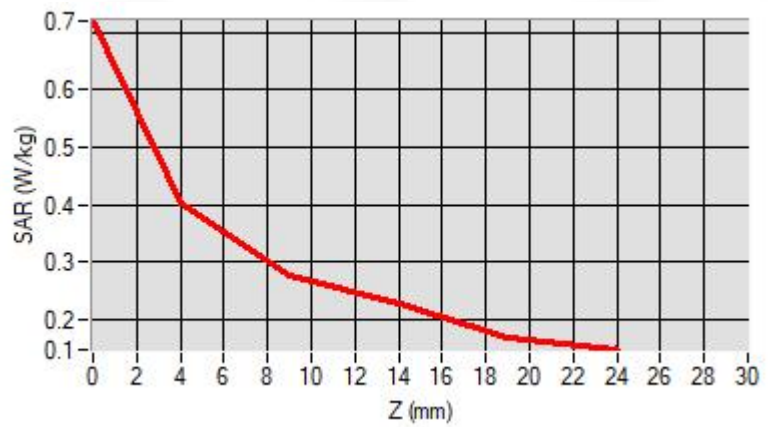

F. 3D Image

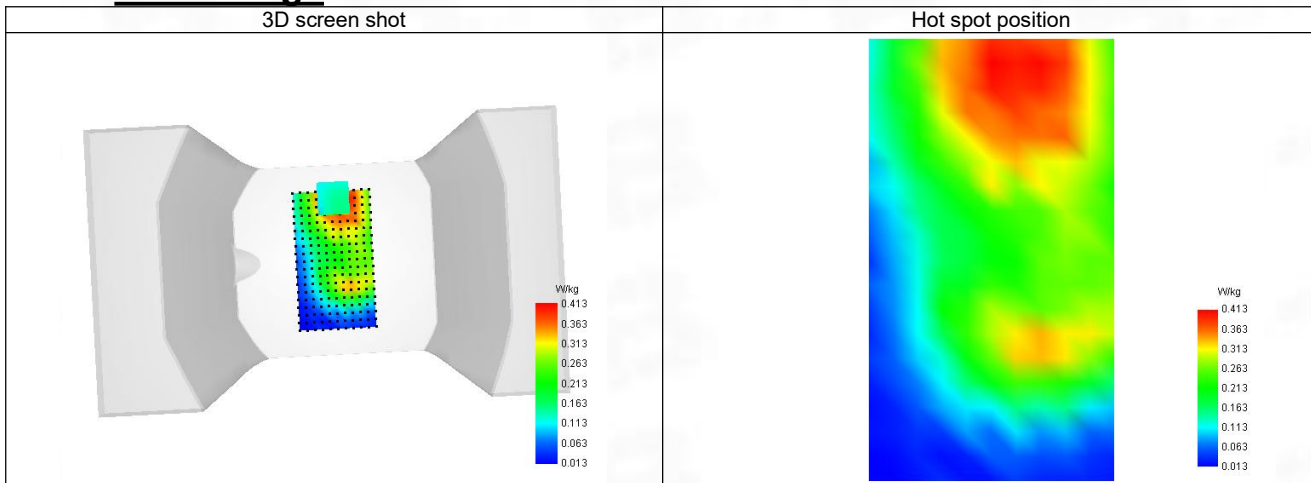

3-Head with front position in dist. 0mm on Channel 661 in GSM1900 voice

SAR Measurement at GSM1900 (Cheek, Right)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Middle (661)
Signal	TDMA (GSM)
Modulation	GMSK

B. Permittivity

Frequency (MHz)	1880.000
Relative permittivity (real part)	39.909
Relative permittivity (imaginary part)	13.351
Conductivity (S/m)	1.395

C. SAR Surface and Volume

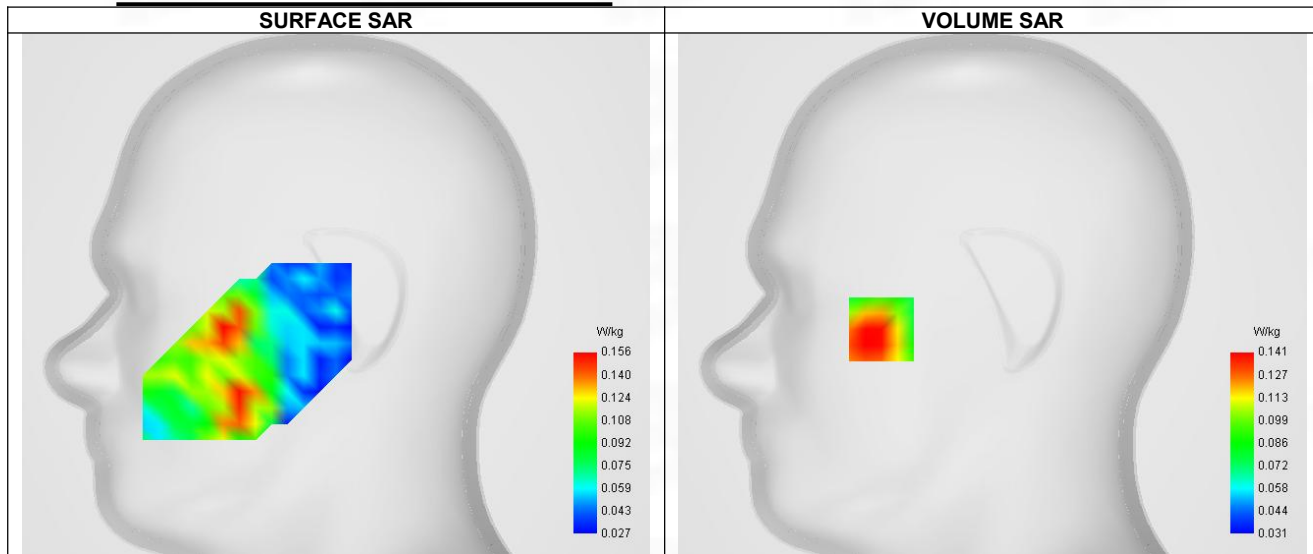


Maximum location: X=-55.00, Y=-17.00 ; SAR Peak: 0.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.099
SAR 1g (W/Kg)	0.140
Variation (%)	-1.820
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.292	0.141	0.084	0.072	0.059

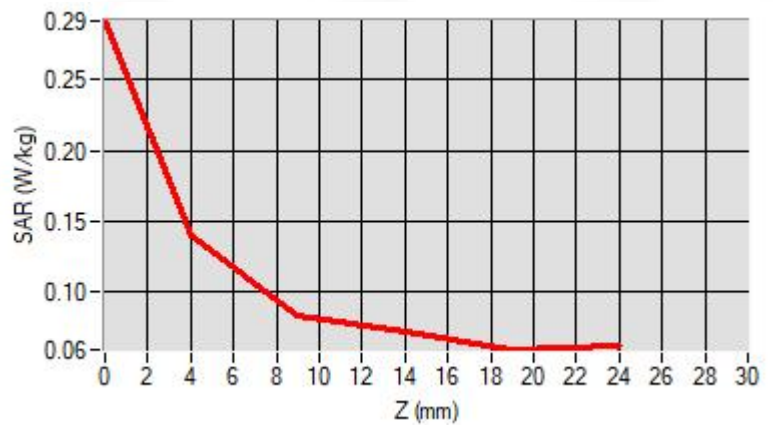

F. 3D Image

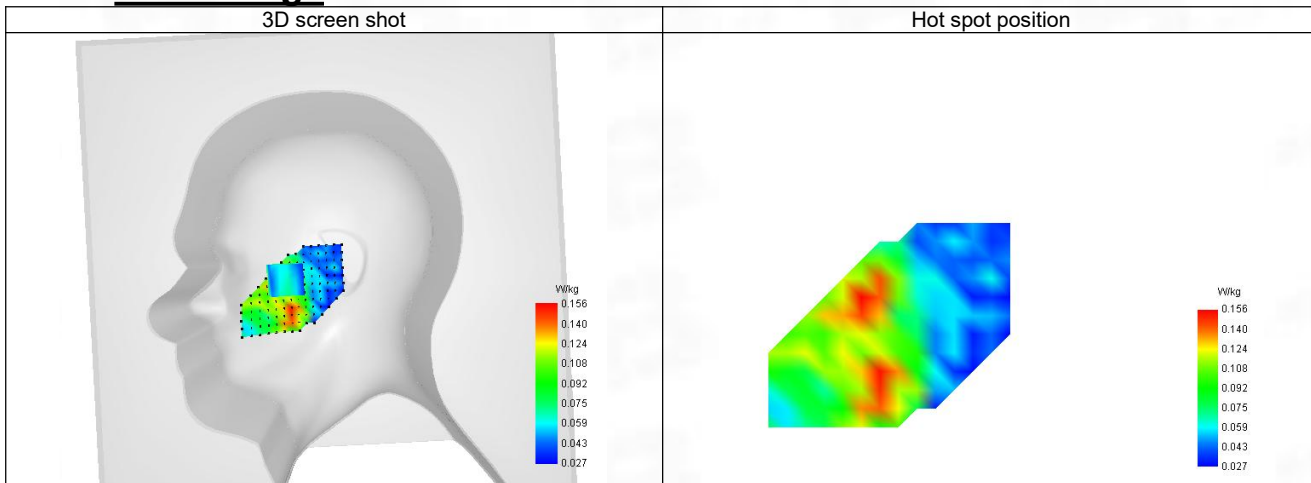

4-Body with bottom position in dist. 10mm on Channel 810 in GPRS1900+2slots

SAR Measurement at GPRS1900 (Body, Validation Plane)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS1900
Channels	Higher (810)
Signal	TDMA (GPRS)
Modulation	GMSK (CS-1)
TX-slots	2

B. Permittivity

Frequency (MHz)	1909.800
Relative permittivity (real part)	39.866
Relative permittivity (imaginary part)	13.394
Conductivity (S/m)	1.417

C. SAR Surface and Volume

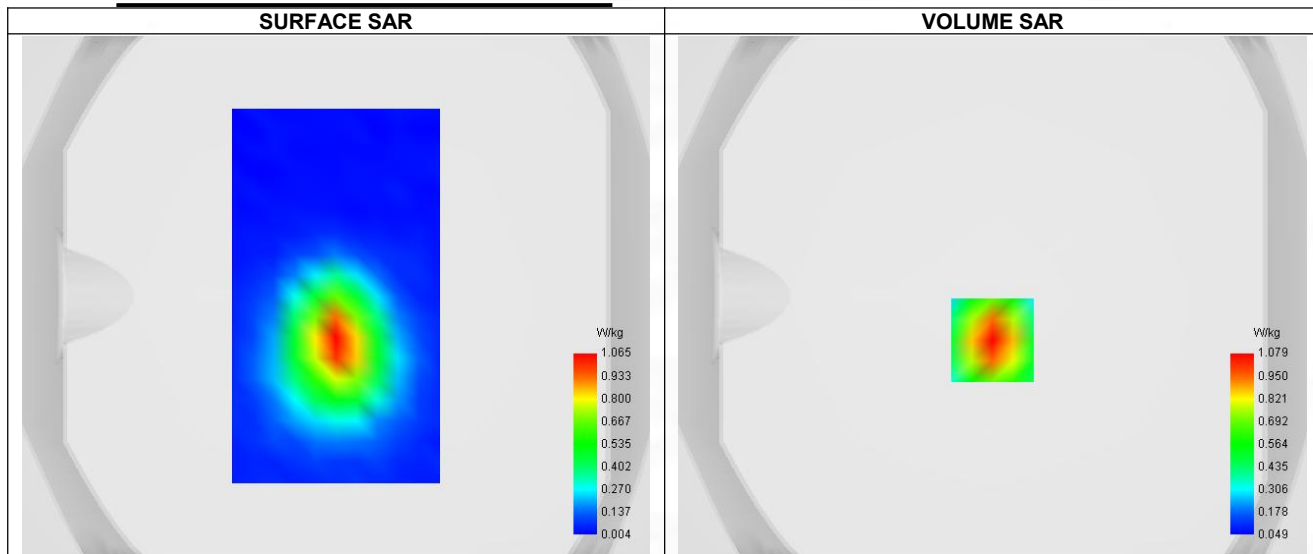


Maximum location: X=0.00, Y=-17.00 ; SAR Peak: 1.74 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.243
SAR 1g (W/Kg)	0.503
Variation (%)	2.800
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.743	1.079	0.581	0.326	0.206

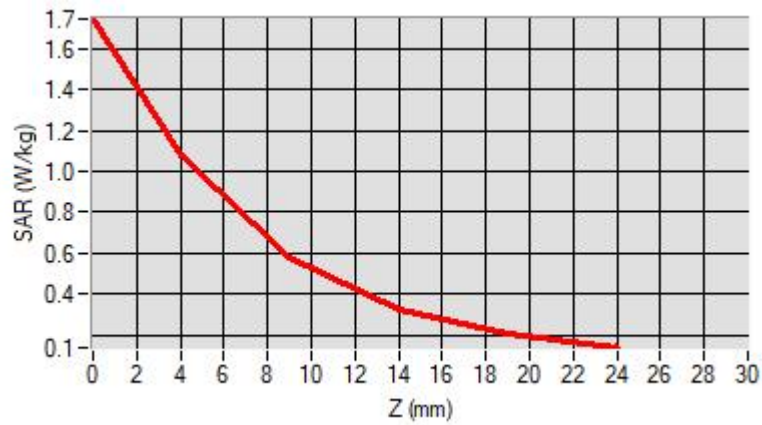

F. 3D Image

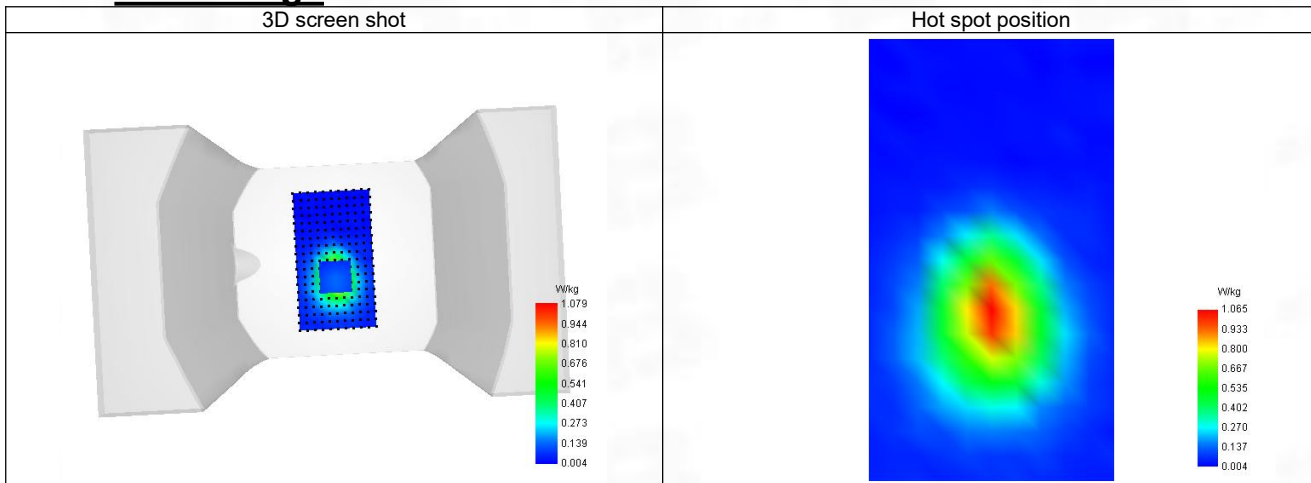

5-Head with front position in dist. 0mm on Channel 9538 in WCDMA Band 2

SAR Measurement at Band 2 (1900) (Cheek, Right)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	Band 2 (1900)
Channels	Higher (9538)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	1907.600
Relative permittivity (real part)	39.869
Relative permittivity (imaginary part)	13.391
Conductivity (S/m)	1.416

C. SAR Surface and Volume

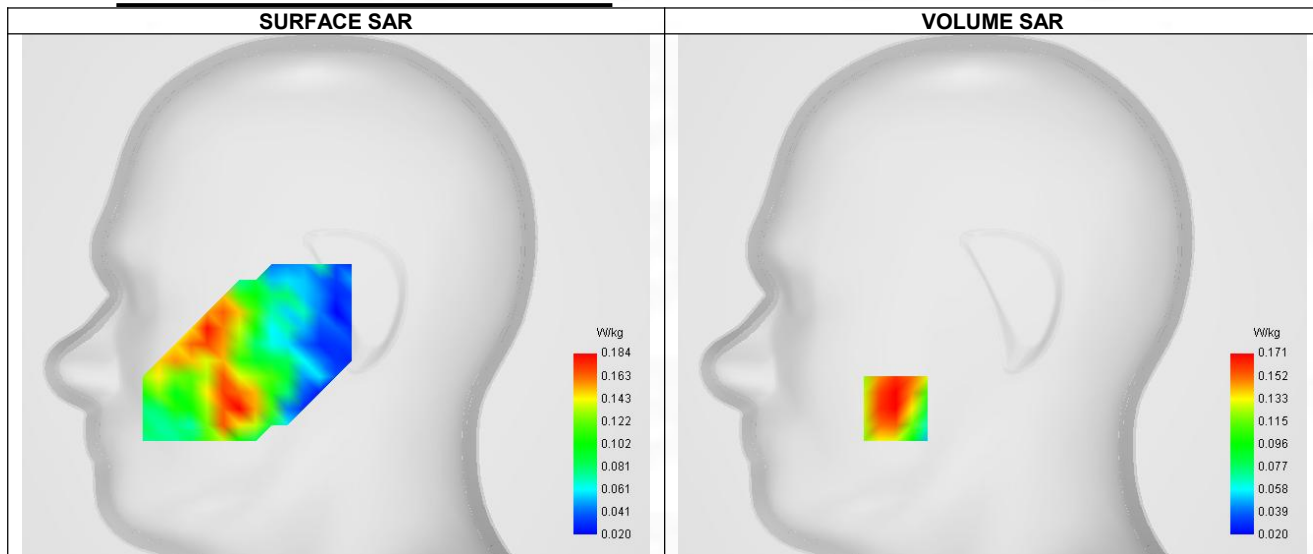


Maximum location: X=-48.00, Y=-56.00 ; SAR Peak: 0.25 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.113
SAR 1g (W/Kg)	0.166
Variation (%)	-2.660
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.349	0.171	0.102	0.081	0.054

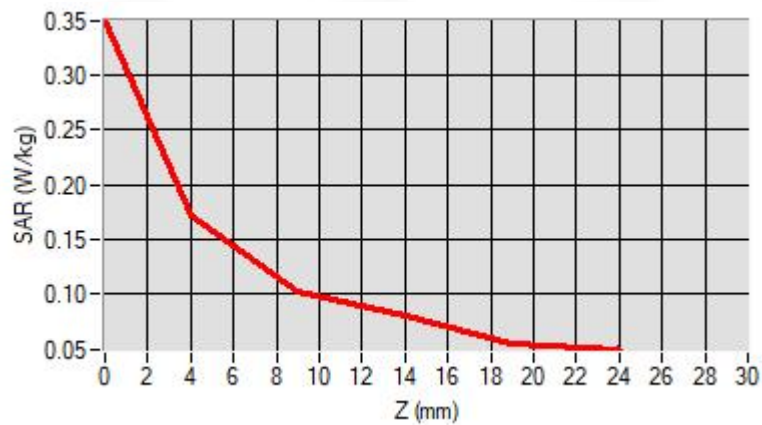

F. 3D Image

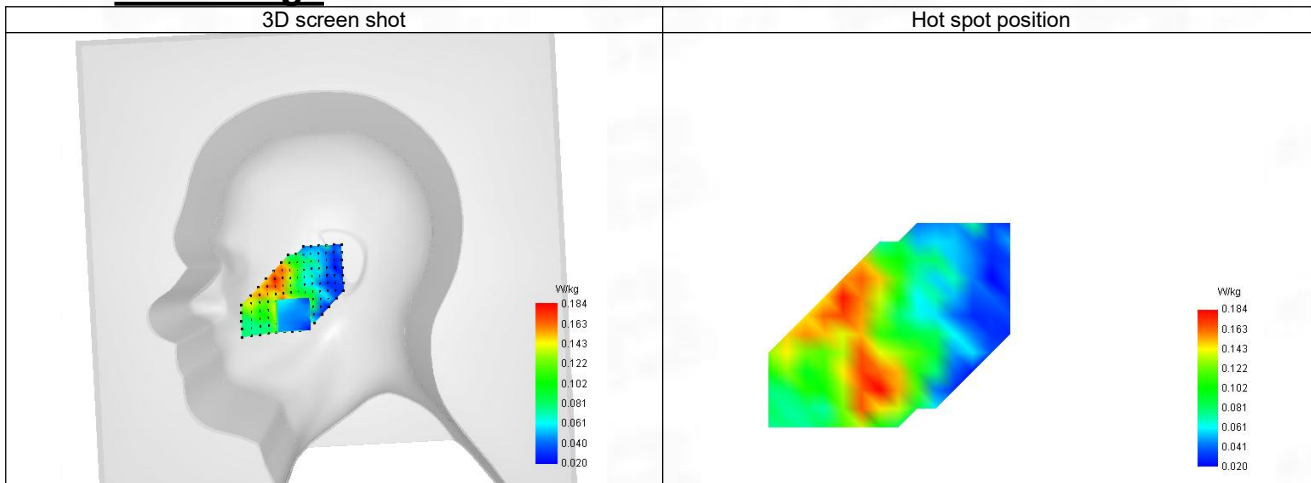

6-Body with bottom position in dist. 10mm on Channel 9538 in WCDMA Band 2

SAR Measurement at Band 2 (1900) (Body, Validation Plane)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 2 (1900)
Channels	Higher (9538)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	1907.600
Relative permittivity (real part)	39.869
Relative permittivity (imaginary part)	13.391
Conductivity (S/m)	1.416

C. SAR Surface and Volume

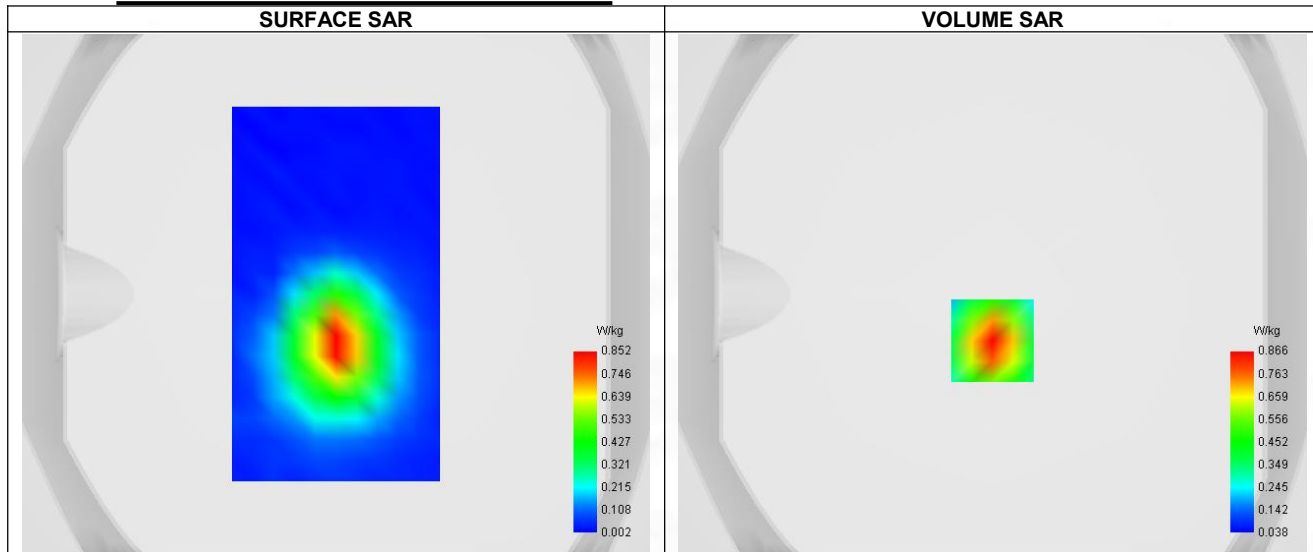


Maximum location: X=0.00, Y=-18.00 ; SAR Peak: 1.38 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.223
SAR 1g (W/Kg)	0.403
Variation (%)	0.300
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.386	0.866	0.467	0.253	0.144

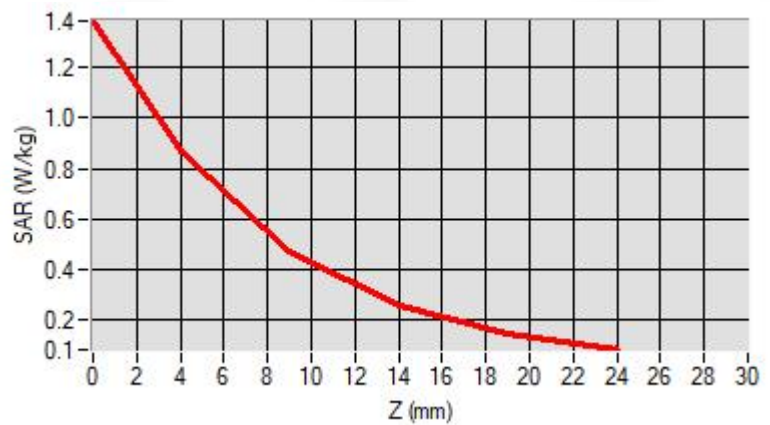

F. 3D Image

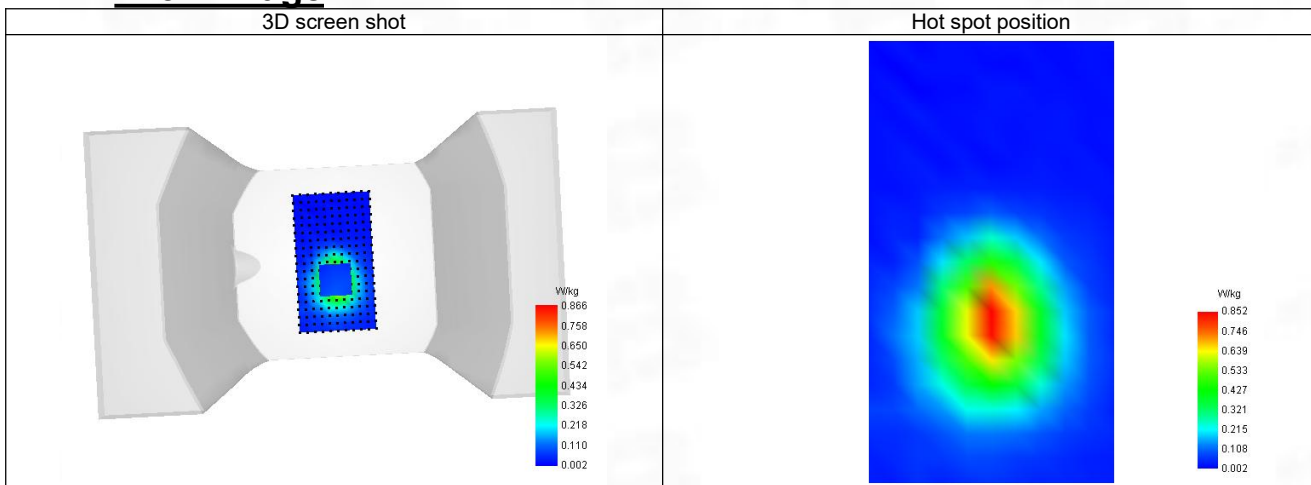

7-Head with front position in dist. 0mm on Channel 1312 in WCDMA Band 4

SAR Measurement at Band 4 (1700) (Cheek, Right)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	Band 4 (1700)
Channels	Lower (1312)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	1712.400
Relative permittivity (real part)	40.046
Relative permittivity (imaginary part)	13.954
Conductivity (S/m)	1.325

C. SAR Surface and Volume

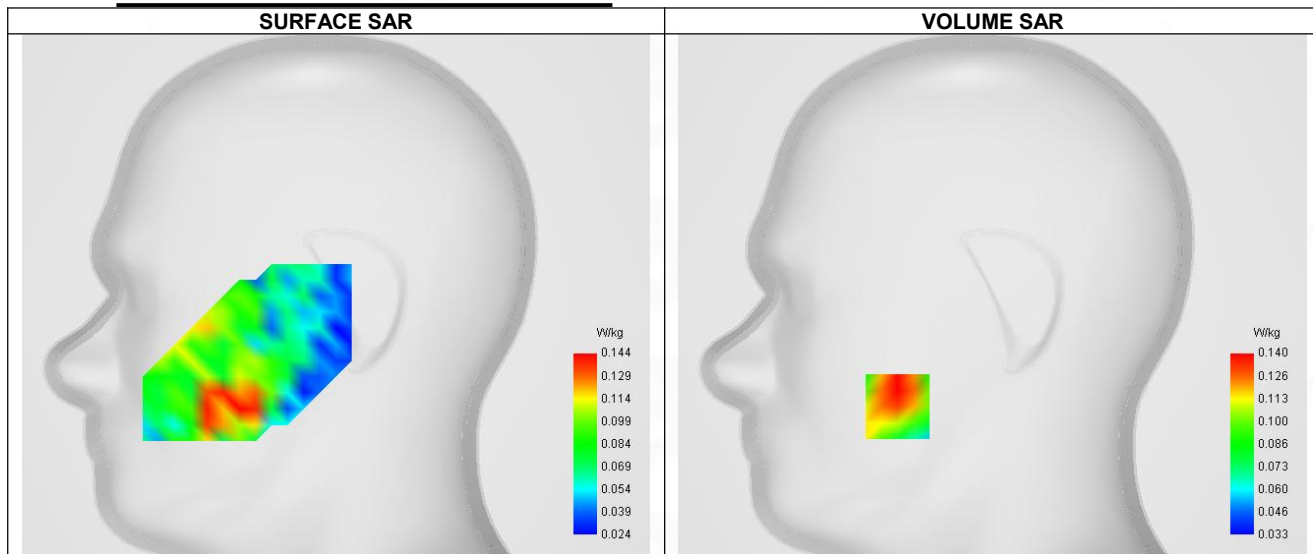


Maximum location: X=-47.00, Y=-55.00 ; SAR Peak: 0.23 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.107
SAR 1g (W/Kg)	0.146
Variation (%)	1.280
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.291	0.140	0.100	0.094	0.070

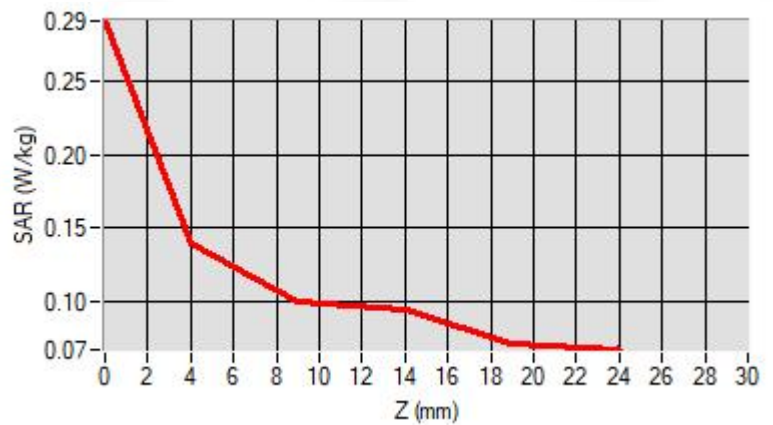

F. 3D Image

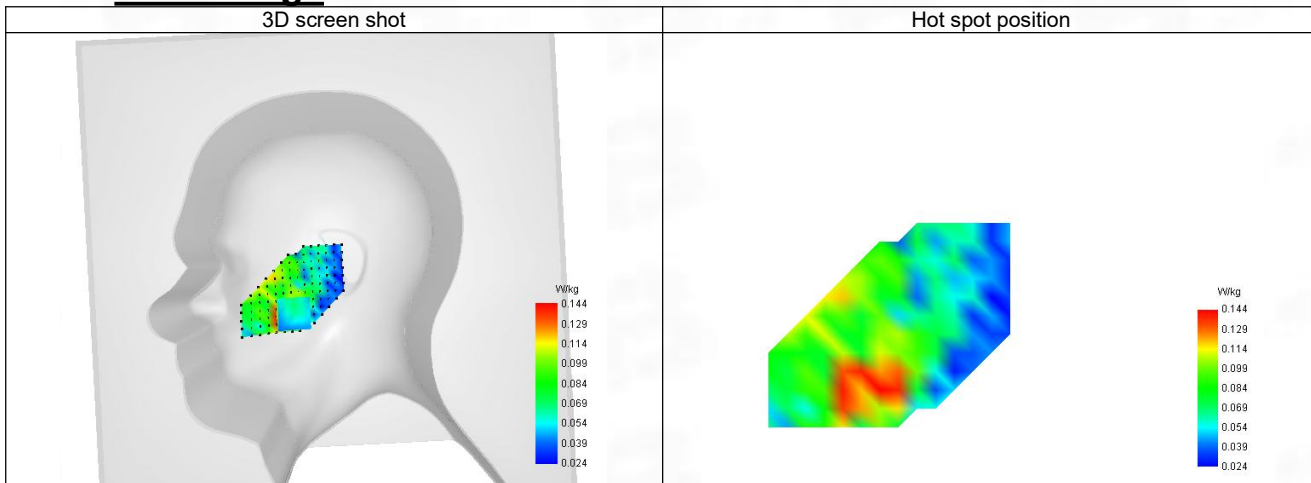

8-Body with bottom position in dist. 10mm on Channel 1312 in WCDMA Band 4

SAR Measurement at Band 4 (1700) (Body, Validation Plane)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 4 (1700)
Channels	Lower (1312)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	1712.400
Relative permittivity (real part)	40.046
Relative permittivity (imaginary part)	13.954
Conductivity (S/m)	1.325

C. SAR Surface and Volume

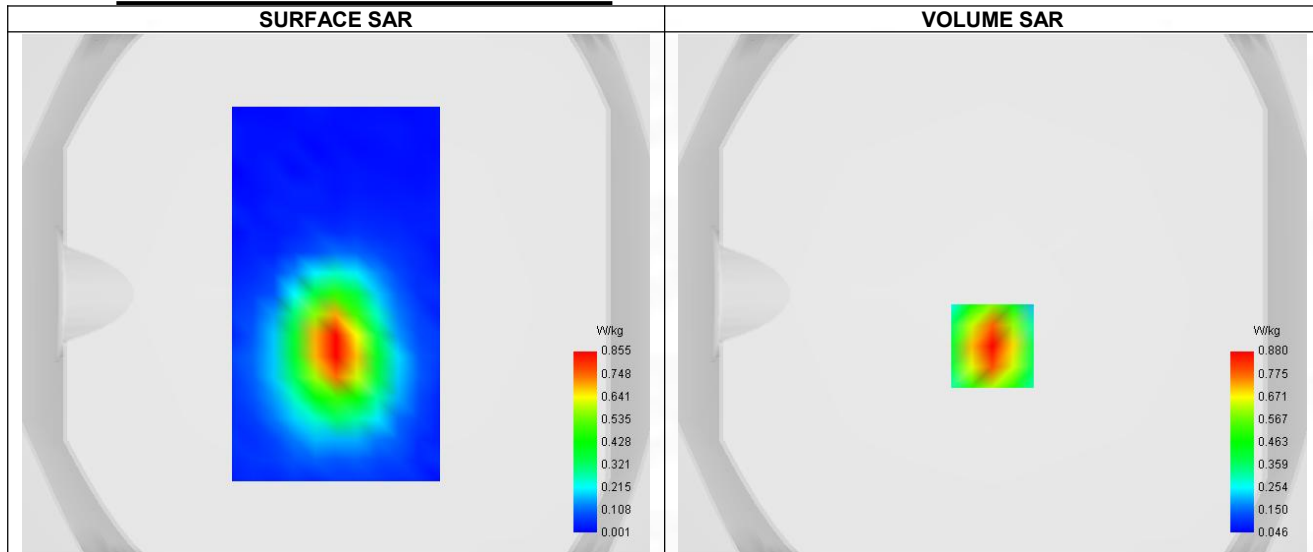


Maximum location: X=0.00, Y=-20.00 ; SAR Peak: 1.35 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.253
SAR 1g (W/Kg)	0.409
Variation (%)	3.450
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.349	0.880	0.508	0.300	0.190

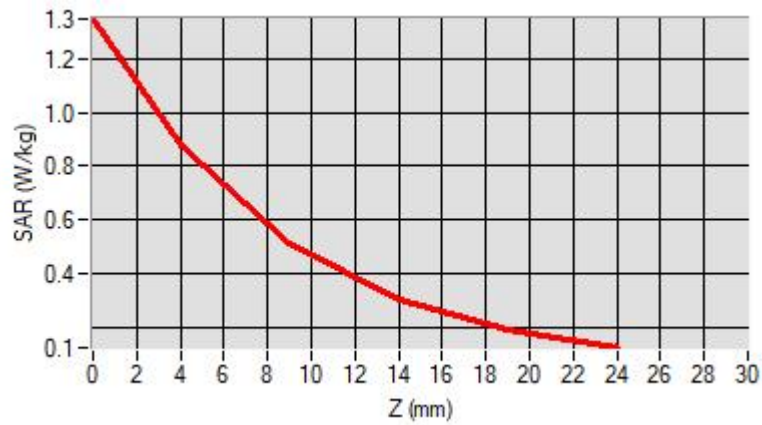

F. 3D Image

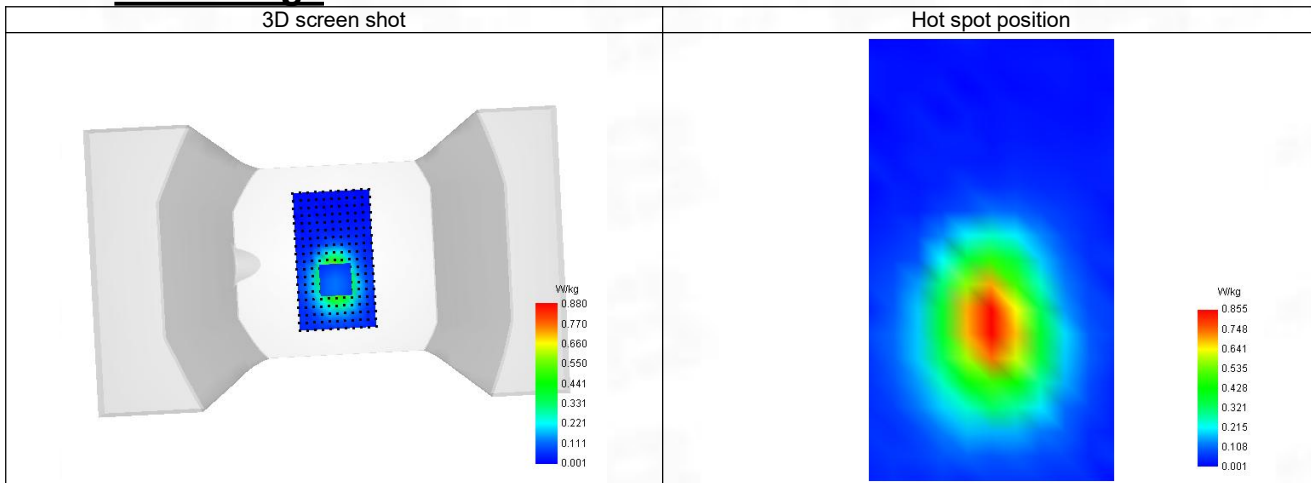

9-Head with front position in dist. 0mm on Channel 4132 in WCDMA Band 5

SAR Measurement at Band 5 (850) (Cheek, Right)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	Band 5 (850)
Channels	Lower (4132)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	826.400
Relative permittivity (real part)	41.423
Relative permittivity (imaginary part)	19.477
Conductivity (S/m)	0.866

C. SAR Surface and Volume

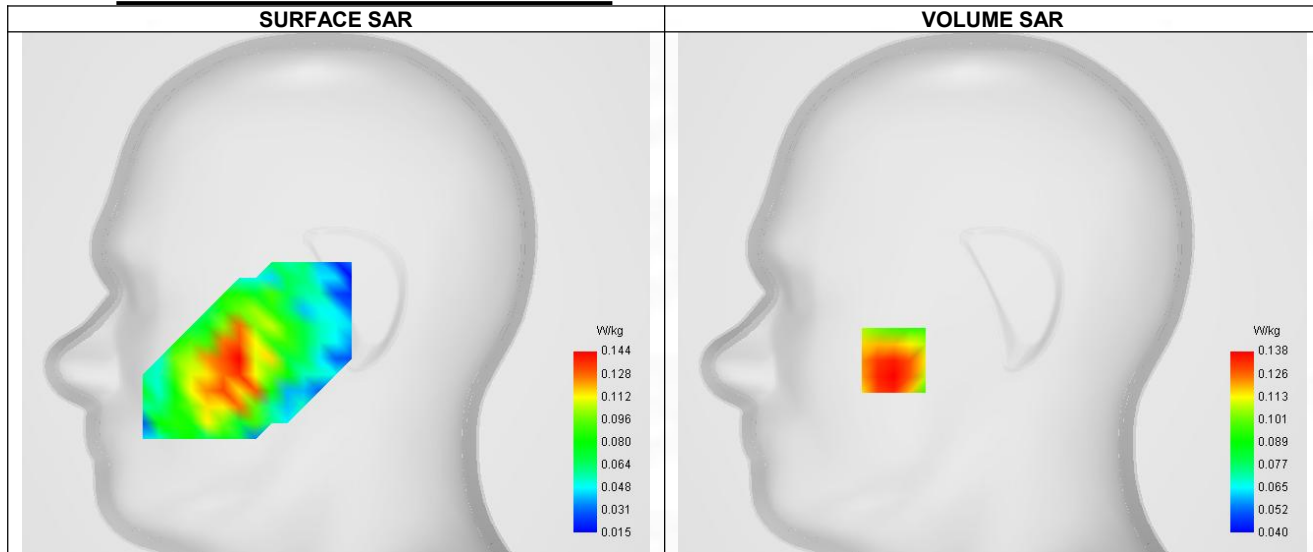


Maximum location: X=-49.00, Y=-33.00 ; SAR Peak: 0.19 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.104
SAR 1g (W/Kg)	0.138
Variation (%)	3.990
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.173	0.138	0.099	0.077	0.070

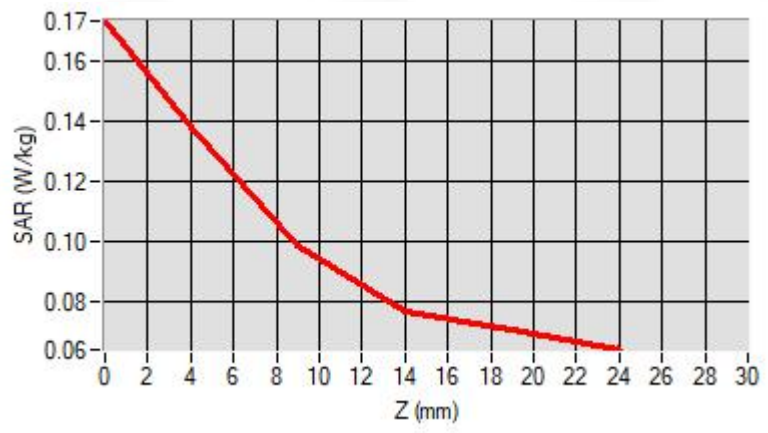

F. 3D Image

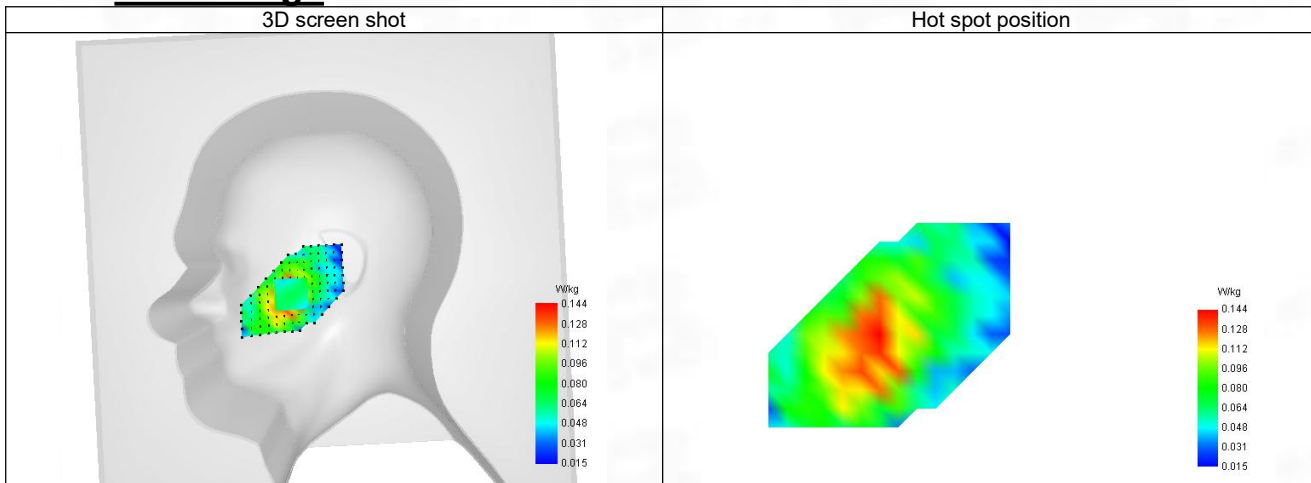

10-Body with front position in dist. 10mm on Channel 4132 in WCDMA Band 5

SAR Measurement at Band 5 (850) (Body, Validation Plane)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 5 (850)
Channels	Lower (4132)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	826.400
Relative permittivity (real part)	41.423
Relative permittivity (imaginary part)	19.477
Conductivity (S/m)	0.866

C. SAR Surface and Volume

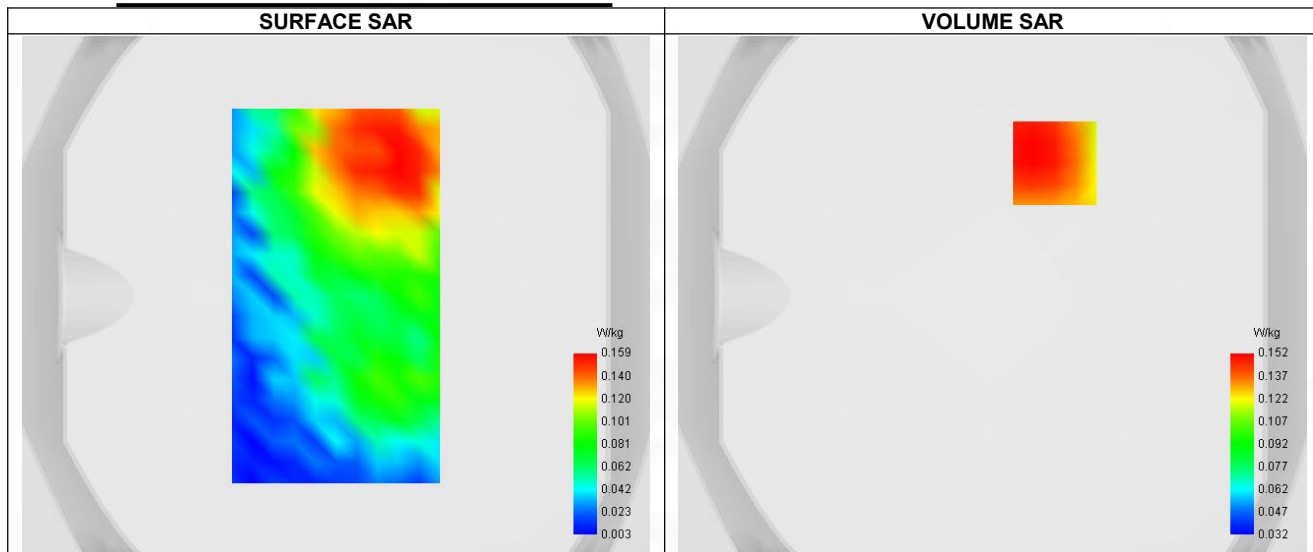


Maximum location: X=24.00, Y=51.00 ; SAR Peak: 0.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.115
SAR 1g (W/Kg)	0.155
Variation (%)	-0.110
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.324	0.152	0.104	0.094	0.063

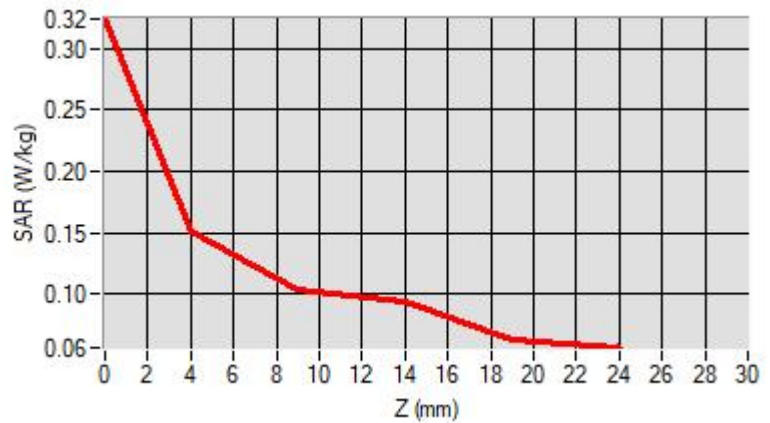

F. 3D Image

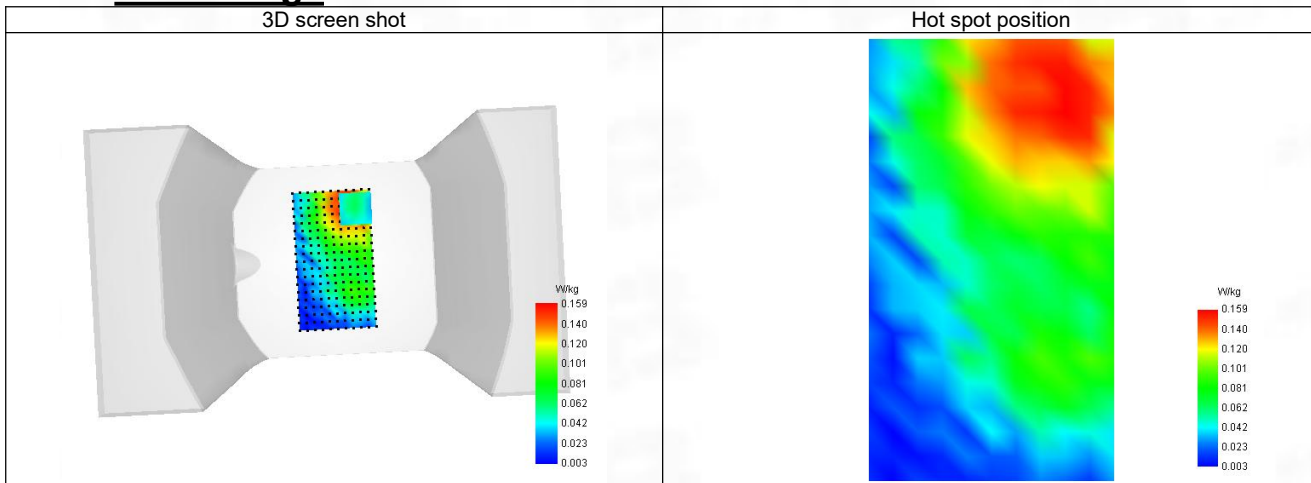

11-Head with front position in dist. 0mm on Channel 18900 in LTE band 2

SAR Measurement at LTE band 2 (Cheek, Right)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 2
Channels	Middle (18900)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	1879.910
Relative permittivity (real part)	39.909
Relative permittivity (imaginary part)	13.351
Conductivity (S/m)	1.395

C. SAR Surface and Volume

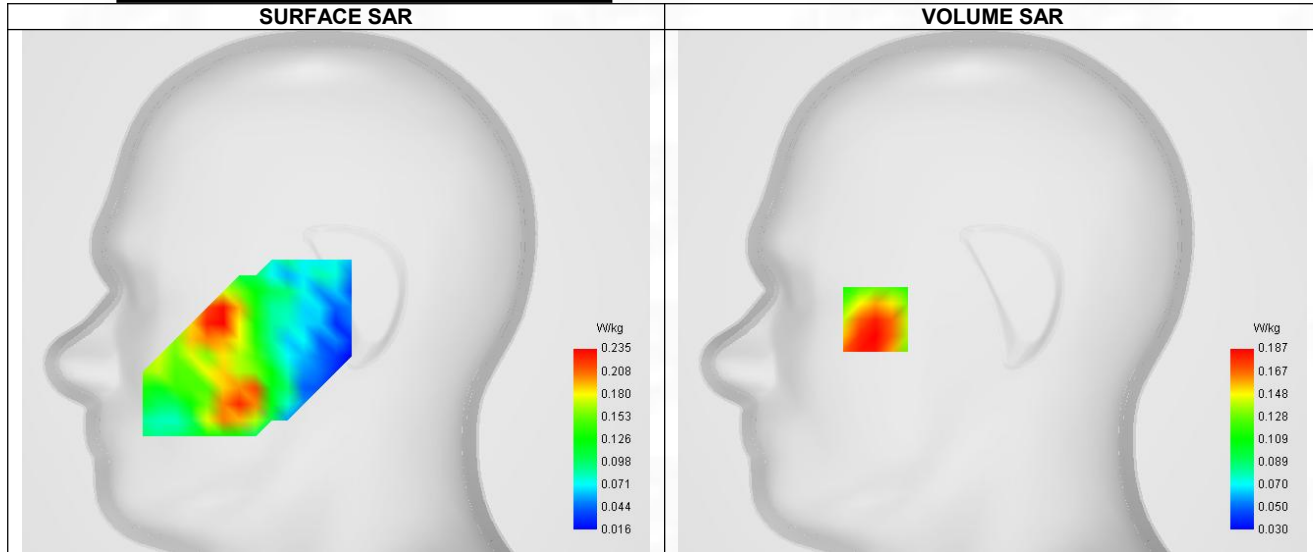


Maximum location: X=-58.00, Y=-14.00 ; SAR Peak: 0.25 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.126
SAR 1g (W/Kg)	0.182
Variation (%)	-0.080
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.330	0.187	0.129	0.103	0.066

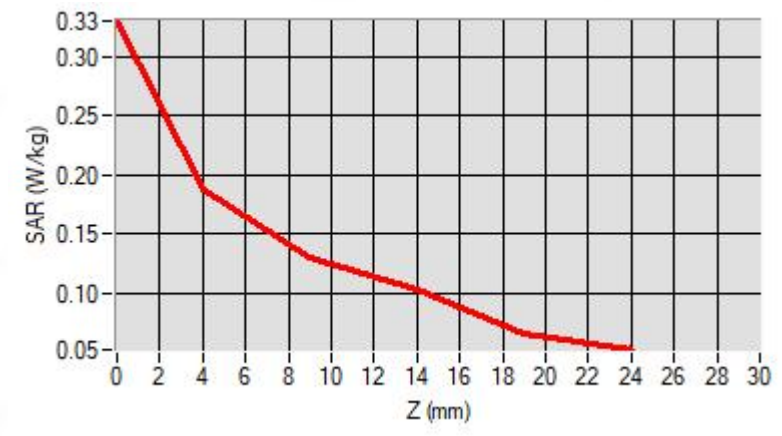

F. 3D Image

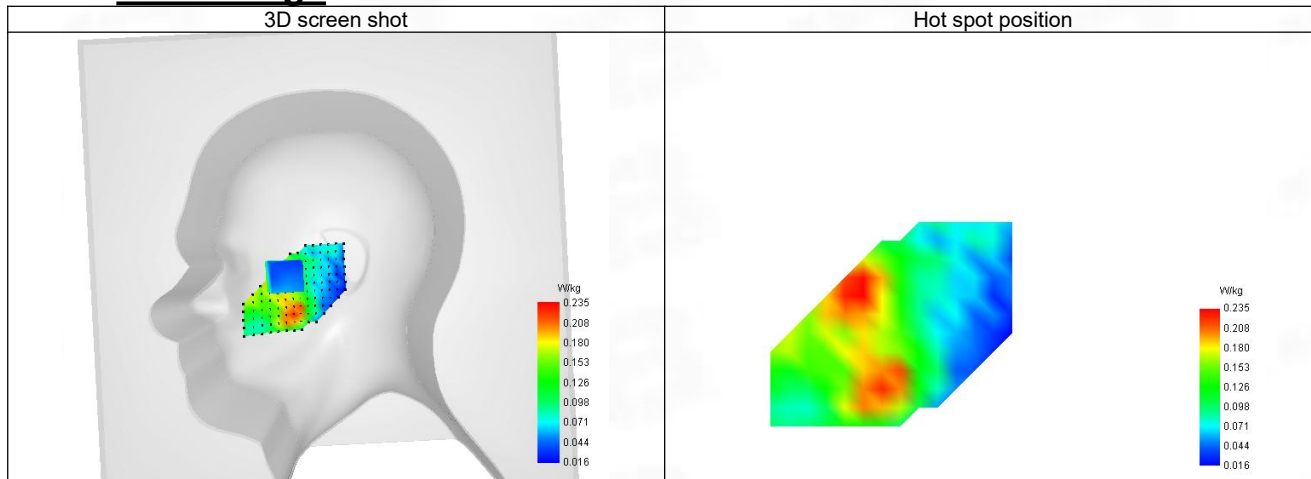

12-Body with bottom position in dist. 10mm on Channel 18900 in LTE band 2

SAR Measurement at LTE band 2 (Body, Validation Plane)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels	Middle (18900)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	1879.910
Relative permittivity (real part)	39.909
Relative permittivity (imaginary part)	13.351
Conductivity (S/m)	1.395

C. SAR Surface and Volume

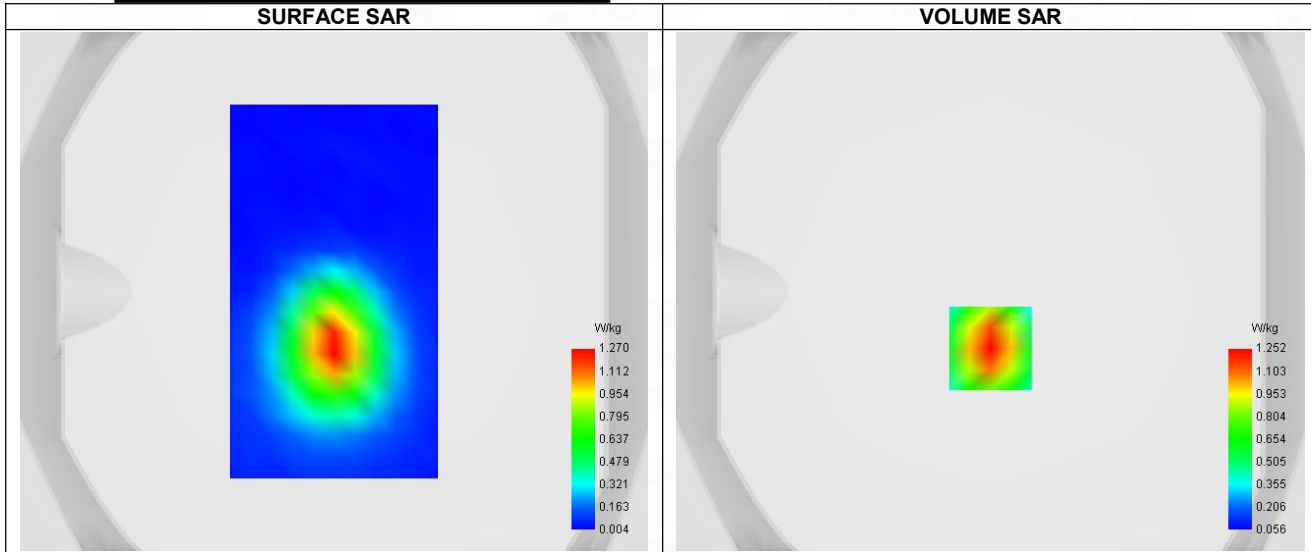


Maximum location: X=0.00, Y=-22.00 ; SAR Peak: 1.89 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.342
SAR 1g (W/Kg)	0.583
Variation (%)	2.060
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.884	1.252	0.737	0.434	0.263

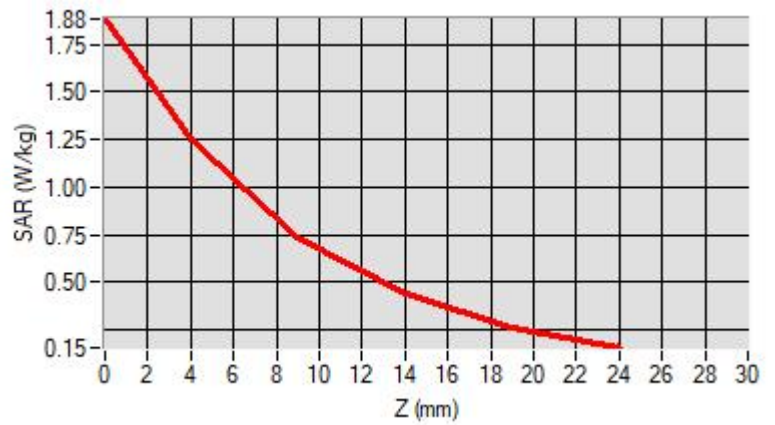

F. 3D Image

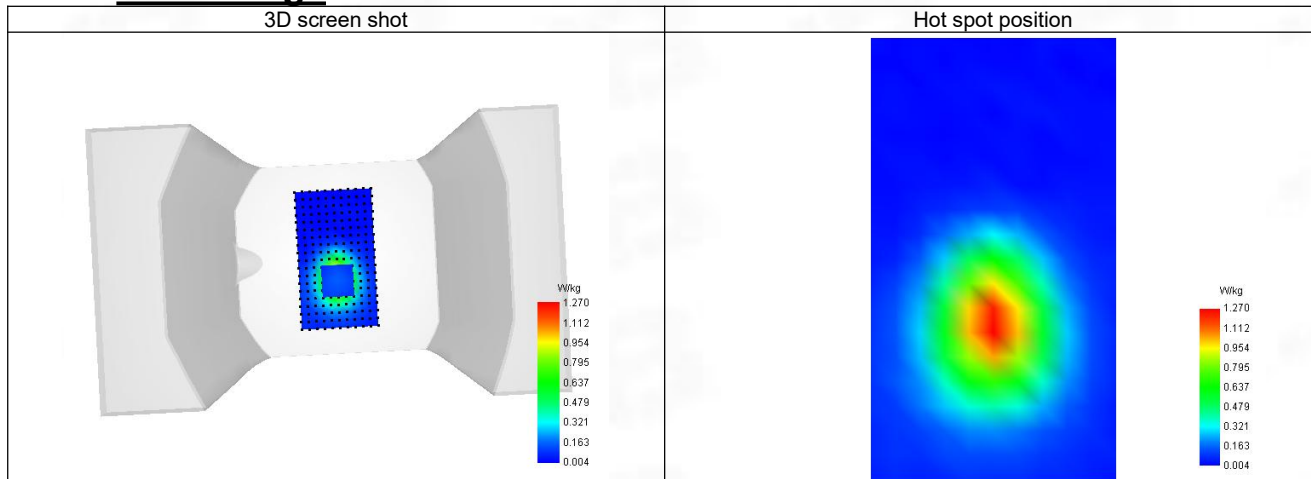

13-Head with front position in dist. 0mm on Channel 20050 in LTE band 4

SAR Measurement at LTE band 4 (Cheek, Right)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 4
Channels	Lower (20050)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	1719.910
Relative permittivity (real part)	40.034
Relative permittivity (imaginary part)	13.966
Conductivity (S/m)	1.329

C. SAR Surface and Volume

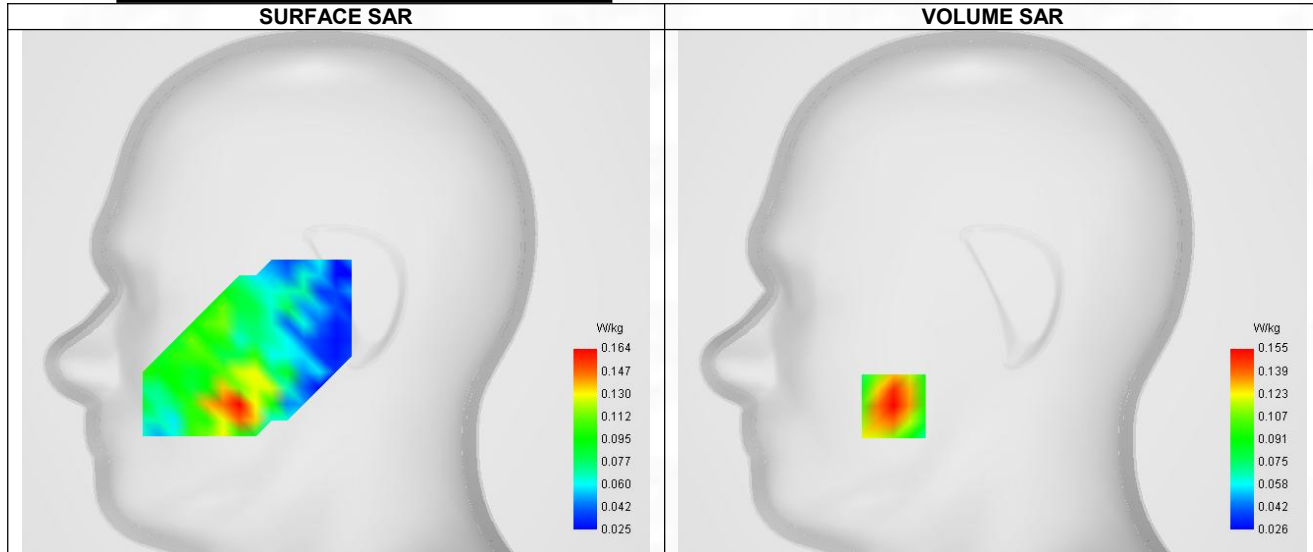


Maximum location: X=-49.00, Y=-57.00 ; SAR Peak: 0.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.150
Variation (%)	4.140
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.185	0.155	0.123	0.097	0.076

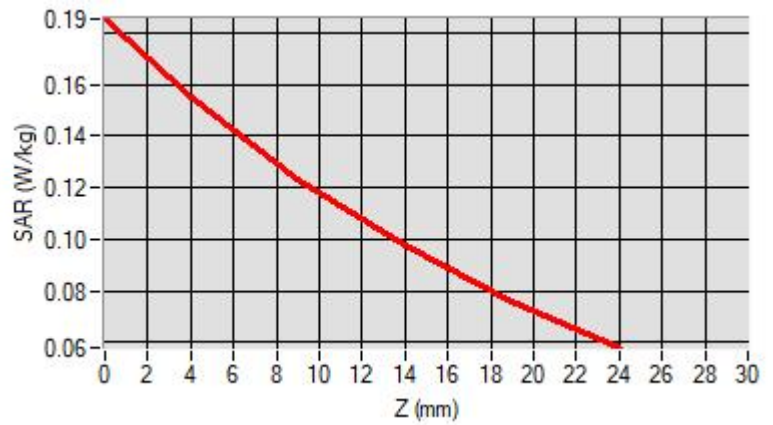

F. 3D Image

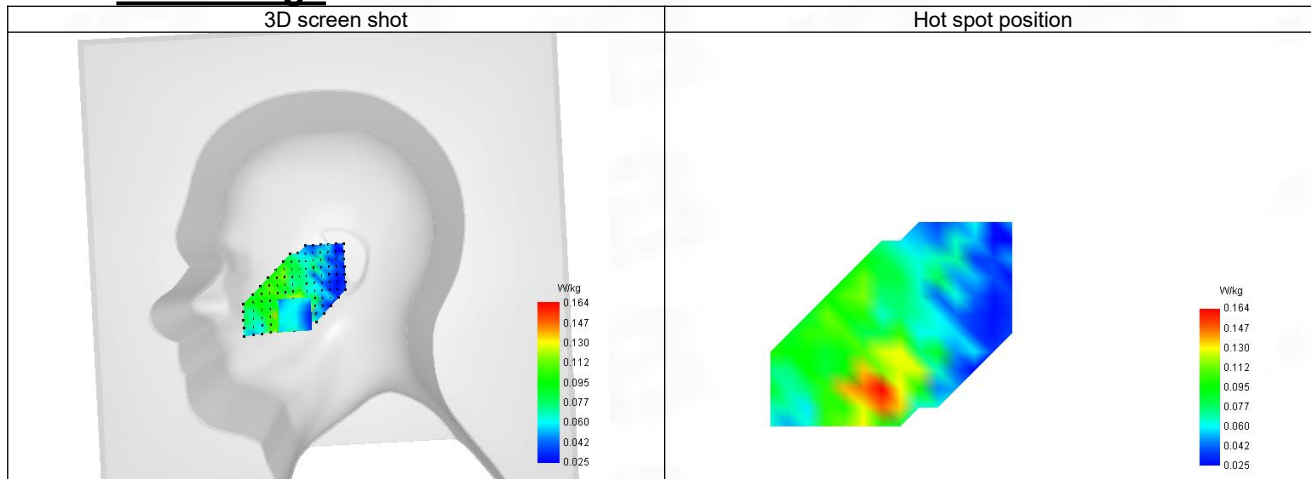

14-Body with bottom position in dist. 10mm on Channel 20050 in LTE band 4

SAR Measurement at LTE band 4 (Body, Validation Plane)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels	Lower (20050)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	1719.910
Relative permittivity (real part)	40.034
Relative permittivity (imaginary part)	13.966
Conductivity (S/m)	1.329

C. SAR Surface and Volume

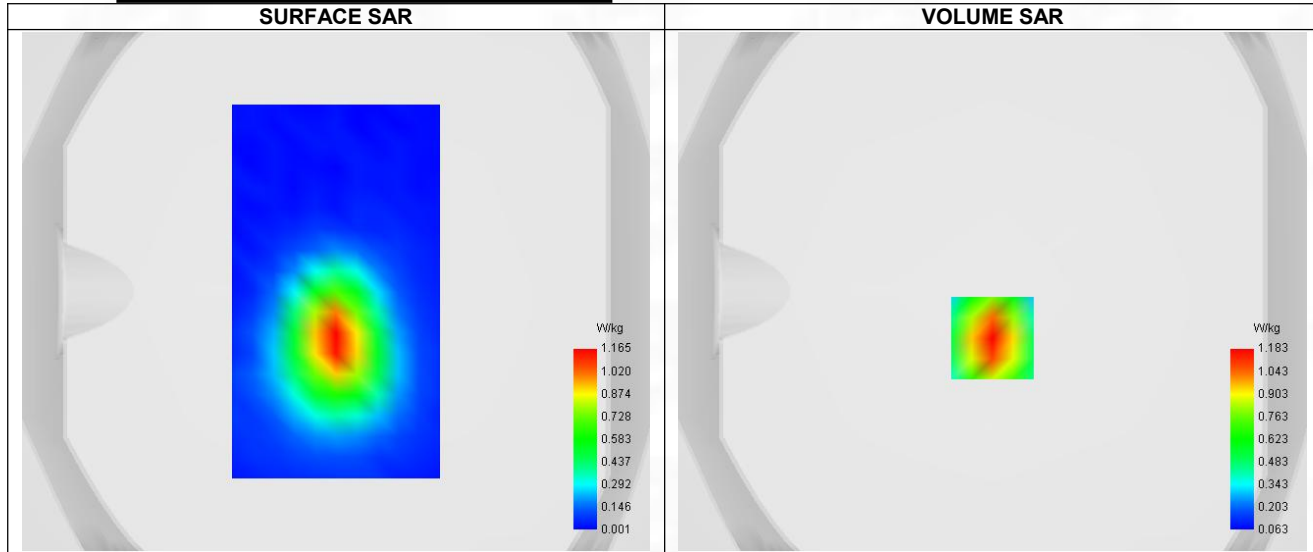


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.307
SAR 1g (W/Kg)	0.549
Variation (%)	-1.580
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.776	1.183	0.696	0.409	0.244

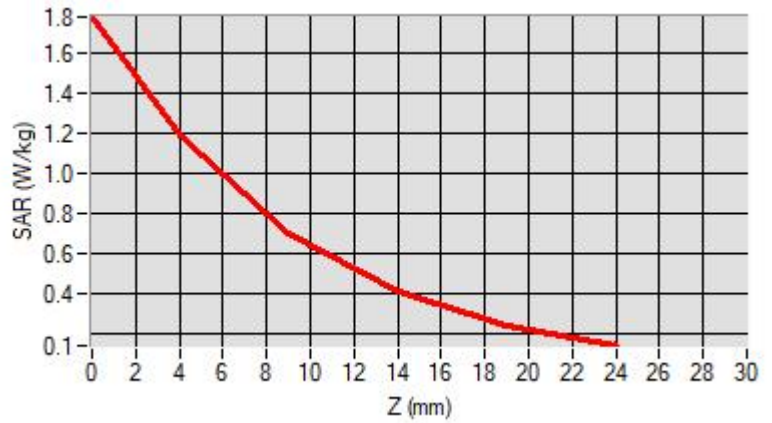

F. 3D Image

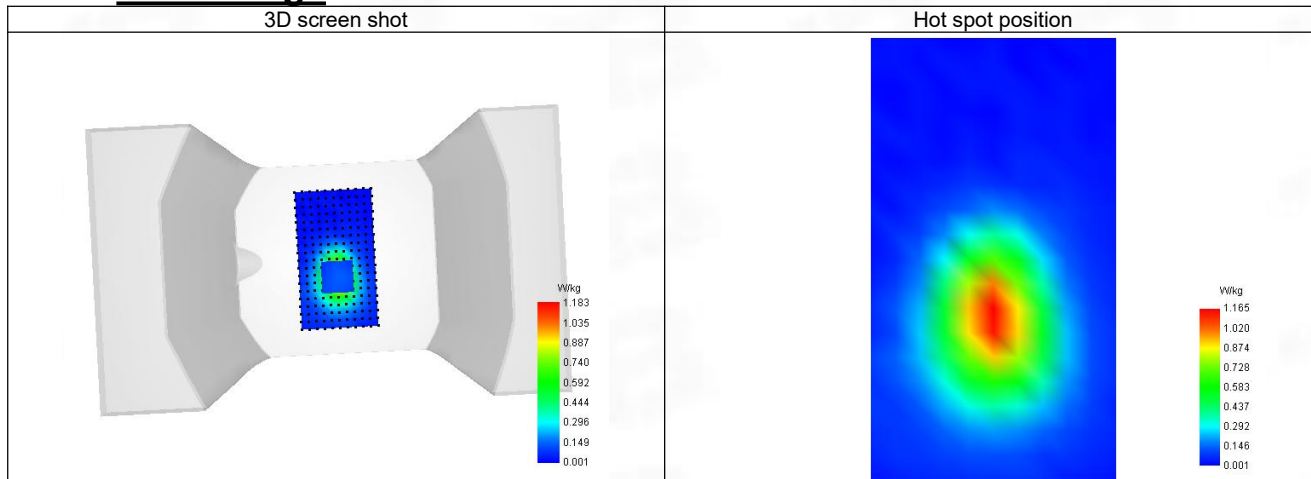

15-Head with front position in dist. 0mm on Channel 20450 in LTE band 5

SAR Measurement at LTE band 5 (Cheek, Right)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Channels	Lower (20450)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	24
RB size	1

B. Permittivity

Frequency (MHz)	828.910
Relative permittivity (real part)	41.419
Relative permittivity (imaginary part)	19.481
Conductivity (S/m)	0.867

C. SAR Surface and Volume

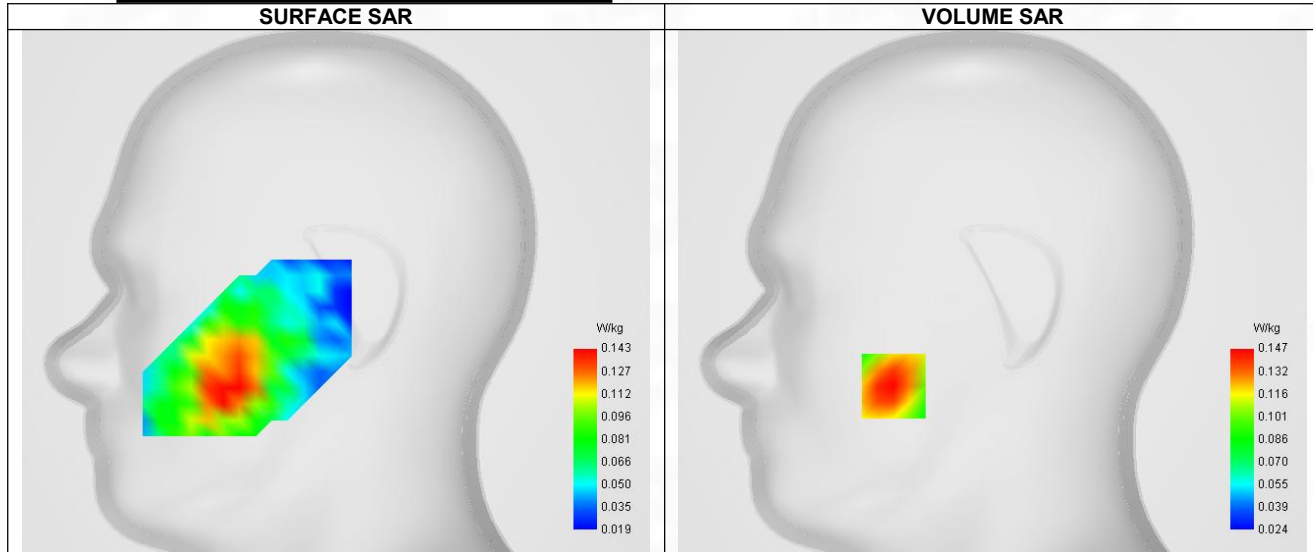


Maximum location: X=-49.00, Y=-47.00 ; SAR Peak: 0.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.141
Variation (%)	-2.650
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.202	0.147	0.100	0.071	0.053

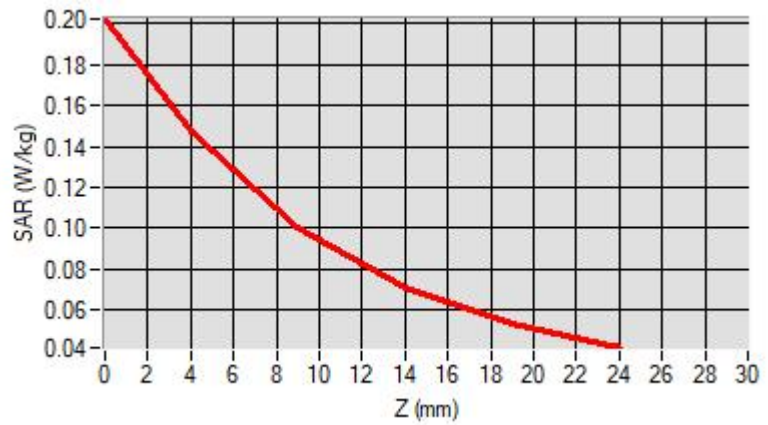

F. 3D Image

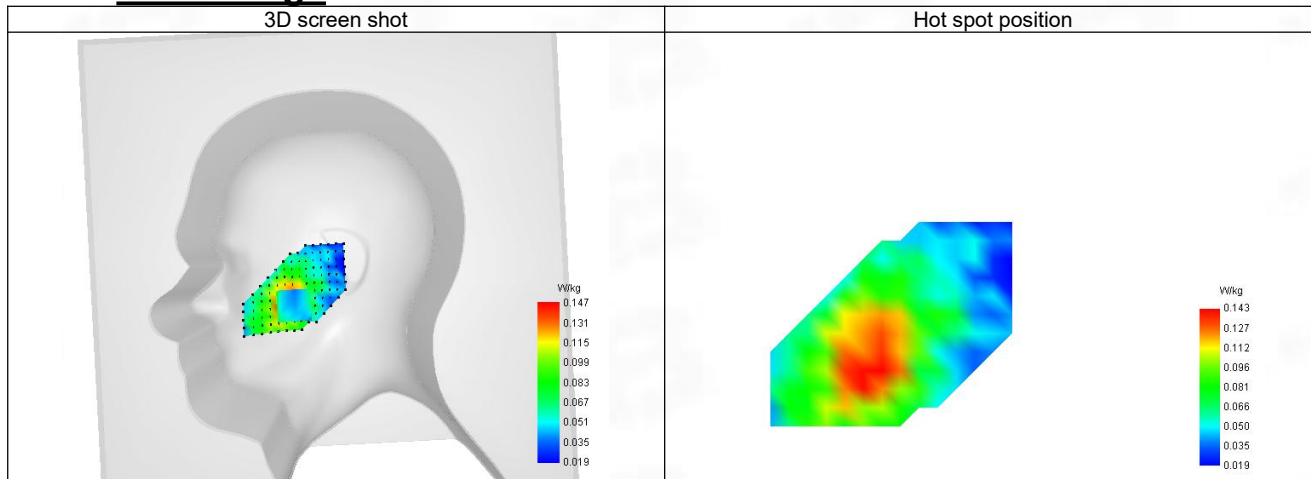

16-Body with back position in dist. 10mm on Channel 20450 in LTE band 5

SAR Measurement at LTE band 5 (Body, Validation Plane)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Channels	Lower (20450)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	24
RB size	1

B. Permittivity

Frequency (MHz)	828.910
Relative permittivity (real part)	41.419
Relative permittivity (imaginary part)	19.481
Conductivity (S/m)	0.867

C. SAR Surface and Volume

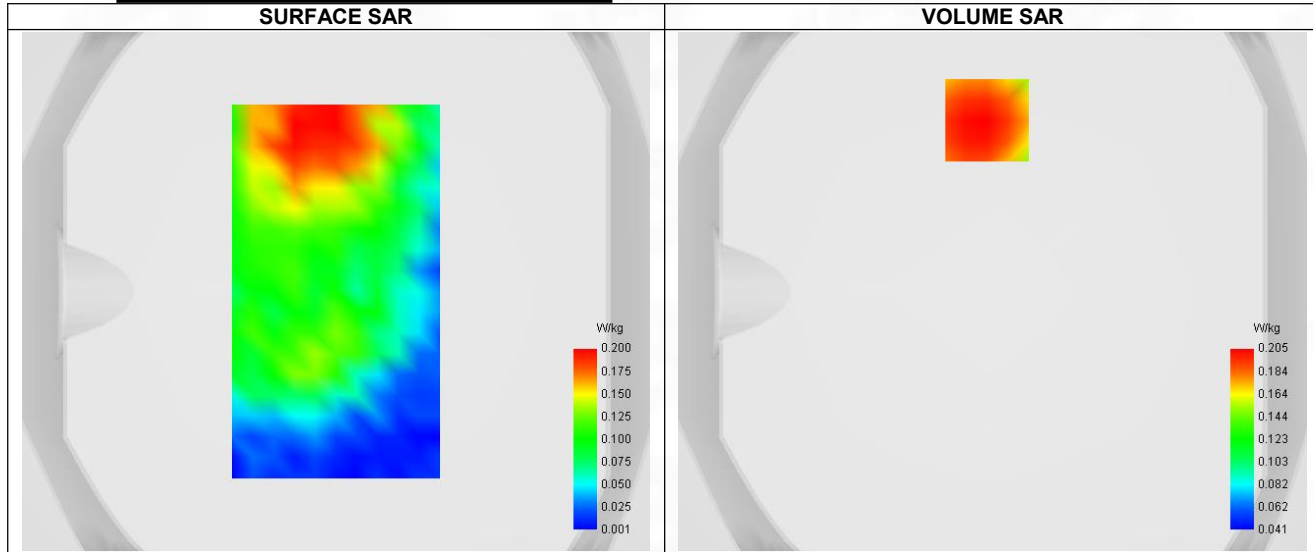


Maximum location: X=-2.00, Y=66.00 ; SAR Peak: 0.29 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.139
SAR 1g (W/Kg)	0.199
Variation (%)	0.890
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.283	0.205	0.138	0.097	0.073

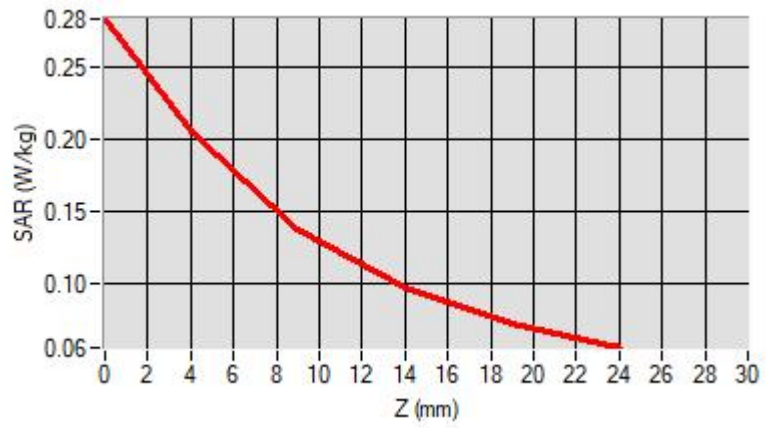

F. 3D Image

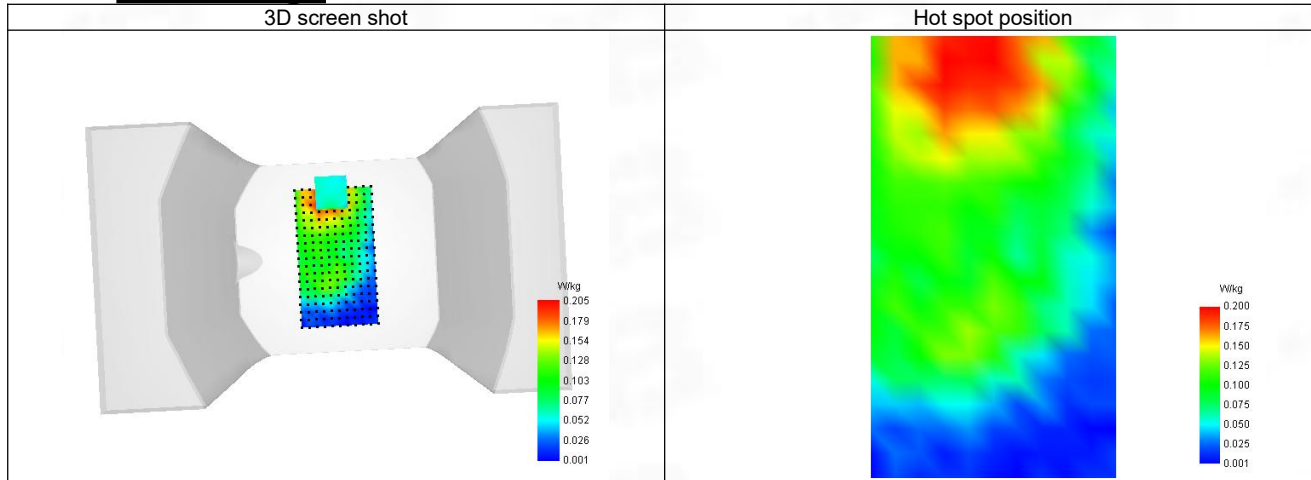

17-Head with front position in dist. 0mm on Channel 20850 in LTE band 7

SAR Measurement at LTE band 7 (Cheek, Right)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 7
Channels	Lower (20850)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	2509.910
Relative permittivity (real part)	39.000
Relative permittivity (imaginary part)	13.080
Conductivity (S/m)	1.874

C. SAR Surface and Volume

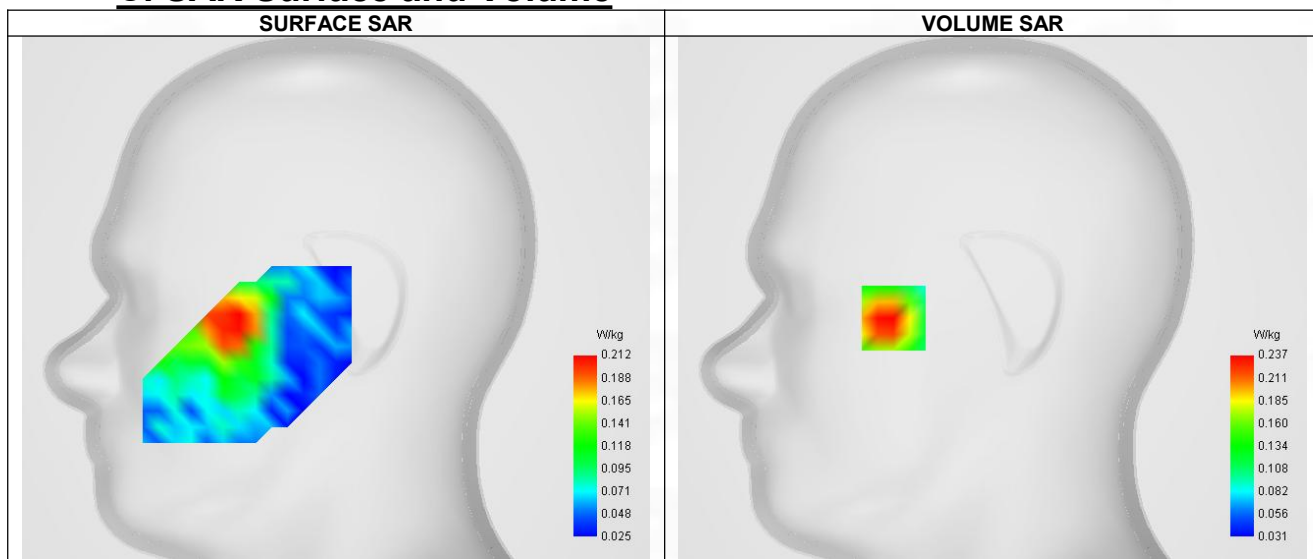

Maximum location: X=-49.00, Y=-10.00 ; SAR Peak: 0.39 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.138
SAR 1g (W/Kg)	0.231
Variation (%)	-2.690
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan


Total or partial reproduction of this document without permission of the Laboratory is not allowed.

Page 109 of 155


BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.363	0.237	0.139	0.086	0.060

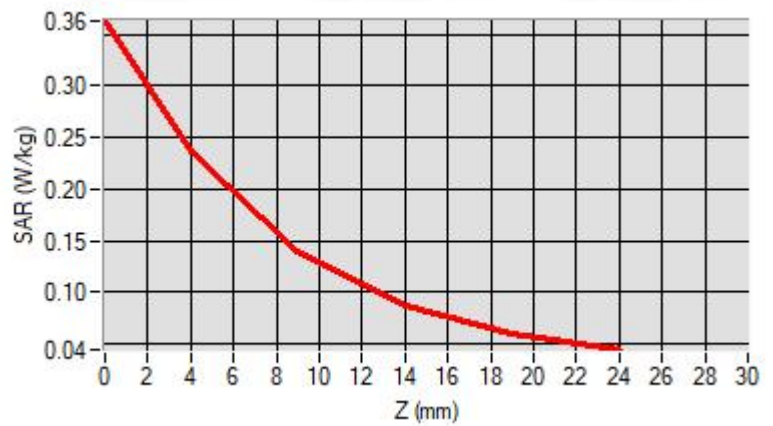

F. 3D Image

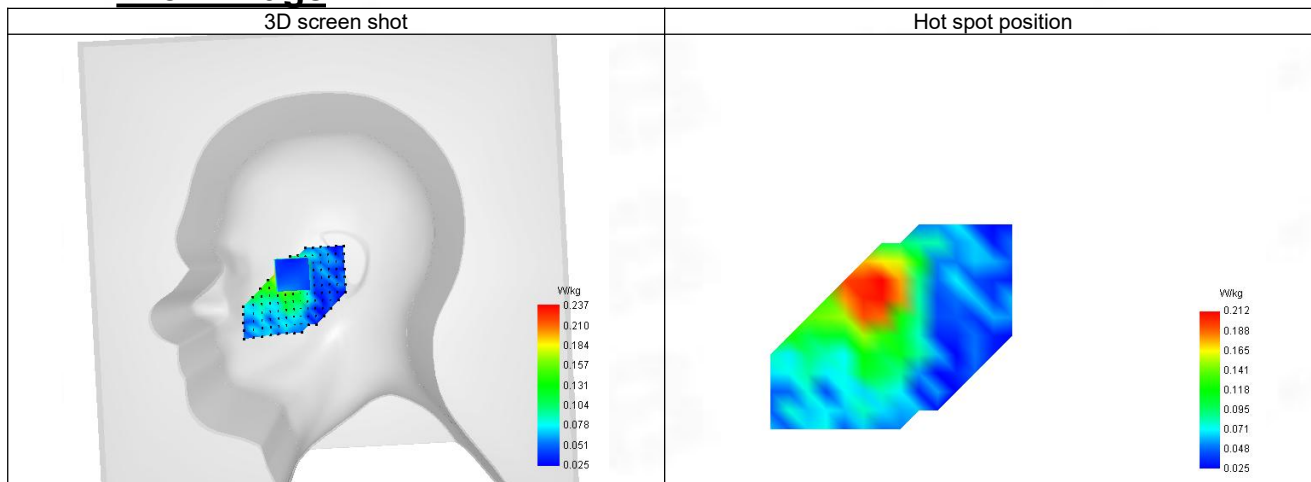

18-Body with bottom position in dist. 10mm on Channel 20850 in LTE band 7

SAR Measurement at LTE band 7 (Body, Validation Plane)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Channels	Lower (20850)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	2509.910
Relative permittivity (real part)	39.000
Relative permittivity (imaginary part)	13.080
Conductivity (S/m)	1.874

C. SAR Surface and Volume

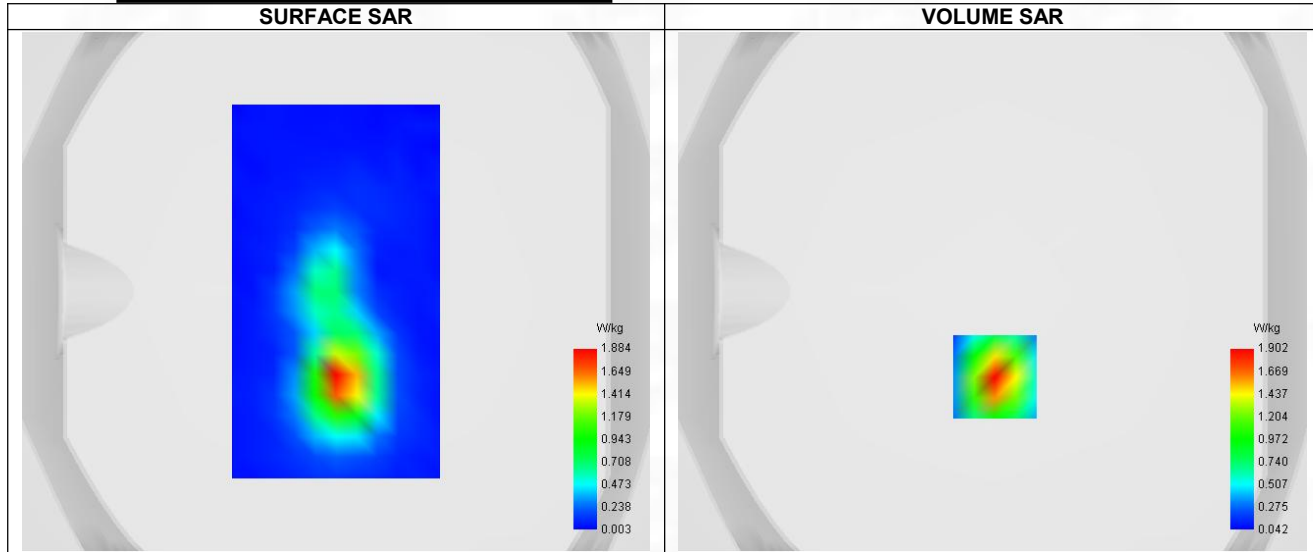


Maximum location: X=1.00, Y=-33.00 ; SAR Peak: 3.13 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.422
SAR 1g (W/Kg)	0.865
Variation (%)	-1.780
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.127	1.902	0.984	0.512	0.284

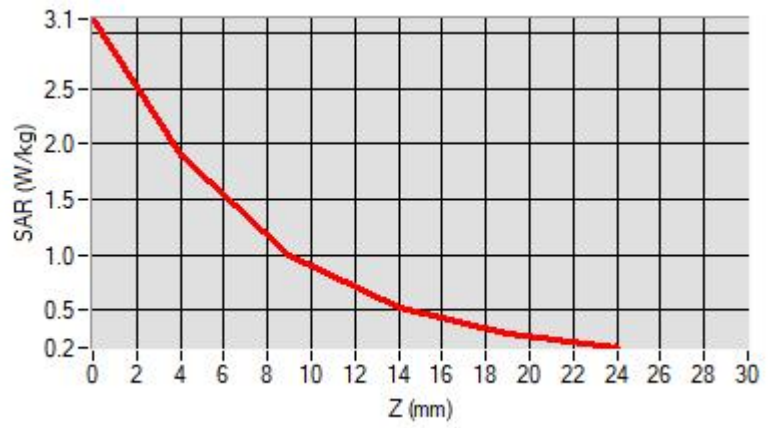

F. 3D Image

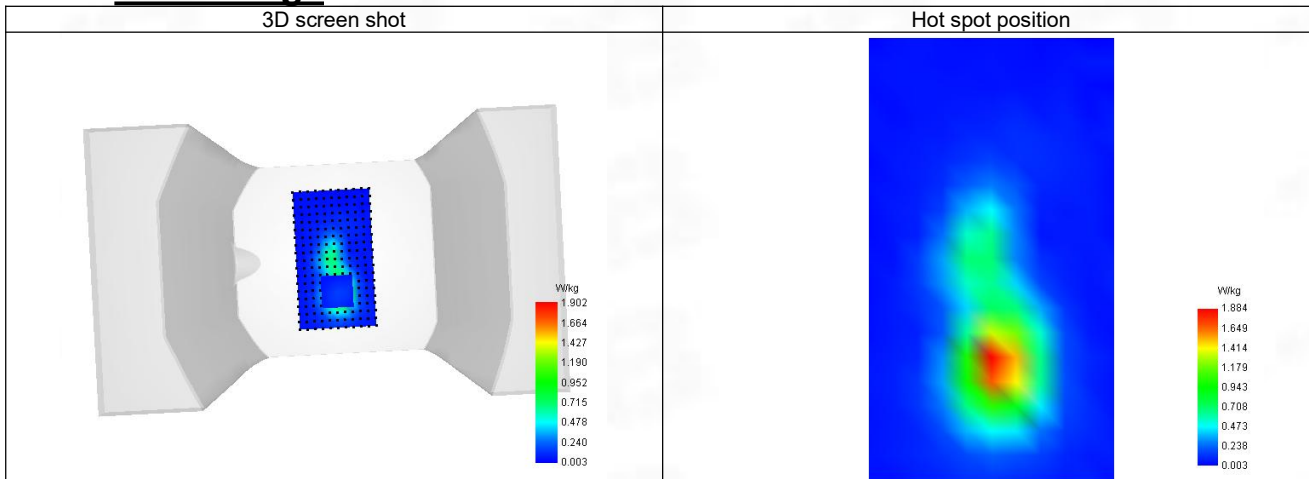

19-Head with front position in dist. 0mm on Channel 23095 in LTE band 12

SAR Measurement at LTE band 12 (Cheek, Right)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 12
Channels	Middle (23095)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	24
RB size	1

B. Permittivity

Frequency (MHz)	707.410
Relative permittivity (real part)	41.608
Relative permittivity (imaginary part)	19.292
Conductivity (S/m)	0.804

C. SAR Surface and Volume

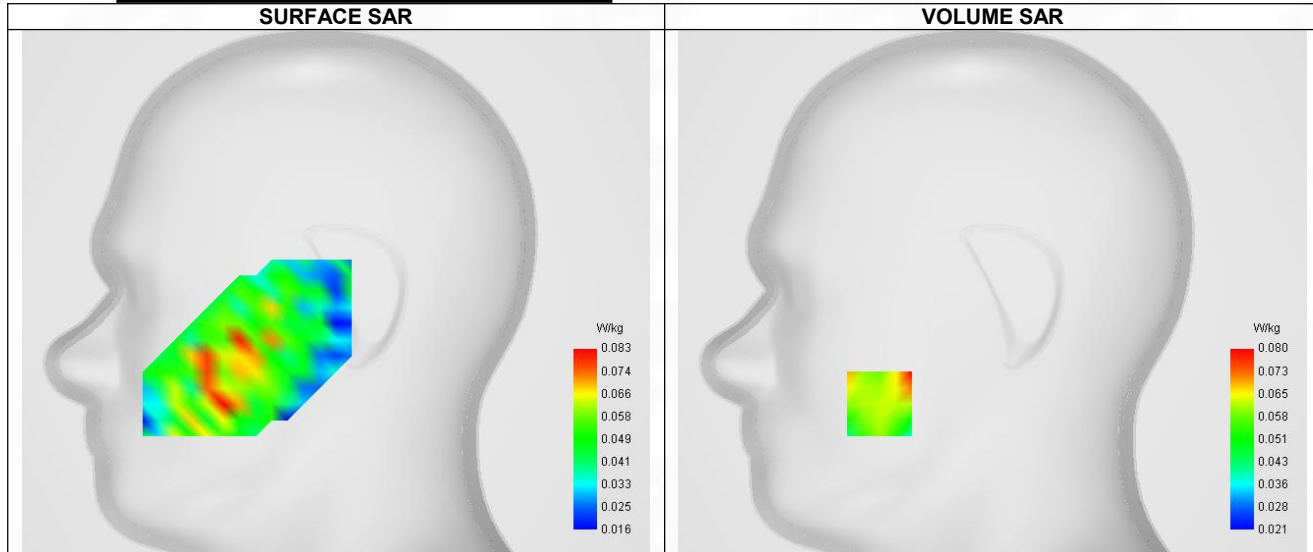


Maximum location: X=-56.00, Y=-56.00 ; SAR Peak: 0.12 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.060
SAR 1g (W/Kg)	0.076
Variation (%)	-1.320
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.109	0.080	0.047	0.036	0.042

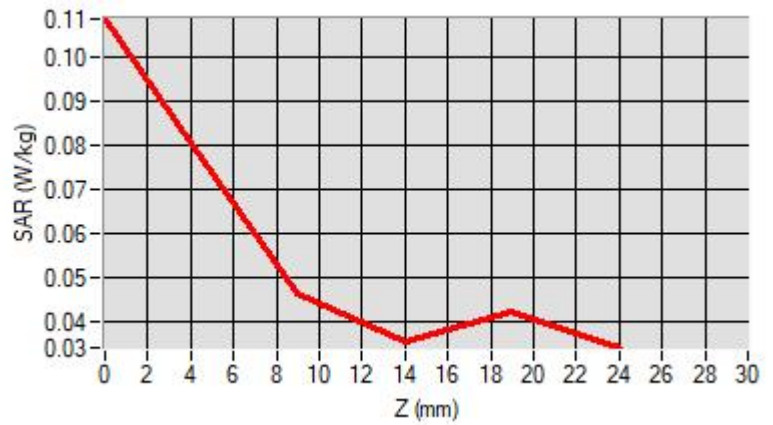

F. 3D Image

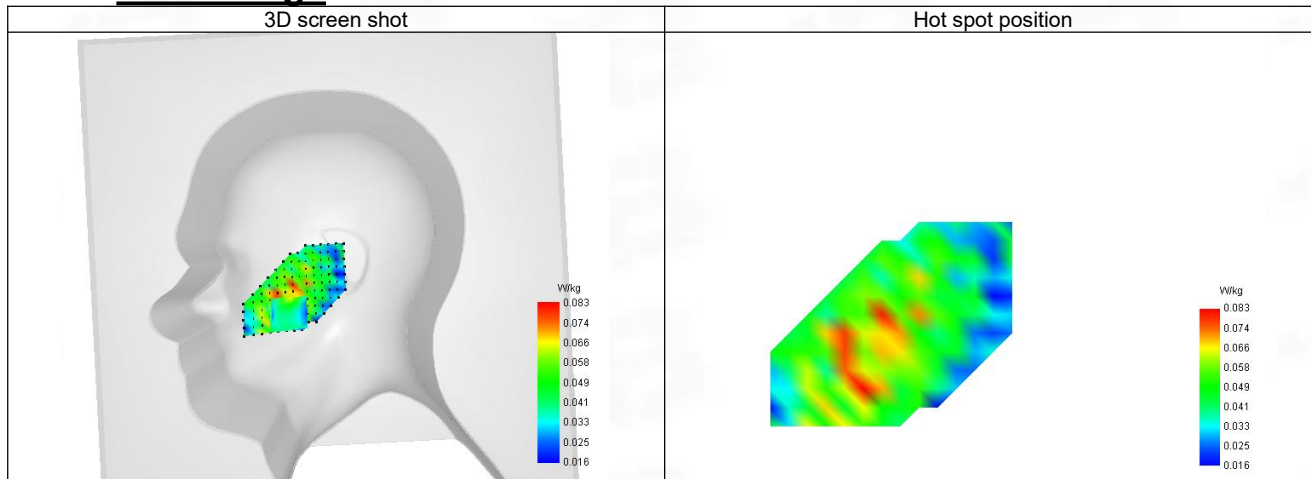

20-Body with back position in dist. 10mm on Channel 23095 in LTE band 12

SAR Measurement at LTE band 12 (Body, Validation Plane)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Channels	Middle (23095)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	24
RB size	1

B. Permittivity

Frequency (MHz)	707.410
Relative permittivity (real part)	41.608
Relative permittivity (imaginary part)	19.292
Conductivity (S/m)	0.804

C. SAR Surface and Volume

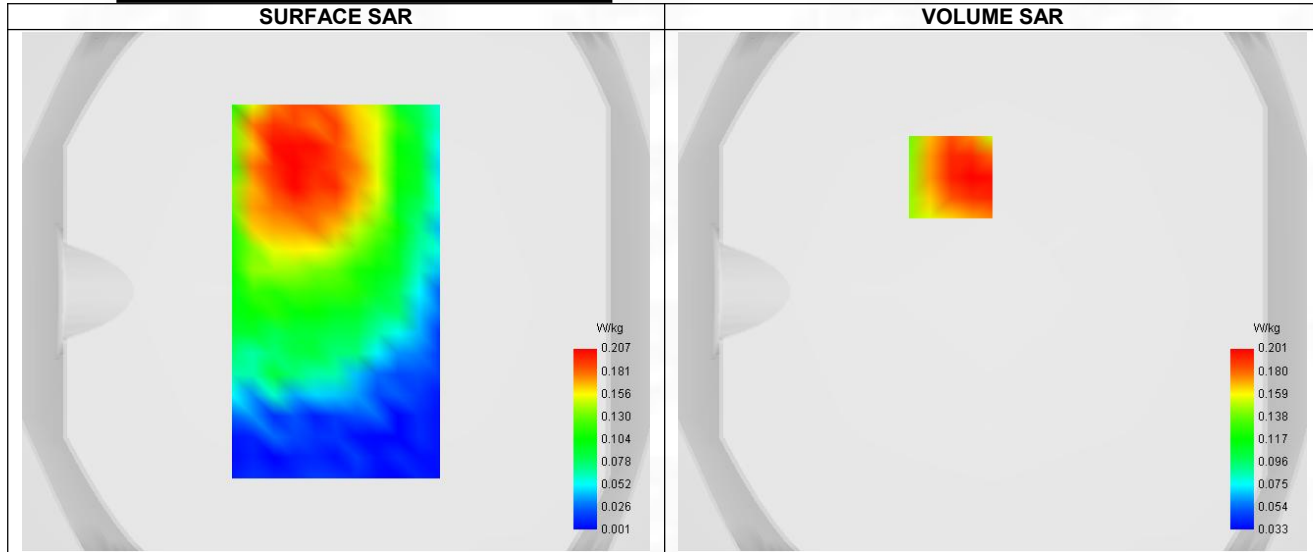


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.138
SAR 1g (W/Kg)	0.198
Variation (%)	-0.670
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.375	0.201	0.121	0.095	0.074

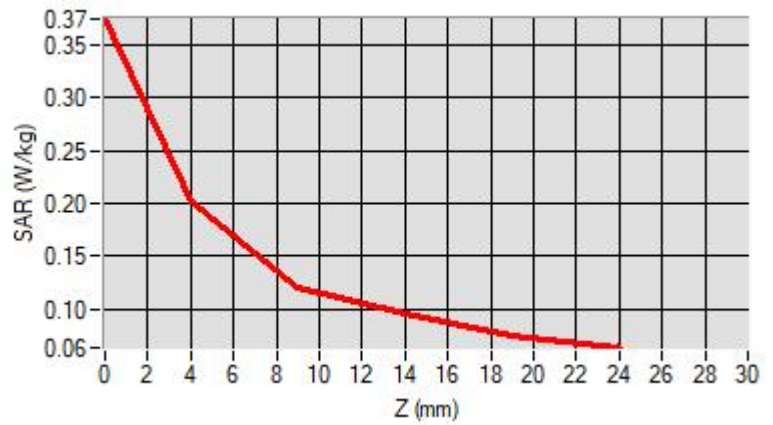

F. 3D Image

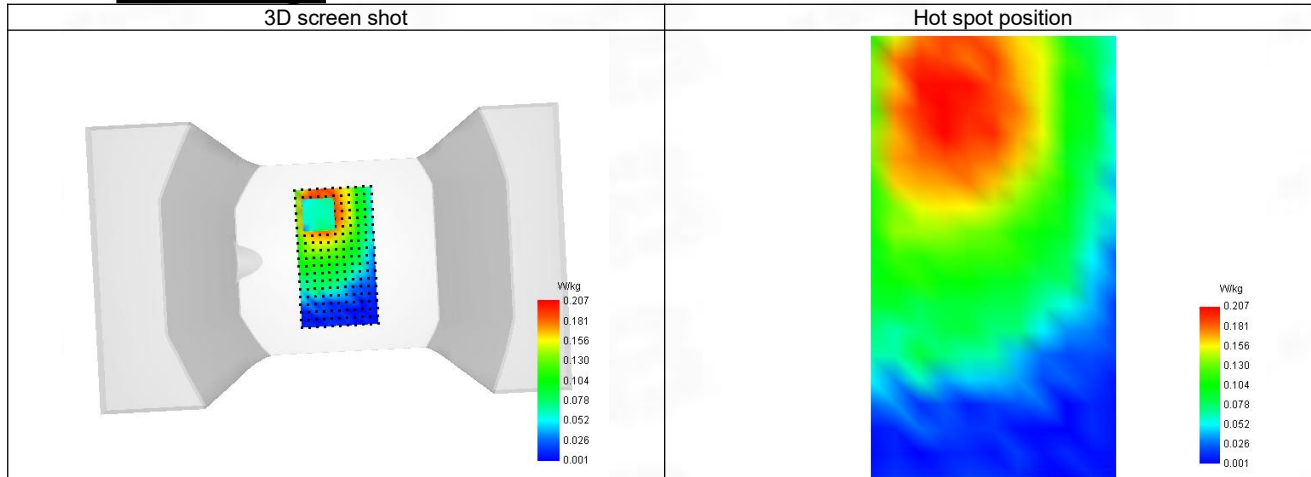

21-Head with front position in dist. 0mm on Channel 23780 in LTE band 17

SAR Measurement at LTE band 17 (Cheek, Right)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Channels	Lower (23780)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	24
RB size	1

B. Permittivity

Frequency (MHz)	708.910
Relative permittivity (real part)	41.606
Relative permittivity (imaginary part)	19.294
Conductivity (S/m)	0.805

C. SAR Surface and Volume

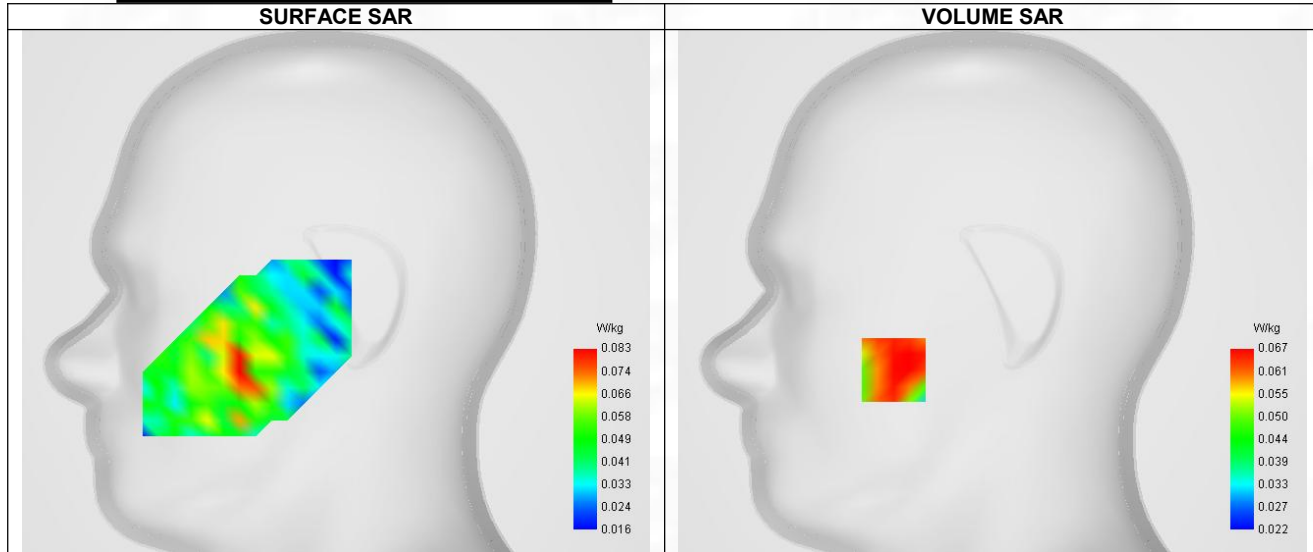


Maximum location: X=-49.00, Y=-39.00 ; SAR Peak: 0.12 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.055
SAR 1g (W/Kg)	0.073
Variation (%)	-2.790
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.085	0.067	0.050	0.044	0.043

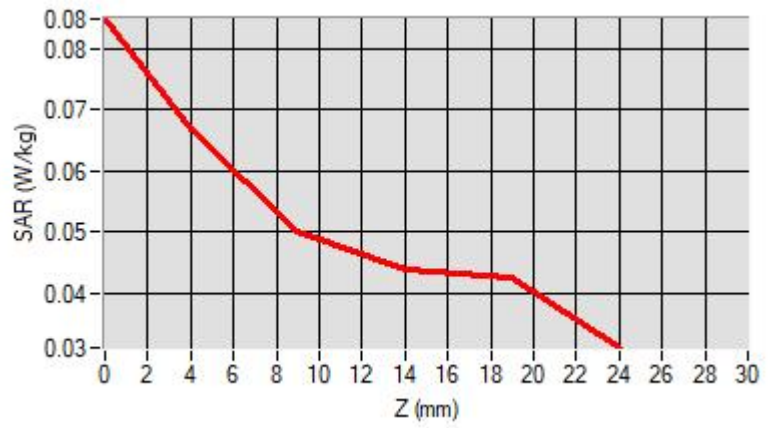

F. 3D Image

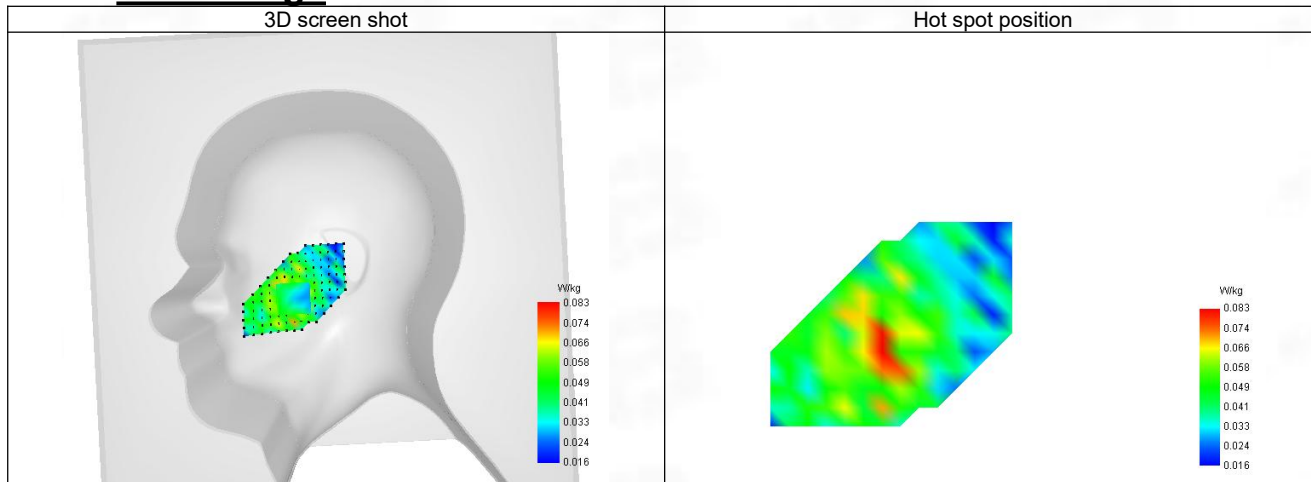

22-Body with back position in dist. 10mm on Channel 23780 in LTE band 17

SAR Measurement at LTE band 17 (Body, Validation Plane)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 17
Channels	Lower (23780)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	24
RB size	1

B. Permittivity

Frequency (MHz)	708.910
Relative permittivity (real part)	41.606
Relative permittivity (imaginary part)	19.294
Conductivity (S/m)	0.805

C. SAR Surface and Volume

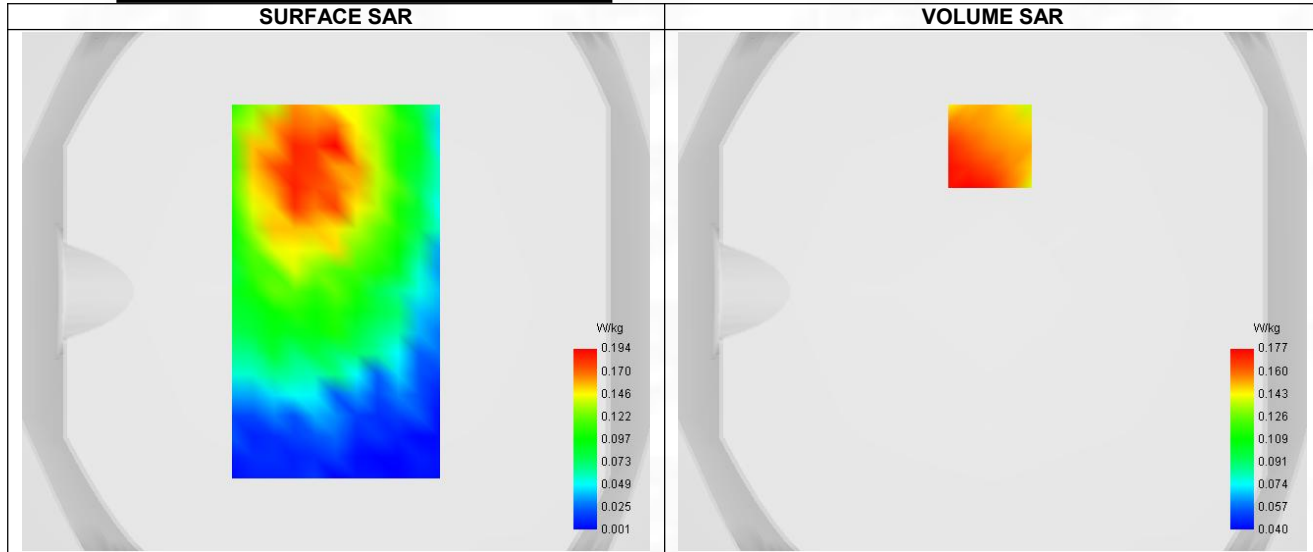


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.127
SAR 1g (W/Kg)	0.172
Variation (%)	-1.370
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.332	0.177	0.127	0.109	0.075

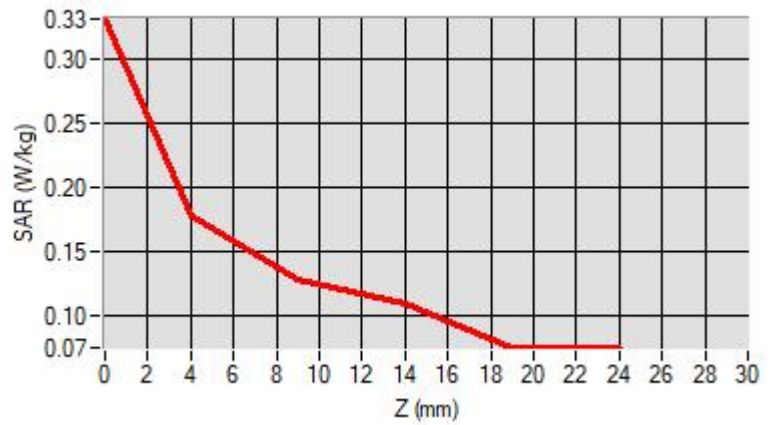

F. 3D Image

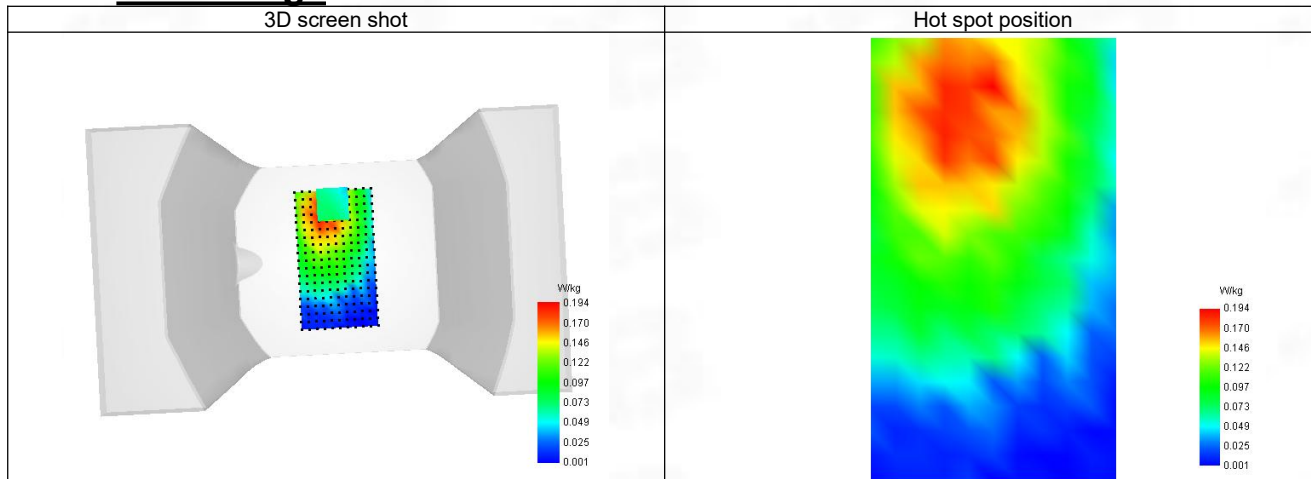

23-Head with front position in dist. 0mm on Channel 27710 in LTE band 30

SAR Measurement at LTE band 30 (Cheek, Right)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 30
Channels	Middle (27710)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	24
RB size	1

B. Permittivity

Frequency (MHz)	2309.910
Relative permittivity (real part)	39.267
Relative permittivity (imaginary part)	13.947
Conductivity (S/m)	1.661

C. SAR Surface and Volume

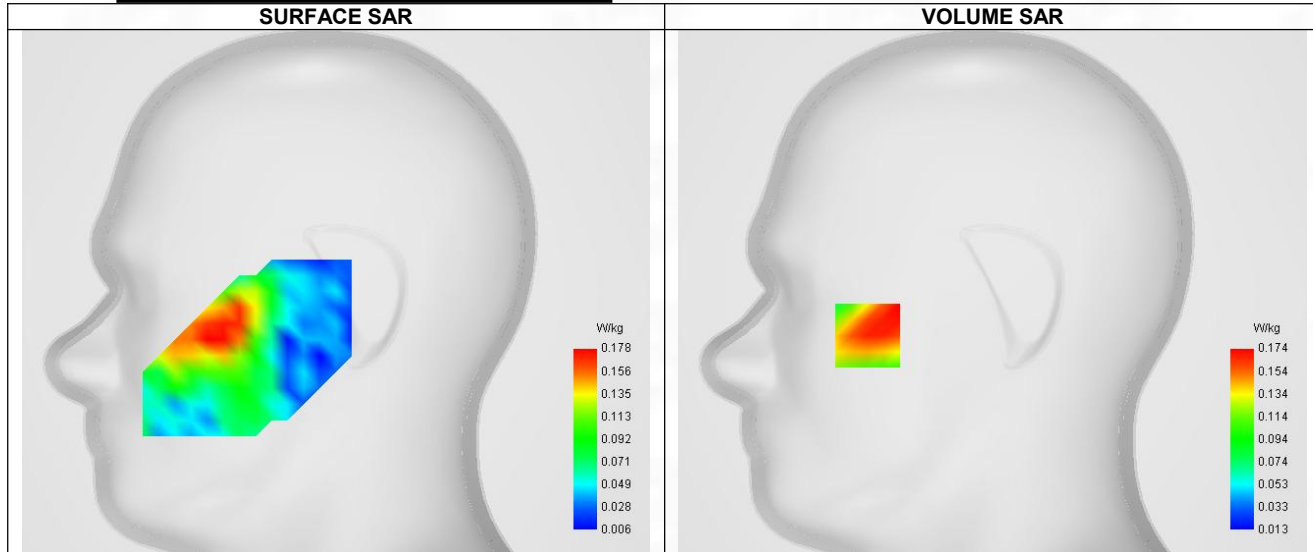


Maximum location: X=-62.00, Y=-22.00 ; SAR Peak: 0.29 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.105
SAR 1g (W/Kg)	0.168
Variation (%)	-0.300
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.491	0.174	0.074	0.061	0.029

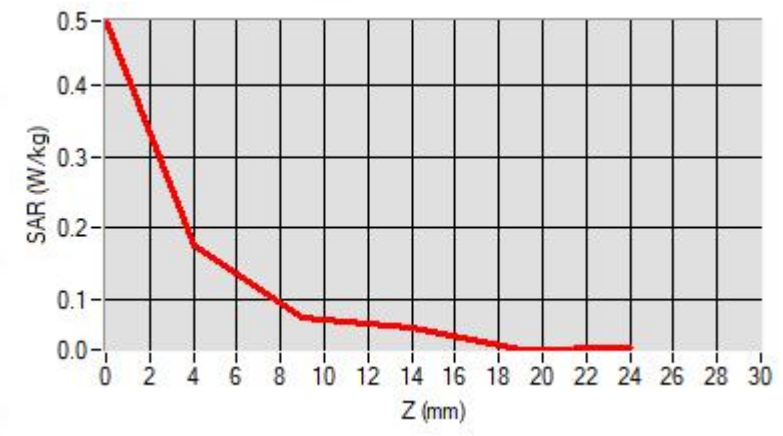

F. 3D Image

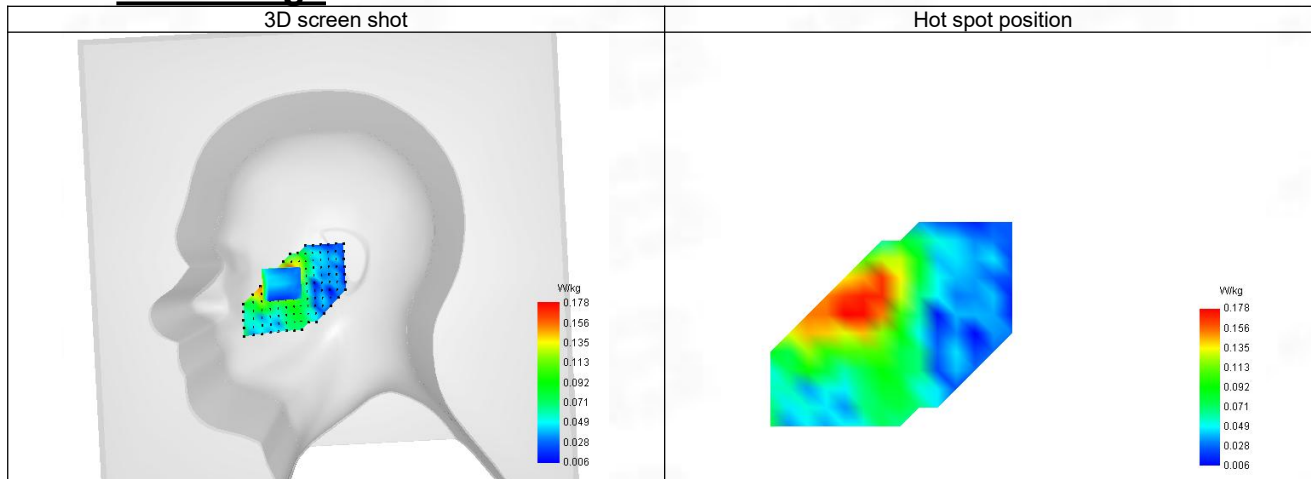

24-Body with bottom position in dist. 10mm on Channel 27710 in LTE band 30

SAR Measurement at LTE band 30 (Body, Validation Plane)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 30
Channels	Middle (27710)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	24
RB size	1

B. Permittivity

Frequency (MHz)	2309.910
Relative permittivity (real part)	39.267
Relative permittivity (imaginary part)	13.947
Conductivity (S/m)	1.661

C. SAR Surface and Volume

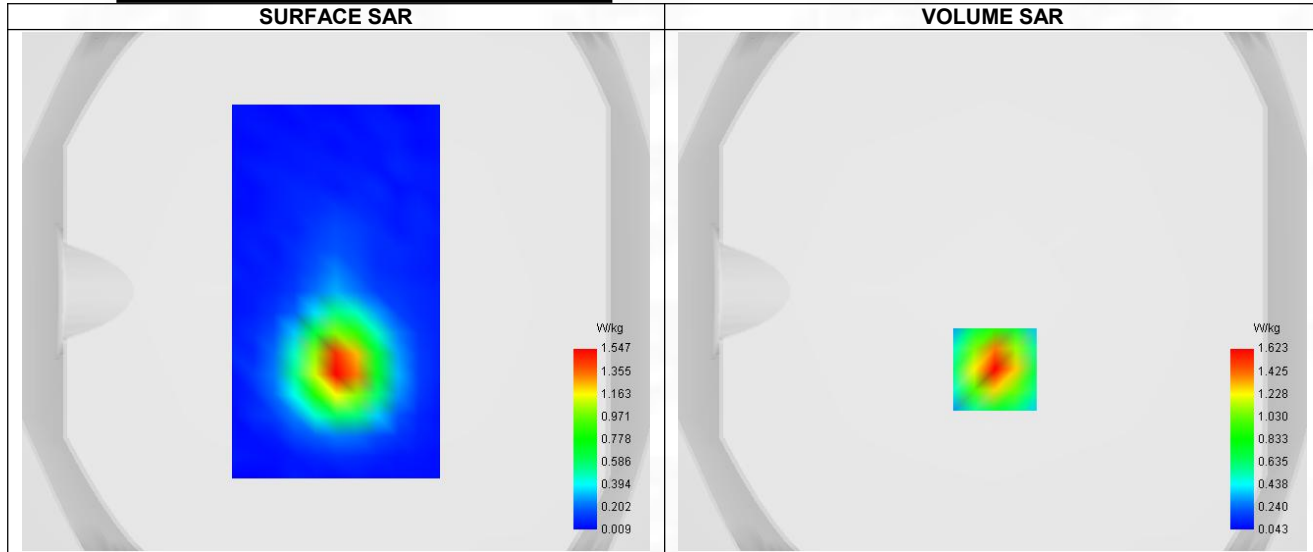


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.340
SAR 1g (W/Kg)	0.749
Variation (%)	2.680
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.695	1.623	0.832	0.435	0.251

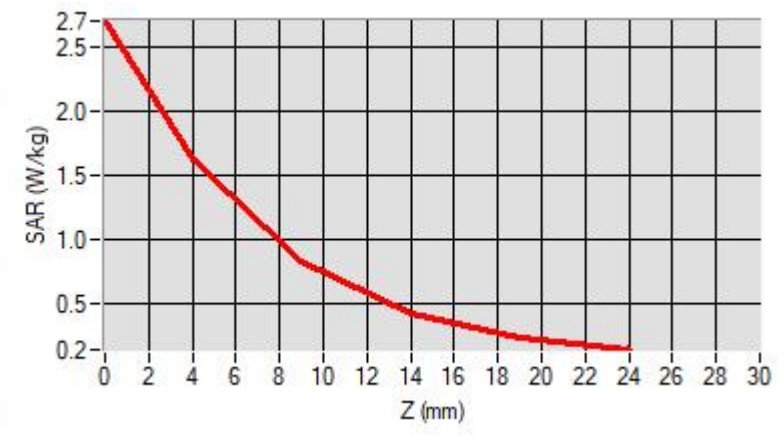

F. 3D Image

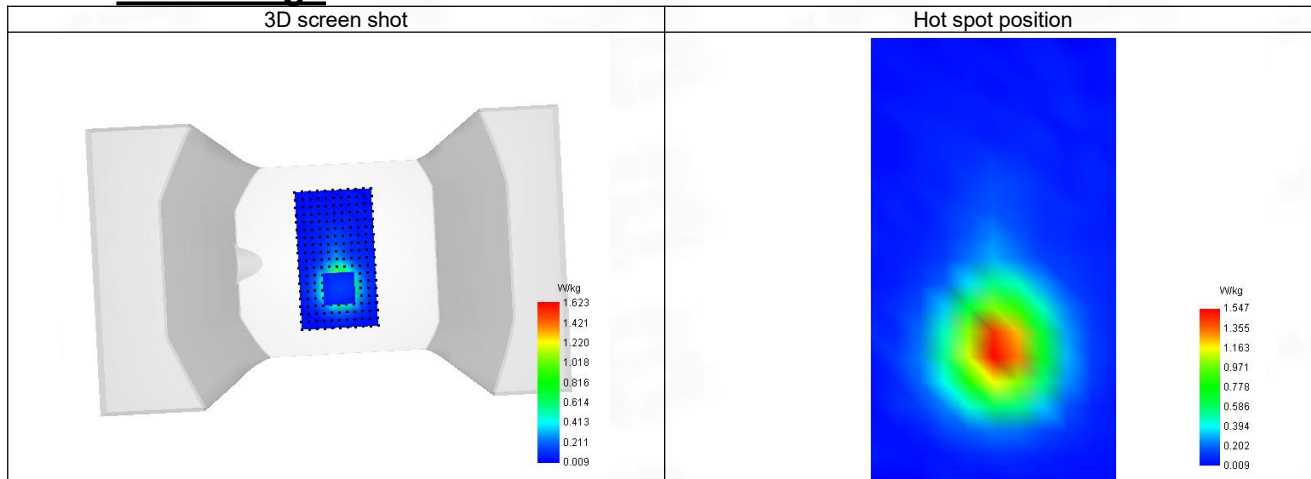

25-Head with front position in dist. 0mm on Channel 132072 in LTE band 66

SAR Measurement at LTE band 66 (Cheek, Right)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 66
Channels	Lower (132072)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	1719.910
Relative permittivity (real part)	40.034
Relative permittivity (imaginary part)	13.966
Conductivity (S/m)	1.329

C. SAR Surface and Volume

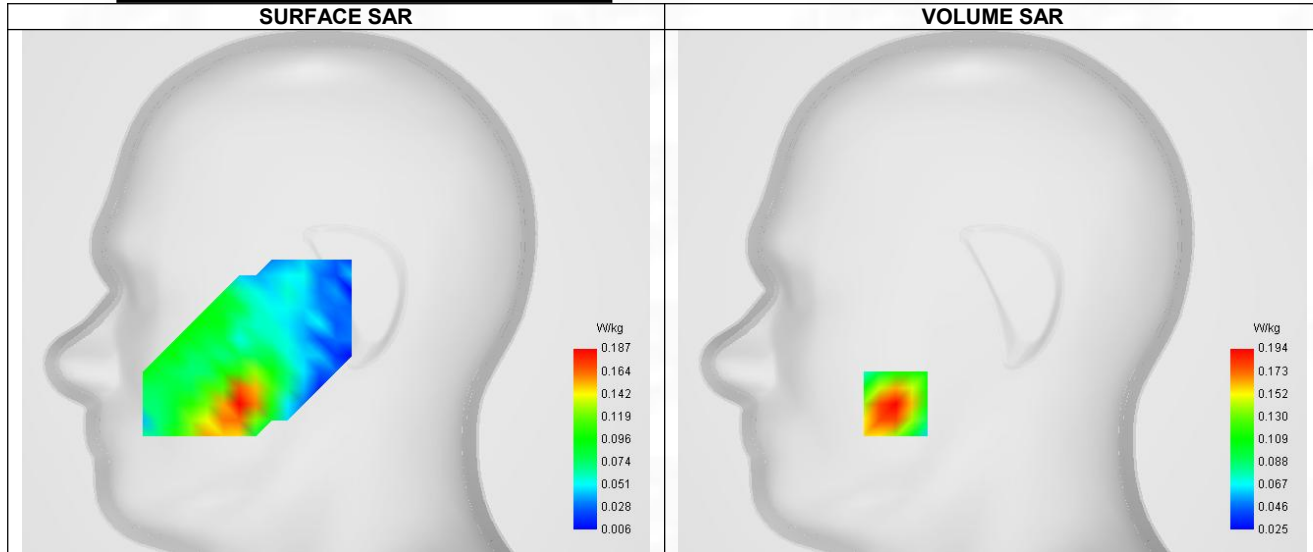


Maximum location: X=-48.00, Y=-56.00 ; SAR Peak: 0.28 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.114
SAR 1g (W/Kg)	0.184
Variation (%)	1.460
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.282	0.194	0.122	0.080	0.058

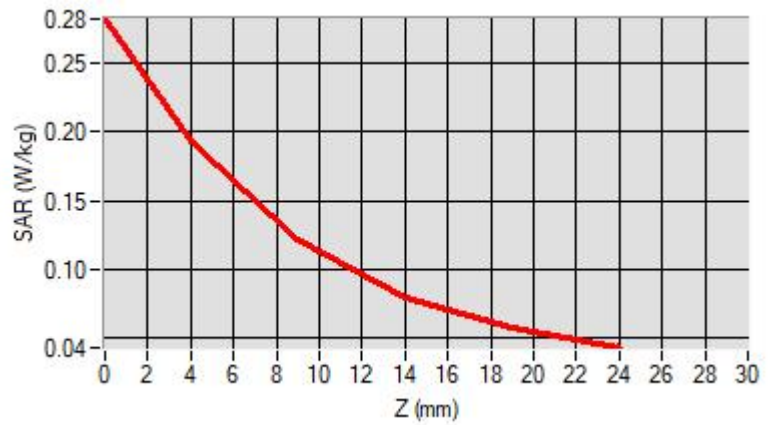

F. 3D Image

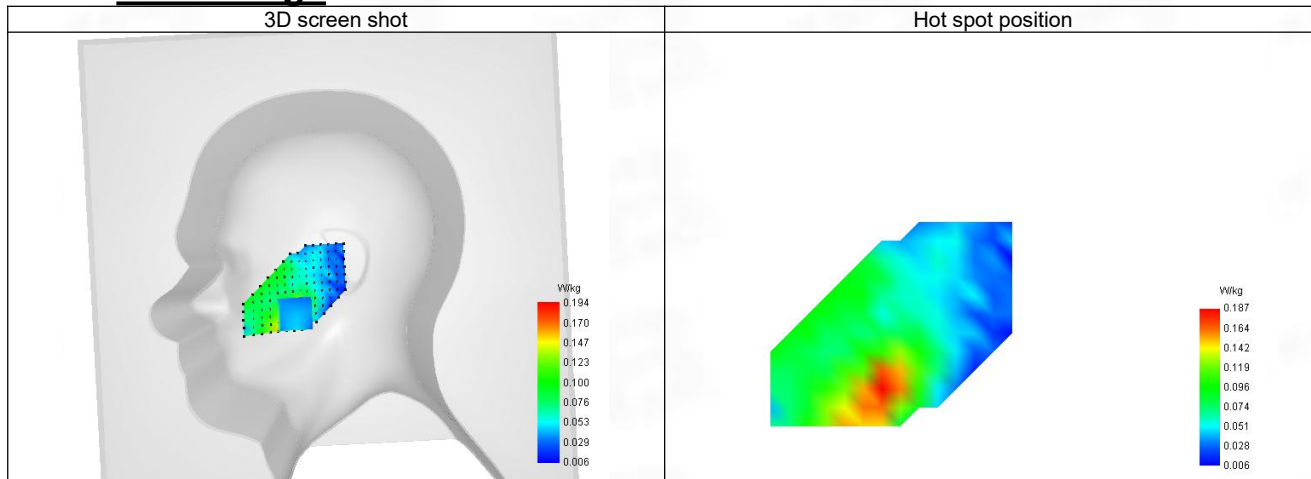

26-Body with bottom position in dist. 10mm on Channel 132072 in LTE band 66

SAR Measurement at LTE band 66 (Body, Validation Plane)

Date of measurement: 26/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 66
Channels	Lower (132072)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	1719.910
Relative permittivity (real part)	40.034
Relative permittivity (imaginary part)	13.966
Conductivity (S/m)	1.329

C. SAR Surface and Volume

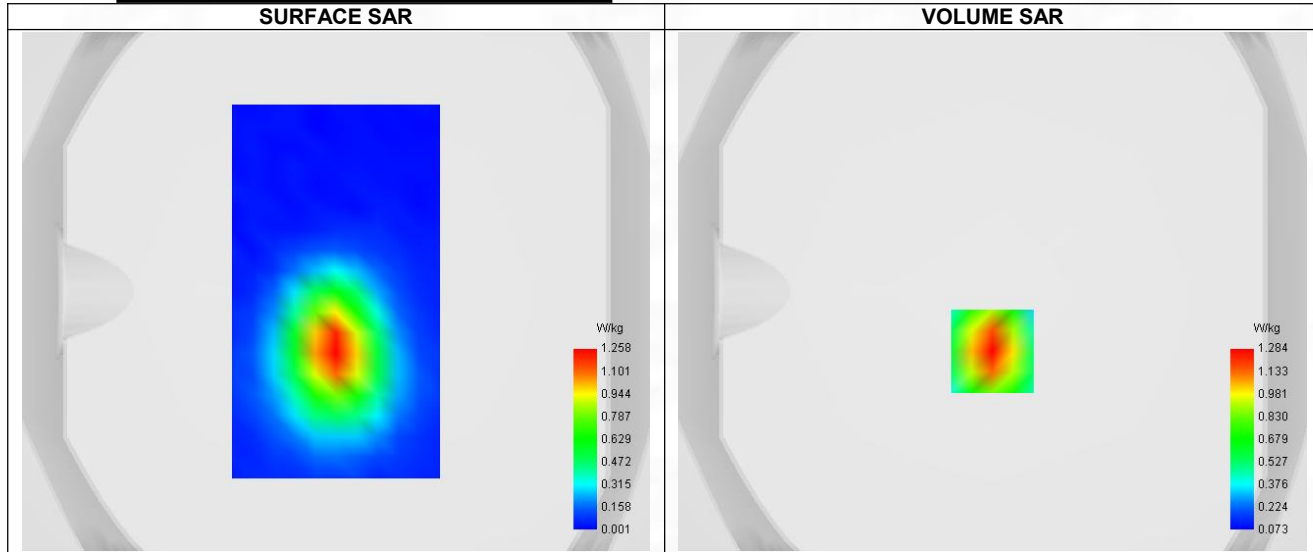


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.261
SAR 1g (W/Kg)	0.596
Variation (%)	-1.450
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.935	1.284	0.757	0.452	0.281

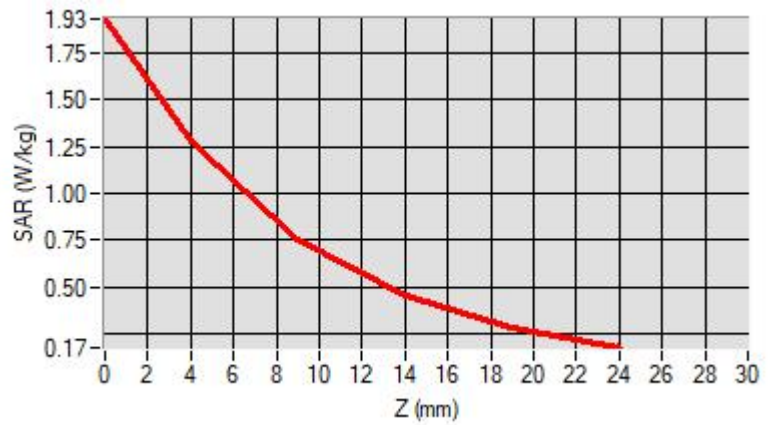

F. 3D Image

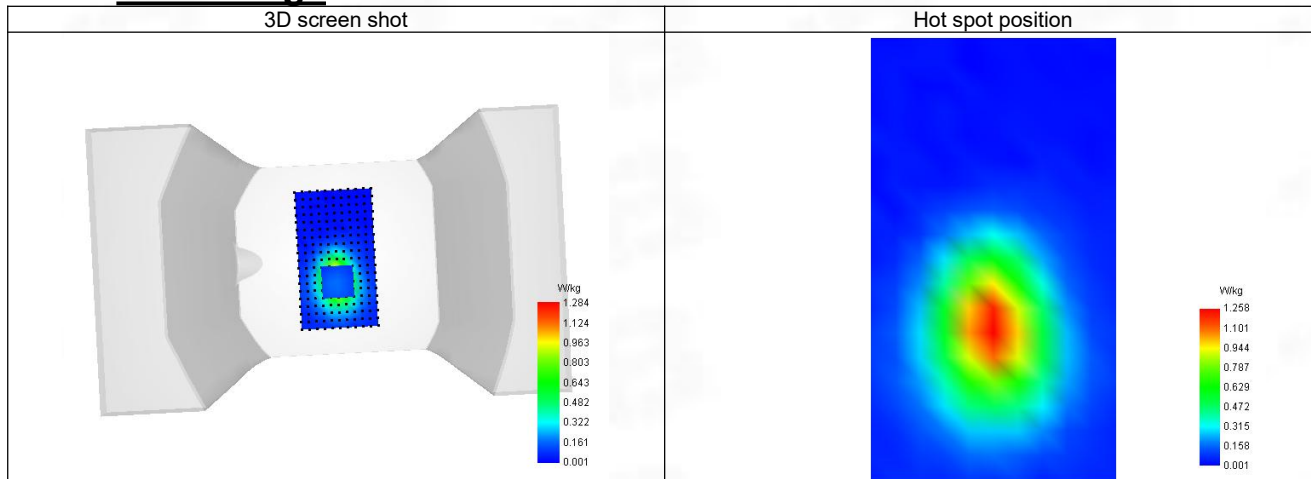

27-Head with front position in dist. 0mm on Channel 133322 in LTE band 71

SAR Measurement at LTE band 71 (Cheek, Right)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 71
Channels	Middle (133322)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	682.910
Relative permittivity (real part)	41.646
Relative permittivity (imaginary part)	19.254
Conductivity (S/m)	0.791

C. SAR Surface and Volume

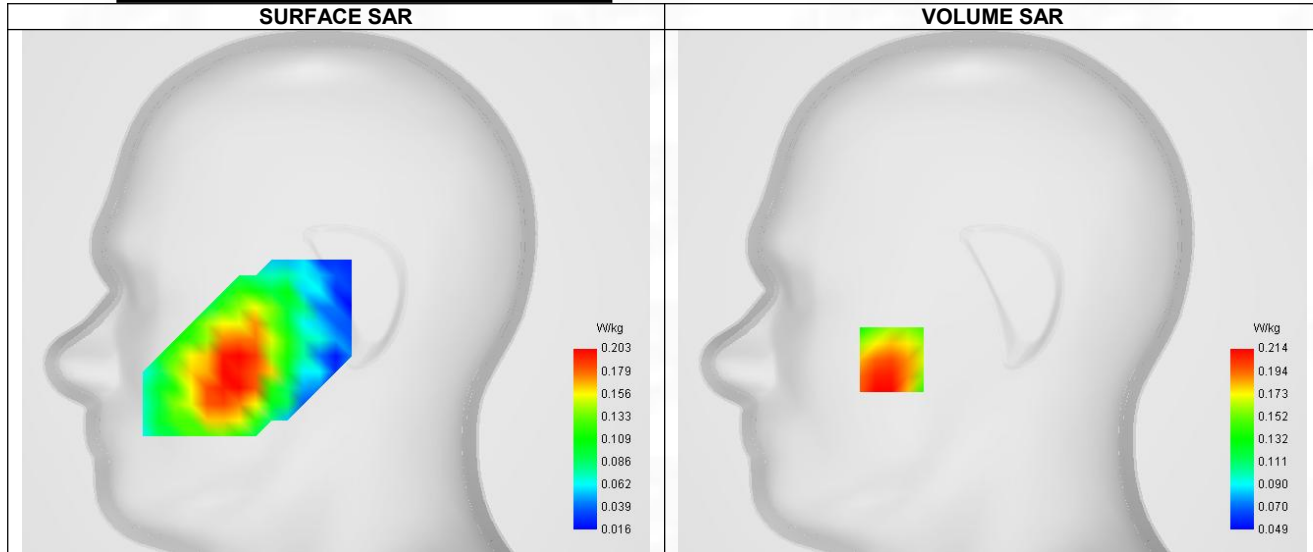


Maximum location: X=-50.00, Y=-34.00 ; SAR Peak: 0.29 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.155
SAR 1g (W/Kg)	0.214
Variation (%)	1.600
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.413	0.214	0.139	0.116	0.085

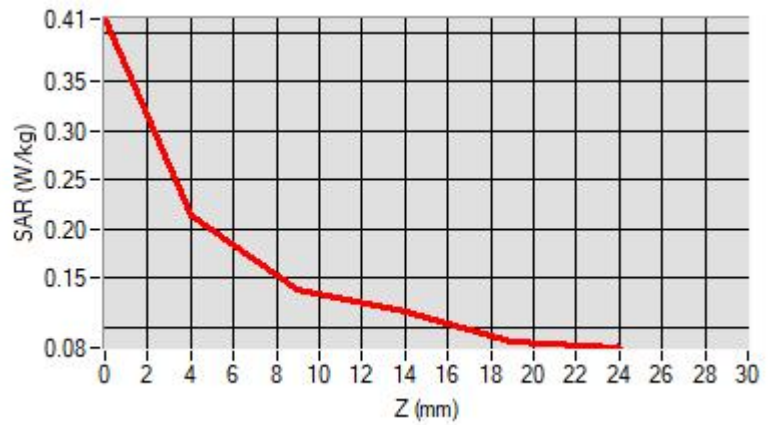

F. 3D Image

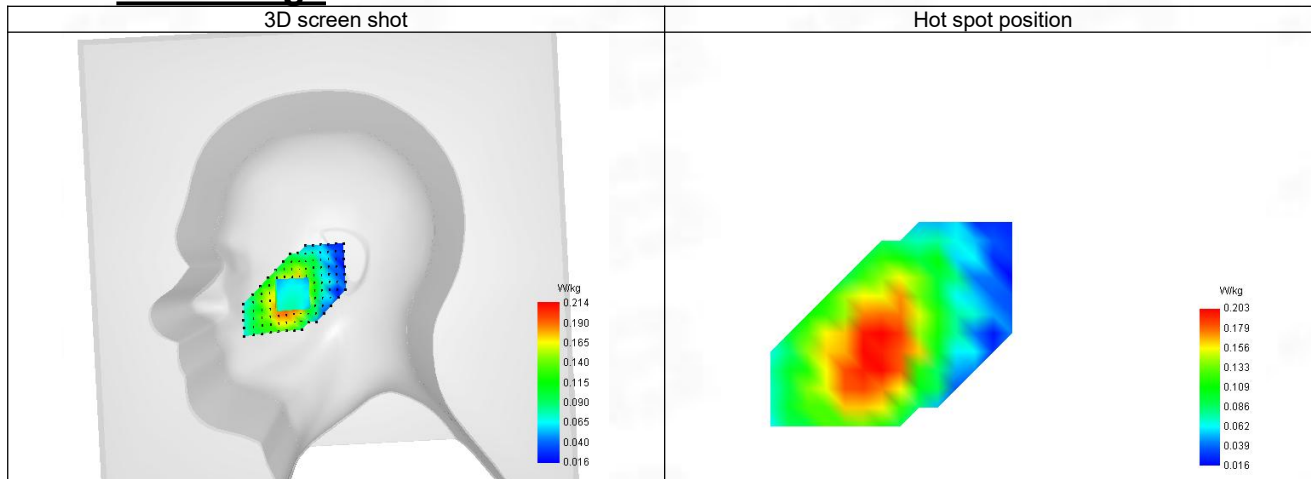

28-Body with front position in dist. 10mm on Channel 133322 in LTE band 71

SAR Measurement at LTE band 71 (Body, Validation Plane)

Date of measurement: 25/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 71
Channels	Middle (133322)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	682.910
Relative permittivity (real part)	41.646
Relative permittivity (imaginary part)	19.254
Conductivity (S/m)	0.791

C. SAR Surface and Volume

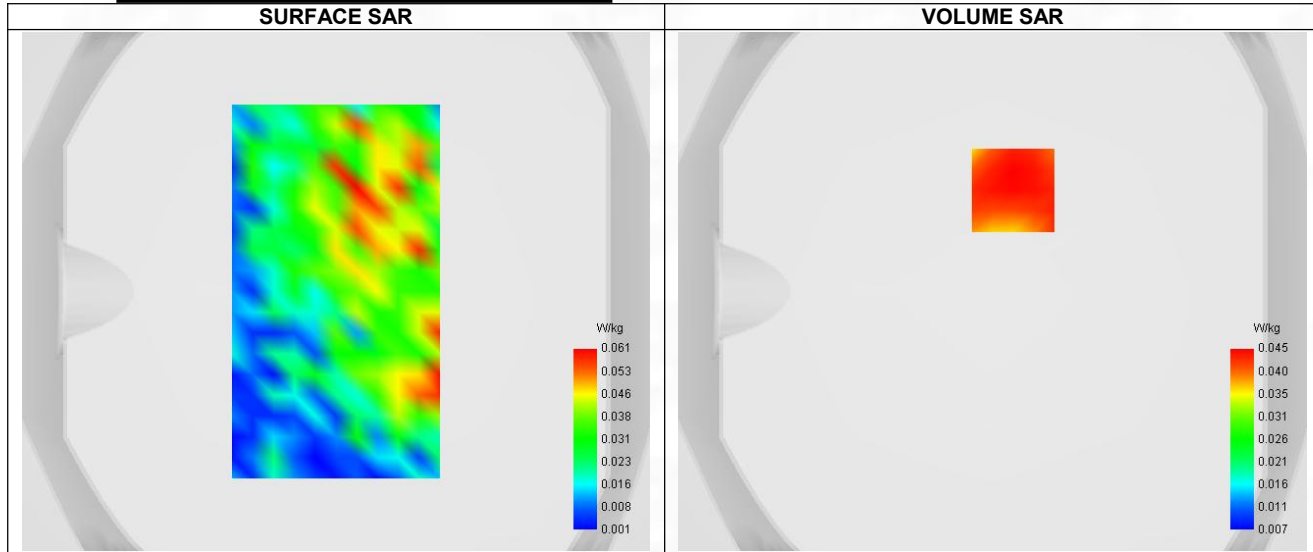

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.038
SAR 1g (W/Kg)	0.047
Variation (%)	0.260
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.015	0.045	0.035	0.025	0.032



F. 3D Image

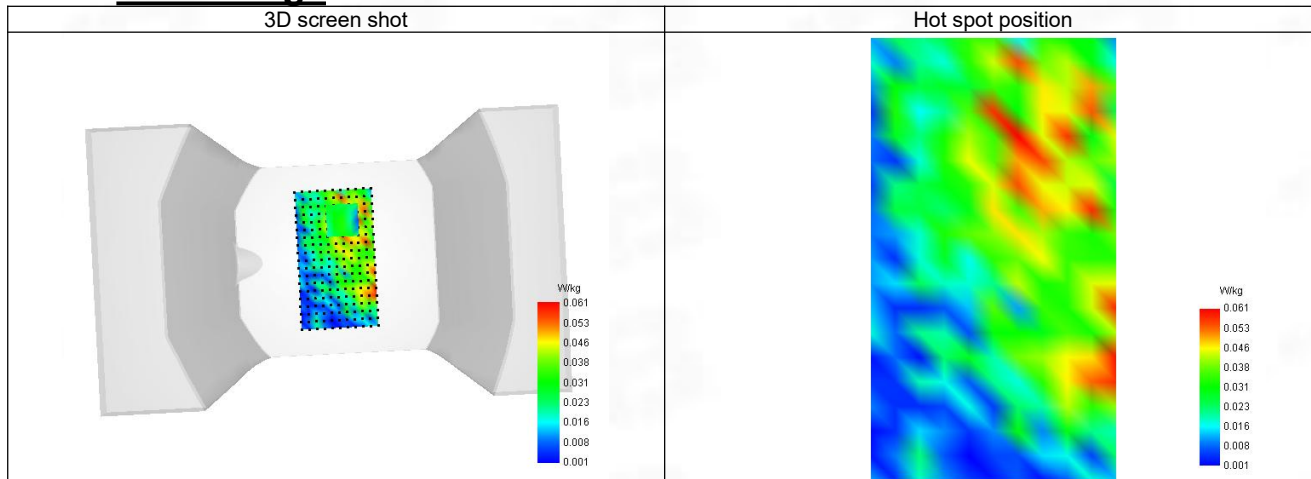

29-Head with front position in dist. 0mm on Channel 1 in IEEE 802.11b ISM

SAR Measurement at IEEE 802.11b ISM (Cheek, Right)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	Lower (1)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	2412.000
Relative permittivity (real part)	39.131
Relative permittivity (imaginary part)	13.505
Conductivity (S/m)	1.769

C. SAR Surface and Volume

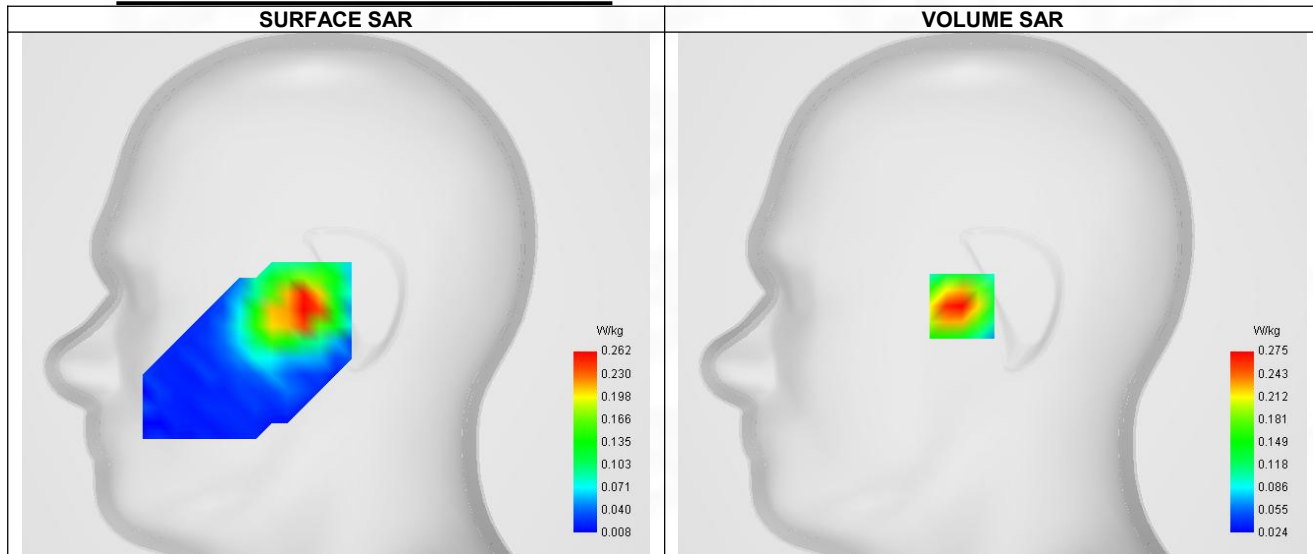


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.144
SAR 1g (W/Kg)	0.260
Variation (%)	-2.810
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.428	0.275	0.155	0.089	0.055

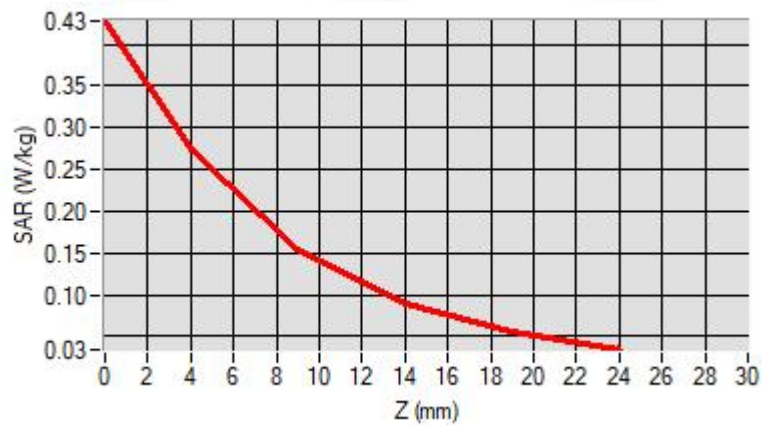

F. 3D Image

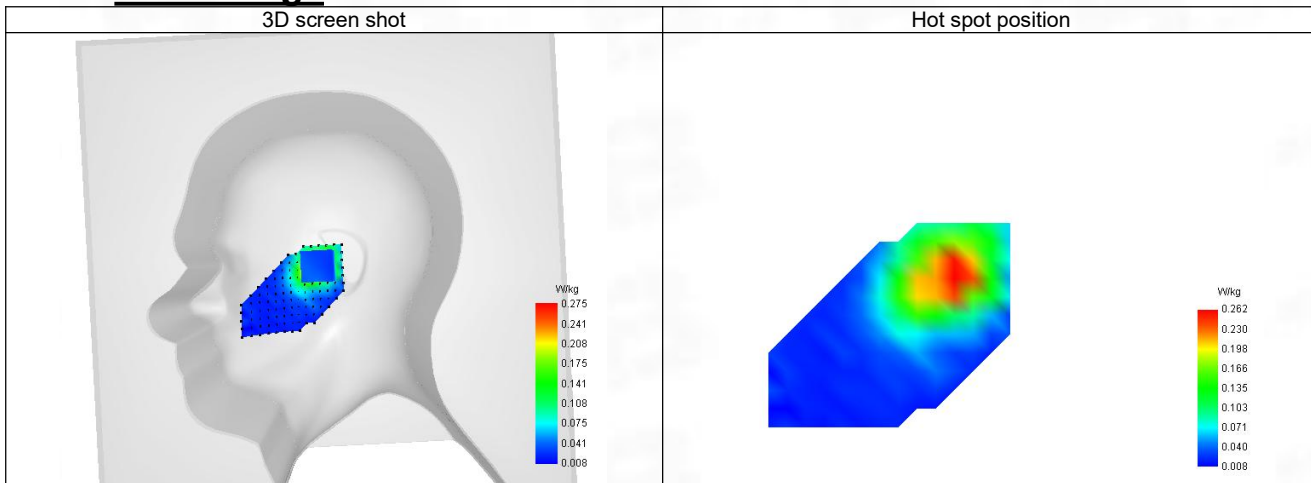

30-Body with front position in dist. 10mm on Channel 1 in IEEE 802.11b ISM

SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Lower (1)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	2412.000
Relative permittivity (real part)	39.131
Relative permittivity (imaginary part)	13.505
Conductivity (S/m)	1.769

C. SAR Surface and Volume

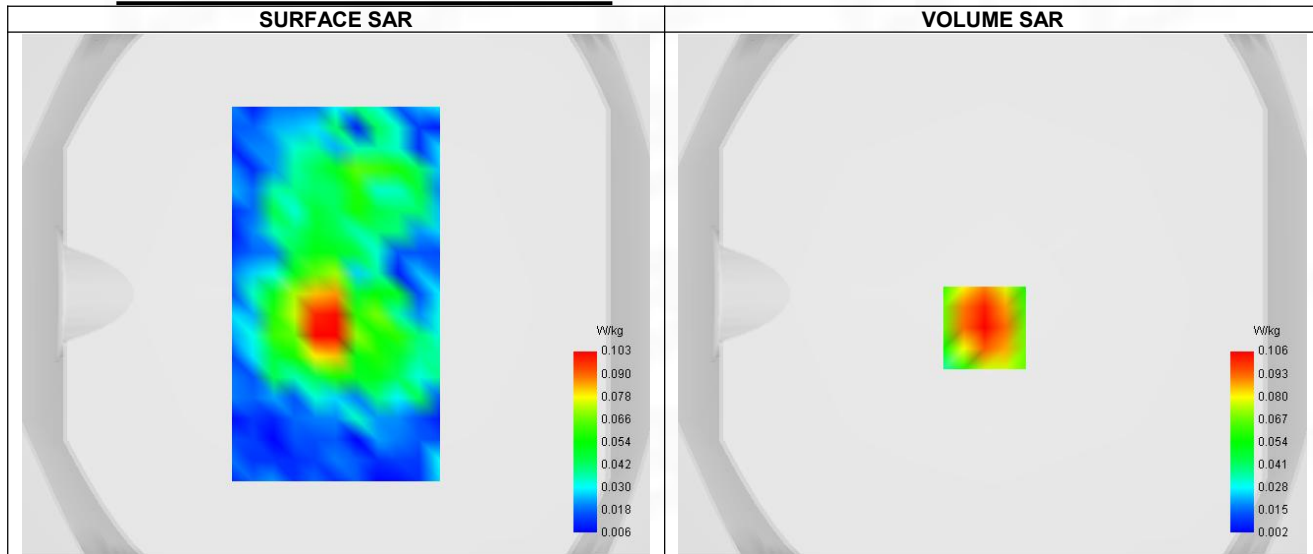


Maximum location: X=-3.00, Y=-13.00 ; SAR Peak: 0.18 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.063
SAR 1g (W/Kg)	0.102
Variation (%)	4.200
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.175	0.106	0.058	0.038	0.032

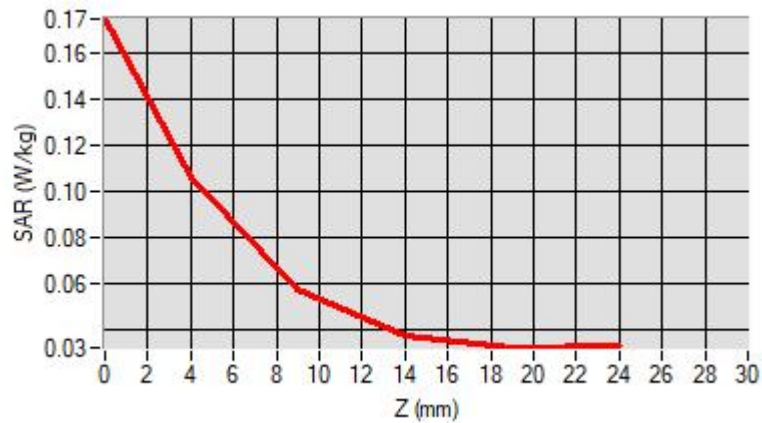

F. 3D Image

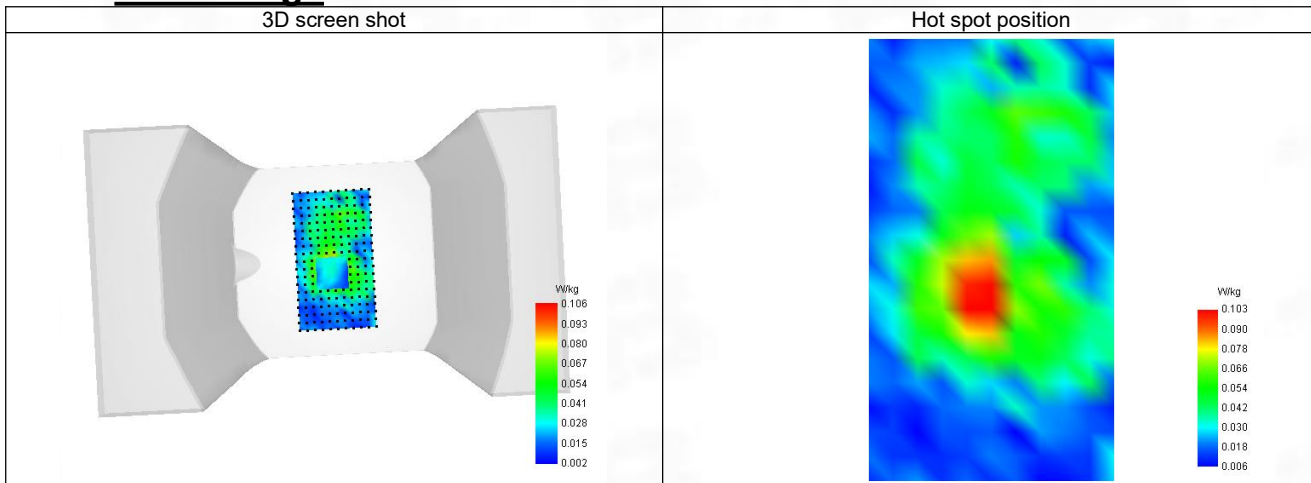

31-Head with front position in dist. 0mm on Channel 48 in IEEE 802.11a U-NII

SAR Measurement at IEEE 802.11a U-NII (Cheek, Right)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11a U-NII
Channels	Lower (48)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5240.000
Relative permittivity (real part)	35.840
Relative permittivity (imaginary part)	16.290
Conductivity (S/m)	4.740

C. SAR Surface and Volume

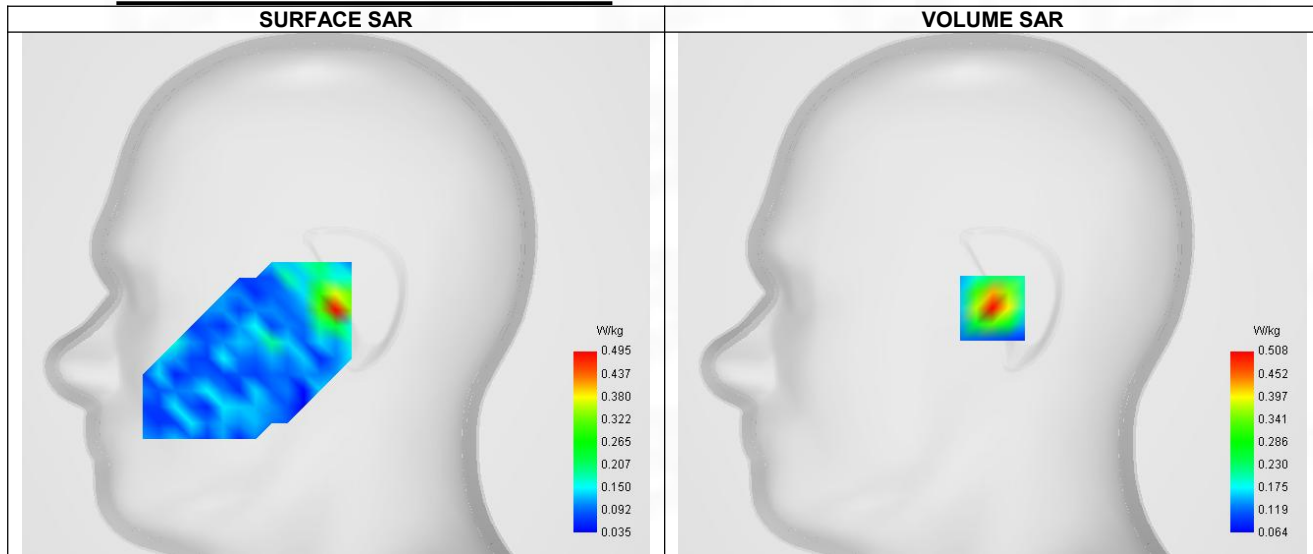


Maximum location: X=0.00, Y=-7.00 ; SAR Peak: 0.97 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.237
SAR 1g (W/Kg)	0.476
Variation (%)	-1.390
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.699	0.508	0.226	0.120	0.097

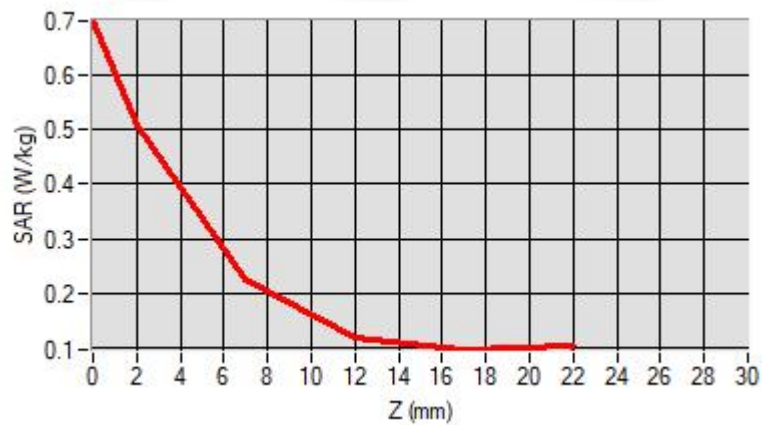

F. 3D Image

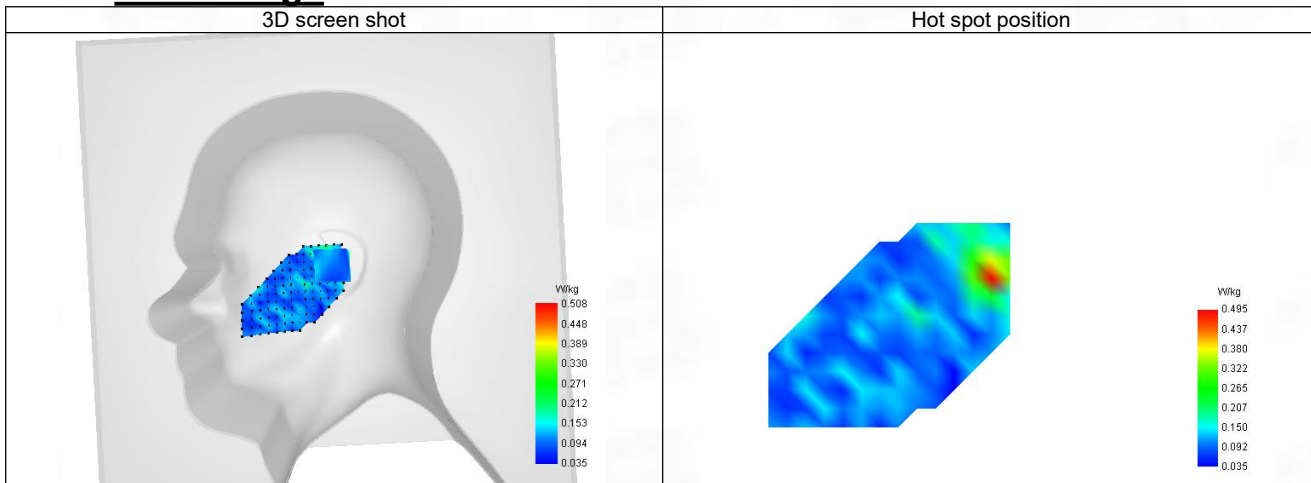

32-Body with front position in dist. 10mm on Channel 48 in IEEE 802.11a U-NII

SAR Measurement at IEEE 802.11a U-NII (Body, Validation Plane)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11a U-NII
Channels	Lower (48)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5240.000
Relative permittivity (real part)	35.840
Relative permittivity (imaginary part)	16.290
Conductivity (S/m)	4.740

C. SAR Surface and Volume

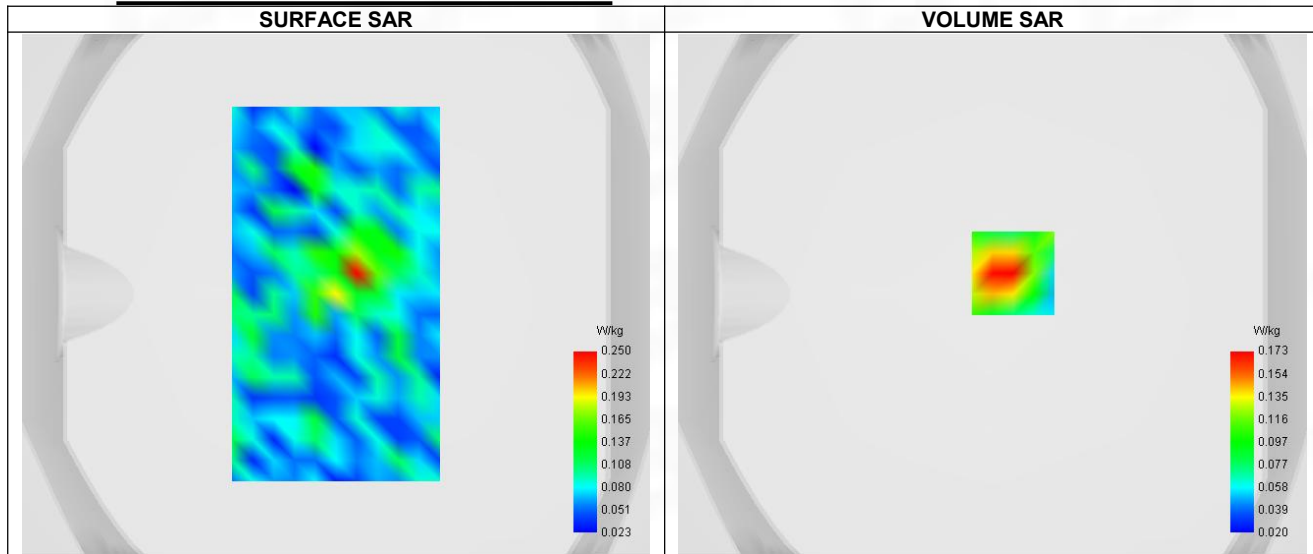


Maximum location: X=8.00, Y=8.00 ; SAR Peak: 0.28 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.113
SAR 1g (W/Kg)	0.151
Variation (%)	-1.790
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.244	0.173	0.076	0.050	0.062

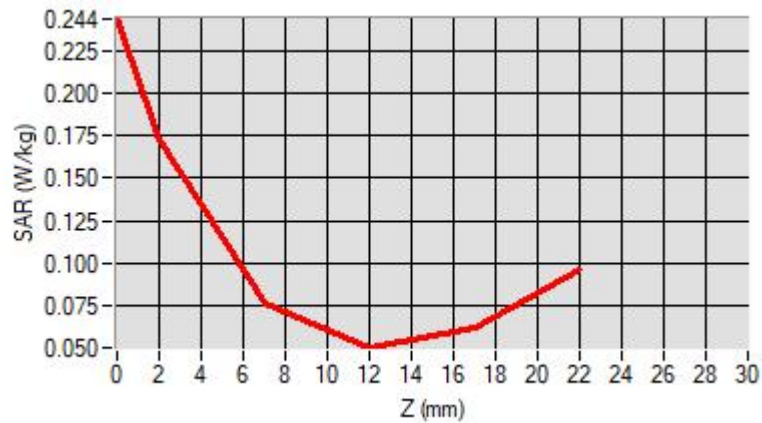

F. 3D Image

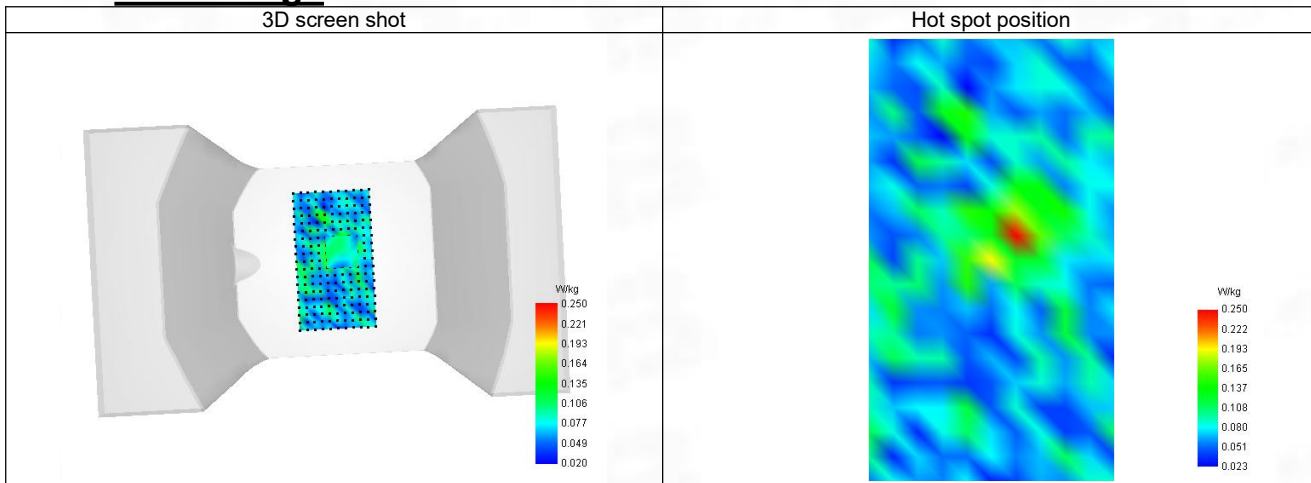

33-Head with front position in dist. 0mm on Channel 64 in IEEE 802.11a U-NII

SAR Measurement at IEEE 802.11a U-NII (Cheek, Right)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.12
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11a U-NII
Channels	Lower (64)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5320.000
Relative permittivity (real part)	35.760
Relative permittivity (imaginary part)	16.370
Conductivity (S/m)	4.820

C. SAR Surface and Volume

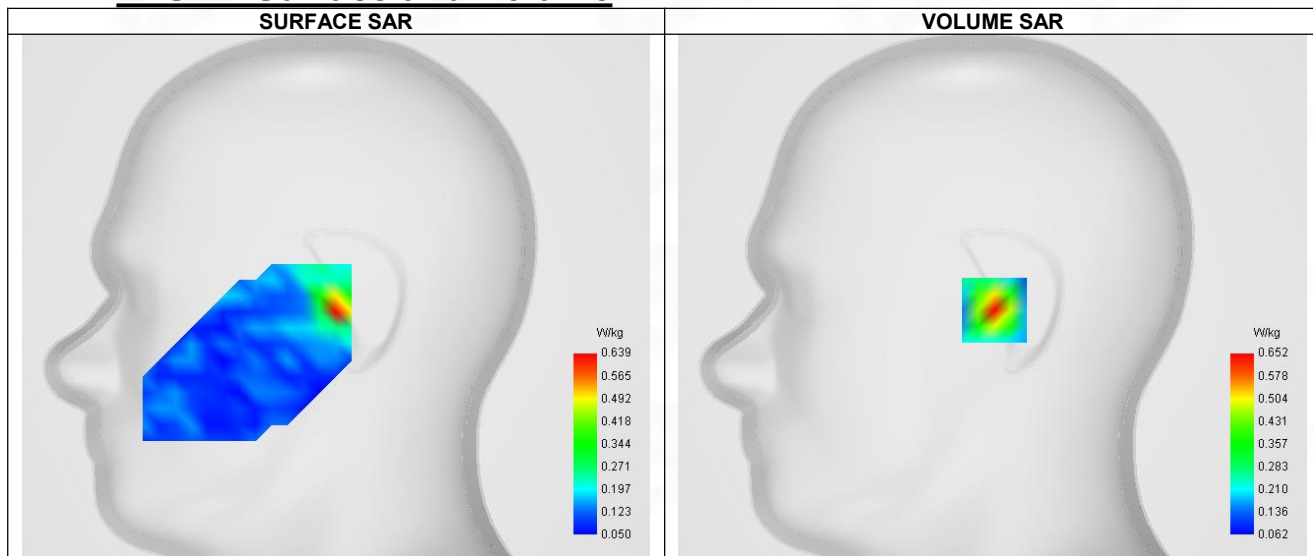


Maximum location: X=1.00, Y=-7.00 ; SAR Peak: 1.32 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.272
SAR 1g (W/Kg)	0.606
Variation (%)	-1.740
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.939	0.652	0.247	0.109	0.082

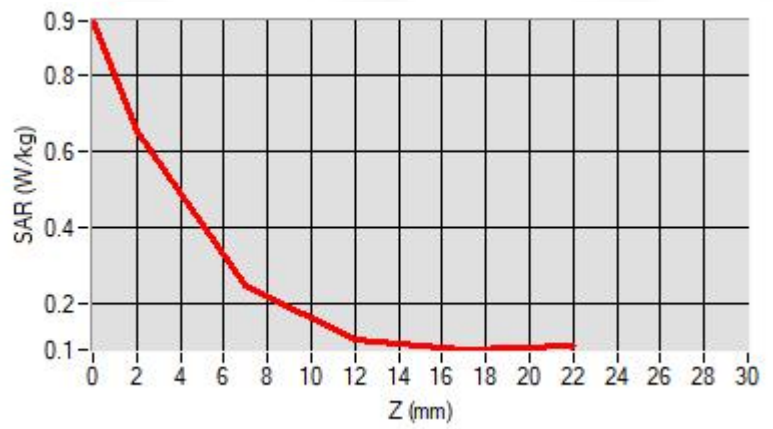

F. 3D Image

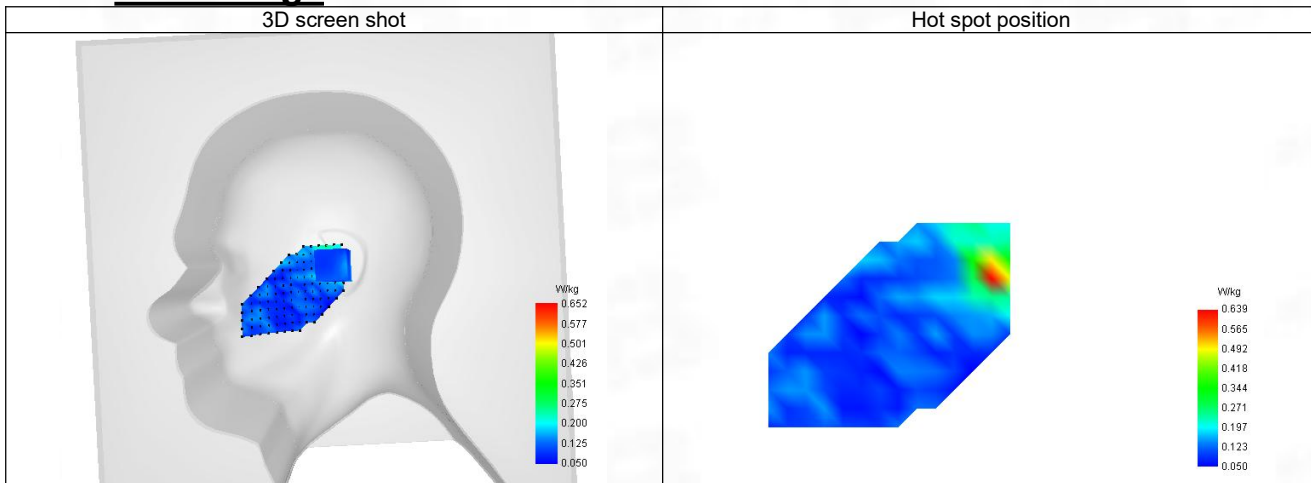

34-Body with front position in dist. 10mm on Channel 64 in IEEE 802.11a U-NII

SAR Measurement at IEEE 802.11a U-NII (Body, Validation Plane)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.12
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11a U-NII
Channels	Lower (64)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5320.000
Relative permittivity (real part)	35.760
Relative permittivity (imaginary part)	16.370
Conductivity (S/m)	4.820

C. SAR Surface and Volume

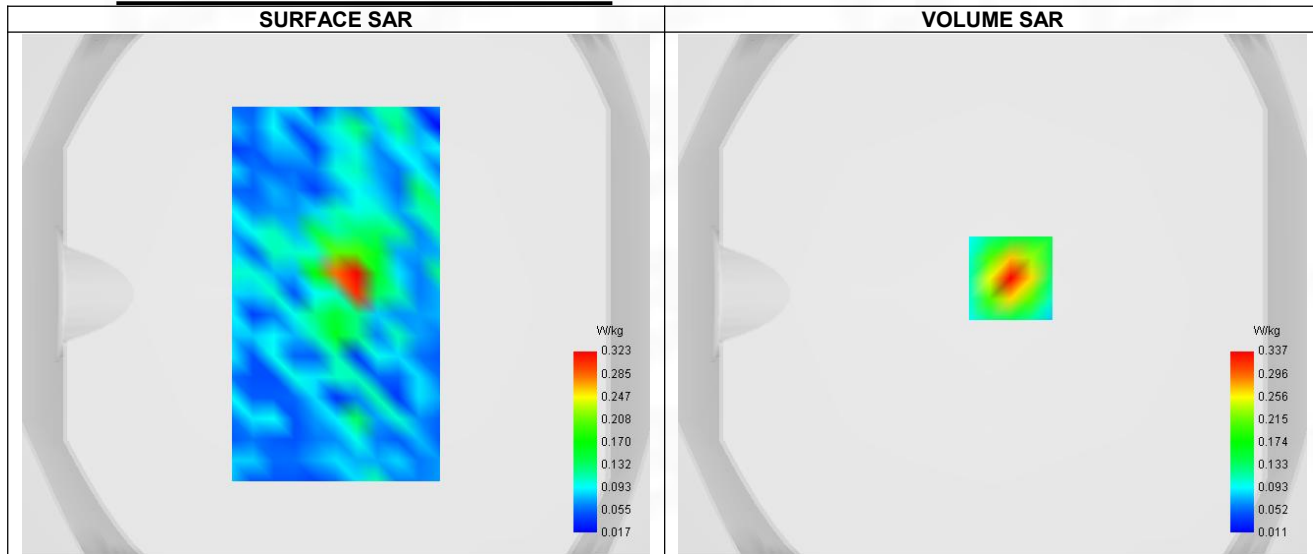


Maximum location: X=7.00, Y=6.00 ; SAR Peak: 0.50 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.124
SAR 1g (W/Kg)	0.227
Variation (%)	1.490
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.489	0.337	0.129	0.065	0.064

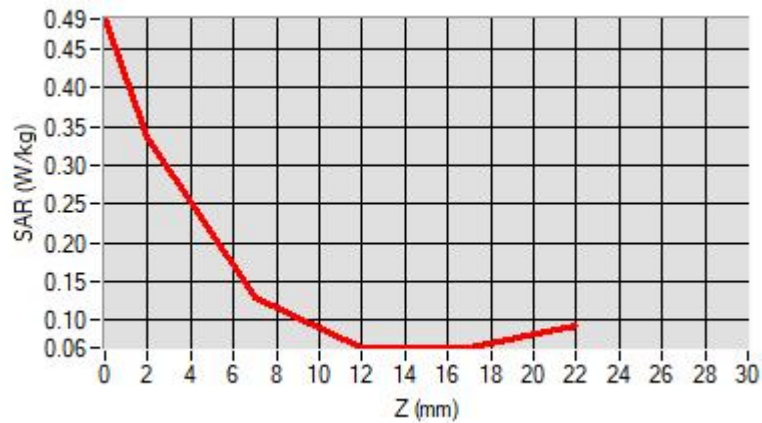

F. 3D Image

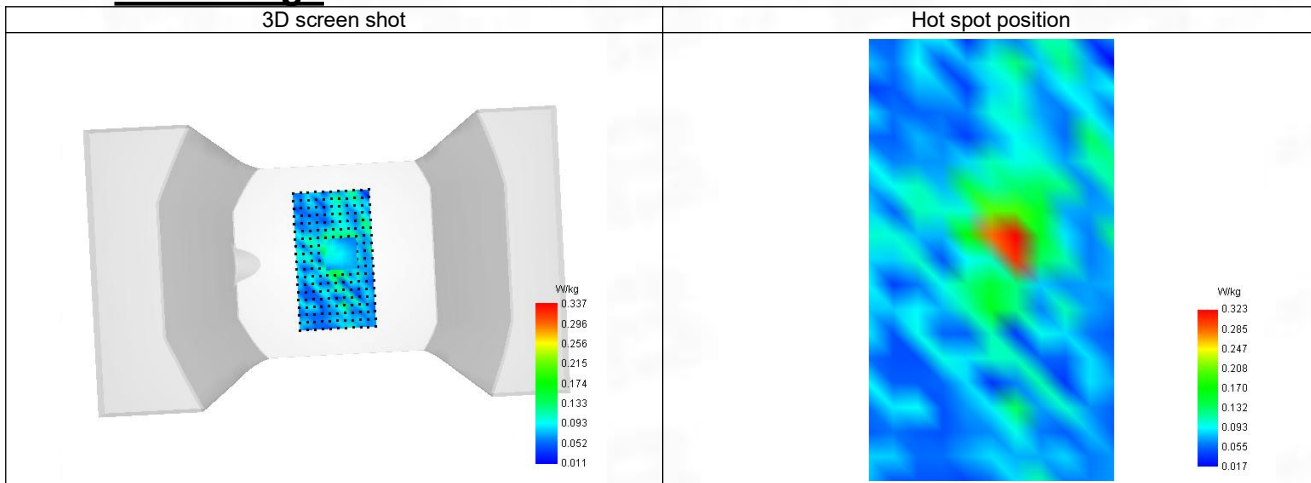

35-Head with front position in dist. 0mm on Channel 140 in IEEE 802.11a U-NII

SAR Measurement at IEEE 802.11a U-NII (Cheek, Right)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.18
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11a U-NII
Channels	Higher (140)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5700.000
Relative permittivity (real part)	35.280
Relative permittivity (imaginary part)	16.520
Conductivity (S/m)	5.210

C. SAR Surface and Volume

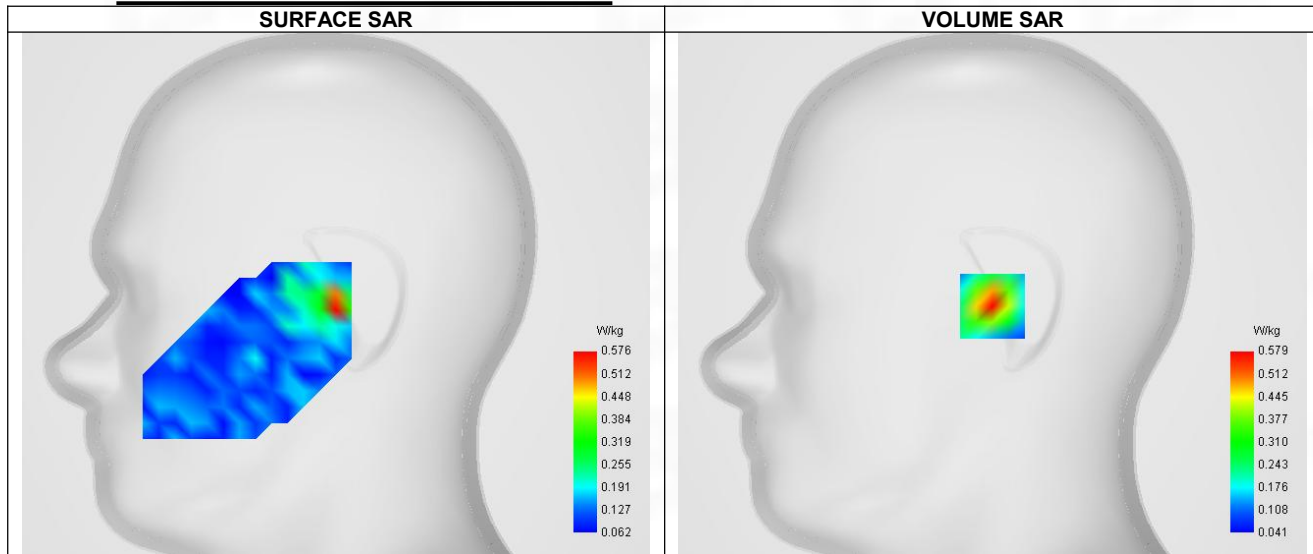


Maximum location: X=0.00, Y=-6.00 ; SAR Peak: 1.41 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.259
SAR 1g (W/Kg)	0.569
Variation (%)	-1.540
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.925	0.579	0.153	0.060	0.085

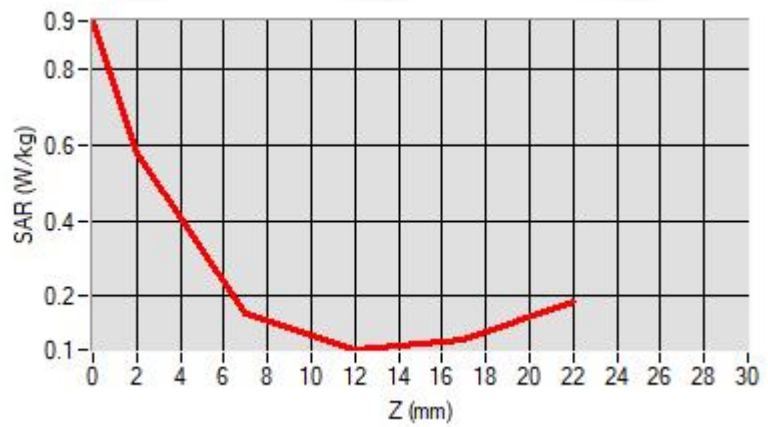

F. 3D Image

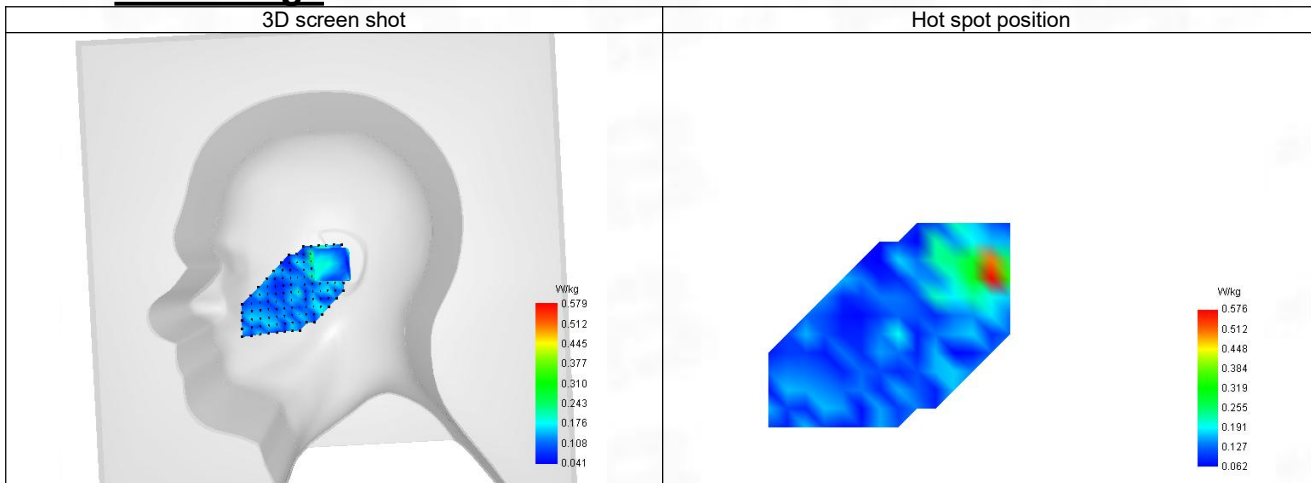

36-Body with front position in dist. 10mm on Channel 140 in IEEE 802.11a U-NII

SAR Measurement at IEEE 802.11a U-NII (Body, Validation Plane)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.18
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11a U-NII
Channels	Higher (140)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5700.000
Relative permittivity (real part)	35.280
Relative permittivity (imaginary part)	16.520
Conductivity (S/m)	5.210

C. SAR Surface and Volume

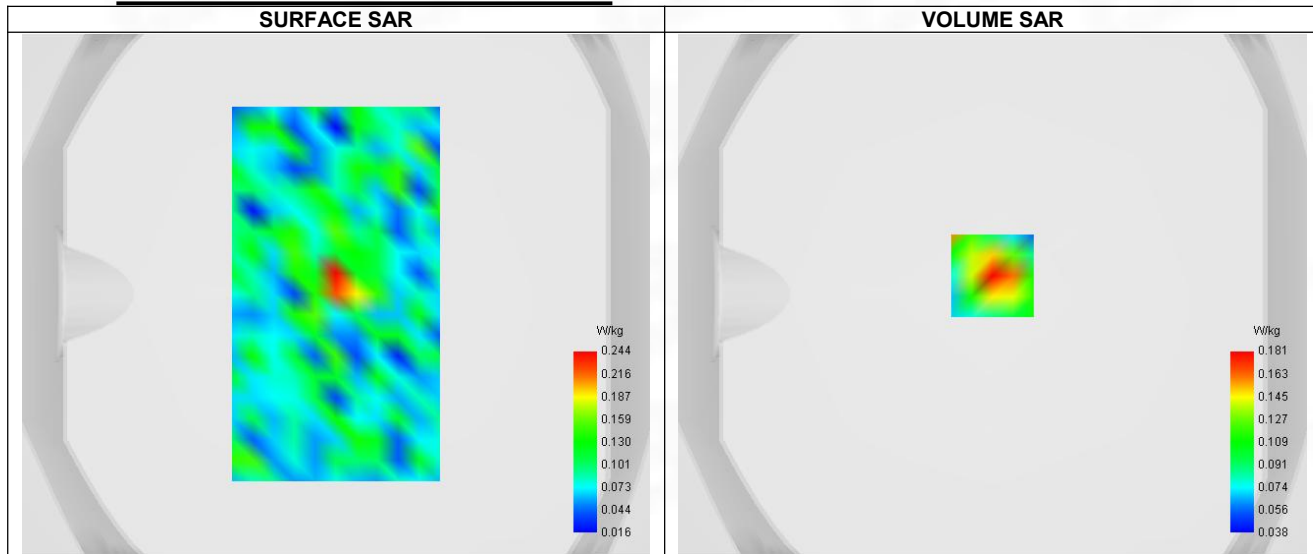


Maximum location: X=0.00, Y=7.00 ; SAR Peak: 0.23 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.101
SAR 1g (W/Kg)	0.142
Variation (%)	-2.700
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.226	0.181	0.107	0.073	0.061

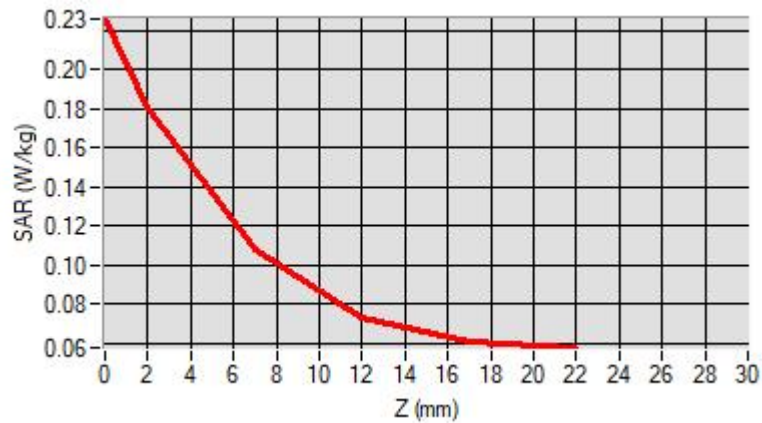

F. 3D Image

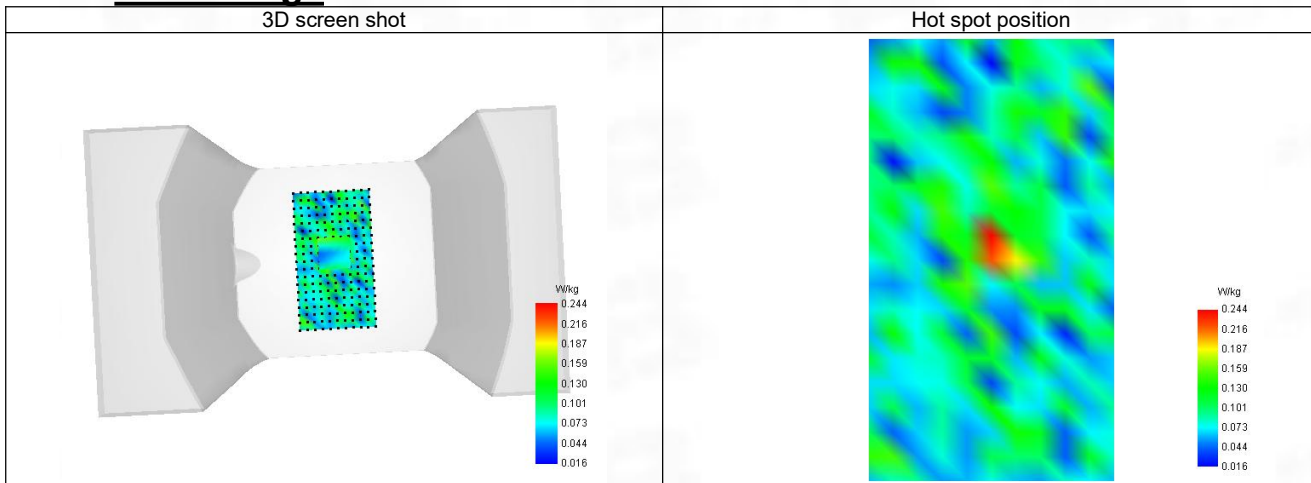

37-Head with front position in dist. 0mm on Channel 149 in IEEE 802.11ac U-NII

SAR Measurement at IEEE 802.11ac U-NII (Cheek, Right)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	2.04
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11ac U-NII
Channels	Higher (149)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5745.000
Relative permittivity (real part)	35.235
Relative permittivity (imaginary part)	16.565
Conductivity (S/m)	5.255

C. SAR Surface and Volume

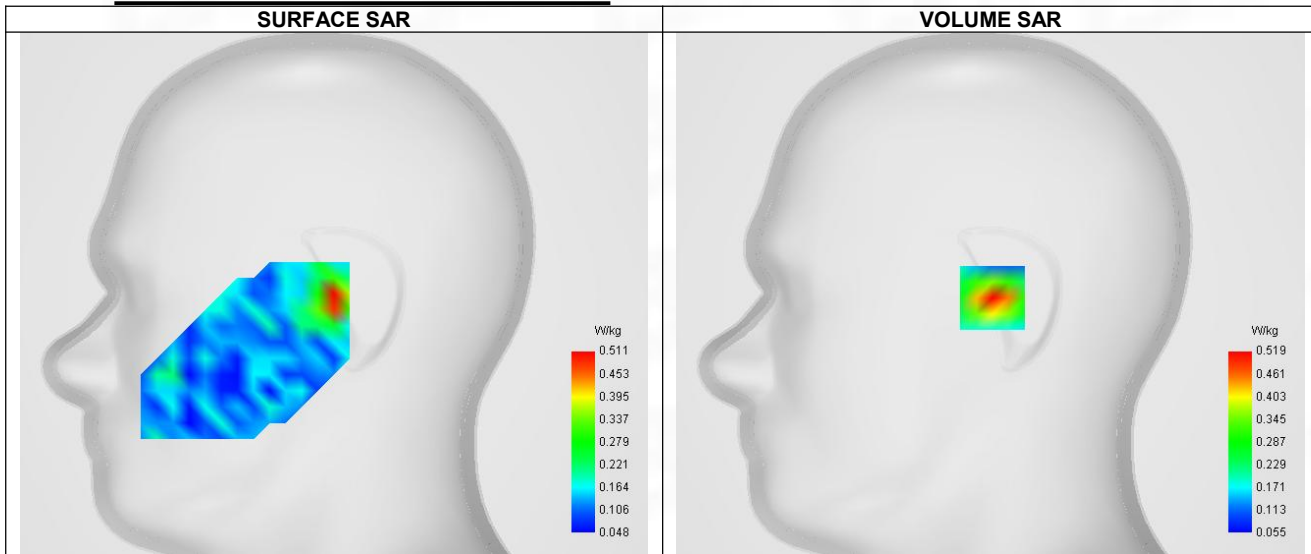


Maximum location: X=1.00, Y=-2.00 ; SAR Peak: 0.95 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.254
SAR 1g (W/Kg)	0.485
Variation (%)	3.430
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.707	0.519	0.239	0.132	0.109

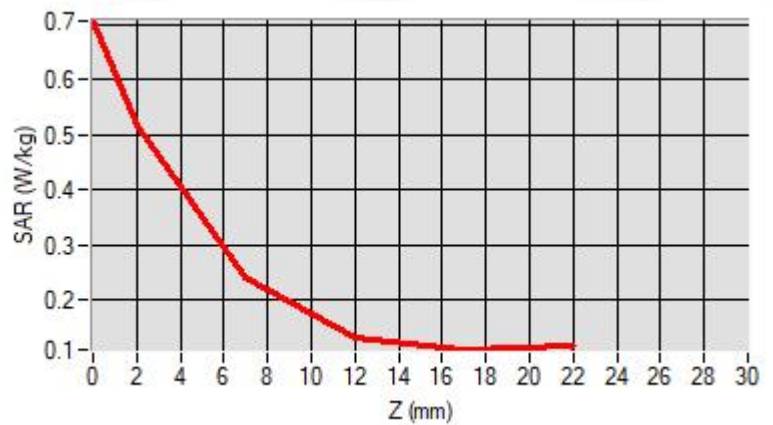

F. 3D Image

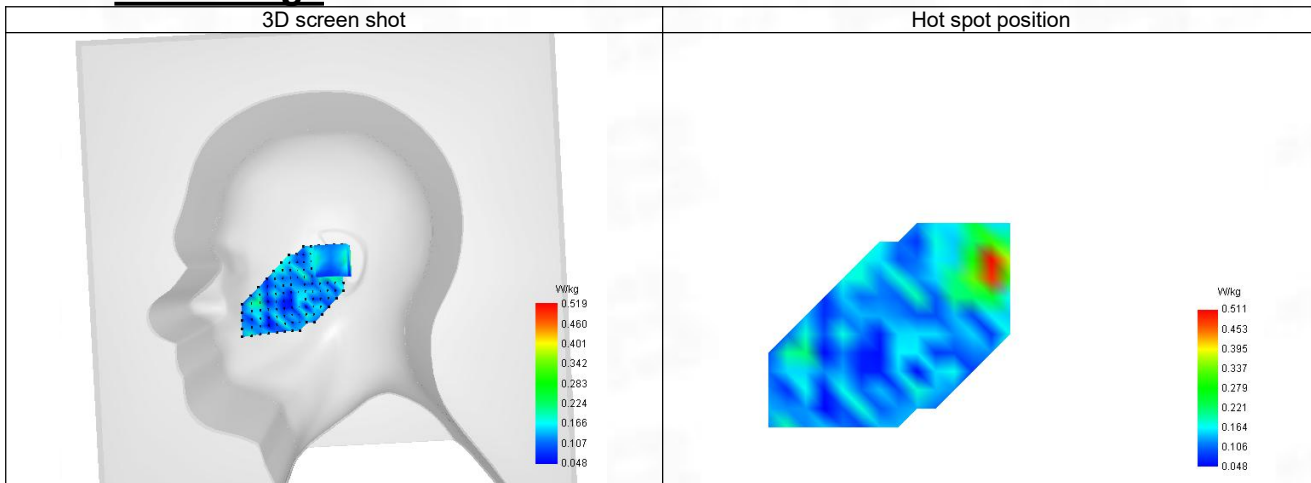

38-Body with front position in dist. 10mm on Channel 149 in IEEE 802.11ac U-NII

SAR Measurement at IEEE 802.11ac U-NII (Body, Validation Plane)

Date of measurement: 27/6/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.04
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11ac U-NII
Channels	Higher (149)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5745.000
Relative permittivity (real part)	35.235
Relative permittivity (imaginary part)	16.565
Conductivity (S/m)	5.255

C. SAR Surface and Volume

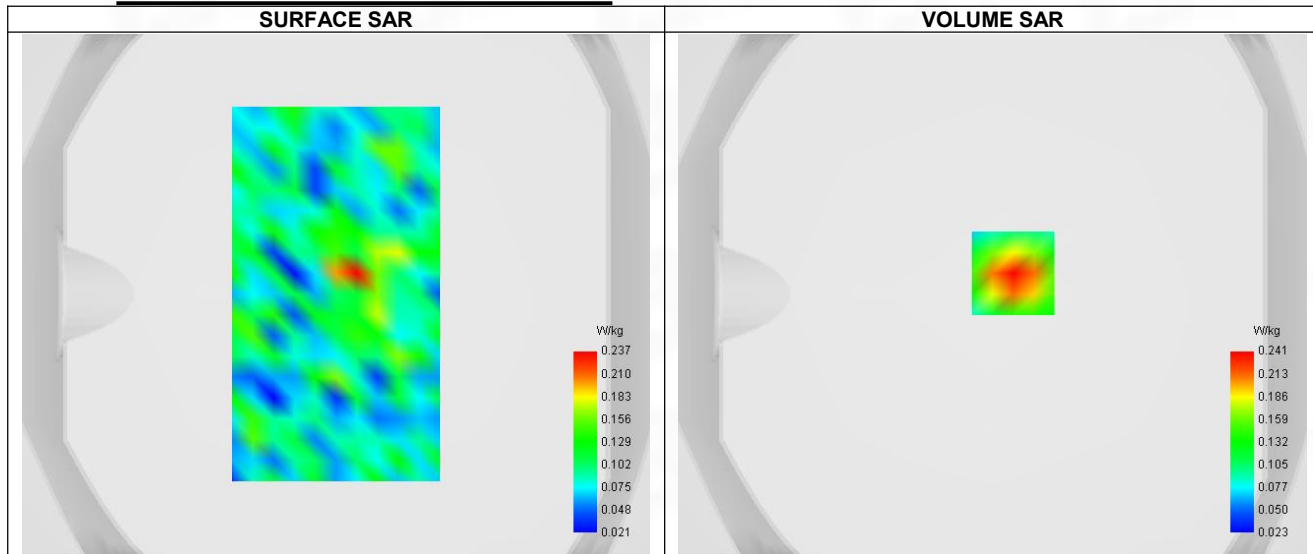


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.125
SAR 1g (W/Kg)	0.181
Variation (%)	-3.610
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.319	0.241	0.124	0.085	0.087

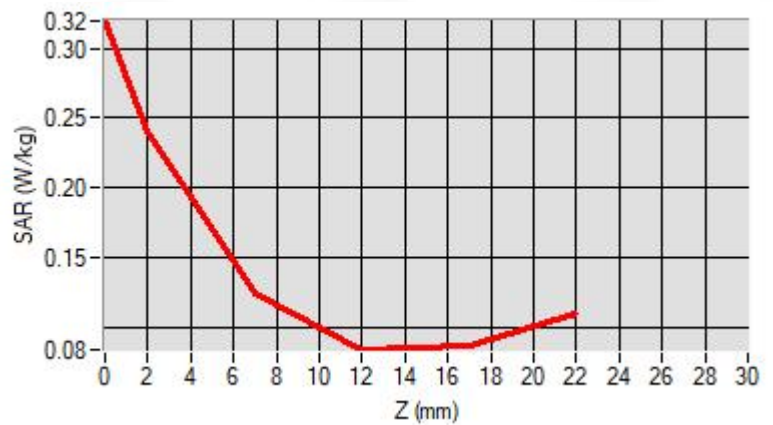

F. 3D Image

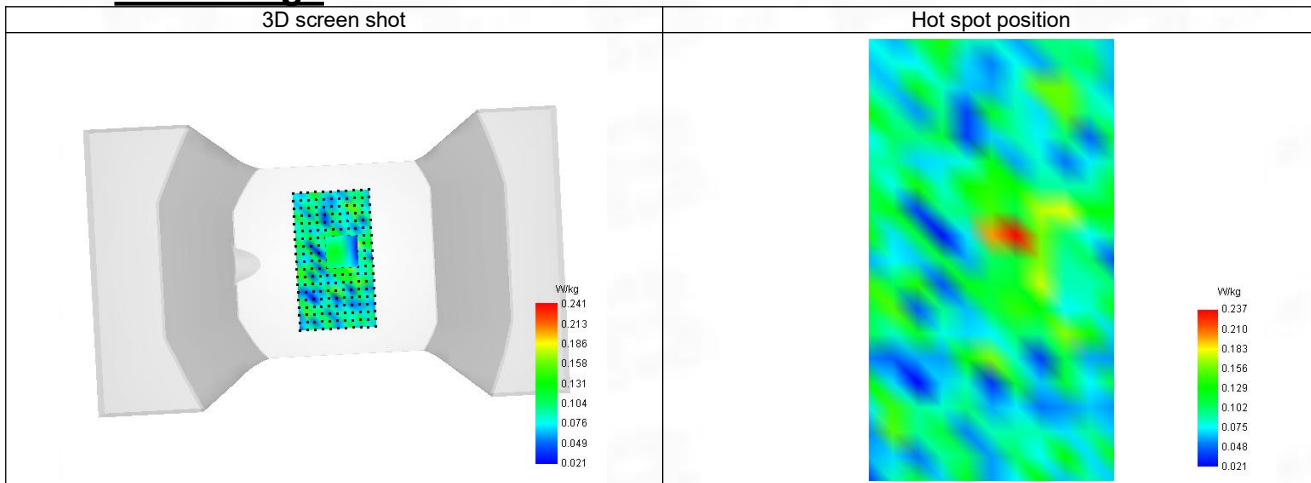

ANNEX D SAR Test Setup Photos

Reference Photo: simulation liquid depth 15cm




Reference Photos



Left Head - Cheek




Left Head - Tilt

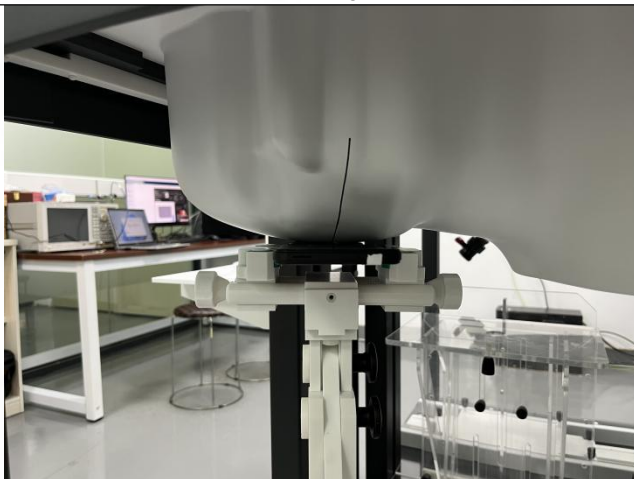


Right Head - Cheek




Right Head - Tilt

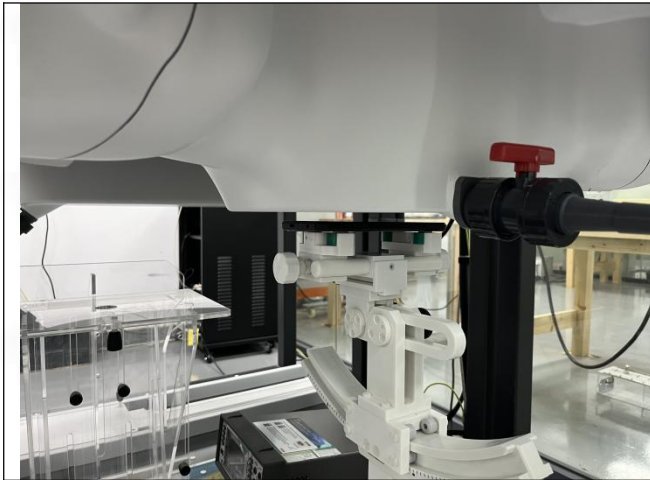


Front (dist. 10mm)

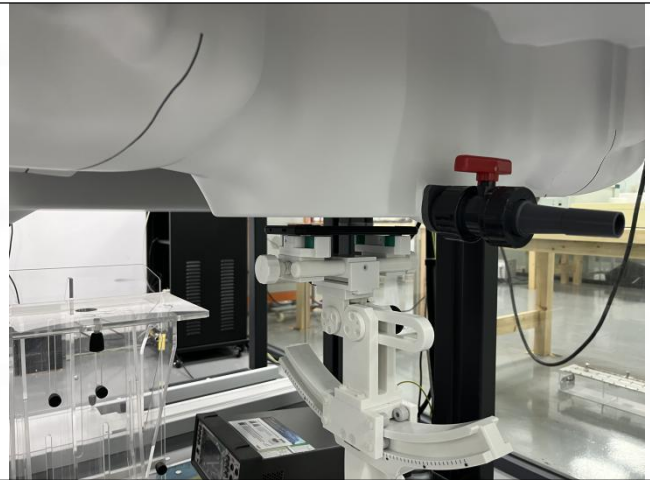

Back (dist. 10mm)

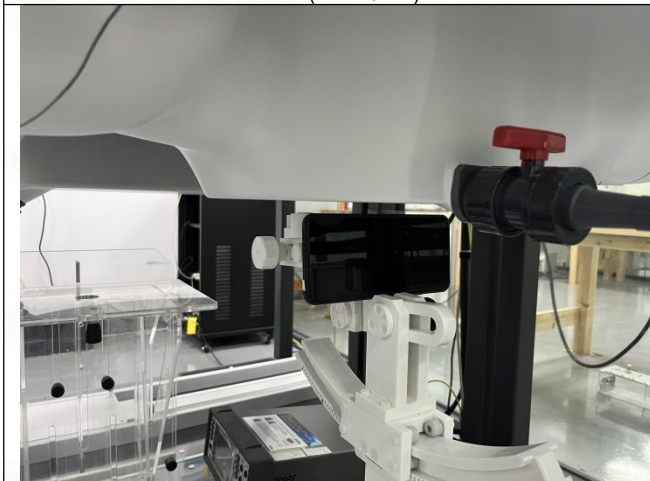

Left (dist. 10mm)

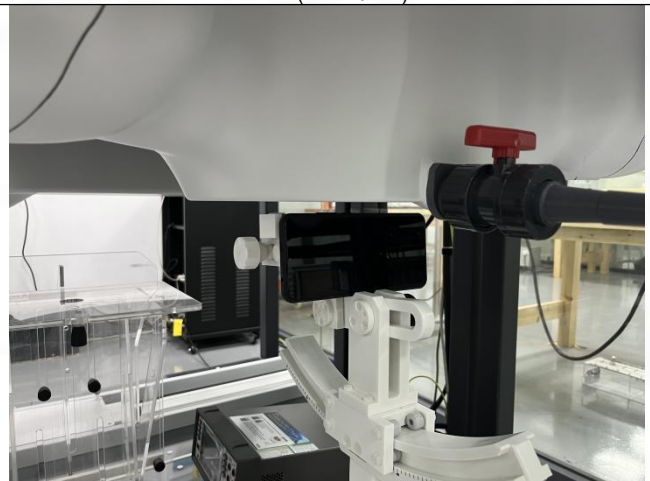

Right (dist. 10mm)



Top (dist. 10mm)



Bottom (dist. 10mm)

ANNEX E EUT External and Internal Photos

Please refer to RF Report.

ANNEX F Calibration Information

Please refer to the document "Calibration.pdf".



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--