



Antenna plate	Monoploe antenna
Model name	PARE65
Antenna gain	-2.41254dB
Frequency range	2. 4GHZ-2. 483GHZ
Connector type	direct
Location of mearment	See Me Here

1, mechanical dimension

a, antenna dimension

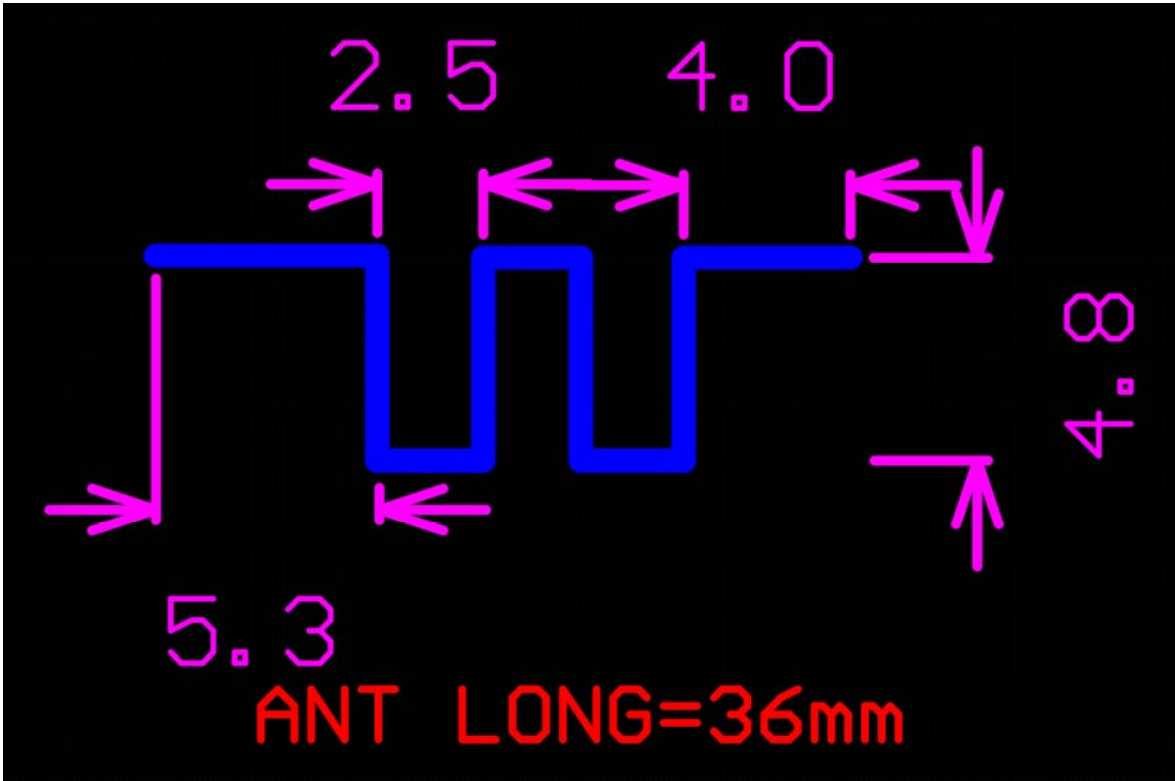

b. antenna final figure

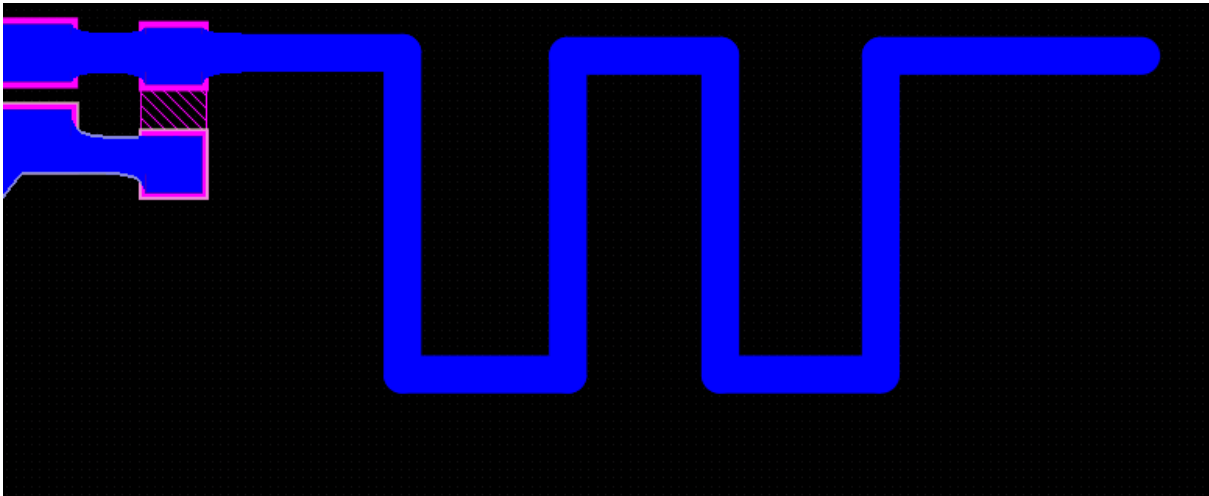

2, antenna specification

Bluetooth mechanical specifiction

2400-2500MHZ

Electrical specifications	
Frequency range (MHz)	2400-2500
Polarization	Linear
Gain (dBi)	-1dB
Impedance (Ω)	50
Directivity	Omni-directional
VSWR	≤ 2.0 (Center frequency)

Mechanical specifications	
Texture of material	
Immersion tin length	
Operation Temperature ($^{\circ}\text{C}$)	-30~60
Humidity (%)	5~95

3.Gain

Frequency	E Total. dB(dB)	Efficiency()
2400MHz	-3.86886	16.23%


2410MHz	-3.80462	17.25%
2420MHz	-3.58124	17.64%
2430MHz	-3.50624	18.48%
2440MHz	-3.41955	17.65%
2450MHz	-3.26336	17.72%
2460MHz	-2.9754	17.49%
2470MHz	-2.67499	17.49%
2480MHz	-2.41254	17.15%

4. INSERTION LOSS/RETURN LOSS/VSWR


Frequency	Input impedance(Ω)	Return loss(dB)	VSWR
2400MHz	38.886	-6.354	2. 512
2402MHz	37.336	-6.412	2. 543
2440MHz	22.254	-6.753	2. 501
2480MHz	18.320	-6.613	2. 522
2500MHz	18.715	-6.702	2. 518

5. 3D Pattern

2400MHZ

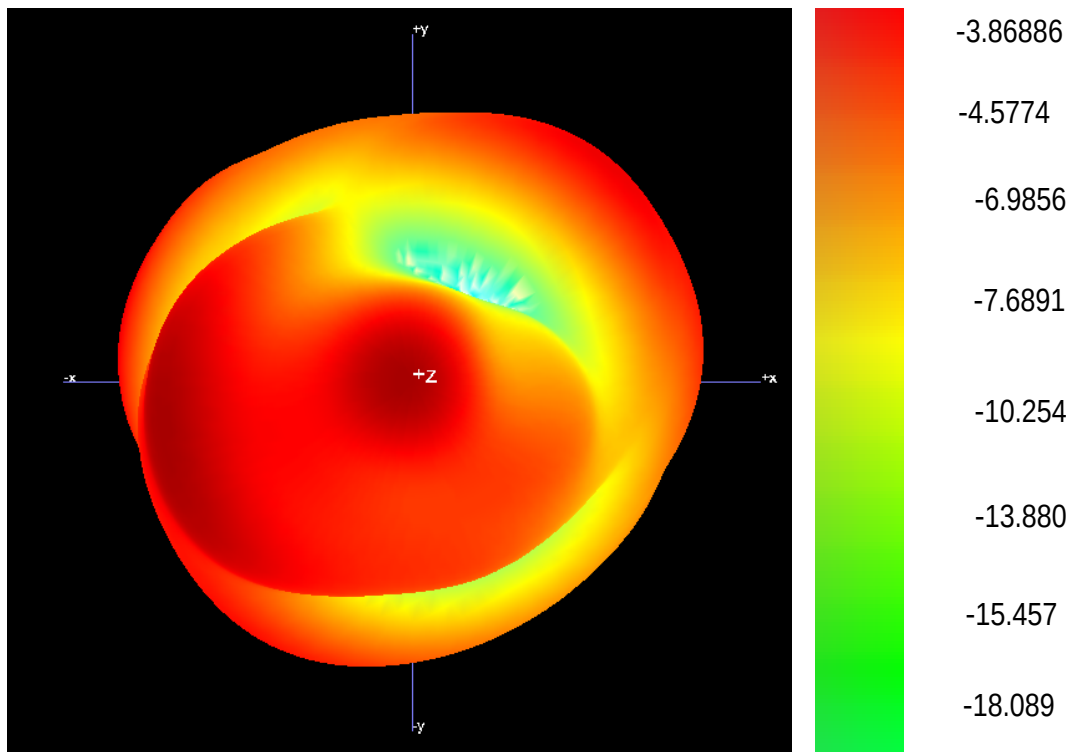

2440MHZ

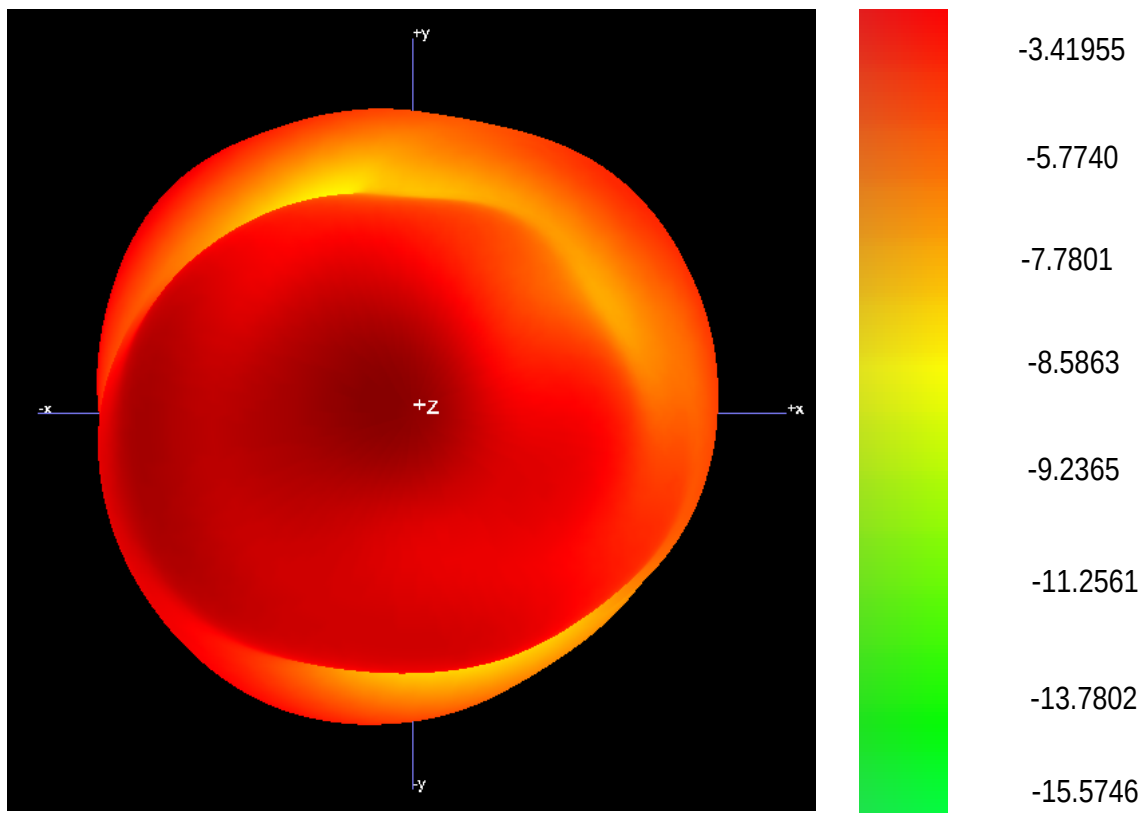

2480MHZ

