


Features

- IEEE 802.1 b/g/n standard
- High isolation
- Small form factor
- On-board mount
- Quick integration

Specification

Frequency (MHz)	2400 -2500
Peak Gain (dBi)	5.1
VSWR	2.0 : 1
Isolation (dB)	-10
Impedance (Ohms)	50
Power (Watts)	/
Efficiency	50%~60%
Dimension (mm)	28.5 x 8.8 x 0.3

Size

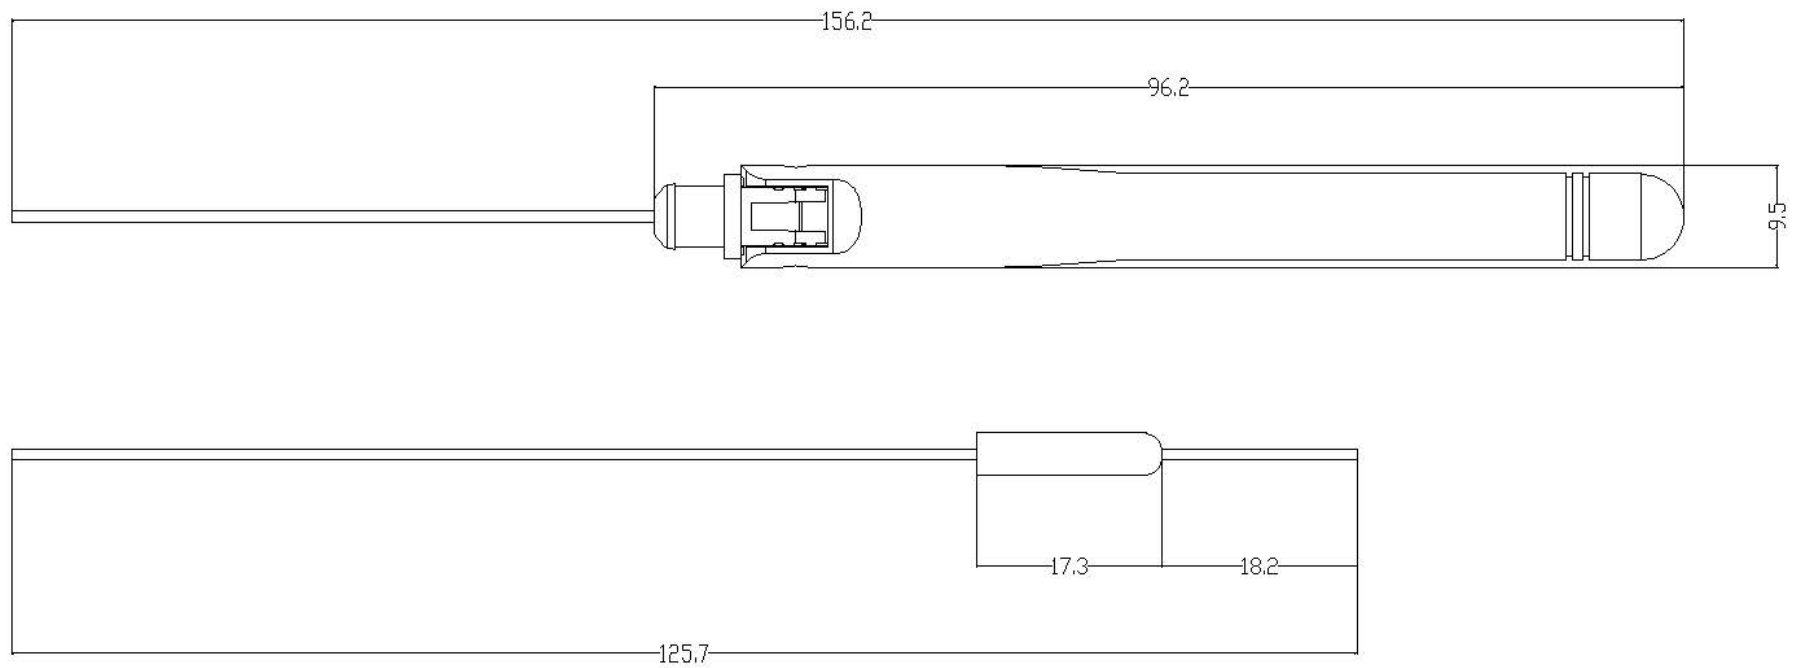


GAIN TABLE


Frequency	Efficiency	Avg. Gain	Peak Gain
2400MHz	54%	-2.7	3.7
2450MHz	58%	-2.4	4.5
2500MHz	64%	-2.0	5.1

PATTERN


XY-plane

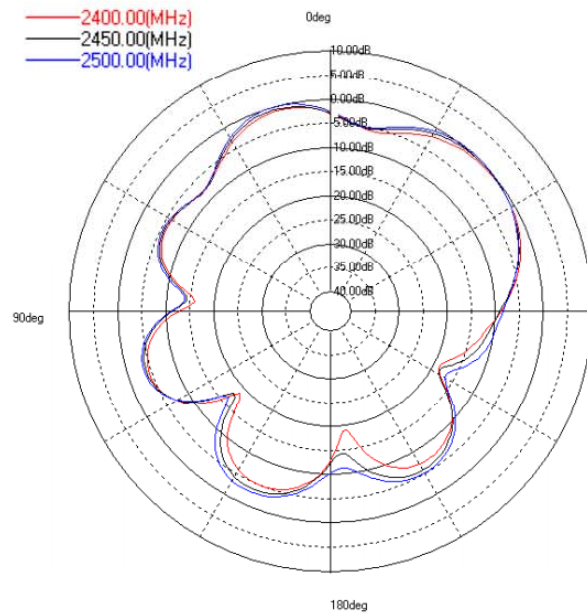

YZ-plane

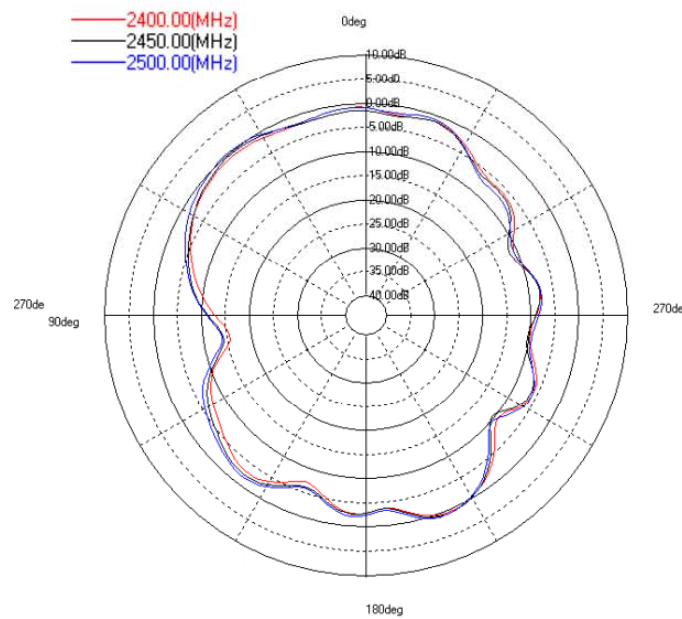

ZX-plane

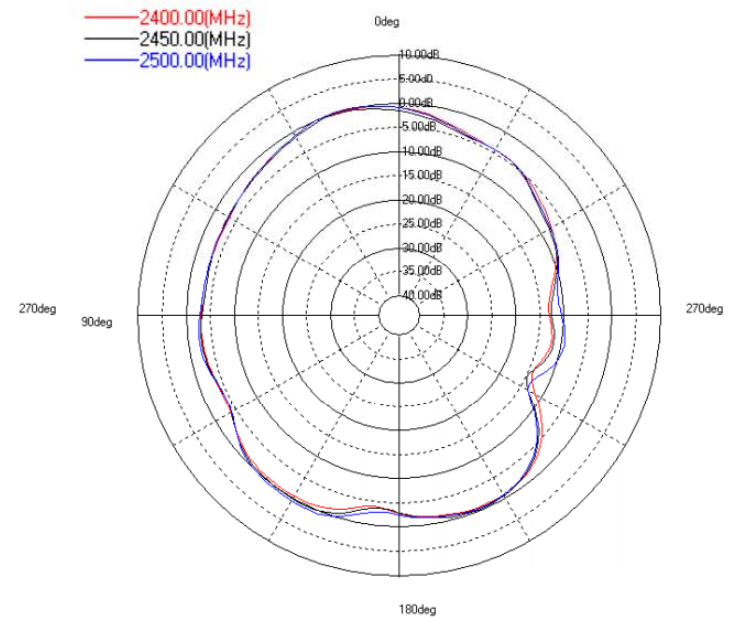

Manufacture:ChongQing Lavid Industrial Co., Ltd

Address:Chongqing wanzhou district one street photoelectric joint community park electrical products manufacturing base
no. 2 workshop

Telephone:(86)023-58593166