



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2021-11-03

Test Report

Report No.: CQASZ20230901627E-02
Applicant: Miami Labs, Inc.
Address of Applicant: 2916 N. Miami Ave, Suite 1100, Miami, FL, USA 33127
Equipment Under Test (EUT):
Product: EXO Mini Pro+
Model No.: EXO Mini Pro+, EXO Mini, MINI 2, MINI 3, MINI 2 PRO
Test Model No.: EXO Mini Pro+
Brand Name: EXO
FCC ID: 2BBX7MP2023
Standards: 47 CFR Part 15, Subpart C
KDB 662911 D01 Multiple Transmitter Output v02r01
Date of Receipt: 2023-09-05
Date of Test: 2023-09-05 to 2023-09-12
Date of Issue: 2023-10-13
Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By: Lewis Zhou
(Lewis Zhou)

Reviewed By: Timo Lei
(Timo Lei)

Approved By: Jack Ai
(Jack Ai)



Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20230901627E-02	Rev.01	Initial report	2023-10-16

1 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10-2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

2 Contents

	Page
VERSION	2
1 TEST SUMMARY	3
2 CONTENTS	4
3 GENERAL INFORMATION	5
3.1 CLIENT INFORMATION	5
3.2 GENERAL DESCRIPTION OF EUT	5
3.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
3.4 TEST ENVIRONMENT AND MODE	7
3.5 DESCRIPTION OF SUPPORT UNITS	8
3.6 TEST LOCATION	8
3.7 TEST FACILITY	8
3.8 STATEMENT OF THE MEASUREMENT UNCERTAINTY	9
3.9 DEVIATION FROM STANDARDS	9
3.10 ABNORMALITIES FROM STANDARD CONDITIONS	9
3.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
3.12 EQUIPMENT LIST	10
4 TEST RESULTS AND MEASUREMENT DATA	11
4.1 ANTENNA REQUIREMENT	11
4.2 CONDUCTED EMISSIONS	12
4.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	18
Test Result	19
Note:	19
When Duty cycle >98%, D.C.F is not required.	19
Test Graphs	20
4.4 6DB OCCUPIED BANDWIDTH	29
Test Result	30
Test Graphs	31
4.5 POWER SPECTRAL DENSITY	40
Test Result	41
Test Graphs	42
4.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS	51
Test Result	52
4.6.1 Test Graphs	53
4.7 RF CONDUCTED SPURIOUS EMISSIONS	59
Test Result	60
Test Graphs	62
4.8 RADIATED SPURIOUS EMISSIONS	89
4.8.1 Radiated emission below 1GHz	92
4.8.2 Transmitter emission above 1GHz	96
4.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	108
5 PHOTOGRAPHS - EUT TEST SETUP	116
5.1 RADIATED SPURIOUS EMISSION	116
5.2 CONDUCTED EMISSION	117
6 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	118

3 General Information

3.1 Client Information

Applicant:	Miami Labs, Inc.
Address of Applicant:	2916 N. Miami Ave, Suite 1100, Miami, FL, USA 33127
Manufacturer:	SHENZHEN HUBSAN TECHNOLOGY CO., LTD
Address of Manufacturer:	Unit 2101-02C, Building F, Xinghe WORLD, Yabao Road, Bantian Street, Longgang District, Shenzhen, China.
Factory:	Dongguan Tengsheng Industrial Co., Ltd.
Address of Factory:	A22# Luyi Street, Tianxin Village, Tangxia Town, Dongguan, China.

3.2 General Description of EUT

Product Name:	EXO Mini Pro+
Model No.:	EXO Mini Pro+, EXO Mini, MINI 2, MINI 3, MINI 2 PRO
Test Model No.:	EXO Mini Pro+
Trade Mark:	EXO
Software Version:	V1.0
Hardware Version:	V1.0
Power Supply:	Li-ion battery DC 7.2V 3000mAh, Charge by DC 8.4V for adapter
EUT Supports Radios application:	BLE: 2402-2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz;
Simultaneous Transmission	☐ Simultaneous TX is supported and evaluated in this report. ☒ Simultaneous TX is not supported.

3.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps
Product Type:	☒ Mobile ☐ Portable
Test Software of EUT:	ARSiriusPCTool
Antenna Type:	External antenna
Antenna Gain:	ANT1:1.95dBi ANT2:1.95dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):


Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

3.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.

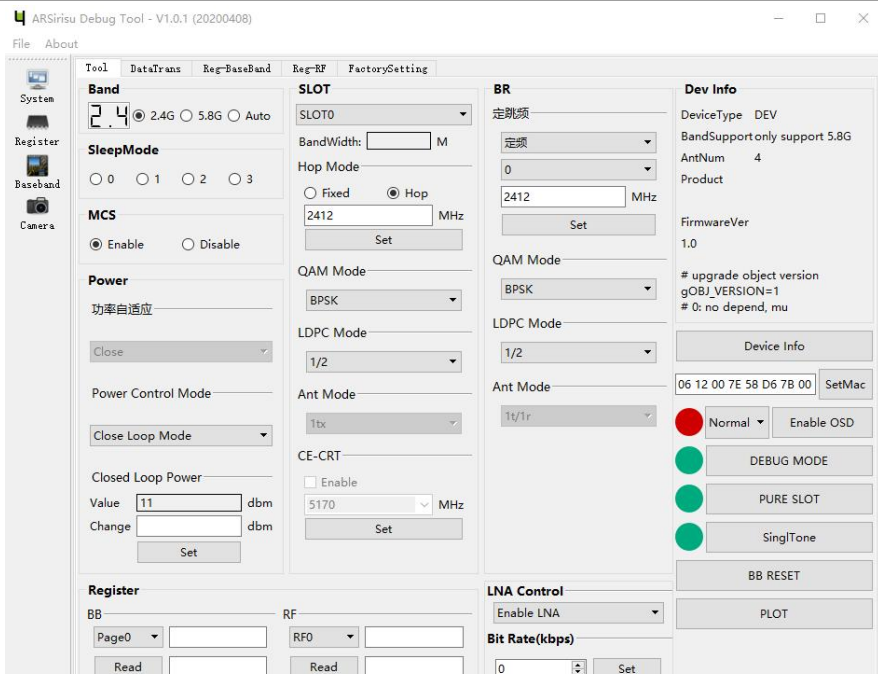Run Software:	
	

3.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Adapter	/	/	/	CQA

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

3.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

3.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

3.8 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3.9 Deviation from Standards

None.

3.10 Abnormalities from Standard Conditions

None.

3.11 Other Information Requested by the Customer

None.

3.12 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Spectrum analyzer	R&S	FSU26	CQA-038	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Spectrum analyzer	R&S	FSU40	CQA-075	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Preamplifier	EMCI	EMC184055SE	CQA-089	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/09/16	2024/09/15
Bilog Antenna	R&S	HL562	CQA-011	2021/09/16	2024/09/15
Horn Antenna	R&S	HF906	CQA-012	2021/09/16	2024/09/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/09/16	2024/09/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2022/09/09 2023/09/08	2023/09/08 2024/09/07
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Antenna Connector	CQA	RFC-01	CQA-080	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2022/09/09 2023/09/08	2023/09/08 2024/09/07
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Power meter	R&S	NRVD	CQA-029	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2022/09/09 2023/09/08	2023/09/08 2024/09/07
EMI Test Receiver	R&S	ESR7	CQA-005	2022/09/09 2023/09/08	2023/09/08 2024/09/07
LISN	R&S	ENV216	CQA-003	2022/09/09 2023/09/08	2023/09/08 2024/09/07
Coaxial cable	CQA	N/A	CQA-C009	2022/09/09 2023/09/08	2023/09/08 2024/09/07
DC power	KEYSIGHT	E3631A	CQA-028	2022/09/09 2023/09/08	2023/09/08 2024/09/07

Test software:

	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3


4 Test results and Measurement Data

4.1 Antenna Requirement

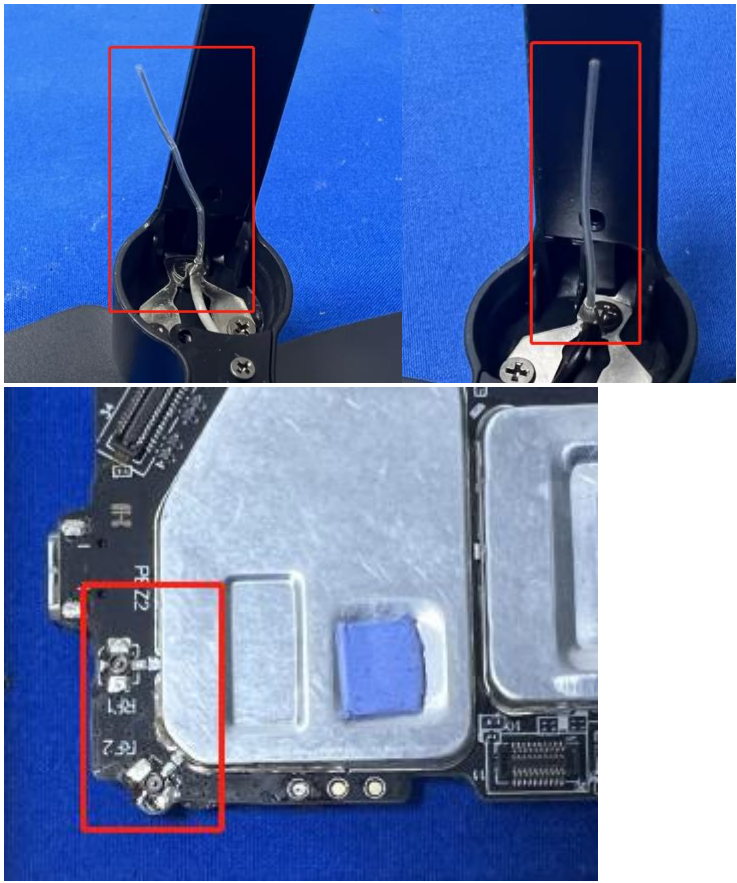Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is External antenna. The connection/connection type between the antenna to the EUT's antenna port is: punique coupling. This is either permanently attachment or a unique coupling that satisfies the requirement.	

Directional gain
 $= 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] \text{ dBi}$
 $= 4.96 \text{ dBi} < 6 \text{ dBi}$

4.2 Conducted Emissions

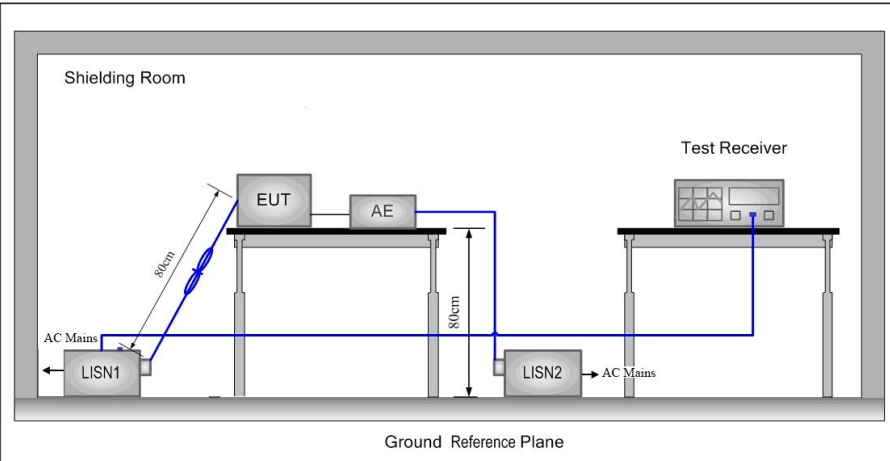
Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:			

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Ant1:

Live Line:

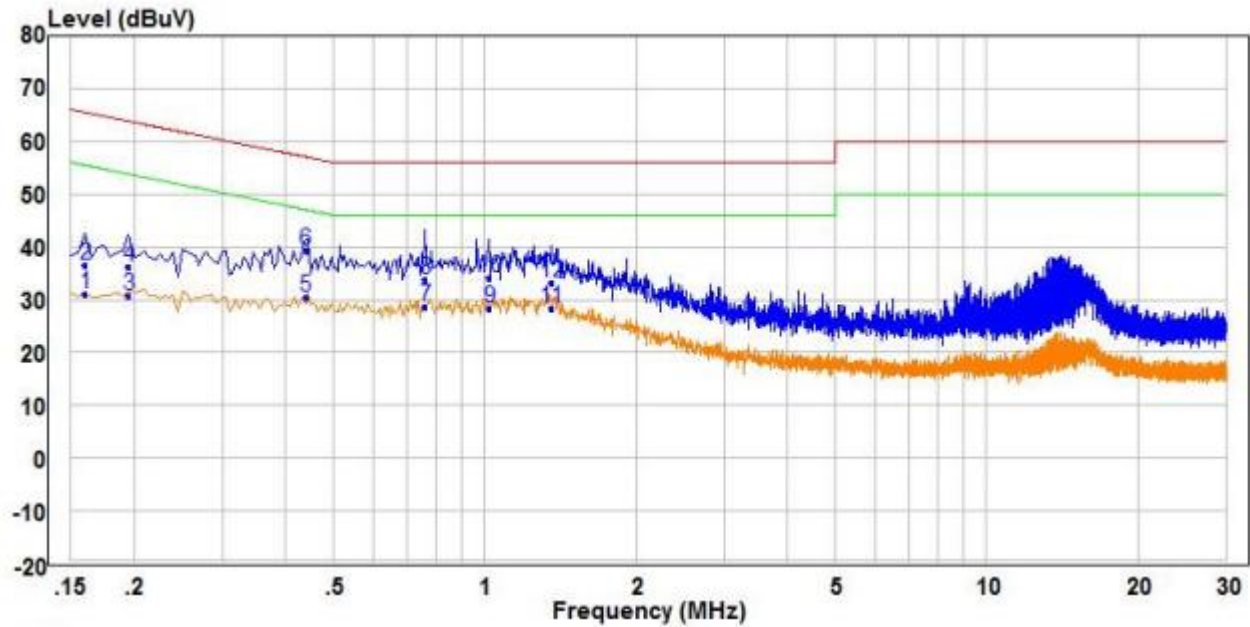


		Read			Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.160	21.47	9.49	30.96	55.46	-24.50	Average	Line
2	0.160	26.98	9.49	36.47	65.46	-28.99	QP	Line
3	0.195	21.23	9.49	30.72	53.82	-23.10	Average	Line
4	0.195	26.68	9.49	36.17	63.82	-27.65	QP	Line
5 PP	0.440	20.90	9.51	30.41	47.06	-16.65	Average	Line
6 QP	0.440	29.87	9.51	39.38	57.06	-17.68	QP	Line
7	0.760	18.85	9.80	28.65	46.00	-17.35	Average	Line
8	0.760	24.12	9.80	33.92	56.00	-22.08	QP	Line
9	1.020	18.93	9.53	28.46	46.00	-17.54	Average	Line
10	1.020	24.51	9.53	34.04	56.00	-21.96	QP	Line
11	1.355	18.74	9.53	28.27	46.00	-17.73	Average	Line
12	1.355	23.73	9.53	33.26	56.00	-22.74	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

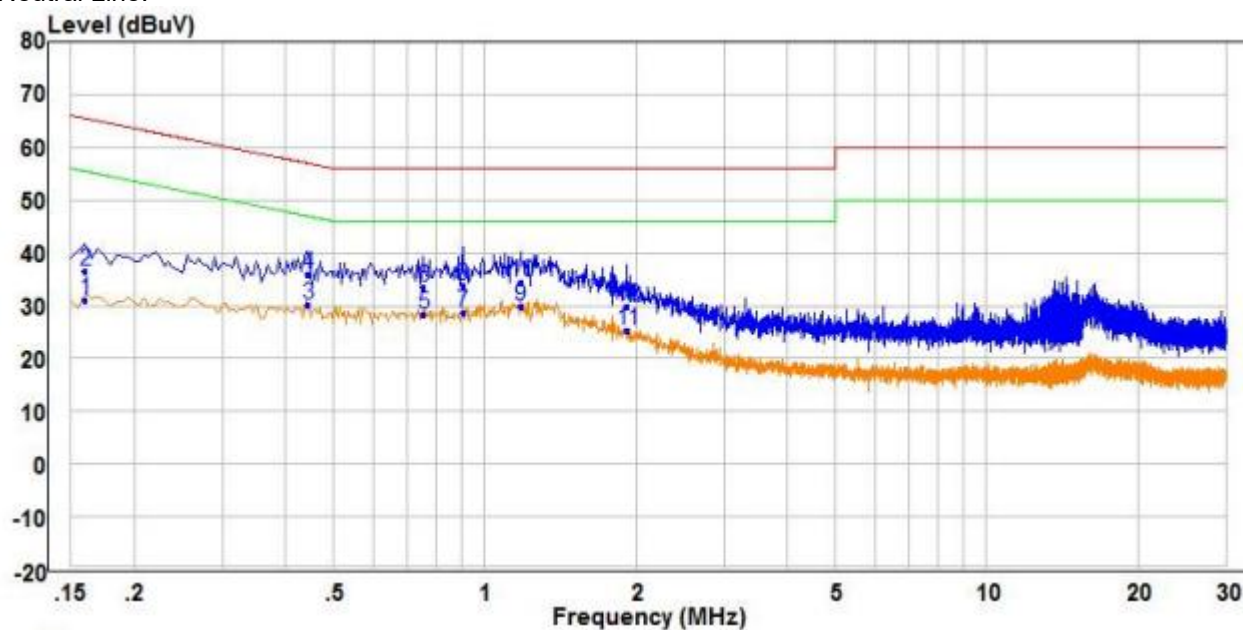


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.160	21.46	9.68	31.14	55.46	-24.32	Average	Neutral
2	0.160	26.96	9.68	36.64	65.46	-28.82	QP	Neutral
3	0.445	20.41	9.65	30.06	46.97	-16.91	Average	Neutral
4 QP	0.445	26.34	9.65	35.99	56.97	-20.98	QP	Neutral
5	0.755	18.40	9.86	28.26	46.00	-17.74	Average	Neutral
6	0.755	23.62	9.86	33.48	56.00	-22.52	QP	Neutral
7	0.905	18.89	9.76	28.65	46.00	-17.35	Average	Neutral
8	0.905	23.92	9.76	33.68	56.00	-22.32	QP	Neutral
9 PP	1.180	20.03	9.71	29.74	46.00	-16.26	Average	Neutral
10	1.180	24.68	9.71	34.39	56.00	-21.61	QP	Neutral
11	1.925	15.45	9.75	25.20	46.00	-20.80	Average	Neutral
12	1.925	20.02	9.75	29.77	56.00	-26.23	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Ant2:

Live Line:

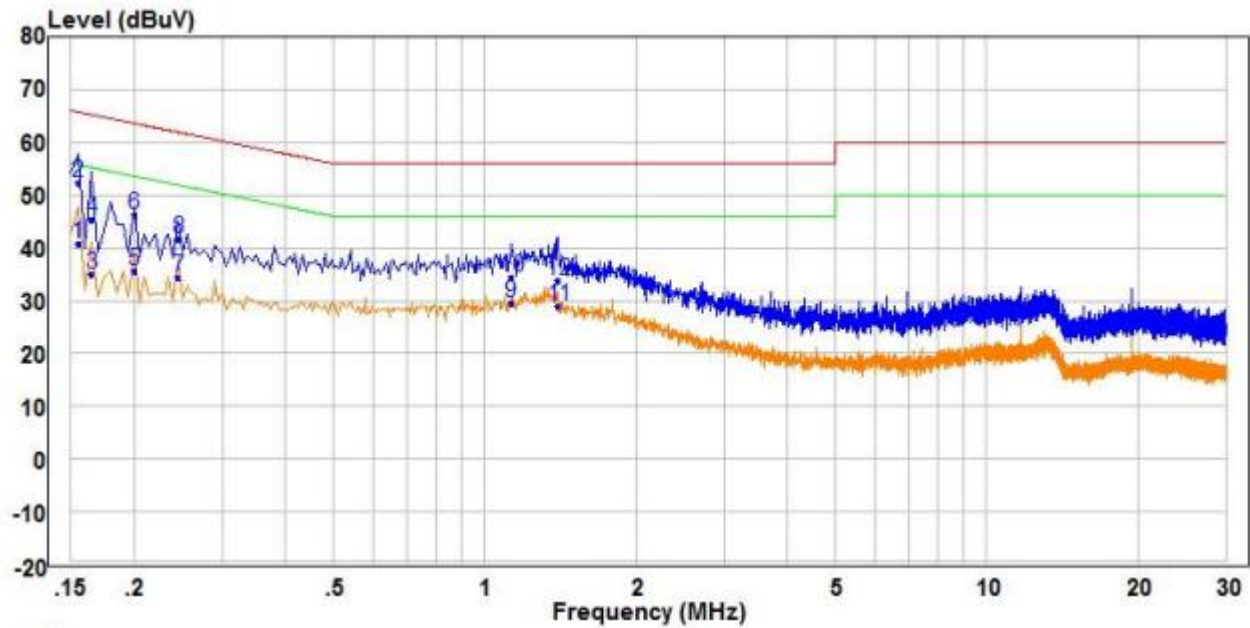


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	Pol/Phase
1	AV	0.155	31.08	9.69	40.77	55.73	-14.96 Average
2	PP	0.155	42.71	9.69	52.40	65.73	-13.33 QP
3		0.165	25.30	9.67	34.97	55.21	-20.24 Average
4		0.165	35.69	9.67	45.36	65.21	-19.85 QP
5		0.200	25.89	9.61	35.50	53.61	-18.11 Average
6		0.200	36.63	9.61	46.24	63.61	-17.37 QP
7		0.245	24.88	9.55	34.43	51.92	-17.49 Average
8		0.245	32.14	9.55	41.69	61.92	-20.23 QP
9		1.130	19.55	10.05	29.60	46.00	-16.40 Average
10		1.130	24.43	10.05	34.48	56.00	-21.52 QP
11		1.400	18.30	10.64	28.94	46.00	-17.06 Average
12		1.400	23.16	10.64	33.80	56.00	-22.20 QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

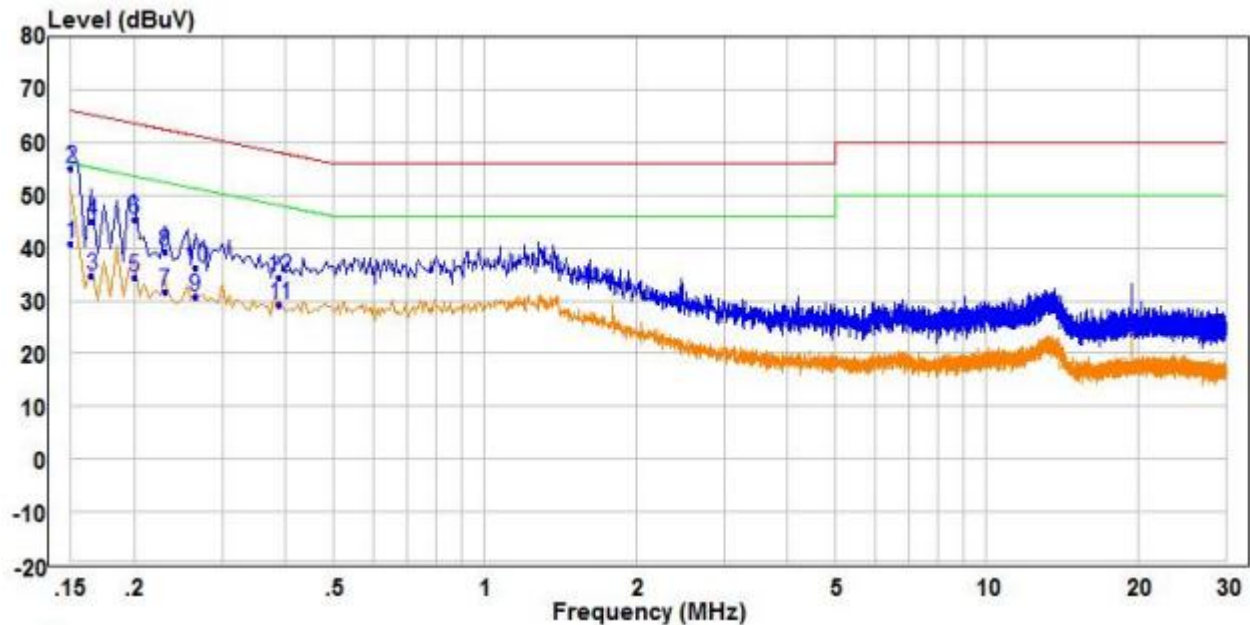


		Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	AV	0.150	31.18	9.70	40.88	56.00	-15.12	Average	Neutral
2	PP	0.150	45.41	9.70	55.11	66.00	-10.89	QP	Neutral
3		0.165	25.06	9.67	34.73	55.21	-20.48	Average	Neutral
4		0.165	35.49	9.67	45.16	65.21	-20.05	QP	Neutral
5		0.200	24.71	9.61	34.32	53.61	-19.29	Average	Neutral
6		0.200	35.80	9.61	45.41	63.61	-18.20	QP	Neutral
7		0.230	22.22	9.56	31.78	52.45	-20.67	Average	Neutral
8		0.230	29.83	9.56	39.39	62.45	-23.06	QP	Neutral
9		0.265	21.26	9.52	30.78	51.27	-20.49	Average	Neutral
10		0.265	26.66	9.52	36.18	61.27	-25.09	QP	Neutral
11		0.390	19.73	9.59	29.32	48.06	-18.74	Average	Neutral
12		0.390	24.84	9.59	34.43	58.06	-23.63	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

4.3 Conducted Peak & Average Output Power

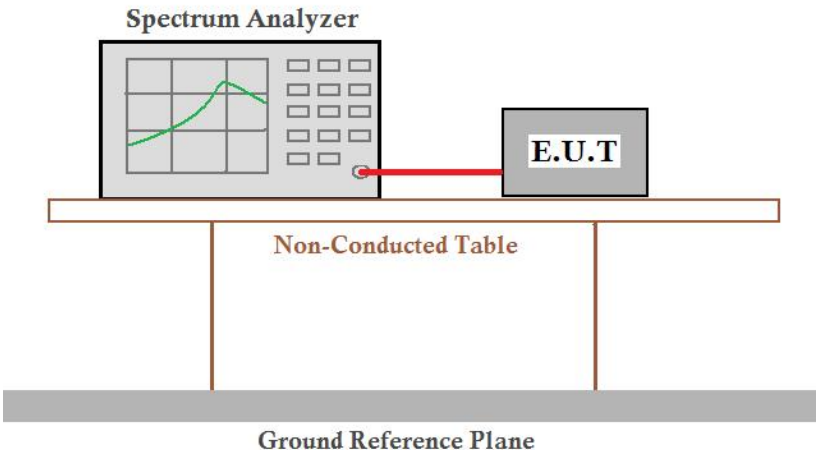Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	<i>Setup for Power meter measurement method</i>  <i>Setup for Spectrum analyser measurement method</i> 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass

Test Result

ANT1:

Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	12.75	≤30.00	PASS
	2437	13.66	≤30.00	PASS
	2462	13.85	≤30.00	PASS
11G	2412	11.62	≤30.00	PASS
	2437	13.37	≤30.00	PASS
	2462	11.68	≤30.00	PASS
11N20SIS O	2412	10.03	≤30.00	PASS
	2437	11.55	≤30.00	PASS
	2462	11.64	≤30.00	PASS

ANT2:

Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	12.74	≤30.00	PASS
	2437	13.78	≤30.00	PASS
	2462	13.77	≤30.00	PASS
11G	2412	11.64	≤30.00	PASS
	2437	13.47	≤30.00	PASS
	2462	11.77	≤30.00	PASS
11N20SIS O	2412	10.31	≤30.00	PASS
	2437	11.65	≤30.00	PASS
	2462	11.60	≤30.00	PASS


ANT1+ANT2:


Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11N20MIM O	2412	13.18	≤30.00	PASS
	2437	14.61	≤30.00	PASS
	2462	14.63	≤30.00	PASS


Note:

When Duty cycle >98%, D.C.F is not required.


Test Graphs

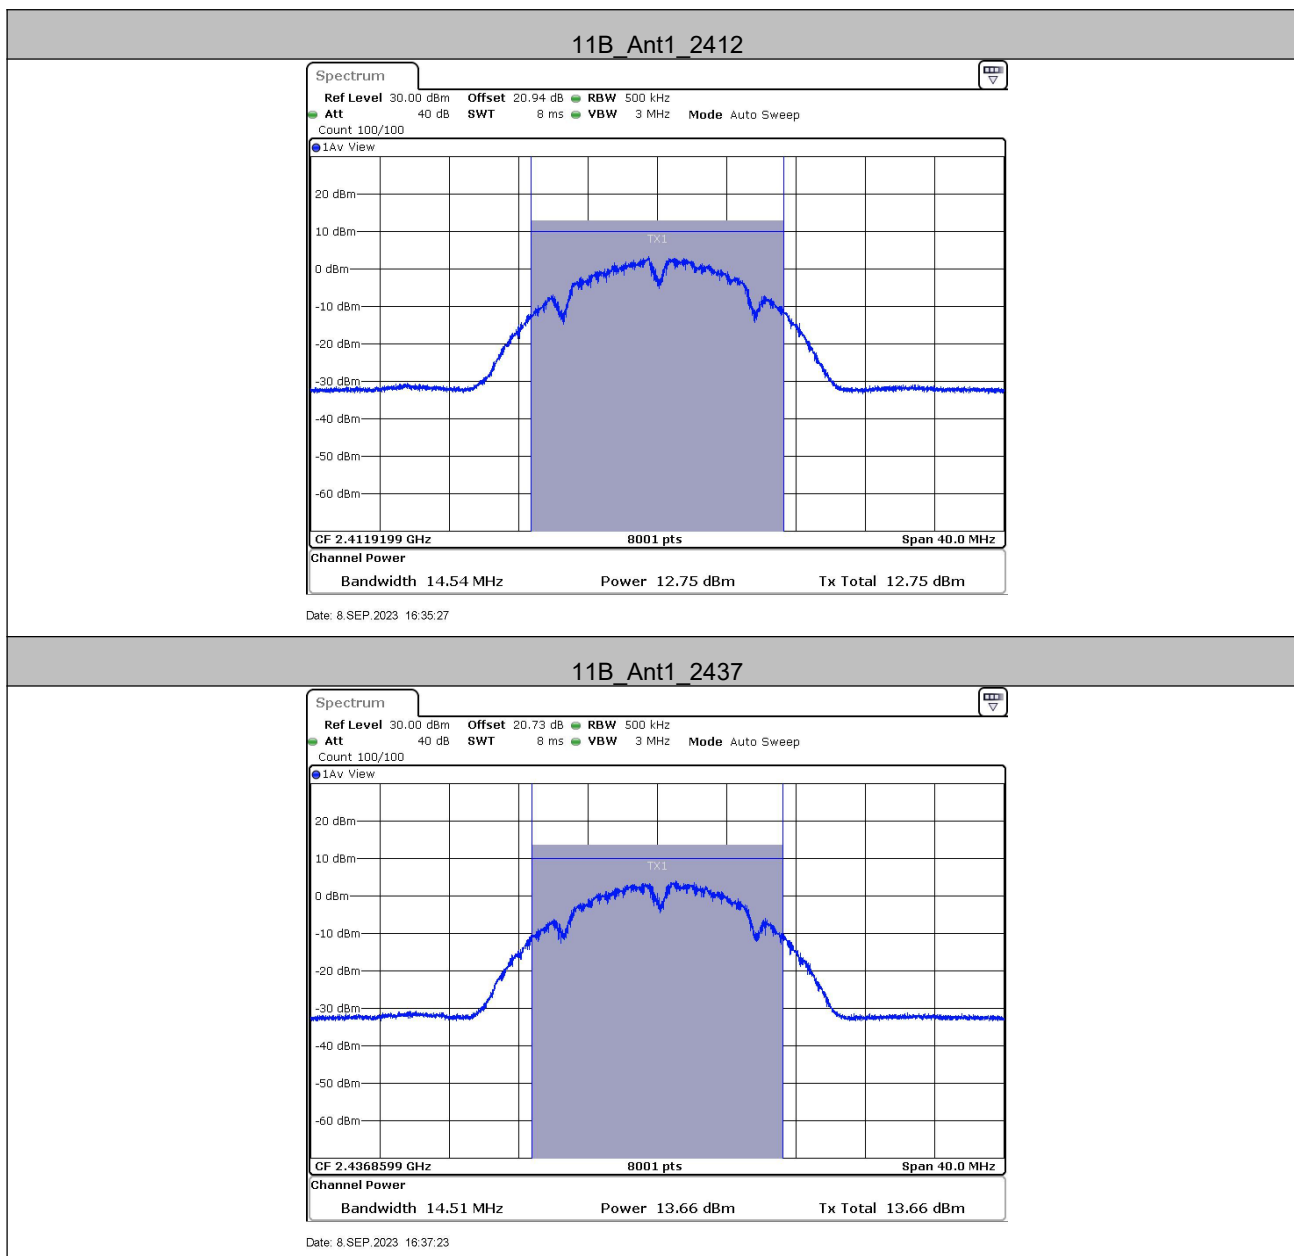

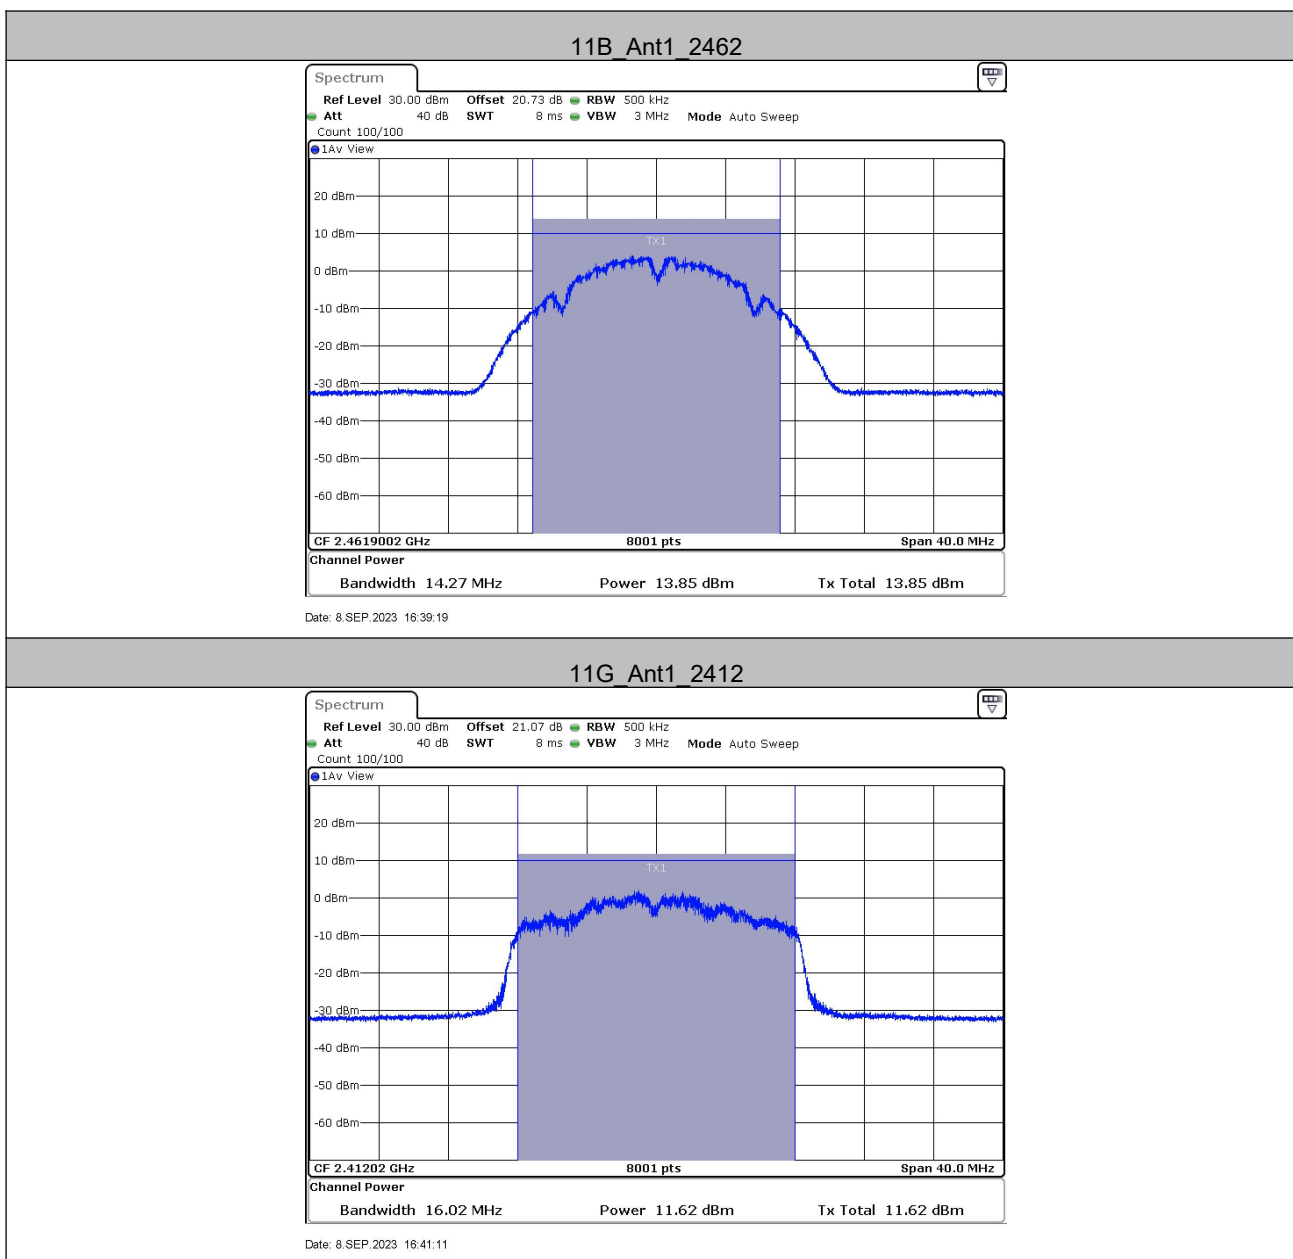

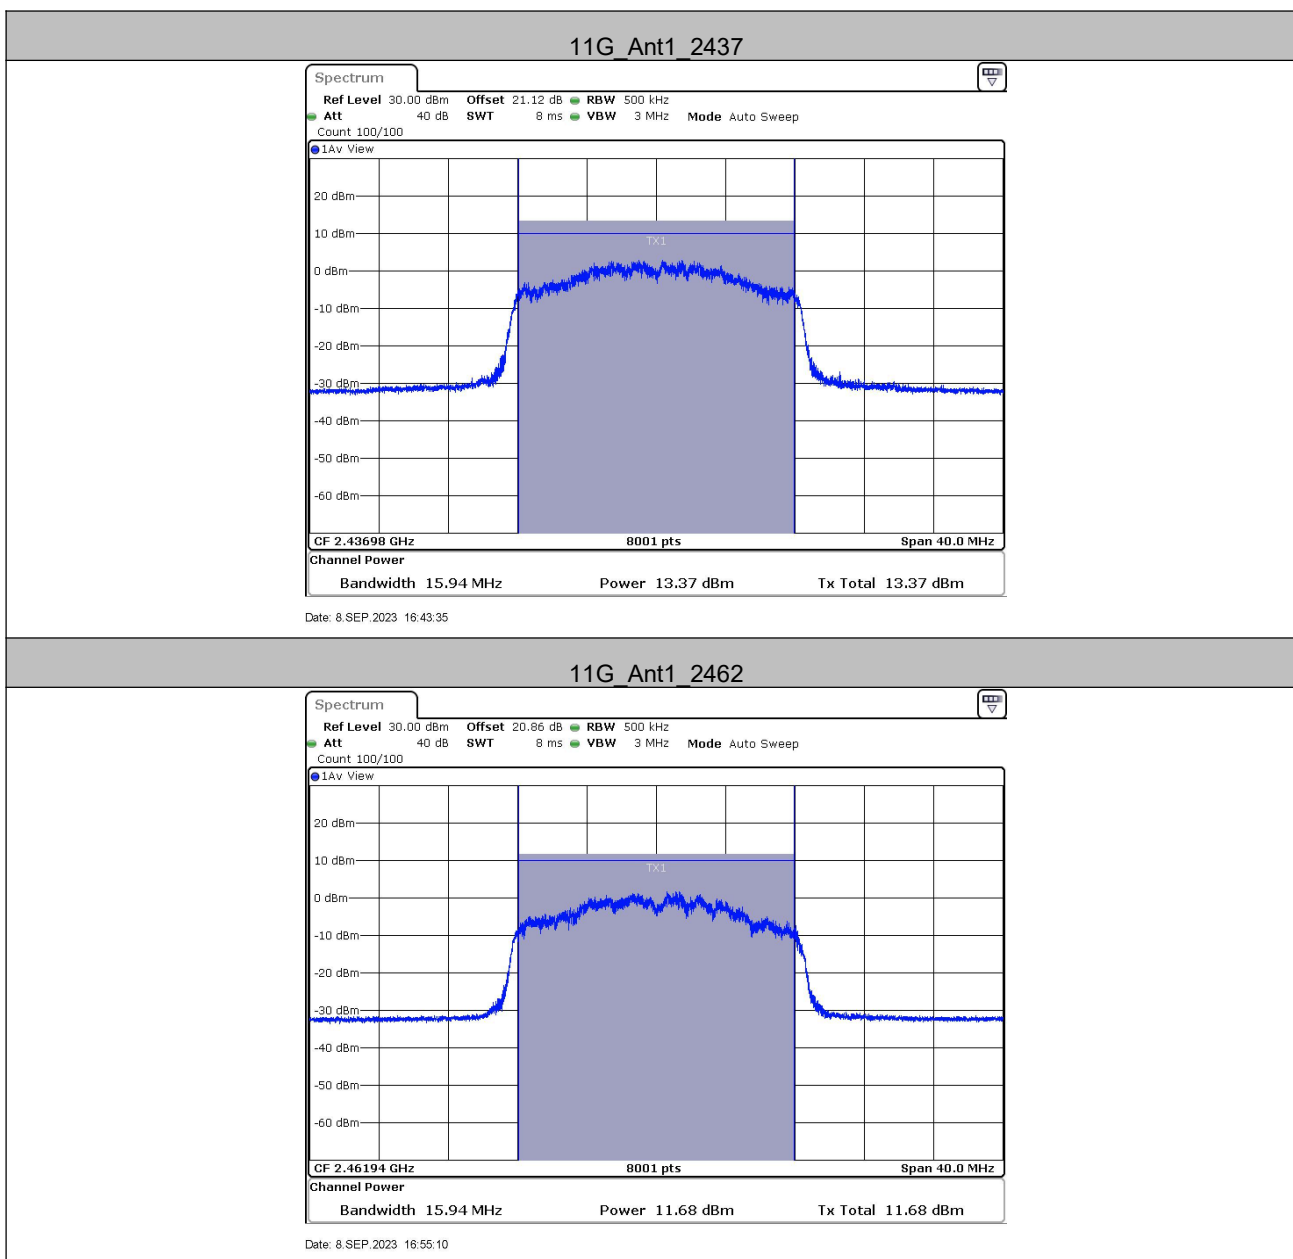


11N20SISO_Ant1_2412

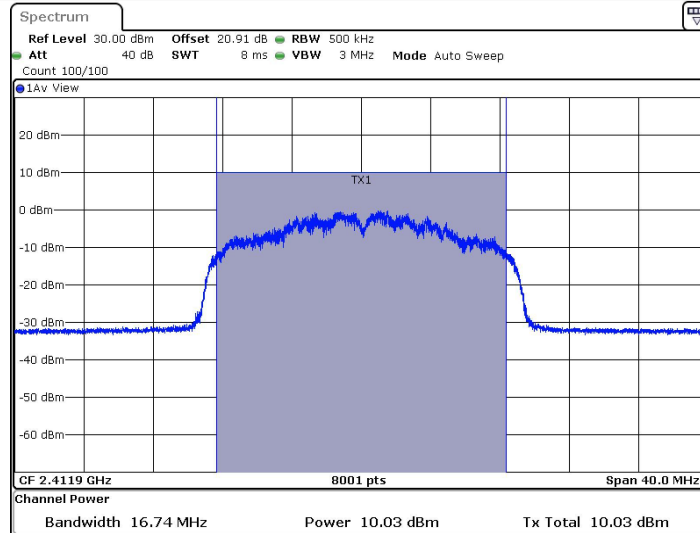


Date: 8.SEP.2023 16:57:30

11N20SISO_Ant1_2437

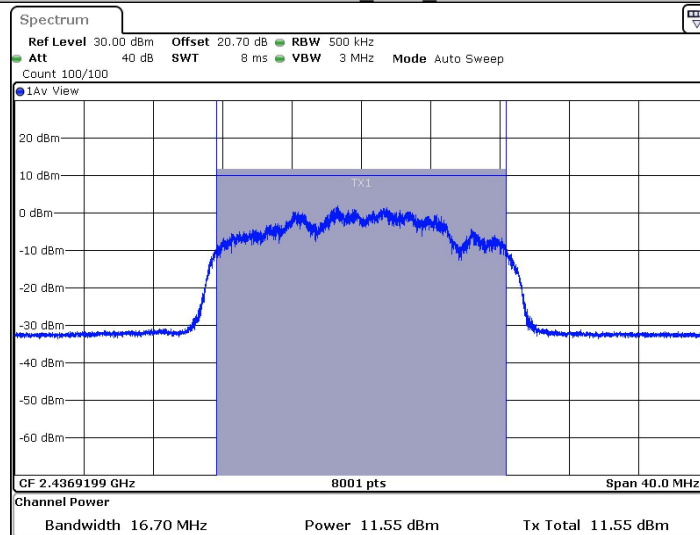


Date: 8.SEP.2023 16:59:10

11N20SISO_Ant1_2462

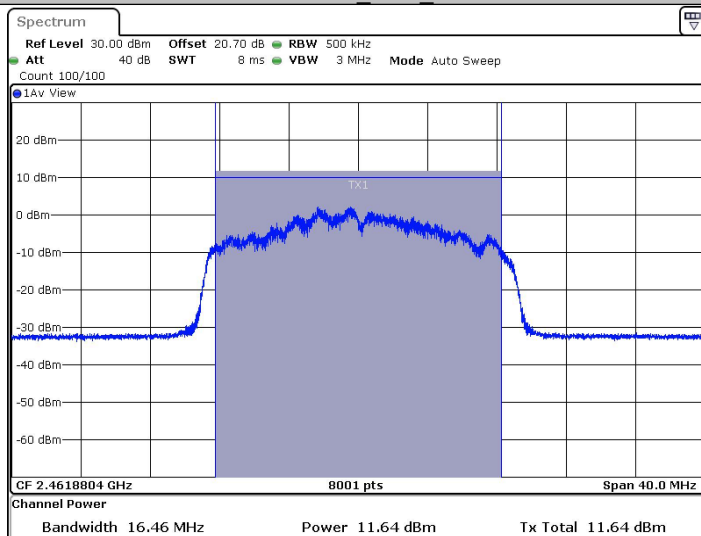


Date: 8.SEP.2023 17:01:40

11B_Ant2_2412

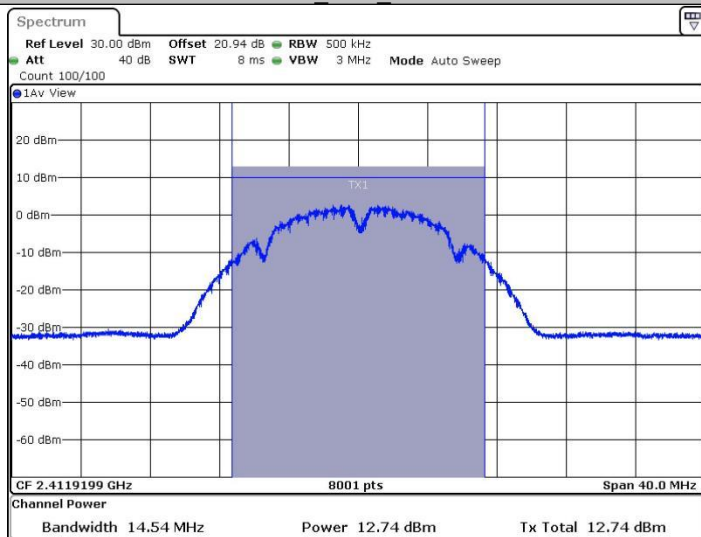


Date: 8.SEP.2023 17:08:25

11B_Ant2_2437

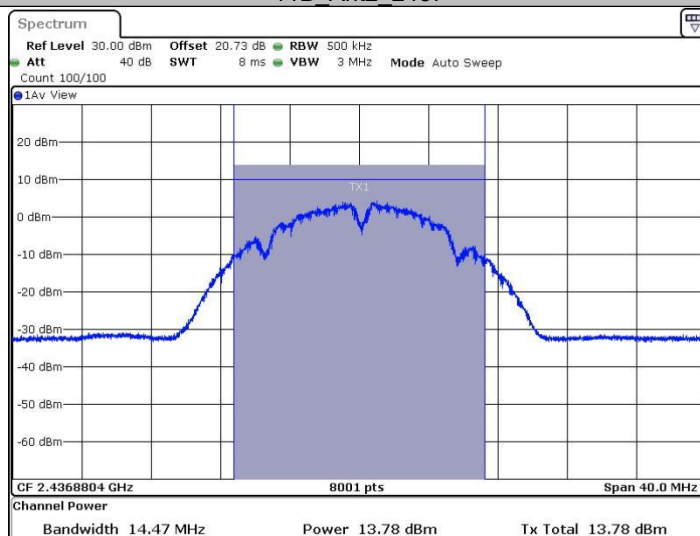


Date: 8.SEP.2023 17:12:11

11B_Ant2_2462

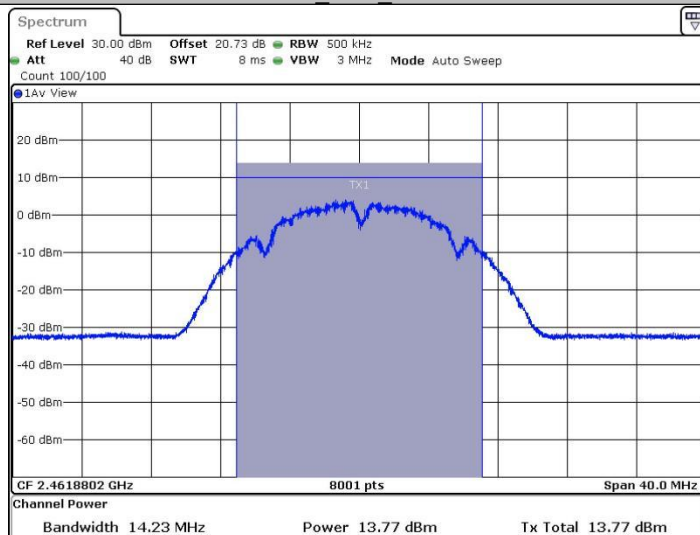


Date: 8.SEP.2023 17:13:39

11G_Ant2_2412

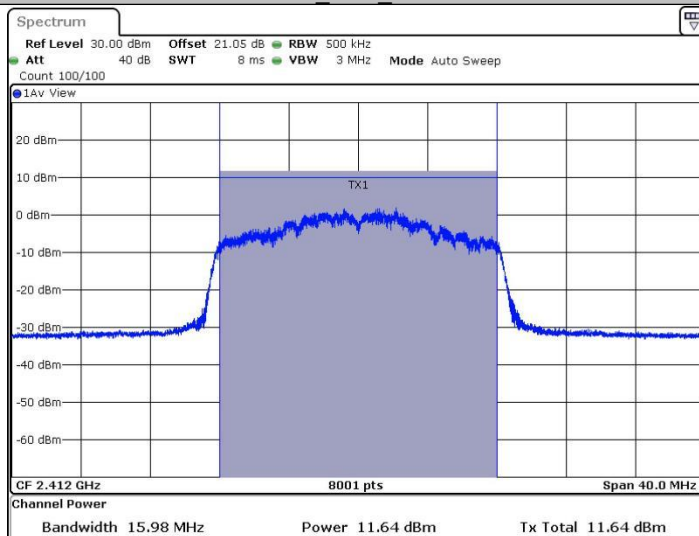


Date: 8.SEP.2023 17:16:24


11G_Ant2_2437

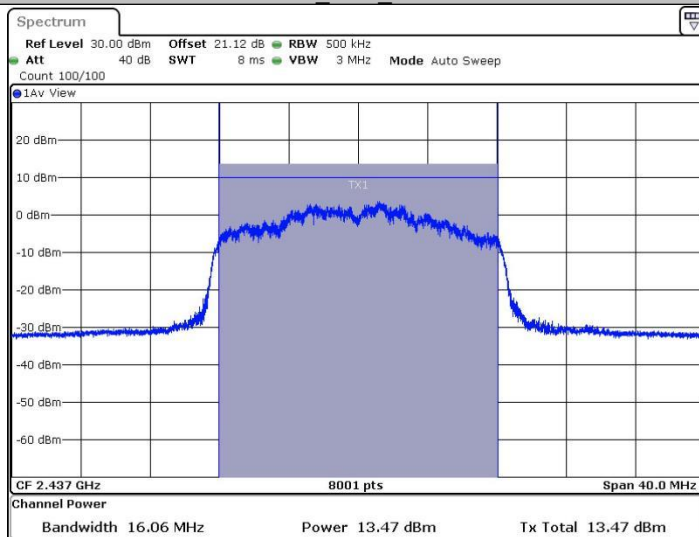

Date: 8.SEP.2023 17:18:28

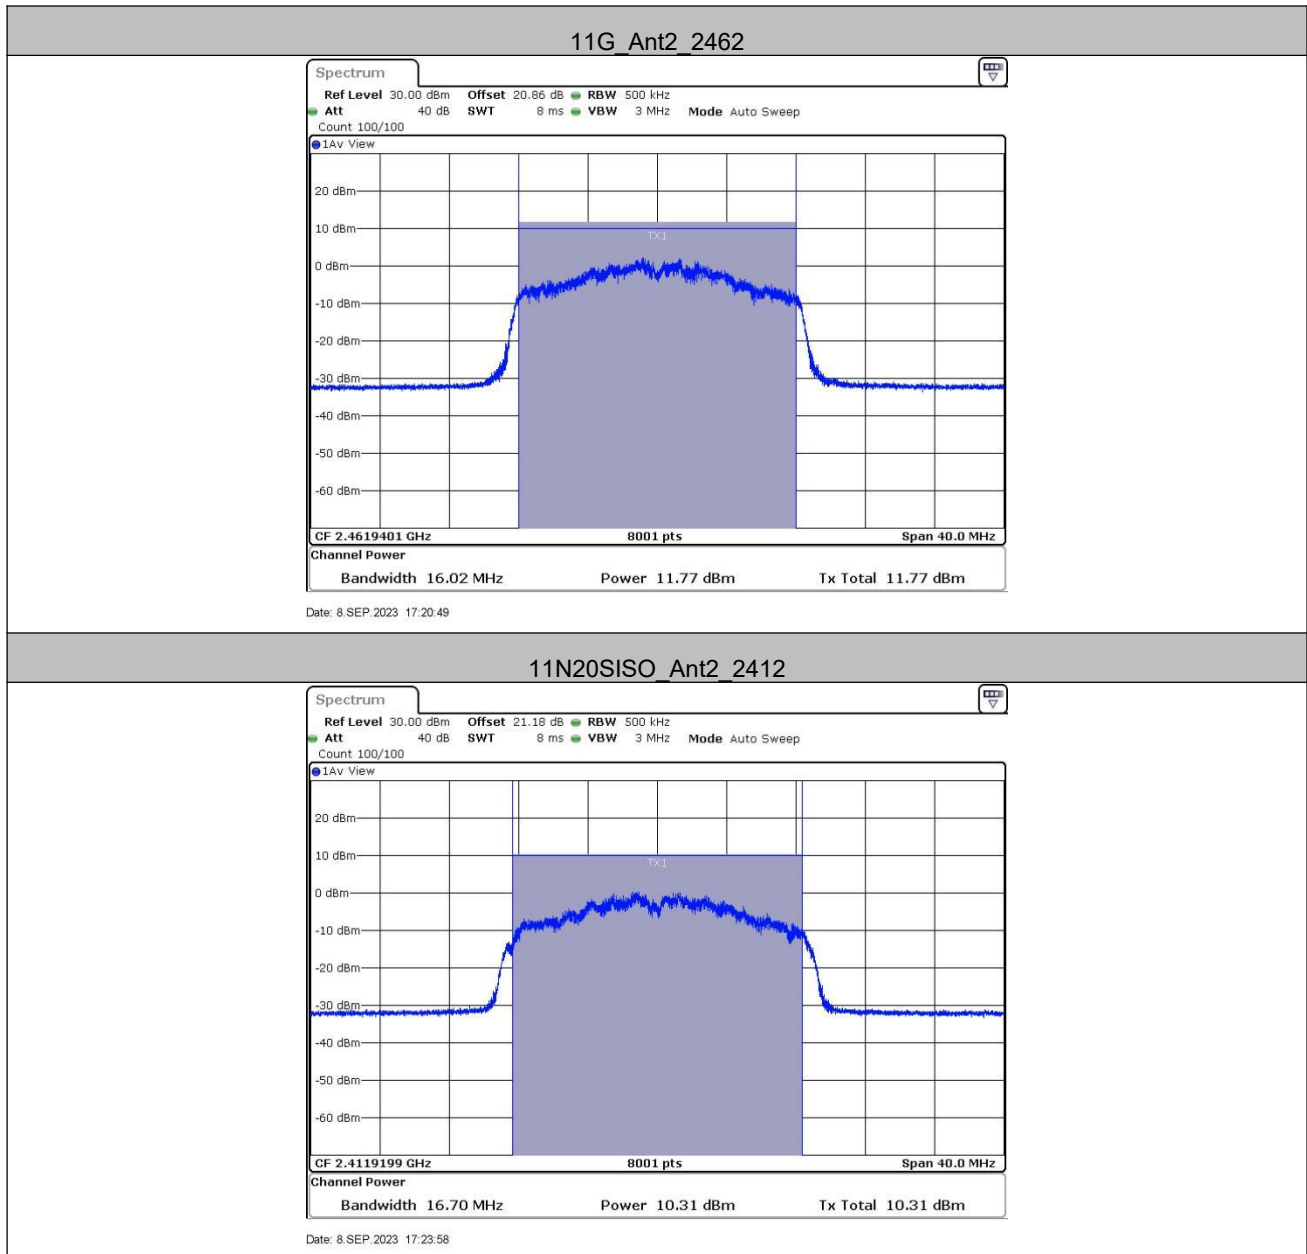


11N20SISO_Ant2_2437

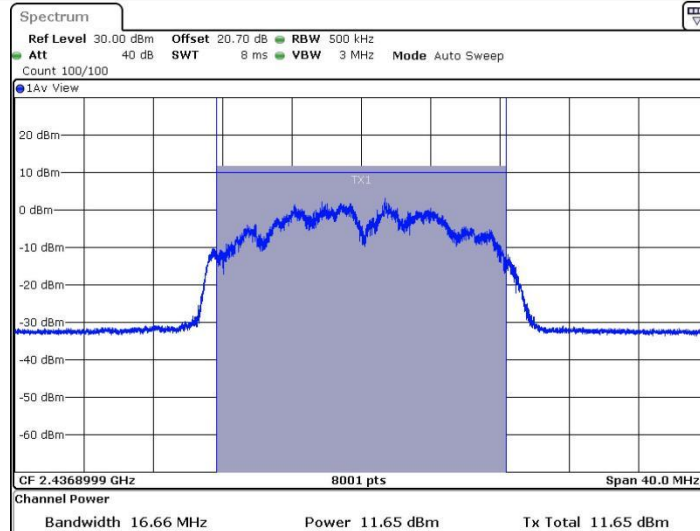


Date: 8.SEP.2023 17:27:49

11N20SISO_Ant2_2462

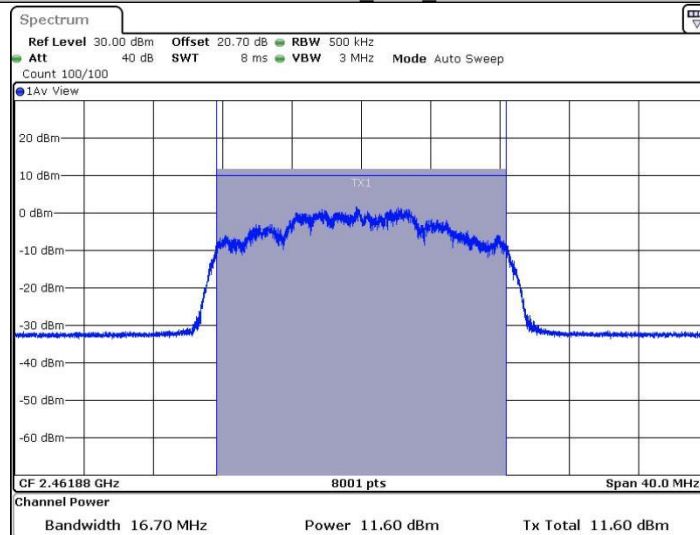

Date: 8.SEP.2023 17:29:32

4.4 6dB Occupied Bandwidth

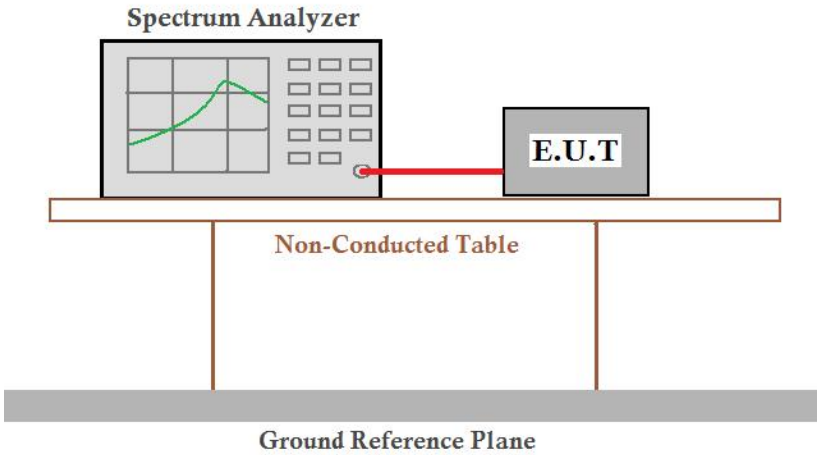Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass

Test Result


ANT1:

TestMode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	9.52	2407.00	2416.52	0.5	PASS
	2437	9.04	2432.48	2441.52	0.5	PASS
	2462	9.04	2457.48	2466.52	0.5	PASS
11G	2412	11.32	2405.72	2417.04	0.5	PASS
	2437	11.32	2430.72	2442.04	0.5	PASS
	2462	11.32	2455.72	2467.04	0.5	PASS
11N20SISO	2412	15.12	2404.44	2419.56	0.5	PASS
	2437	11.32	2430.72	2442.04	0.5	PASS
	2462	11.28	2455.76	2467.04	0.5	PASS


ANT2:

TestMode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	9.08	2407.44	2416.52	0.5	PASS
	2437	9.04	2432.48	2441.52	0.5	PASS
	2462	9.04	2457.48	2466.52	0.5	PASS
11G	2412	11.28	2405.76	2417.04	0.5	PASS
	2437	12.56	2429.48	2442.04	0.5	PASS
	2462	10.08	2456.96	2467.04	0.5	PASS
11N20SISO	2412	11.32	2405.72	2417.04	0.5	PASS
	2437	11.32	2430.72	2442.04	0.5	PASS
	2462	15.12	2454.44	2469.56	0.5	PASS

Test Graphs

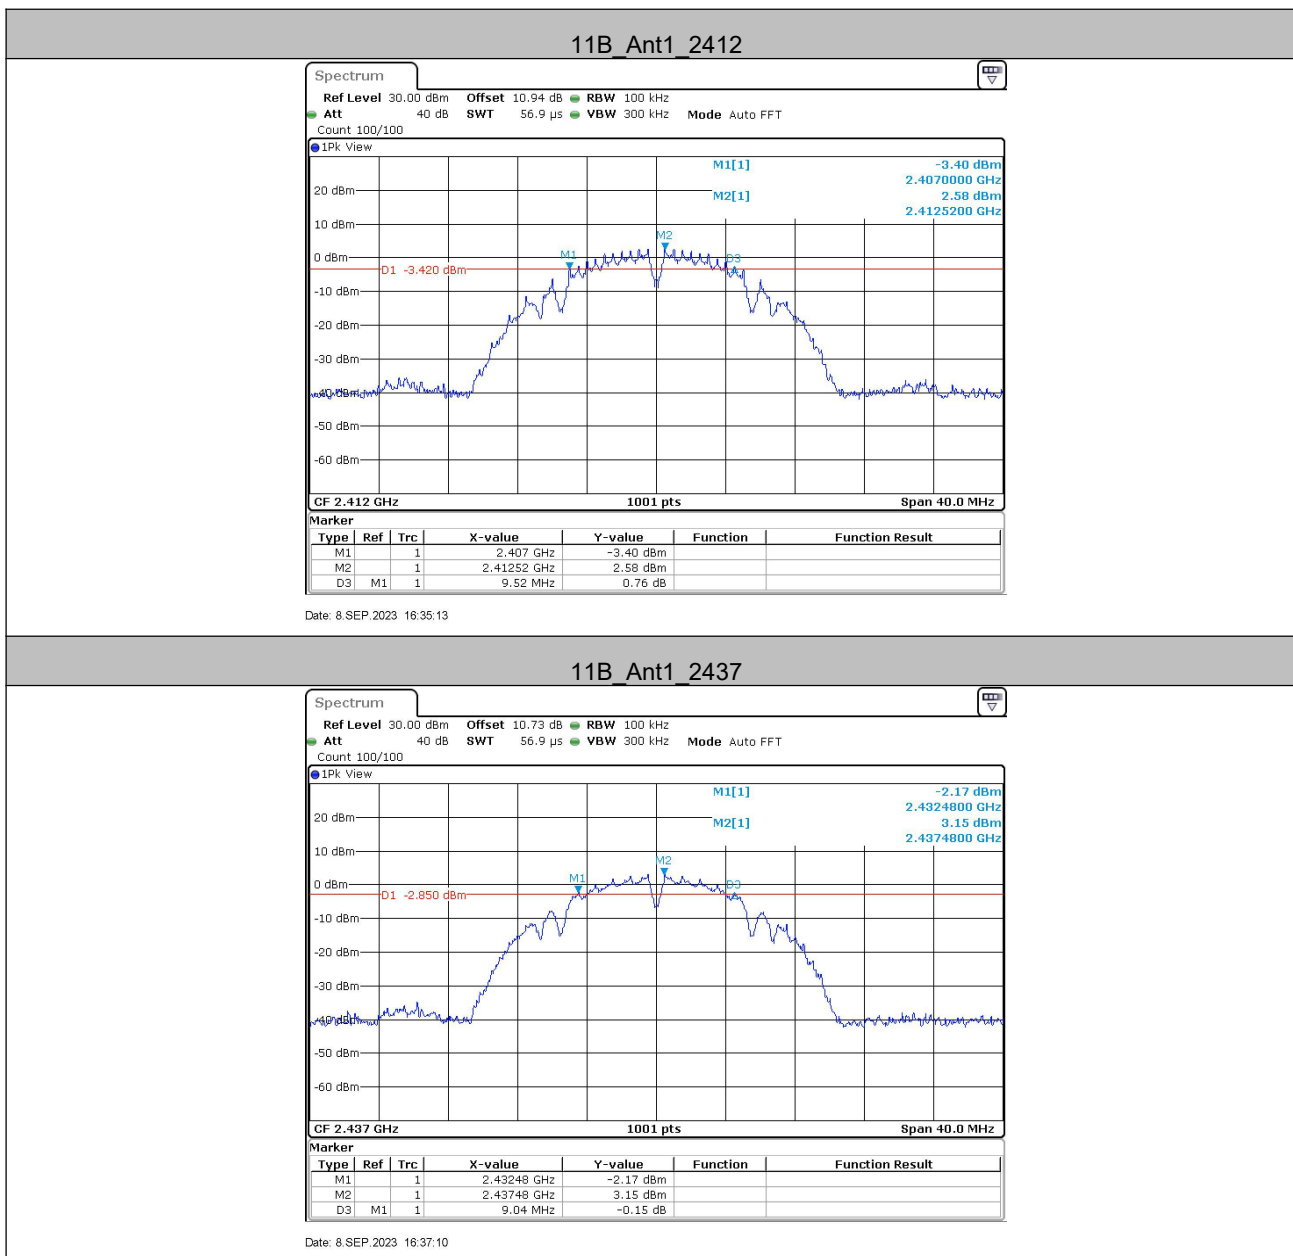


11B Ant1 2462

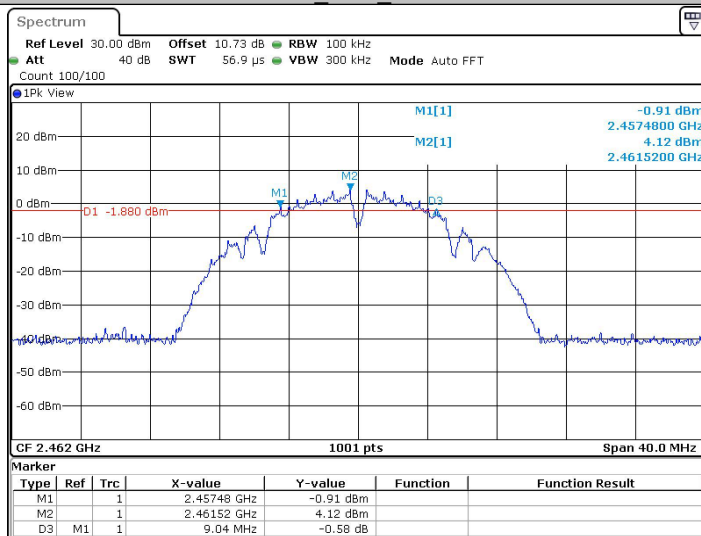


Date: 8.SEP.2023 16:39:05

11G Ant1 2412

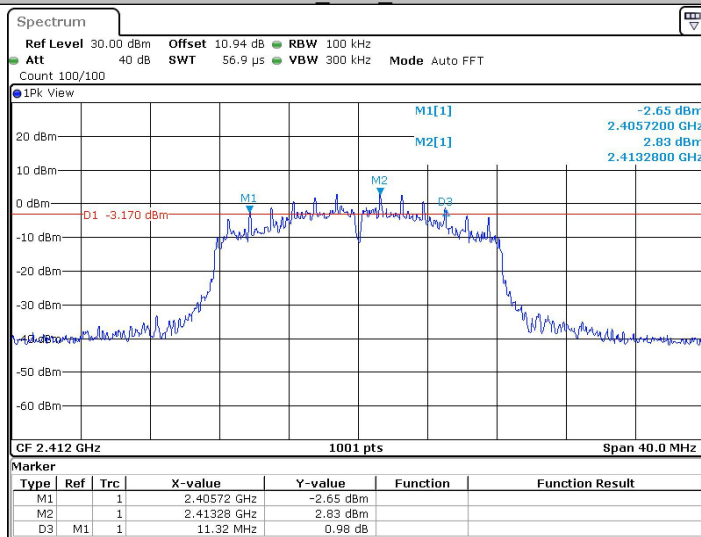


Date: 8.SEP.2023 16:40:56

11G_Ant1_2437

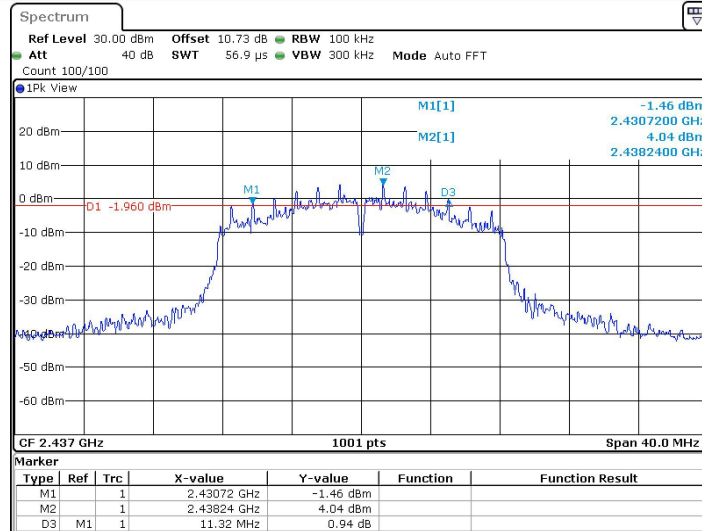


Date: 8.SEP.2023 16:43:22

11G_Ant1_2462

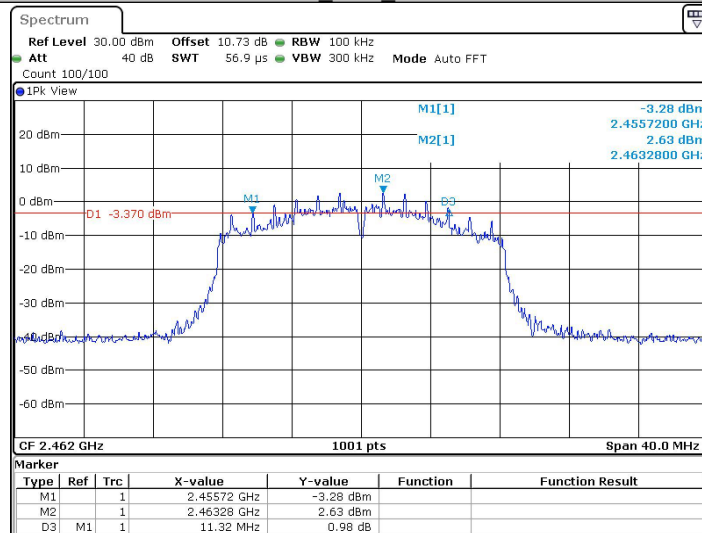


Date: 8.SEP.2023 16:54:57

11N20SISO_Ant1_2412

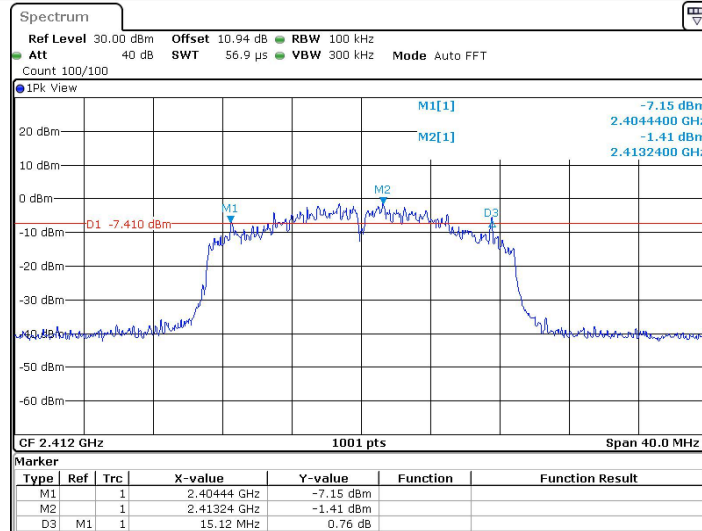


Date: 8.SEP.2023 16:57:17

11N20SISO_Ant1_2437

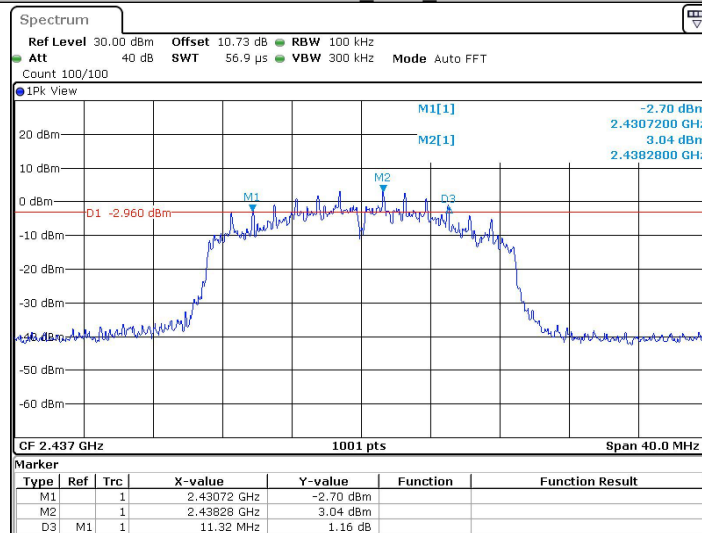


Date: 8.SEP.2023 16:58:57

11N20SISO_Ant1_2462

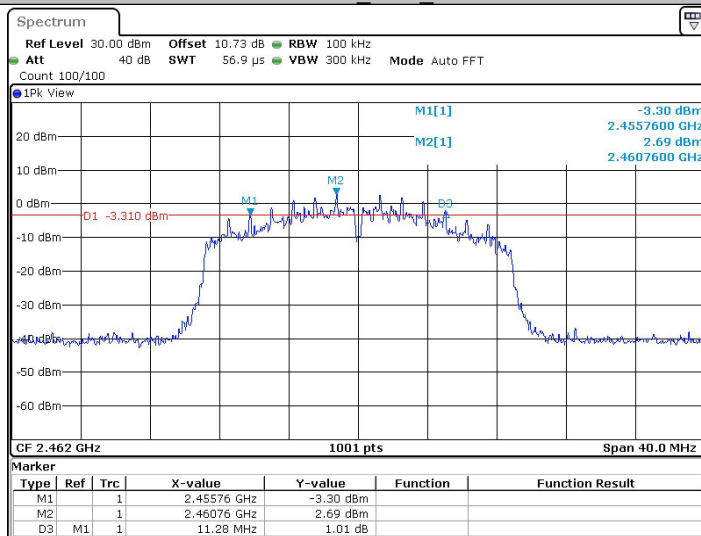


Date: 8.SEP.2023 17:01:27

11B_Ant2_2412

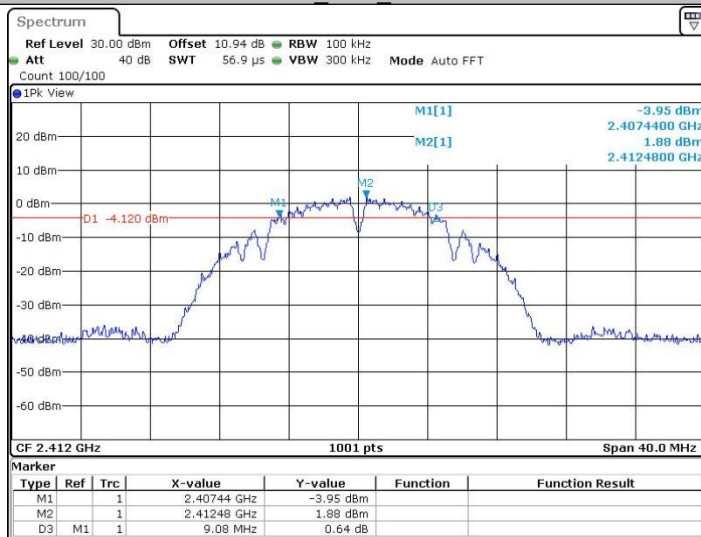


Date: 8.SEP.2023 17:08:12

11B_Ant2_2437

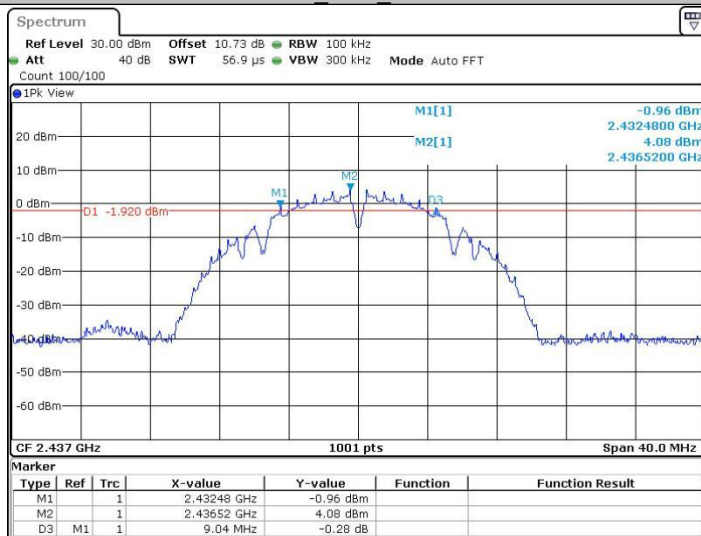


Date: 8.SEP.2023 17:11:58

11B_Ant2_2462

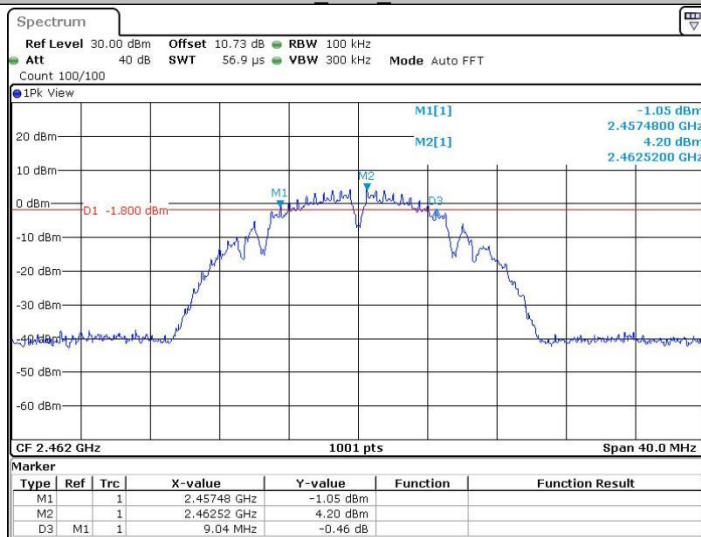


Date: 8.SEP.2023 17:13:26

11G_Ant2_2412

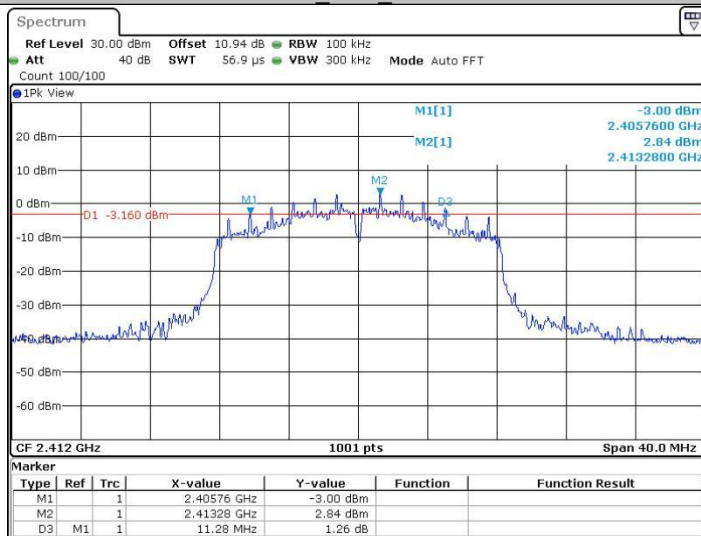


Date: 8.SEP.2023 17:16:10

11G_Ant2_2437

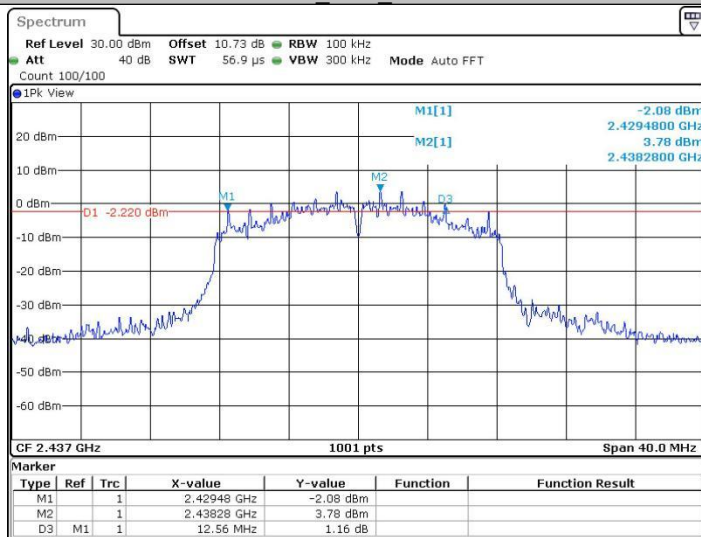


Date: 8.SEP.2023 17:18:15

11G_Ant2_2462

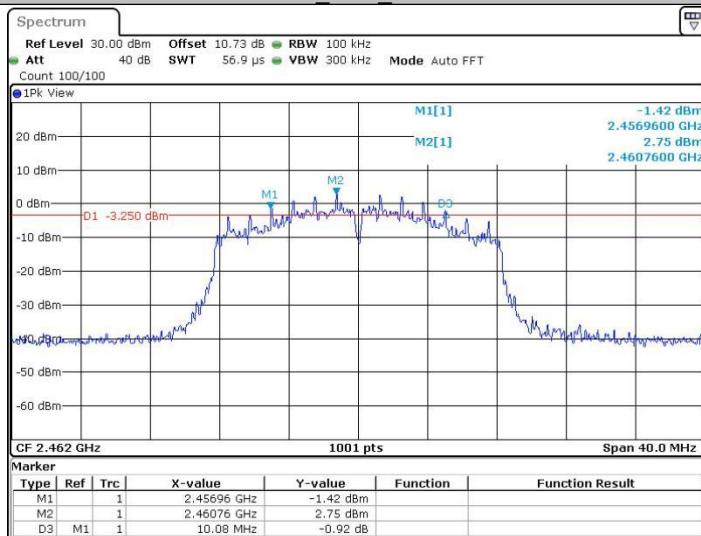


Date: 8.SEP.2023 17:20:35

11N20SISO_Ant2_2412

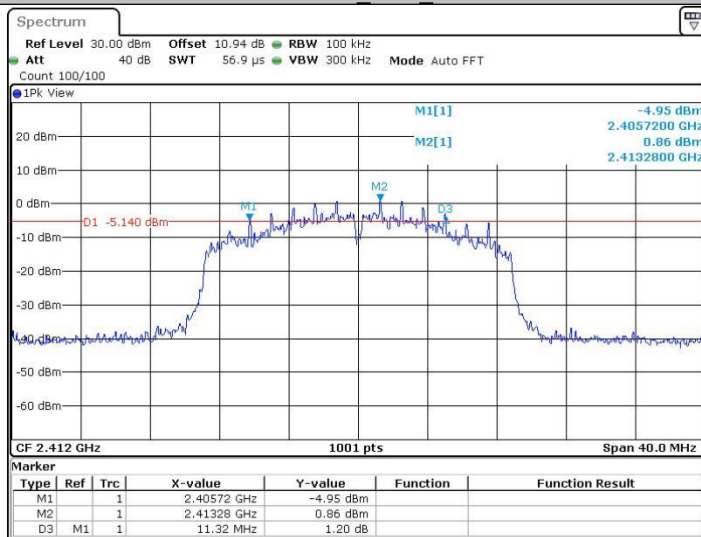


Date: 8.SEP.2023 17:23:45

11N20SISO_Ant2_2437

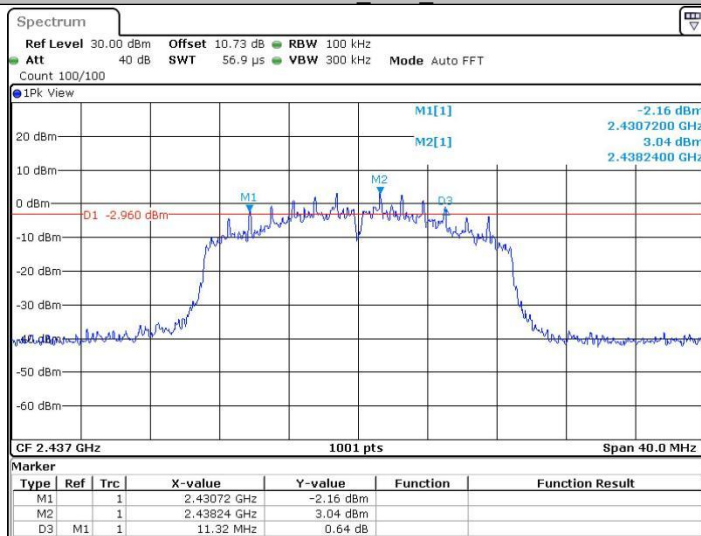


Date: 8.SEP.2023 17:27:35

11N20SISO_Ant2_2462

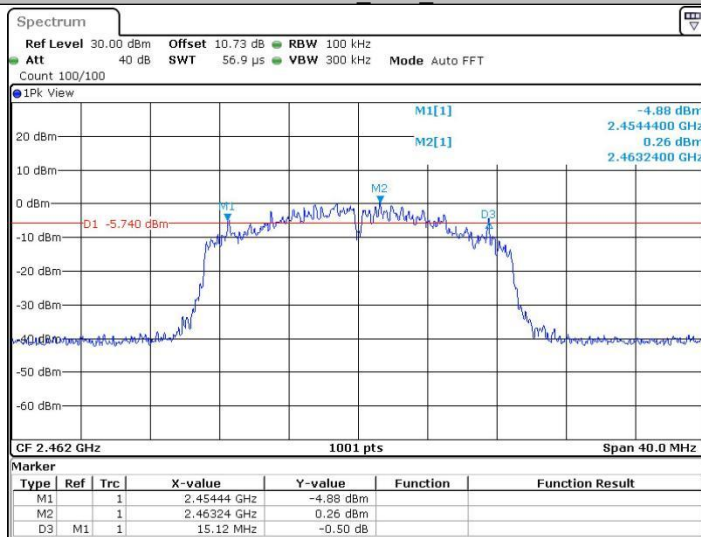

Date: 8.SEP.2023 17:29:19

4.5 Power Spectral Density

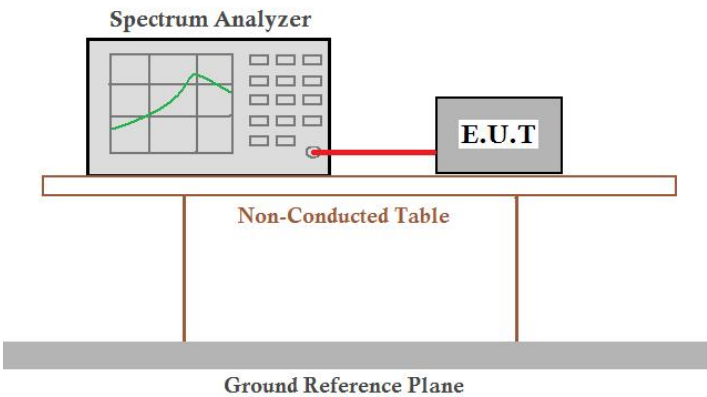Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass