

Appendix C for KSCR231000185801

Calibration Certificate

| Object | Apply                               | No | Model   | SN    | Calibration Date | Due date of calibration |
|--------|-------------------------------------|----|---------|-------|------------------|-------------------------|
| Dipole | <input type="checkbox"/>            | 1  | CLA150  | 4025  | 2021/04/26       | 2024/04/25              |
|        | <input type="checkbox"/>            | 2  | D450V3  | 1103  | 2021/04/21       | 2024/04/20              |
|        | <input type="checkbox"/>            | 3  | D750V3  | 1188  | 2022/03/29       | 2025/03/28              |
|        | <input type="checkbox"/>            | 4  | D835V2  | 4d114 | 2022/03/31       | 2025/03/30              |
|        | <input type="checkbox"/>            | 5  | D900V2  | 1d079 | 2022/06/07       | 2025/06/06              |
|        | <input type="checkbox"/>            | 6  | D1800V2 | 2d170 | 2022/03/31       | 2025/03/30              |
|        | <input type="checkbox"/>            | 7  | D1900V2 | 5d136 | 2022/06/07       | 2025/06/06              |
|        | <input type="checkbox"/>            | 8  | D2000V2 | 1041  | 2022/06/06       | 2025/06/05              |
|        | <input type="checkbox"/>            | 9  | D2300V2 | 1096  | 2022/03/31       | 2025/03/30              |
|        | <input checked="" type="checkbox"/> | 10 | D2450V2 | 817   | 2022/04/01       | 2025/03/31              |
|        | <input type="checkbox"/>            | 11 | D2600V2 | 1158  | 2022/03/31       | 2025/03/30              |
|        | <input checked="" type="checkbox"/> | 12 | D5GHzV2 | 1095  | 2022/06/01       | 2025/05/31              |
| DAE    | <input checked="" type="checkbox"/> | 13 | DAE4    | 1245  | 2023/04/25       | 2024/04/24              |
| Probe  | <input checked="" type="checkbox"/> | 14 | EX3DV4  | 3801  | 2023/06/23       | 2024/06/22              |

## 1 Dipole

## 1.1 CLA150 - SN 4025

| Calibration Laboratory of<br>Schmid & Partner<br>Engineering AG<br>Zeughausstrasse 43, 8004 Zurich, Switzerland                                                                                                                                                               |                      | S<br>Schweizerischer Kalibrierdienst<br>Service suisse d'étalonnage<br>C<br>Servizio svizzero di taratura<br>S<br>Swiss Calibration Service |                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Accredited by the Swiss Accreditation Service (SAS)<br>The Swiss Accreditation Service is one of the signatories to the EA<br>Multilateral Agreement for the recognition of calibration certificates                                                                          |                      | Accreditation No.: SCS 0108                                                                                                                 |                        |
| Client: SGS-CN (Auden)                                                                                                                                                                                                                                                        |                      | Certificate No: CLA150-4025_Apr21                                                                                                           |                        |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                                |                      |                                                                                                                                             |                        |
| Object: CLA150 - SN: 4025                                                                                                                                                                                                                                                     |                      |                                                                                                                                             |                        |
| Calibration procedure(s): QA CAL-15.v9<br>Calibration Procedure for SAR Validation Sources below 700 MHz                                                                                                                                                                      |                      |                                                                                                                                             |                        |
| Calibration date: April 26, 2021                                                                                                                                                                                                                                              |                      |                                                                                                                                             |                        |
| This calibration certificate documents the traceability to national standards, which require the physical units of measurements (SI).<br>The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. |                      |                                                                                                                                             |                        |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.                                                                                                                                                |                      |                                                                                                                                             |                        |
| Calibration Equipment used (M&TE critical for calibration)                                                                                                                                                                                                                    |                      |                                                                                                                                             |                        |
| Primary Standards                                                                                                                                                                                                                                                             | ID #                 | Cal Date (Certificate No.)                                                                                                                  | Scheduled Calibration  |
| Power meter NRP                                                                                                                                                                                                                                                               | SN: 10475            | 09-Apr-21 (No. 217-03201/03202)                                                                                                             | Apr-22                 |
| Power sensor NRP Z91                                                                                                                                                                                                                                                          | SN: 103344           | 09-Apr-21 (No. 217-03201)                                                                                                                   | Apr-22                 |
| Power sensor NRP Z91                                                                                                                                                                                                                                                          | SN: 103345           | 09-Apr-21 (No. 217-03202)                                                                                                                   | Apr-22                 |
| Reference 20 dB Attenuator                                                                                                                                                                                                                                                    | SN: C23862 (200)     | 09-Apr-21 (No. 217-03343)                                                                                                                   | Apr-22                 |
| Type-N mismatch combination                                                                                                                                                                                                                                                   | SN: 310902 / 0007    | 09-Apr-21 (No. 217-03344)                                                                                                                   | Apr-22                 |
| Reference Probe EX30N4                                                                                                                                                                                                                                                        | SN: 3877             | 30-Dec-20 (No. EX3-0877_Dec20)                                                                                                              | Dec-21                 |
| ENEA                                                                                                                                                                                                                                                                          | SN: 664              | 26-Jan-20 (No. DMS4-654_Jan20)                                                                                                              | Jun-21                 |
| Secondary Standards                                                                                                                                                                                                                                                           | ID #                 | Check Date (in house)                                                                                                                       | Scheduled Check        |
| Power meter S44185                                                                                                                                                                                                                                                            | SN: G841203074       | 09-Apr-16 (in house check Jun-20)                                                                                                           | In house check: Jun-20 |
| Power sensor E4113A                                                                                                                                                                                                                                                           | SN: MY4148067        | 06-Apr-16 (in house check Jun-20)                                                                                                           | In house check: Jun-20 |
| Power sensor E4113A                                                                                                                                                                                                                                                           | SN: 000110210        | 06-Apr-16 (in house check Jun-20)                                                                                                           | In house check: Jun-20 |
| RF generator HP 8594D                                                                                                                                                                                                                                                         | SN: US8401001709     | 04-Aug-09 (in house check Jun-20)                                                                                                           | In house check: Jun-20 |
| Network Analyser Agilent E8363A                                                                                                                                                                                                                                               | SN: US41000477       | 31-Mar-14 (in house check Oct-20)                                                                                                           | In house check: Oct-21 |
| Calibrated by:                                                                                                                                                                                                                                                                | Name: Jeffrey Katman | Function: Laboratory Technician                                                                                                             | Signature:             |
| Approved by:                                                                                                                                                                                                                                                                  | Name: Kaja Polovic   | Function: Technical Manager                                                                                                                 | Signature:             |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                               |                      |                                                                                                                                             |                        |
| Issued: April 26, 2021                                                                                                                                                                                                                                                        |                      |                                                                                                                                             |                        |
| Certificate No: CLA150-4025_Apr21 Page 1 of 6                                                                                                                                                                                                                                 |                      |                                                                                                                                             |                        |

| Calibration Laboratory of<br>Schmid & Partner<br>Engineering AG<br>Zeughausstrasse 43, 8004 Zurich, Switzerland                                                                                                                       |                                 | S<br>Schweizerischer Kalibrierdienst<br>Service suisse d'étalonnage<br>C<br>Servizio svizzero di taratura<br>S<br>Swiss Calibration Service |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--|
| Accredited by the Swiss Accreditation Service (SAS)<br>The Swiss Accreditation Service is one of the signatories to the EA<br>Multilateral Agreement for the recognition of calibration certificates                                  |                                 | Accreditation No.: SCS 0108                                                                                                                 |  |
| <b>Glossary:</b>                                                                                                                                                                                                                      |                                 |                                                                                                                                             |  |
| TSL                                                                                                                                                                                                                                   | Issue simulating liquid         |                                                                                                                                             |  |
| ConvF                                                                                                                                                                                                                                 | sensitivity in TSL / NORM x,y,z |                                                                                                                                             |  |
| N/A                                                                                                                                                                                                                                   | not applicable or not measured  |                                                                                                                                             |  |
| <b>Calibration is Performed According to the Following Standards:</b>                                                                                                                                                                 |                                 |                                                                                                                                             |  |
| a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013                 |                                 |                                                                                                                                             |  |
| b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016                            |                                 |                                                                                                                                             |  |
| c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010                             |                                 |                                                                                                                                             |  |
| d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"                                                                                                                                                                    |                                 |                                                                                                                                             |  |
| <b>Additional Documentation:</b>                                                                                                                                                                                                      |                                 |                                                                                                                                             |  |
| e) DASY4/5 System Handbook                                                                                                                                                                                                            |                                 |                                                                                                                                             |  |
| <b>Methods Applied and Interpretation of Parameters:</b>                                                                                                                                                                              |                                 |                                                                                                                                             |  |
| • <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in this certificate are valid at the frequency indicated.                                 |                                 |                                                                                                                                             |  |
| • <b>Antenna Parameters with TSL:</b> The source is mounted in a touch configuration below the center marking of the flat phantom.                                                                                                    |                                 |                                                                                                                                             |  |
| • <b>Return Loss:</b> This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required. |                                 |                                                                                                                                             |  |
| • <b>SAR measured:</b> SAR measured at the stated antenna input power.                                                                                                                                                                |                                 |                                                                                                                                             |  |
| • <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.                                                                                                                               |                                 |                                                                                                                                             |  |
| • <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.                                                                                                                    |                                 |                                                                                                                                             |  |
| The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.       |                                 |                                                                                                                                             |  |
| Certificate No: CLA150-4025_Apr21 Page 2 of 6                                                                                                                                                                                         |                                 |                                                                                                                                             |  |

| Measurement Conditions                                    |                              |                                  |
|-----------------------------------------------------------|------------------------------|----------------------------------|
| DASY system configuration, as far as not given on page 1. |                              |                                  |
| DASY Version                                              | DASY5                        | V52.10.4                         |
| Extrapolation                                             | Advanced Extrapolation       |                                  |
| Phantom                                                   | ELIA Flat Phantom            | Shell thickness: 2 ± 0.2 mm      |
| EUT Positioning                                           | Touch Position               |                                  |
| Zoom Scan Resolution                                      | dx, dy = 4.0 mm, dz = 1.4 mm | Graded Ratio = 1.4 (Z direction) |
| Frequency                                                 | 150 MHz ± 1 MHz              |                                  |

| Head TSL parameters                                     |                 |              |                  |
|---------------------------------------------------------|-----------------|--------------|------------------|
| The following parameters and calculations were applied. |                 |              |                  |
|                                                         | Temperature     | Permittivity | Conductivity     |
| Nominal Head TSL parameters                             | 22.0 °C         | 52.3         | 0.75 mho/m       |
| Measured Head TSL parameters                            | (22.0 ± 0.2) °C | 51.1 ± 6 %   | 0.75 mho/m ± 6 % |
| Head TSL temperature change during test                 | < 0.5 °C        | ---          | ---              |

| SAR result with Head TSL                                |                  |                          |
|---------------------------------------------------------|------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | Condition        |                          |
| SAR measured                                            | 1 W input power  | 3.90 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W | 3.88 W/kg ± 19.4 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition        |                          |
| SAR measured                                            | 1 W input power  | 2.60 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W | 2.59 W/kg ± 18.0 % (k=2) |

| Appendix (Additional assessments outside the scope of SCS 0108) |                  |
|-----------------------------------------------------------------|------------------|
| <b>Antenna Parameters with Head TSL</b>                         |                  |
| Impedance, transformed to feed point                            | 47.9 Ω ± 1.5 (j) |
| Return Loss                                                     | -31.4 dB         |
| <b>Additional EUT Data</b>                                      |                  |
| Manufactured by                                                 | SPEAG            |

Certificate No: CLA150-4025\_Apr21 Page 3 of 6

Certificate No: CLA150-4025\_Apr21 Page 4 of 6

## DASY5 Validation Report for Head TSL

Date: 26.04.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: CLA150; Type: CLA150; Serial: CLA150 - SN: 4025

Communication System: UID 0 - CW; Frequency: 150 MHz  
Medium parameters used:  $f = 150$  MHz;  $\sigma = 0.76$  S/m;  $\epsilon_0 = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

## DASY52 Configuration:

- Probe: EX3DV4 - SN3877; ConvF(12.51, 12.51, 12.51) @ 150 MHz; Calibrated: 30.12.2020
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DA84 SN654; Calibrated: 26.06.2020
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP.1003
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

## CLA Calibration for HSL-LF Tissue/CLA150, touch configuration, Pin=1W/Zoom Scan,

dist=1.4mm (8x10x8)/Cube 0; Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 85.93 W/kg; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 7.36 W/kg

SAR(1 g) = 3.90 W/kg; SAR(10 g) = 2.60 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (&gt; 30mm)


Ratio of SAR at M2 to SAR at M1 = 80.4%

Maximum value of SAR (measured) = 5.48 W/kg

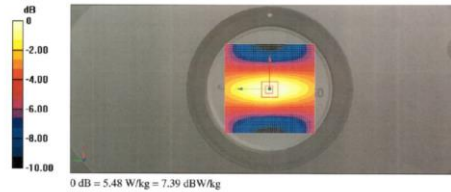

Certificate No: CLA150-4025\_Apr21

Page 5 of 6

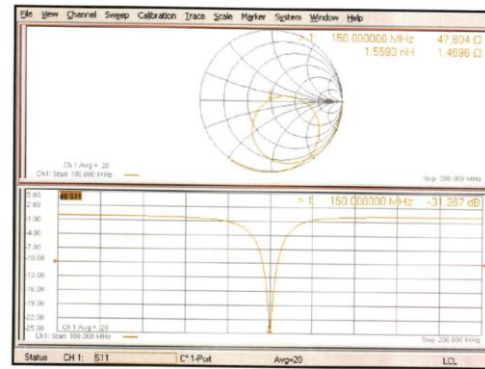

Certificate No: CLA150-4025\_Apr21

Page 6 of 6

## 1.2 D450V3 - SN 1103

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client: SGS-CN (Aude)

Certificate No: D450V3-1103\_Apr21

## CALIBRATION CERTIFICATE

|                                                                                                                                                                                                                                                                            |                                                                                |                                   |                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------|------------------------|
| Object                                                                                                                                                                                                                                                                     | D450V3 - SN: 1103                                                              |                                   |                        |
| Calibration procedure(s)                                                                                                                                                                                                                                                   | QA CAL-15_v9<br>Calibration Procedure for SAR Validation Sources below 700 MHz |                                   |                        |
| Calibration date:                                                                                                                                                                                                                                                          | April 21, 2021                                                                 |                                   |                        |
| This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. |                                                                                |                                   |                        |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (20 ± 2) °C and humidity < 70%.                                                                                                                                            |                                                                                |                                   |                        |
| Calibration Equipment used (MPE critical for calibration)                                                                                                                                                                                                                  |                                                                                |                                   |                        |
| Primary Standards                                                                                                                                                                                                                                                          | ID #                                                                           | Cal Date (Certificate No.)        | Scheduled Calibration  |
| Power meter NRP                                                                                                                                                                                                                                                            | SN: 104778                                                                     | 09-Apr-21 (No. 217-03021/03020)   | Apr-22                 |
| Power sensor NRP-291                                                                                                                                                                                                                                                       | SN: 103244                                                                     | 09-Apr-21 (No. 217-03021)         | Apr-22                 |
| Power sensor NRP-291                                                                                                                                                                                                                                                       | SN: 103245                                                                     | 09-Apr-21 (No. 217-03020)         | Apr-22                 |
| Reference 20 dB Attenuator                                                                                                                                                                                                                                                 | SN: CC2852 (200)                                                               | 09-Apr-21 (No. 217-03345)         | Apr-22                 |
| Type-N mismatch combination                                                                                                                                                                                                                                                | SN: 310852 / 06327                                                             | 09-Apr-21 (No. 217-03344)         | Apr-22                 |
| Reference Probe E3030A                                                                                                                                                                                                                                                     | SN: 3877                                                                       | 30-Dec-20 (No. E30-3877_Dec20)    | Dec-21                 |
| DAEA                                                                                                                                                                                                                                                                       | SN: 654                                                                        | 26-Jun-20 (No. D454-654_Jun20)    | Jun-21                 |
| Secondary Standards                                                                                                                                                                                                                                                        | ID #                                                                           | Check Date (In house)             | Scheduled Check        |
| Power meter E4419B                                                                                                                                                                                                                                                         | SN: GB41200274                                                                 | 06-Apr-16 (In house check Jun-20) | In house check Jun-22  |
| Power sensor E4412A                                                                                                                                                                                                                                                        | SN: MY41496047                                                                 | 06-Apr-16 (In house check Jun-20) | In house check Jun-22  |
| Power sensor E4412A                                                                                                                                                                                                                                                        | SN: 00018010                                                                   | 06-Apr-16 (In house check Jun-20) | In house check Jun-22  |
| RF generator HP 8548C                                                                                                                                                                                                                                                      | SN: U503460101700                                                              | 06-Apr-16 (In house check Jun-20) | In house check Jun-22  |
| Network Analyzer Agilent E8358A                                                                                                                                                                                                                                            | SN: U841980477                                                                 | 31-Mar-14 (In house check Oct-20) | In house check Oct-21  |
| Calibrated by:                                                                                                                                                                                                                                                             | Name: Claudio Leuber                                                           | Function: Laboratory Technician   | Signature: [Signature] |
| Approved by:                                                                                                                                                                                                                                                               | Name: Kello Polovic                                                            | Function: Technical Manager       | Signature: [Signature] |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                            |                                                                                |                                   |                        |
| Issued: April 23, 2021                                                                                                                                                                                                                                                     |                                                                                |                                   |                        |

Certificate No: D450V3-1103\_Apr21

Page 1 of 6

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

## Glossary:

TSL Issue simulating liquid  
ConvF sensitivity in TSL / NORM x,y,z  
N/A not applicable or not measured

## Calibration is Performed According to the Following Standards:

- IEC 61010-1:2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 665664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Additional Documentation:

- DASY4/5 System Handbook

## Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D450V3-1103\_Apr21

Page 2 of 6

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |                                 |
|------------------------------|------------------------|---------------------------------|
| DASY Version                 | DASY5                  | V62.10.4                        |
| Extrapolation                | Advanced Extrapolation |                                 |
| Phantom                      | ELJ4 Flat Phantom      | Shell thickness: $2 \pm 0.2$ mm |
| Distance Dipole Center - TSL | 15 mm                  | with Spacer                     |
| Zoom Scan Resolution         | $d_x, d_y, d_z = 5$ mm |                                 |
| Frequency                    | 450 MHz $\pm 1$ MHz    |                                 |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         |                     |                |                      |
|-----------------------------------------|---------------------|----------------|----------------------|
|                                         | Temperature         | Permittivity   | Conductivity         |
| Nominal Head TSL parameters             | 22.0 °C             | 43.5           | 0.57 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 43.1 $\pm$ 6 % | 0.57 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ---            | ---                  |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 1.14 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 4.55 W/kg $\pm$ 18.1 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 0.757 W/kg                   |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 3.06 W/kg $\pm$ 17.6 % (k=2) |

Certificate No: D450V3-1103\_Apr21

Page 5 of 6

## DASY5 Validation Report for Head TSL

Test Laboratory: SPEAG, Zurich, Switzerland

Date: 21.04.2021

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1103

Communication System: UID 0 - CW; Frequency: 450 MHz  
Medium parameters used:  $f = 450$  MHz;  $\alpha = 0.87$  S/m;  $\epsilon_r = 43.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 - SN3877; ConvF(10.64, 10.64, 10.64) @ 450 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 26.06.2020
- Phantom: ELJ v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### Dipole Calibration for Head Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:  $d_x=5$ mm,  $d_y=5$ mm,  $d_z=5$ mm  
Reference Value = 39.18 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 1.76 W/kg  
SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.767 W/kg  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 64.9%  
Maximum value of SAR (measured) = 1.53 W/kg

Certificate No: D450V3-1103\_Apr21

Page 5 of 6

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 57.1 $\Omega$ - 2.6 j $\Omega$ |
| Return Loss                          | -23.0 dB                       |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.346 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|

Certificate No: D450V3-1103\_Apr21

Page 6 of 6

Certificate No: D450V3-1103\_Apr21

Page 6 of 6

## 1.3 D750V3 - SN 1188


| TTL Speag CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |            | CAICT                                                                                                                                                                          |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------|------|------------------------------------------|-----------------------|------------------|--------|-------------------------------|--------|--------------------|--------|-------------------------------|--------|------------------------|---------|------------------------------------|--------|------|---------|------------------------------------|--------|---------------------|------|------------------------------------------|-----------------------|-------------------------|------------|-------------------------------|--------|-------------------------|------------|-------------------------------|--------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2512 Fax: +86-10-42304633-2504<br>E-mail: csl@chinaetl.com http://www.chinaetl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |            | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: csl@chinaetl.com http://www.chinaetl.cn |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Client: <b>SGS-CN</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            | Certificate No: <b>Z22-60103</b>                                                                                                                                               |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Object: <b>D750V3 - SN: 1188</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Calibration Procedure(s): <b>FF-Z11-003-01</b><br>Calibration Procedures for dipole validation kits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Calibration date: <b>March 28, 2022</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Calibration Equipment used (M&TE critical for calibration)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| <table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Calibrated by Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Power Meter NRP2</td><td>104277</td><td>24-Sep-21 (CTTL No.J21X08326)</td><td>Sep-22</td></tr><tr><td>Power sensor NRP88</td><td>104291</td><td>24-Sep-21 (CTTL No.J21X08326)</td><td>Sep-22</td></tr><tr><td>Reference Probe EX3DV4</td><td>SN 7307</td><td>26-May-21(SPEAG.No.EX3-7307_May21)</td><td>May-22</td></tr><tr><td>DAE4</td><td>SN 1556</td><td>12-Jan-22(CTTL-SPEAG.No.Z22-60007)</td><td>Jan-23</td></tr><tr><th>Secondary Standards</th><th>ID #</th><th>Cal Date (Calibrated by Certificate No.)</th><th>Scheduled Calibration</th></tr><tr><td>Signal Generator S4438C</td><td>MY48671430</td><td>13-Jan-22 (CTTL No.J22X00409)</td><td>Jan-23</td></tr><tr><td>Network Analyzer E5071C</td><td>MY48110673</td><td>14-Jan-22 (CTTL No.J22X00409)</td><td>Jan-23</td></tr></tbody></table> |            |                                                                                                                                                                                |                       | Primary Standards | ID # | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration | Power Meter NRP2 | 104277 | 24-Sep-21 (CTTL No.J21X08326) | Sep-22 | Power sensor NRP88 | 104291 | 24-Sep-21 (CTTL No.J21X08326) | Sep-22 | Reference Probe EX3DV4 | SN 7307 | 26-May-21(SPEAG.No.EX3-7307_May21) | May-22 | DAE4 | SN 1556 | 12-Jan-22(CTTL-SPEAG.No.Z22-60007) | Jan-23 | Secondary Standards | ID # | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration | Signal Generator S4438C | MY48671430 | 13-Jan-22 (CTTL No.J22X00409) | Jan-23 | Network Analyzer E5071C | MY48110673 | 14-Jan-22 (CTTL No.J22X00409) | Jan-23 |
| Primary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | ID #       | Cal Date (Calibrated by Certificate No.)                                                                                                                                       | Scheduled Calibration |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Power Meter NRP2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 104277     | 24-Sep-21 (CTTL No.J21X08326)                                                                                                                                                  | Sep-22                |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Power sensor NRP88                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 104291     | 24-Sep-21 (CTTL No.J21X08326)                                                                                                                                                  | Sep-22                |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Reference Probe EX3DV4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | SN 7307    | 26-May-21(SPEAG.No.EX3-7307_May21)                                                                                                                                             | May-22                |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| DAE4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | SN 1556    | 12-Jan-22(CTTL-SPEAG.No.Z22-60007)                                                                                                                                             | Jan-23                |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Secondary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ID #       | Cal Date (Calibrated by Certificate No.)                                                                                                                                       | Scheduled Calibration |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Signal Generator S4438C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | MY48671430 | 13-Jan-22 (CTTL No.J22X00409)                                                                                                                                                  | Jan-23                |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Network Analyzer E5071C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | MY48110673 | 14-Jan-22 (CTTL No.J22X00409)                                                                                                                                                  | Jan-23                |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Calibrated by: <b>Zhao Jing</b> SAR Test Engineer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Reviewed by: <b>Lin Hao</b> SAR Test Engineer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Approved by: <b>Qi Dianyan</b> SAR Project Leader                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Issued: April 3, 2022                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                                                                                                                                                                |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |
| Certificate No: Z22-60103                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |            | Page 1 of 6                                                                                                                                                                    |                       |                   |      |                                          |                       |                  |        |                               |        |                    |        |                               |        |                        |         |                                    |        |      |         |                                    |        |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |

| TTL Speag CALIBRATION LABORATORY                                                                                                                                               |  | CAICT                                                                                                                                                                          |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: csl@chinaetl.com http://www.chinaetl.cn |  | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: csl@chinaetl.com http://www.chinaetl.cn |  |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1:                                                                                     |  |                                                                                                                                                                                |  |
| DASY Version                                                                                                                                                                   |  | DASY52                                                                                                                                                                         |  |
| Extrapolation                                                                                                                                                                  |  | Advanced Extrapolation                                                                                                                                                         |  |
| Phantom                                                                                                                                                                        |  | Triple Flat Phantom 5.1C                                                                                                                                                       |  |
| Distance Dipole Center - TSL                                                                                                                                                   |  | 15 mm with Spacer                                                                                                                                                              |  |
| Zoom Scan Resolution                                                                                                                                                           |  | dx, dy, dz = 5 mm                                                                                                                                                              |  |
| Frequency                                                                                                                                                                      |  | 750 MHz ± 1 MHz                                                                                                                                                                |  |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied:                                                                                          |  |                                                                                                                                                                                |  |
| Temperature                                                                                                                                                                    |  | 22.0 °C                                                                                                                                                                        |  |
| Permittivity                                                                                                                                                                   |  | 42.0                                                                                                                                                                           |  |
| Conductivity                                                                                                                                                                   |  | 0.90 mho/m                                                                                                                                                                     |  |
| Nominal Head TSL parameters                                                                                                                                                    |  | (22.0 ± 0.2) °C                                                                                                                                                                |  |
| Measured Head TSL parameters                                                                                                                                                   |  | 41.4 ± 6 %                                                                                                                                                                     |  |
| Head TSL temperature change during test                                                                                                                                        |  | <1.0 °C                                                                                                                                                                        |  |
| <b>SAR result with Head TSL</b>                                                                                                                                                |  |                                                                                                                                                                                |  |
| SAR averaged over 1 cm² (1 g) of Head TSL                                                                                                                                      |  | Condition                                                                                                                                                                      |  |
| SAR measured                                                                                                                                                                   |  | 250 mW input power                                                                                                                                                             |  |
| SAR for nominal Head TSL parameters                                                                                                                                            |  | normalized to 1W                                                                                                                                                               |  |
| SAR averaged over 10 cm² (10 g) of Head TSL                                                                                                                                    |  | Condition                                                                                                                                                                      |  |
| SAR measured                                                                                                                                                                   |  | 250 mW input power                                                                                                                                                             |  |
| SAR for nominal Head TSL parameters                                                                                                                                            |  | normalized to 1W                                                                                                                                                               |  |

| TTL Speag CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                     |                                | CAICT                                                                                                                                                                          |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: csl@chinaetl.com http://www.chinaetl.cn                                                                                                                                       |                                | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: csl@chinaetl.com http://www.chinaetl.cn |  |
| <b>Glossary:</b>                                                                                                                                                                                                                                                                                                     |                                |                                                                                                                                                                                |  |
| TSL                                                                                                                                                                                                                                                                                                                  | tissue simulating liquid       |                                                                                                                                                                                |  |
| ConvF                                                                                                                                                                                                                                                                                                                | sensitivity in TSL / NORMx.y.z |                                                                                                                                                                                |  |
| N/A                                                                                                                                                                                                                                                                                                                  | not applicable or not measured |                                                                                                                                                                                |  |
| <b>Calibration is Performed According to the Following Standards:</b>                                                                                                                                                                                                                                                |                                |                                                                                                                                                                                |  |
| a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices-Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 |                                |                                                                                                                                                                                |  |
| b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"                                                                                                                                                                                                                                                   |                                |                                                                                                                                                                                |  |
| <b>Additional Documentation:</b>                                                                                                                                                                                                                                                                                     |                                |                                                                                                                                                                                |  |
| c) DASY4/5 System Handbook                                                                                                                                                                                                                                                                                           |                                |                                                                                                                                                                                |  |
| <b>Methods Applied and Interpretation of Parameters:</b>                                                                                                                                                                                                                                                             |                                |                                                                                                                                                                                |  |
| • <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.                                                                                                                 |                                |                                                                                                                                                                                |  |
| • <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.                                                                                               |                                |                                                                                                                                                                                |  |
| • <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.      |                                |                                                                                                                                                                                |  |
| • <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.                                                                                                                                                                                              |                                |                                                                                                                                                                                |  |
| • <b>SAR measured:</b> SAR measured at the stated antenna input power.                                                                                                                                                                                                                                               |                                |                                                                                                                                                                                |  |
| • <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.                                                                                                                                                                                                              |                                |                                                                                                                                                                                |  |
| • <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.                                                                                                                                                                                                   |                                |                                                                                                                                                                                |  |
| The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.                                                                                      |                                |                                                                                                                                                                                |  |
| Certificate No: Z22-60103                                                                                                                                                                                                                                                                                            |                                | Page 2 of 6                                                                                                                                                                    |  |

| TTL Speag CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  | CAICT                                                                                                                                                                          |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: csl@chinaetl.com http://www.chinaetl.cn                                                                                                                                                                                                                                                                                                                                              |  | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: csl@chinaetl.com http://www.chinaetl.cn |  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |                                                                                                                                                                                |  |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |                                                                                                                                                                                |  |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  | 53.60-1.13jΩ                                                                                                                                                                   |  |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  | -28.7dB                                                                                                                                                                        |  |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |                                                                                                                                                                                |  |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  | 0.947 ns                                                                                                                                                                       |  |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                      |  |                                                                                                                                                                                |  |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. |  |                                                                                                                                                                                |  |
| No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.                                                                                                                                                                                                                                                                                                                                                                              |  |                                                                                                                                                                                |  |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                                                                                                                                                                                |  |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  | SPEAG                                                                                                                                                                          |  |
| Certificate No: Z22-60103                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  | Page 4 of 6                                                                                                                                                                    |  |



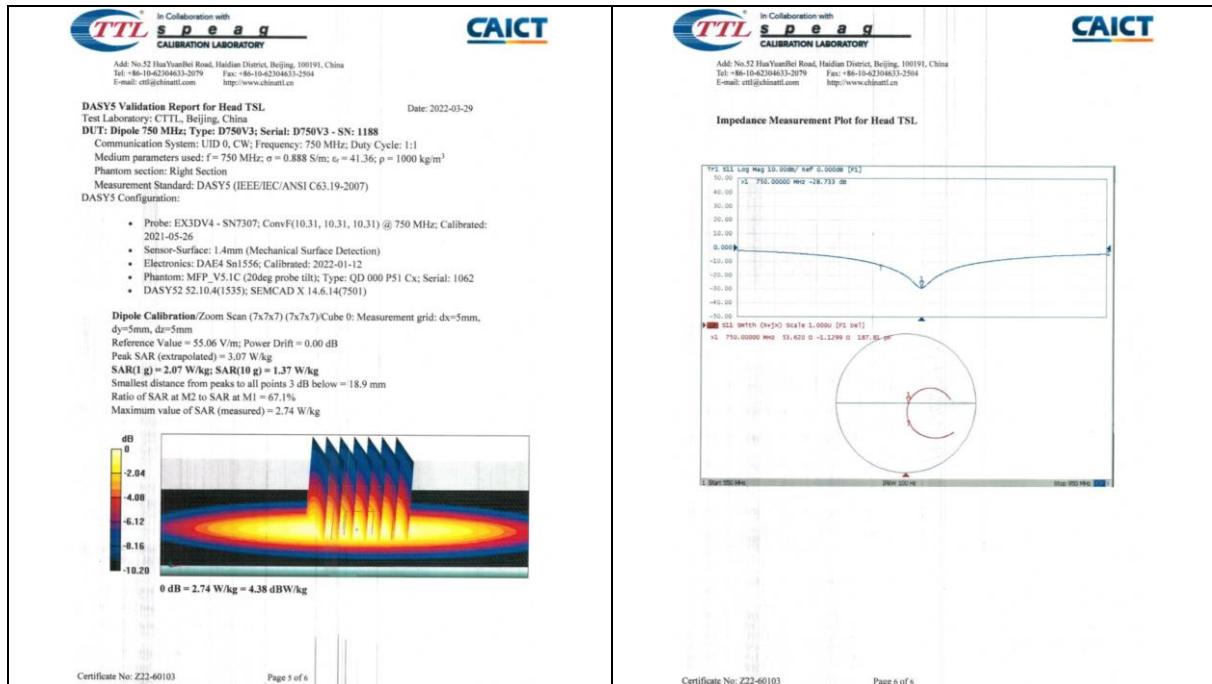

#### 1.4 D835V2 - SN 4d114

**TTL Speaq** CALIBRATION LABORATORY  
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-4204633-2079 Fax: +86-10-4204633-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

**CAICT**

Client: SGS-CN Certificate No: Z22-60104

**CALIBRATION CERTIFICATE**

Object: D835V2 - SN: 4d114

Calibration Procedure(s): FF-Z11-003-01  
Calibration Procedures for dipole validation kits

Calibration date: March 31, 2022

This Calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity <70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|------------------------|---------|-------------------------------------------|-----------------------|
| Power Meter NRP2       | 106277  | 24-Sep-21 (CTTL, No.J21X08326)            | Sep-22                |
| Power sensor NRPBS     | 104261  | 24-Sep-21 (CTTL, No.J21X08326)            | Sep-22                |
| Reference Probe EX3DV4 | SN 7307 | 26-May-21 (SPEAG, No.EX3-7307_May21)      | May-22                |
| DAE4                   | SN 1556 | 12-Jan-22 (CTTL-SPEAG, No.Z22-60007)      | Jan-23                |

| Secondary Standards     | ID #       | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|-------------------------------------------|-----------------------|
| Signal Generator E4438C | MY49071430 | 13-Jan-22 (CTTL, No.J22X00409)            | Jan-23                |
| Network Analyzer E5071C | MY46110673 | 14-Jan-22 (CTTL, No.J22X00409)            | Jan-23                |

Calibrated by: Zhao Jing SAR Test Engineer

Reviewed by: Lin Hao SAR Test Engineer

Approved by: Qi Dianyan SAR Project Leader

Issued: April 6, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60104 Page 1 of 6

**TTL Speaq** CALIBRATION LABORATORY  
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-4204633-2079 Fax: +86-10-4204633-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

**CAICT**

**Glossary:**  
TSL: tissue simulating liquid  
ConvF: sensitivity in TSL / NORMx.y.z  
N/A: not applicable or not measured

**Calibration is Performed According to the Following Standards:**  
a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020  
b) KDB 665664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**  
c) DASY4/5 System Handbook


**Methods Applied and Interpretation of Parameters:**


- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60104 Page 2 of 6

| TTL Speaq Calibration Laboratory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                          | CAICT                                                                                                                                                                                                      |                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| In Collaboration with<br>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com                                                                                                                                                                                                                                                                                                                  |                          | In Collaboration with<br>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |                  |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1.                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |                                                                                                                                                                                                            |                  |
| DASY Version                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | DASY52                   | VS2 10.4                                                                                                                                                                                                   |                  |
| Extrapolation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Advanced Extrapolation   |                                                                                                                                                                                                            |                  |
| Phantom                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Triple Flat Phantom 5.1C |                                                                                                                                                                                                            |                  |
| Distance Dipole Center - TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 15 mm                    | with Spacer                                                                                                                                                                                                |                  |
| Zoom Scan Resolution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | dx, dy, dz = 5 mm        |                                                                                                                                                                                                            |                  |
| Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 835 MHz ± 1 MHz          |                                                                                                                                                                                                            |                  |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied.                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          |                                                                                                                                                                                                            |                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Temperature              | Permittivity                                                                                                                                                                                               | Conductivity     |
| Nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 22.0 °C                  | 41.5                                                                                                                                                                                                       | 0.90 mho/m       |
| Measured Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | (22.0 ± 0.2) °C          | 41.0 ± 5 %                                                                                                                                                                                                 | 0.91 mho/m ± 5 % |
| Head TSL temperature change during test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <1.0 °C                  | ---                                                                                                                                                                                                        | ---              |
| <b>SAR result with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                          |                                                                                                                                                                                                            |                  |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Condition                |                                                                                                                                                                                                            |                  |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 250 mW input power       | 2.37 W/kg                                                                                                                                                                                                  |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | normalized to 1W         | 9.40 W/kg ± 18.8 % (k=2)                                                                                                                                                                                   |                  |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Condition                |                                                                                                                                                                                                            |                  |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 250 mW input power       | 1.54 W/kg                                                                                                                                                                                                  |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | normalized to 1W         | 6.12 W/kg ± 18.7 % (k=2)                                                                                                                                                                                   |                  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          |                                                                                                                                                                                                            |                  |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                          |                                                                                                                                                                                                            |                  |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 48.70 - j22jΩ            |                                                                                                                                                                                                            |                  |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -25.3dB                  |                                                                                                                                                                                                            |                  |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |                                                                                                                                                                                                            |                  |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1.307 ns                 |                                                                                                                                                                                                            |                  |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                      |                          |                                                                                                                                                                                                            |                  |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. |                          |                                                                                                                                                                                                            |                  |
| No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.                                                                                                                                                                                                                                                                                                                                                                              |                          |                                                                                                                                                                                                            |                  |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |                                                                                                                                                                                                            |                  |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | SPEAG                    |                                                                                                                                                                                                            |                  |
| Certificate No: Z22-60104 Page 3 of 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          |                                                                                                                                                                                                            |                  |
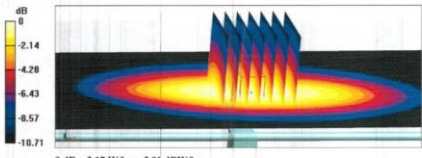
| TTL Speaq Calibration Laboratory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  | CAICT                                                                                                                                                                                                      |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| In Collaboration with<br>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  | In Collaboration with<br>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |  |
| <b>DASY5 Validation Report for Head TSL</b><br>Test Laboratory: CTTTL, Beijing, China<br>DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d114<br>Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1<br>Medium parameters used: f = 835 MHz; σ = 0.907 S/m; ε <sub>r</sub> = 40.98; ρ = 1000 kg/m <sup>3</sup><br>Phantom section: Right Section<br>Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)<br>DASY5 Configuration: <ul style="list-style-type: none"><li>Probe: EX3DV4 - SN7307; ConvF(10.13, 10.13, 10.13) @ 835 MHz; Calibrated: 2021-05-26</li><li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li><li>Electronics: DA4 E4 Sn1556; Calibrated: 2022-01-12</li><li>Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062</li><li>DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)</li></ul> |  |                                                                                                                                                                                                            |  |
| Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm<br>Reference Value = 57.88 V/m; Power Drift = 0.04 dB<br>Peak SAR (extrapolated) = 3.56 W/kg<br>SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.54 W/kg<br>Smallest distance from peaks to all points 3 dB below = 15.8 mm<br>Ratio of SAR at M2 to SAR at M1 = 66.2%<br>Maximum value of SAR (measured) = 3.17 W/kg                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |                                                                                                                                                                                                            |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |                                                                                                                                                                                                            |  |
| 0 dB = 3.17 W/kg = 5.01 dBW/kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |                                                                                                                                                                                                            |  |
| Certificate No: Z22-60104 Page 5 of 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |                                                                                                                                                                                                            |  |
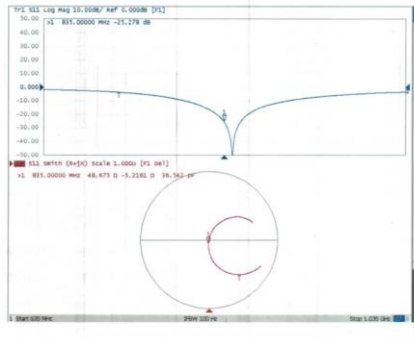
| TTL Speaq Calibration Laboratory                                                                                                                                                                           |  | CAICT                                                                                                                                                                                                      |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| In Collaboration with<br>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |  | In Collaboration with<br>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |  |
| <b>Impedance Measurement Plot for Head TSL</b>                                                                                                                                                             |  |                                                                                                                                                                                                            |  |
|                                                                                                                        |  |                                                                                                                                                                                                            |  |
| Certificate No: Z22-60104 Page 6 of 6                                                                                                                                                                      |  |                                                                                                                                                                                                            |  |

## 1.5 D900V2 - SN 1d079


| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                                                                                                                                                                            |            | In Collaboration with<br><b>CAICT</b><br>CALIBRATION<br>CNAS 1079                                                                                  |                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191<br>Tel: +86-10-6259633-2117<br>E-mail: cti@speag.com http://www.speag.com                                                                                                                                   |            | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-6259633-2117<br>E-mail: cti@caict.ac.cn http://www.caict.ac.cn |                       |
| Client: <b>SGS-CN</b>                                                                                                                                                                                                                                                     |            | Certificate No: <b>Z22-60184</b>                                                                                                                   |                       |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                            |            |                                                                                                                                                    |                       |
| Object: <b>D900V2 - SN: 1d079</b>                                                                                                                                                                                                                                         |            |                                                                                                                                                    |                       |
| Calibration Procedure(s): <b>FF-Z11-003-01</b>                                                                                                                                                                                                                            |            |                                                                                                                                                    |                       |
| Calibration Procedures for dipole validation kits                                                                                                                                                                                                                         |            |                                                                                                                                                    |                       |
| Calibration date: <b>June 7, 2022</b>                                                                                                                                                                                                                                     |            |                                                                                                                                                    |                       |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (S). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. |            |                                                                                                                                                    |                       |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (23±1)°C and humidity <70%.                                                                                                                                               |            |                                                                                                                                                    |                       |
| Calibration Equipment used (MATE critical for calibration)                                                                                                                                                                                                                |            |                                                                                                                                                    |                       |
| Primary Standards                                                                                                                                                                                                                                                         | ID #       | Cal Date (Calibrated by Certificate No.)                                                                                                           | Scheduled Calibration |
| Power Meter NRP2                                                                                                                                                                                                                                                          | 106277     | 24-Sep-21 (CTTL No.J21X08326)                                                                                                                      | Sep-22                |
| Power sensor NRP8S                                                                                                                                                                                                                                                        | 104291     | 24-Sep-21 (CTTL No.J21X08326)                                                                                                                      | Sep-22                |
| Reference Probe EX3DV4                                                                                                                                                                                                                                                    | SN 7464    | 28-Jan-22 (SPEAG No EX3-7464_Jan22)                                                                                                                | Jan-23                |
| DAE4                                                                                                                                                                                                                                                                      | SN 1556    | 12-Jan-22 (CTTL-SPEAG No Z22-60007)                                                                                                                | Jan-23                |
| Secondary Standards                                                                                                                                                                                                                                                       | ID #       | Cal Date (Calibrated by Certificate No.)                                                                                                           | Scheduled Calibration |
| Signal Generator E4438C                                                                                                                                                                                                                                                   | MY49071430 | 13-Jan-22 (CTTL No.Z22X00409)                                                                                                                      | Jan-23                |
| Network Analyzer E5071C                                                                                                                                                                                                                                                   | MY49110673 | 14-Jan-22 (CTTL No.Z22X00409)                                                                                                                      | Jan-23                |
| Calibrated by:                                                                                                                                                                                                                                                            | Name       | Function                                                                                                                                           | Signature             |
|                                                                                                                                                                                                                                                                           | Zhao Jing  | SAR Test Engineer                                                                                                                                  |                       |
| Reviewed by:                                                                                                                                                                                                                                                              | Lin Hao    | SAR Test Engineer                                                                                                                                  |                       |
| Approved by:                                                                                                                                                                                                                                                              | Qi Dianyan | SAR Project Leader                                                                                                                                 |                       |
| Issued: June 13, 2022                                                                                                                                                                                                                                                     |            |                                                                                                                                                    |                       |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                           |            |                                                                                                                                                    |                       |
| Certificate No: Z22-60184                                                                                                                                                                                                                                                 |            | Page 1 of 6                                                                                                                                        |                       |

| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                                                 |                          | In Collaboration with<br><b>CAICT</b><br>CALIBRATION<br>CNAS 1079                                                                                  |                  |
|------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-6259633-2117<br>E-mail: cti@speag.com http://www.speag.com |                          | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-6259633-2117<br>E-mail: cti@caict.ac.cn http://www.caict.ac.cn |                  |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1.                                                     |                          |                                                                                                                                                    |                  |
| DASY Version                                                                                                                                   | DASY52                   | 52.10.4                                                                                                                                            |                  |
| Extrapolation                                                                                                                                  | Advanced Extrapolation   |                                                                                                                                                    |                  |
| Phantom                                                                                                                                        | Triple Flat Phantom 5.1C |                                                                                                                                                    |                  |
| Distance Dipole Center - TSL                                                                                                                   | 15 mm                    | with Spacer                                                                                                                                        |                  |
| Zoom Scan Resolution                                                                                                                           | dk, dy, dz = 5 mm        |                                                                                                                                                    |                  |
| Frequency                                                                                                                                      | 900 MHz ± 1 MHz          |                                                                                                                                                    |                  |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied.                                                          |                          |                                                                                                                                                    |                  |
|                                                                                                                                                | Temperature              | Permittivity                                                                                                                                       | Conductivity     |
| Nominal Head TSL parameters                                                                                                                    | 22.0 °C                  | 41.5                                                                                                                                               | 0.97 nholm       |
| Measured Head TSL parameters                                                                                                                   | (22.0 ± 0.2) °C          | 42.1 ± 6 %                                                                                                                                         | 0.98 nholm ± 6 % |
| Head TSL temperature change during test                                                                                                        | <1.0 °C                  | ---                                                                                                                                                | ---              |
| <b>SAR result with Head TSL</b>                                                                                                                |                          |                                                                                                                                                    |                  |
| SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL                                                                                          | Condition                |                                                                                                                                                    |                  |
| SAR measured                                                                                                                                   | 250 mW input power       | 2.70 W/kg                                                                                                                                          |                  |
| SAR for nominal Head TSL parameters                                                                                                            | normalized to 1W         | 11.0 W/kg ± 18.5 % (k=2)                                                                                                                           |                  |
| SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL                                                                                        | Condition                |                                                                                                                                                    |                  |
| SAR measured                                                                                                                                   | 250 mW input power       | 1.73 W/kg                                                                                                                                          |                  |
| SAR for nominal Head TSL parameters                                                                                                            | normalized to 1W         | 7.09 W/kg ± 18.7 % (k=2)                                                                                                                           |                  |
| Certificate No: Z22-60184                                                                                                                      |                          | Page 3 of 6                                                                                                                                        |                  |

| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  | In Collaboration with<br><b>CAICT</b><br>CALIBRATION<br>CNAS 1079                                                                                  |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-6259633-2117<br>E-mail: cti@speag.com http://www.speag.com                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-6259633-2117<br>E-mail: cti@caict.ac.cn http://www.caict.ac.cn |  |
| <b>Glossary:</b><br>TSL: tissue simulating liquid<br>ConvF: sensitivity in TSL / NORMx,y,z<br>N/A: not applicable or not measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |                                                                                                                                                    |  |
| <b>Calibration is Performed According to the Following Standards:</b><br>a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020<br>b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"<br>c) DASY4/5 System Handbook                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                                                                                                                                                    |  |
| <b>Additional Documentation:</b><br>DASY4/5 System Handbook                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |                                                                                                                                                    |  |
| <b>Methods Applied and Interpretation of Parameters:</b><br>• <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.<br>• <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.<br>• <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.<br>• <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.<br>• <b>SAR measured:</b> SAR measured at the stated antenna input power.<br>• <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.<br>• <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result. |  |                                                                                                                                                    |  |
| The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |                                                                                                                                                    |  |
| Certificate No: Z22-60184                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  | Page 2 of 6                                                                                                                                        |  |

| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                | In Collaboration with<br><b>CAICT</b><br>CALIBRATION<br>CNAS 1079                                                                                  |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-6259633-2117<br>E-mail: cti@speag.com http://www.speag.com                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-6259633-2117<br>E-mail: cti@caict.ac.cn http://www.caict.ac.cn |  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                |                                                                                                                                                    |  |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                |                                                                                                                                                    |  |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 48.10 - 8.49jΩ |                                                                                                                                                    |  |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -23.3 dB       |                                                                                                                                                    |  |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                |                                                                                                                                                    |  |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1.312 ns       |                                                                                                                                                    |  |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                                                                                                                                                    |  |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged. |                |                                                                                                                                                    |  |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                |                                                                                                                                                    |  |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SPEAG          |                                                                                                                                                    |  |
| Certificate No: Z22-60184                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                | Page 4 of 6                                                                                                                                        |  |



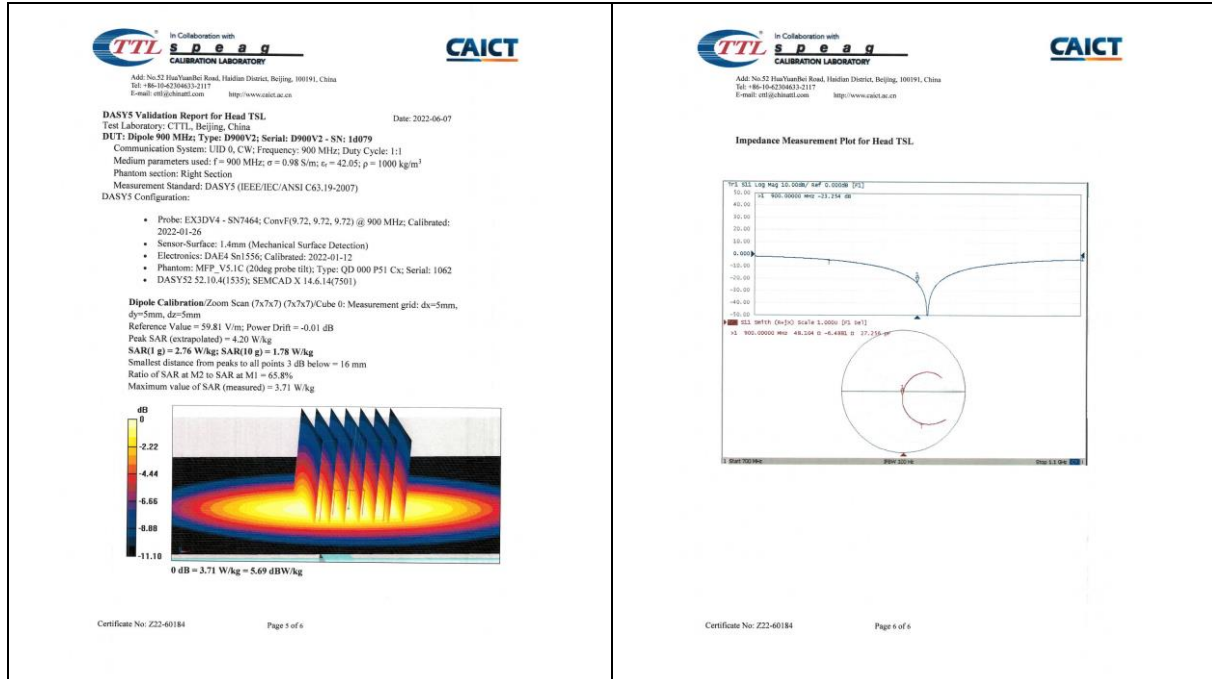

## 1.6 D1800V2 - SN 2d170

**TTL** In Collaboration with **CAICT**  
**Calibration Laboratory**

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-42306033-2117 Fax: +86-10-42306033-2117  
E-mail: cti@china.ttl.com http://www.china.ttl.com

Client: **SGS-CN** Certificate No: **Z22-60105**

**CALIBRATION CERTIFICATE**

Object: **D1800V2 - SN: 2d170**

Calibration Procedure(s): **FF-Z11-003-01**  
Calibration Procedures for dipole validation kits

Calibration date: **March 31, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity <70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration |
|------------------------|---------|------------------------------------------|-----------------------|
| Power Meter NRP2       | 106277  | 24-Sep-21 (CTTL No.J21X08326)            | Sep-22                |
| Power sensor NRP8S     | 104291  | 24-Sep-21 (CTTL No.J21X08326)            | Sep-22                |
| Reference Probe EX3DV4 | SN 7307 | 26-May-21 (SPEAG No.EX3-7307_May21)      | May-22                |
| DAE4                   | SN 1556 | 12-Jan-22 (CTTL-SPEAG No.Z22-60007)      | Jan-23                |

| Secondary Standards     | ID #       | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Signal Generator E4438C | MY49071430 | 13-Jan-22 (CTTL No.J22X00406)            | Jan-23                |
| Network Analyzer E5071C | MY46110673 | 14-Jan-22 (CTTL No.J22X00406)            | Jan-23                |

Calibrated by: **Zhao Jing** SAR Test Engineer  
Reviewed by: **Lin Hao** SAR Test Engineer  
Approved by: **Qi Diqian** SAR Project Leader

Issued: April 6, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60105 Page 1 of 6

**TTL** In Collaboration with **CAICT**  
**Calibration Laboratory**

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-42306033-2079 Fax: +86-10-42306033-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

**Glossary:**  
TSL: tissue simulating liquid  
ConvF: sensitivity in TSL / NORMx.y.z  
N/A: not applicable or not measured

**Calibration is Performed According to the Following Standards:**  
a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020  
b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"


**Additional Documentation:**  
c) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**  

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60105 Page 2 of 6

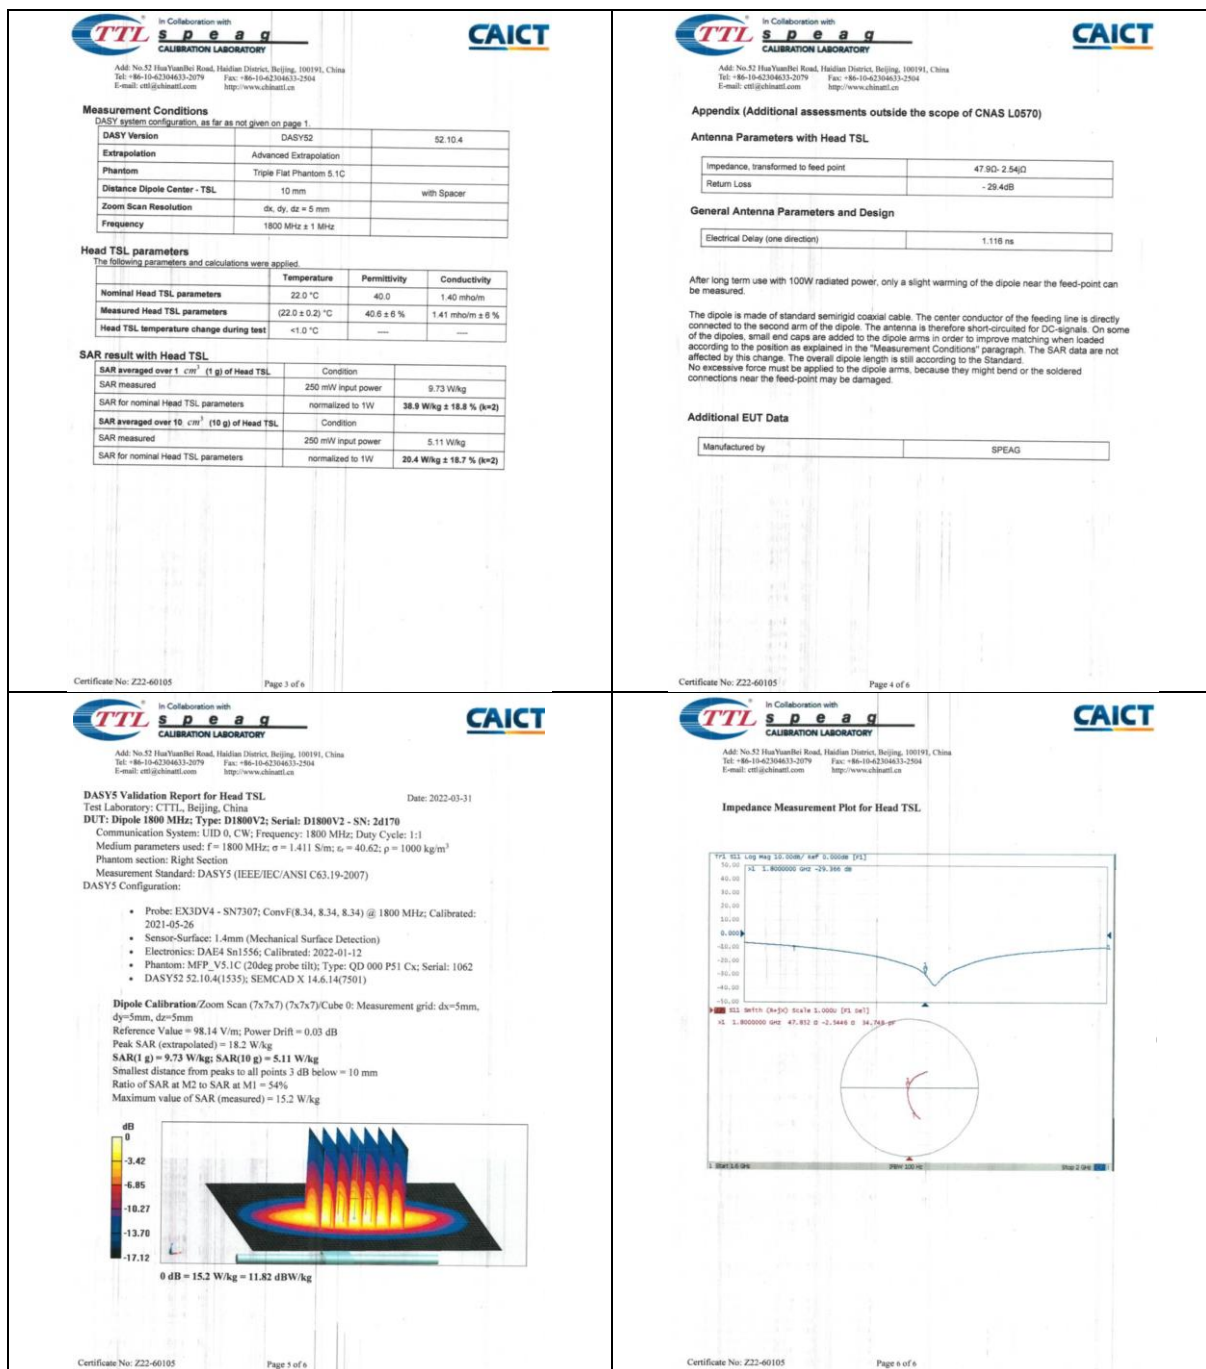


## 1.7 D1900V2 - SN 5d136

| TTL Calibration Laboratory                                                                                                                                                                                                                                                 |                                                                    | CAICT                                                                                                                          |                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| In Collaboration with<br>CALIBRATION LABORATORY                                                                                                                                                                                                                            |                                                                    | 中国合格评定国家认可委员会<br>CALIBRATION                                                                                                   |                       |
| Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-4220603-2117<br>E-mail: cti@china-test.com                                                                                                                                             |                                                                    | Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-4220603-2117<br>E-mail: cti@china-test.com |                       |
| Client                                                                                                                                                                                                                                                                     | SGS-CN                                                             | Certificate No.                                                                                                                | Z22-60185             |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                             |                                                                    |                                                                                                                                |                       |
| Object                                                                                                                                                                                                                                                                     | D1900V2 - SN: 5d136                                                |                                                                                                                                |                       |
| Calibration Procedure(s)                                                                                                                                                                                                                                                   | FF-Z11-003-01<br>Calibration Procedures for dipole validation kits |                                                                                                                                |                       |
| Calibration date:                                                                                                                                                                                                                                                          | June 7, 2022                                                       |                                                                                                                                |                       |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. |                                                                    |                                                                                                                                |                       |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (23±1)°C and humidity<70%.                                                                                                                                                 |                                                                    |                                                                                                                                |                       |
| Calibration Equipment used (M&TE critical for calibration)                                                                                                                                                                                                                 |                                                                    |                                                                                                                                |                       |
| Primary Standards                                                                                                                                                                                                                                                          | ID #                                                               | Cal Date (Calibrated by: Certificate No.)                                                                                      | Scheduled Calibration |
| Power Meter NRP2                                                                                                                                                                                                                                                           | 106277                                                             | 24-Sep-21 (CTTL No.J21X08326)                                                                                                  | Sep-22                |
| Power sensor NRP65                                                                                                                                                                                                                                                         | 104291                                                             | 24-Sep-21 (CTTL No.J21X08326)                                                                                                  | Sep-22                |
| Reference Probe EXSDV4                                                                                                                                                                                                                                                     | SN 7464                                                            | 28-Jan-22 (SPEAG No EX3-7464_Jan22)                                                                                            | Jan-23                |
| DAE4                                                                                                                                                                                                                                                                       | SN 1556                                                            | 12-Jan-22 (CTTL-SPEAG No Z22-60007)                                                                                            | Jan-23                |
| Secondary Standards                                                                                                                                                                                                                                                        | ID #                                                               | Cal Date (Calibrated by: Certificate No.)                                                                                      | Scheduled Calibration |
| Signal Generator E4438C                                                                                                                                                                                                                                                    | MY48071430                                                         | 13-Jan-22 (CTTL No.J22X00409)                                                                                                  | Jan-23                |
| Network Analyzer E5071C                                                                                                                                                                                                                                                    | MY48110073                                                         | 14-Jan-22 (CTTL No.J22X00409)                                                                                                  | Jan-23                |
| Calibrated by:                                                                                                                                                                                                                                                             | Name                                                               | Function                                                                                                                       | Signature             |
|                                                                                                                                                                                                                                                                            | Zhao Jing                                                          | SAR Test Engineer                                                                                                              |                       |
| Reviewed by:                                                                                                                                                                                                                                                               | Lin Hao                                                            | SAR Test Engineer                                                                                                              |                       |
| Approved by:                                                                                                                                                                                                                                                               | Qi Dianyan                                                         | SAR Project Leader                                                                                                             |                       |
| Issued: June 13, 2022                                                                                                                                                                                                                                                      |                                                                    |                                                                                                                                |                       |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                            |                                                                    |                                                                                                                                |                       |
| Certificate No: Z22-60185                                                                                                                                                                                                                                                  |                                                                    | Page 1 of 6                                                                                                                    |                       |

| TTL Calibration Laboratory                                                                                                     |                          | CAICT                                                                                                                          |                 |
|--------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------|-----------------|
| In Collaboration with<br>CALIBRATION LABORATORY                                                                                |                          | 中国合格评定国家认可委员会<br>CALIBRATION                                                                                                   |                 |
| Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-4220603-2117<br>E-mail: cti@china-test.com |                          | Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-4220603-2117<br>E-mail: cti@china-test.com |                 |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1.                                     |                          |                                                                                                                                |                 |
| DASY Version                                                                                                                   | DASY52                   | 52.10.4                                                                                                                        |                 |
| Extrapolation                                                                                                                  | Advanced Extrapolation   |                                                                                                                                |                 |
| Phantom                                                                                                                        | Triple Flat Phantom 5.1C |                                                                                                                                |                 |
| Distance Dipole Center - TSL                                                                                                   | 10 mm                    | with Spacer                                                                                                                    |                 |
| Zoom Scan Resolution                                                                                                           | dx, dy, dz = 5 mm        |                                                                                                                                |                 |
| Frequency                                                                                                                      | 1900 MHz ± 1 MHz         |                                                                                                                                |                 |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied:                                          |                          |                                                                                                                                |                 |
| Nominal Head TSL parameters                                                                                                    | Temperature              | Permittivity                                                                                                                   | Conductivity    |
|                                                                                                                                | 22.0 °C                  | 40.0                                                                                                                           | 1.40 nH/m       |
| Measured Head TSL parameters                                                                                                   | (22.0 ± 0.2) °C          | 39.9 ± 6 %                                                                                                                     | 1.39 nH/m ± 6 % |
| Head TSL temperature change during test                                                                                        | <1.0 °C                  | ---                                                                                                                            | ---             |
| <b>SAR result with Head TSL</b>                                                                                                |                          |                                                                                                                                |                 |
| SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL                                                                          | Condition                |                                                                                                                                |                 |
| SAR measured                                                                                                                   | 250 mW input power       | 9.65 W/kg                                                                                                                      |                 |
| SAR for nominal Head TSL parameters                                                                                            | normalized to 1W         | 40.0 W/kg ± 16.8 % (k=2)                                                                                                       |                 |
| SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL                                                                        | Condition                |                                                                                                                                |                 |
| SAR measured                                                                                                                   | 250 mW input power       | 5.18 W/kg                                                                                                                      |                 |
| SAR for nominal Head TSL parameters                                                                                            | normalized to 1W         | 20.8 W/kg ± 18.7 % (k=2)                                                                                                       |                 |
| Certificate No: Z22-60185                                                                                                      |                          | Page 3 of 6                                                                                                                    |                 |

| TTL Calibration Laboratory                                                                                                                                                                                                                                                                                            |                                | CAICT                                                                                                                          |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--|
| In Collaboration with<br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                       |                                | 中国合格评定国家认可委员会<br>CALIBRATION                                                                                                   |  |
| Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-4220603-2117<br>E-mail: cti@china-test.com                                                                                                                                                                                        |                                | Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-4220603-2117<br>E-mail: cti@china-test.com |  |
| <b>Glossary:</b>                                                                                                                                                                                                                                                                                                      |                                |                                                                                                                                |  |
| TSL                                                                                                                                                                                                                                                                                                                   | tissue simulating liquid       |                                                                                                                                |  |
| CorrF                                                                                                                                                                                                                                                                                                                 | sensitivity in TSL / NORMx.y.z |                                                                                                                                |  |
| N/A                                                                                                                                                                                                                                                                                                                   | not applicable or not measured |                                                                                                                                |  |
| <b>Calibration is Performed According to the Following Standards:</b>                                                                                                                                                                                                                                                 |                                |                                                                                                                                |  |
| a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 |                                |                                                                                                                                |  |
| b) KDB 865984, "SAR Measurement Requirements for 100 MHz to 6 GHz"                                                                                                                                                                                                                                                    |                                |                                                                                                                                |  |
| <b>Additional Documentation:</b>                                                                                                                                                                                                                                                                                      |                                |                                                                                                                                |  |
| c) DASY4/5 System Handbook                                                                                                                                                                                                                                                                                            |                                |                                                                                                                                |  |
| <b>Methods Applied and Interpretation of Parameters:</b>                                                                                                                                                                                                                                                              |                                |                                                                                                                                |  |
| • <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.                                                                                                                  |                                |                                                                                                                                |  |
| • <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.                                                                                                |                                |                                                                                                                                |  |
| • <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.       |                                |                                                                                                                                |  |
| • <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.                                                                                                                                                                                               |                                |                                                                                                                                |  |
| • <b>SAR measured:</b> SAR measured at the stated antenna input power.                                                                                                                                                                                                                                                |                                |                                                                                                                                |  |
| • <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.                                                                                                                                                                                                               |                                |                                                                                                                                |  |
| • <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.                                                                                                                                                                                                    |                                |                                                                                                                                |  |
| The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.                                                                                       |                                |                                                                                                                                |  |
| Certificate No: Z22-60185                                                                                                                                                                                                                                                                                             |                                | Page 2 of 6                                                                                                                    |  |

| TTL Calibration Laboratory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               | CAICT                                                                                                                          |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------|--|
| In Collaboration with<br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |               | 中国合格评定国家认可委员会<br>CALIBRATION                                                                                                   |  |
| Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-4220603-2117<br>E-mail: cti@china-test.com                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |               | Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-4220603-2117<br>E-mail: cti@china-test.com |  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |               |                                                                                                                                |  |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |                                                                                                                                |  |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 51.02 ± 7.58Ω |                                                                                                                                |  |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -22.4dB       |                                                                                                                                |  |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |               |                                                                                                                                |  |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1.109 ns      |                                                                                                                                |  |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |               |                                                                                                                                |  |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small and caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged. |               |                                                                                                                                |  |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                                                                                                |  |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SPEAG         |                                                                                                                                |  |
| Certificate No: Z22-60185                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               | Page 4 of 6                                                                                                                    |  |

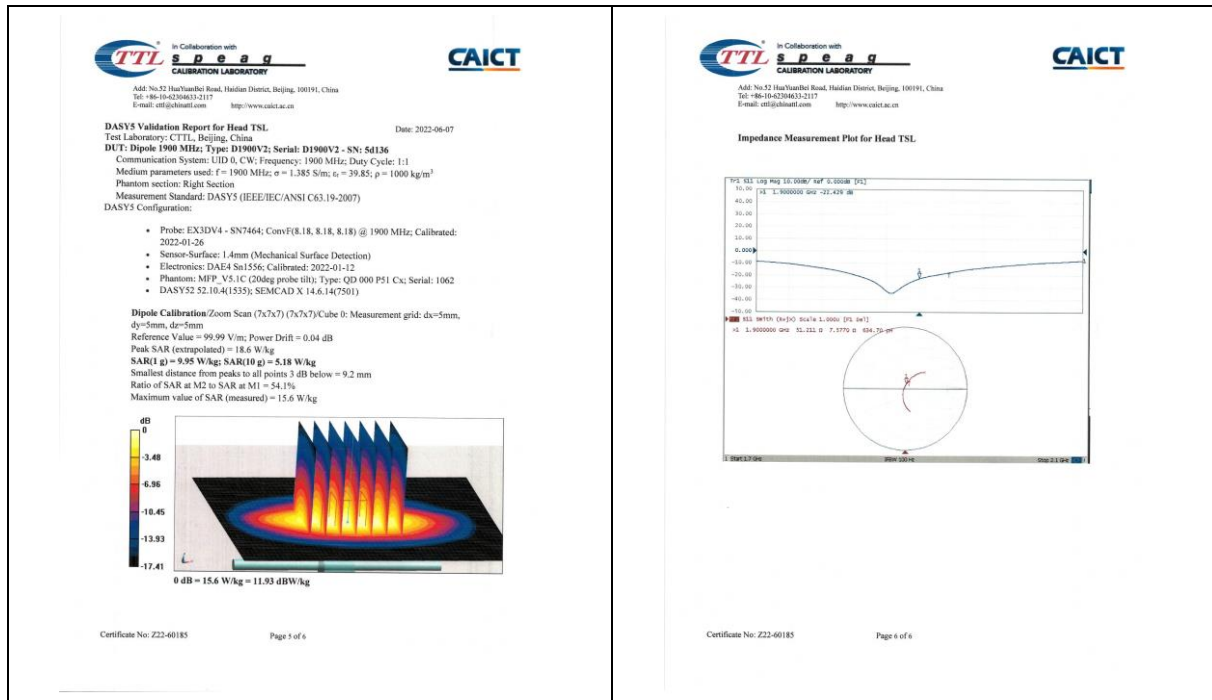

## 1.8 D2000V2 - SN 1041

In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY

CAICT

Address: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62506633-3117  
E-mail: cti@tstl.com.cn http://www.caict.ac.cn

Client: **SGS-CN** Certificate No: **Z22-60186**

**CALIBRATION CERTIFICATE**

Object: **D2000V2 - SN: 1041**

Calibration Procedure(s): **FF-Z11-003-01**  
Calibration Procedures for dipole validation kits

Calibration date: **June 8, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (B). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22±3)°C and humidity <70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration |
|------------------------|---------|------------------------------------------|-----------------------|
| Power Meter NRP2       | 106277  | 24-Sep-21 (CTTL No. J21X08328)           | Sep-22                |
| Power sensor NRP8S     | 104291  | 24-Sep-21 (CTTL No. J21X08328)           | Sep-22                |
| Reference Probe EX3DV4 | SN 7464 | 26-Jan-22 (SPEAG No. EX3-7464_Jan22)     | Jan-23                |
| DAE4                   | SN 1556 | 12-Jan-22 (CTTL-SPEAG No. Z22-60007)     | Jan-23                |

| Secondary Standards     | ID #       | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Signal Generator E4438C | MY49071430 | 13-Jan-22 (CTTL No. J22X00409)           | Jan-23                |
| Network Analyzer E5071C | MY48110673 | 14-Jan-22 (CTTL No. J22X00409)           | Jan-23                |

Calibrated by: **Zhao Jing** SAR Test Engineer Signature: 

Reviewed by: **Lin Hao** SAR Test Engineer Signature: 

Approved by: **Qi Danyuan** SAR Project Leader Signature: 

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Issued: June 13, 2022

Certificate No: Z22-60186 Page 1 of 6

In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY

CAICT

Address: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62506633-3117  
E-mail: cti@tstl.com.cn http://www.caict.ac.cn

**Glossary:**  
TSL: Issue simulating liquid  
ConvF: sensitivity in TSL: NORMx.y.z  
N/A: not applicable or not measured

**Calibration is Performed According to the Following Standards:**  
a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020  
b) KDB 865964, "SAR Measurement Requirements for 100 MHz to 8 GHz"

**Additional Documentation:**  
c) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**  

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.


The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.


Certificate No: Z22-60186 Page 2 of 6



| In Collaboration with<br><b>TTL</b><br>CALIBRATION LABORATORY                                                                                         |                          | <b>CAICT</b>             |                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------|------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62306633-2117<br>E-mail: ott@china.ttl.com http://www.caict.ac.cn |                          |                          |                  |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1.                                                            |                          |                          |                  |
| DASY Version                                                                                                                                          | DASY52                   | 52.10.4                  |                  |
| Extrapolation                                                                                                                                         | Advanced Extrapolation   |                          |                  |
| Phantom                                                                                                                                               | Triple Flat Phantom S.1C |                          |                  |
| Distance Dipole Center - TSL                                                                                                                          | 10 mm                    | with Spacer              |                  |
| Zoom Scan Resolution                                                                                                                                  | dx, dy, dz = 5 mm        |                          |                  |
| Frequency                                                                                                                                             | 2000 MHz ± 1 MHz         |                          |                  |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied:                                                                 |                          |                          |                  |
|                                                                                                                                                       | Temperature              | Permittivity             | Conductivity     |
| Nominal Head TSL parameters                                                                                                                           | 22.0 °C                  | 40.0                     | 1.40 mho/m       |
| Measured Head TSL parameters                                                                                                                          | (22.0 ± 0.2) °C          | 40.2 ± 6 %               | 1.39 mho/m ± 6 % |
| Head TSL temperature change during test                                                                                                               | <1.0 °C                  | ---                      | ---              |
| <b>SAR result with Head TSL</b>                                                                                                                       |                          |                          |                  |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                 | Condition                |                          |                  |
| SAR measured                                                                                                                                          | 250 mW input power       | 10.4 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                   | normalized to 1W         | 41.8 W/kg ± 16.8 % (k=2) |                  |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                               | Condition                |                          |                  |
| SAR measured                                                                                                                                          | 250 mW input power       | 5.30 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                   | normalized to 1W         | 21.3 W/kg ± 16.7 % (k=2) |                  |
| Certificate No: Z22-60186 Page 3 of 6                                                                                                                 |                          |                          |                  |


| In Collaboration with<br><b>TTL</b><br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                               |               | <b>CAICT</b> |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62306633-2117<br>E-mail: ott@china.ttl.com http://www.caict.ac.cn                                                                                                                                                                                                                                                                                                                                                                       |               |              |  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |              |  |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |               |              |  |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 48.4Ω ± 0.74Ω |              |  |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -34.9dB       |              |  |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |               |              |  |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1.088 ns      |              |  |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                      |               |              |  |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. |               |              |  |
| No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.                                                                                                                                                                                                                                                                                                                                                                              |               |              |  |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |              |  |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | SPEAG         |              |  |
| Certificate No: Z22-60186 Page 4 of 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |              |  |
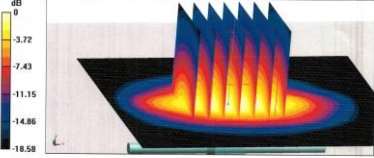
| In Collaboration with<br><b>TTL</b><br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  | <b>CAICT</b> |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62306633-2117<br>E-mail: ott@china.ttl.com http://www.caict.ac.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |              |  |
| <b>DASY5 Validation Report for Head TSL</b><br>Test Laboratory: CTTL, Beijing, China<br>DUT: Dipole 2000 MHz; Type: D2000V2; Serial: D2000V2 - SN: 1041<br>Communication System: UTD 0, CW; Frequency: 2000 MHz; Duty Cycle: 1:1<br>Medium parameters used: f = 2000 MHz; σ = 1.392 S/m; ε <sub>r</sub> = 40.21; ρ = 1000 kg/m <sup>3</sup><br>Phantom section: Right Section<br>Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)<br>DASY5 Configuration: <ul style="list-style-type: none"><li>Probe: EX3DV4 - SN7464; ConvF(8.2, 8.2) @ 2000 MHz; Calibrated: 2022-01-26</li><li>Sensor Surface: 1.4mm (Mechanical Surface Detection)</li><li>Electronics: DA64 Sn1556; Calibrated: 2022-01-12</li><li>Phantom: MPP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062</li><li>DASY52: 52.10.4(1555); SEMCAD X 14.6.14(7501)</li></ul> Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm<br>Reference Value = 103.4 V/m; Power Drift = 0.03 dB<br>Peak SAR (extrapolated) = 19.6 W/kg<br>SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.3 W/kg<br>Smallest distance from peaks to all points 3 dB below = 9.1 mm<br>Ratio of SAR at M2 to SAR at M1 = 53.6%<br>Maximum value of SAR (measured) = 16.3 W/kg |  |              |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |              |  |
| Certificate No: Z22-60186 Page 5 of 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |              |  |
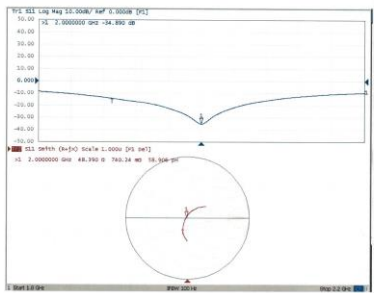
| In Collaboration with<br><b>TTL</b><br>CALIBRATION LABORATORY                                                                                         |  | <b>CAICT</b> |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62306633-2117<br>E-mail: ott@china.ttl.com http://www.caict.ac.cn |  |              |  |
| <b>Impedance Measurement Plot for Head TSL</b>                                                                                                        |  |              |  |
|                                                                   |  |              |  |
| Certificate No: Z22-60186 Page 6 of 6                                                                                                                 |  |              |  |

## 1.9 D2300V2 - SN 1096

| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                    | CAICT                                                                                                                                                                          |                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191<br>Tel: +86-10-42304633-2512 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                    | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |                       |
| Client                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | SGS-CN                                                             | Certificate No.                                                                                                                                                                | Z22-60106             |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    |                                                                                                                                                                                |                       |
| Object                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | D2300V2 - SN: 1096                                                 |                                                                                                                                                                                |                       |
| Calibration Procedure(s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | FF-Z11-003-01<br>Calibration Procedures for dipole validation kits |                                                                                                                                                                                |                       |
| Calibration date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | March 31, 2022                                                     |                                                                                                                                                                                |                       |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                    |                                                                                                                                                                                |                       |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity <70%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                    |                                                                                                                                                                                |                       |
| Calibration Equipment used (M&TE critical for calibration)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                    |                                                                                                                                                                                |                       |
| Primary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | ID #                                                               | Cal Date (Calibrated by Certificate No.)                                                                                                                                       | Scheduled Calibration |
| Power Meter NRP2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 108277                                                             | 24-Sep-21 (CTTL No.J21X08328)                                                                                                                                                  | Sep-22                |
| Power sensor NRP8S                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 104291                                                             | 24-Sep-21 (CTTL No.J21X08328)                                                                                                                                                  | Sep-22                |
| Reference Probe EX3DV4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | SN 7307                                                            | 26-May-21 (SPEAG No.EK3-7307_May21)                                                                                                                                            | May-22                |
| DAE4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | SN 1556                                                            | 12-Jan-22 (CTTL-SPEAG No.Z22-60007)                                                                                                                                            | Jan-23                |
| Secondary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | ID #                                                               | Cal Date (Calibrated by Certificate No.)                                                                                                                                       | Scheduled Calibration |
| Signal Generator E4438C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | MY49071430                                                         | 13-Jan-22 (CTTL No.J22X00406)                                                                                                                                                  | Jan-23                |
| Network Analyzer E5071C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | MY48110673                                                         | 14-Jan-22 (CTTL No.J22X00406)                                                                                                                                                  | Jan-23                |
| Calibrated by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Name                                                               | Function                                                                                                                                                                       | Signature             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Zhao Jing                                                          | SAR Test Engineer                                                                                                                                                              |                       |
| Reviewed by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Lin Hao                                                            | SAR Test Engineer                                                                                                                                                              |                       |
| Approved by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Qi Diqiyuan                                                        | SAR Project Leader                                                                                                                                                             |                       |
| Issued: April 6, 2022                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                    |                                                                                                                                                                                |                       |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                    |                                                                                                                                                                                |                       |
| Certificate No: Z22-60106                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                    | Page 1 of 6                                                                                                                                                                    |                       |
| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                    | CAICT                                                                                                                                                                          |                       |
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |                       |
| <b>Measurement Conditions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                    |                                                                                                                                                                                |                       |
| DASY system configuration, as far as not given on page 1:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                    |                                                                                                                                                                                |                       |
| DASY Version                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | DASY32                                                             | 52.10.4                                                                                                                                                                        |                       |
| Extrapolation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Advanced Extrapolation                                             |                                                                                                                                                                                |                       |
| Phantom                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Triple Flat Phantom 5.1C                                           |                                                                                                                                                                                |                       |
| Distance Dipole Center - TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 10 mm                                                              | with Spacer                                                                                                                                                                    |                       |
| Zoom Scan Resolution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | dx, dy, dz = 5 mm                                                  |                                                                                                                                                                                |                       |
| Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2300 MHz ± 1 MHz                                                   |                                                                                                                                                                                |                       |
| <b>Head TSL parameters</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                    |                                                                                                                                                                                |                       |
| The following parameters and calculations were applied:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                    |                                                                                                                                                                                |                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Temperature                                                        | Permittivity                                                                                                                                                                   | Conductivity          |
| Nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 22.0 °C                                                            | 39.5                                                                                                                                                                           | 1.67 mho/m            |
| Measured Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | (22.0 ± 0.2) °C                                                    | 39.8 ± 6 %                                                                                                                                                                     | 1.70 mho/m ± 6 %      |
| Head TSL temperature change during test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <1.0 °C                                                            | ---                                                                                                                                                                            | ---                   |
| <b>SAR result with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                    |                                                                                                                                                                                |                       |
| SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Condition                                                          |                                                                                                                                                                                |                       |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 250 mW input power                                                 | 12.4 W/kg                                                                                                                                                                      |                       |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | normalized to 1W                                                   | 49.2 W/kg ± 18.8 % (k=2)                                                                                                                                                       |                       |
| SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Condition                                                          |                                                                                                                                                                                |                       |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 250 mW input power                                                 | 5.88 W/kg                                                                                                                                                                      |                       |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | normalized to 1W                                                   | 23.4 W/kg ± 18.7 % (k=2)                                                                                                                                                       |                       |
| Certificate No: Z22-60106                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                    | Page 3 of 6                                                                                                                                                                    |                       |
| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                    | CAICT                                                                                                                                                                          |                       |
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |                       |
| Certificate No: Z22-60106                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                    | Page 2 of 6                                                                                                                                                                    |                       |
| <b>Glossary:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                    |                                                                                                                                                                                |                       |
| TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | tissue simulating liquid                                           |                                                                                                                                                                                |                       |
| ConvF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | sensitivity in TSL / NORMx,y,z                                     |                                                                                                                                                                                |                       |
| N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | not applicable or not measured                                     |                                                                                                                                                                                |                       |
| <b>Calibration is Performed According to the Following Standards:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                    |                                                                                                                                                                                |                       |
| a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1: 528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                    |                                                                                                                                                                                |                       |
| b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                    |                                                                                                                                                                                |                       |
| <b>Additional Documentation:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                    |                                                                                                                                                                                |                       |
| c) DASY4/5 System Handbook                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                    |                                                                                                                                                                                |                       |
| <b>Methods Applied and Interpretation of Parameters:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                    |                                                                                                                                                                                |                       |
| <ul style="list-style-type: none"> <li>Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li>Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.</li> <li>Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li>Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.</li> <li>SAR measured: SAR measured at the stated antenna input power.</li> <li>SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li>SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> |                                                                    |                                                                                                                                                                                |                       |
| The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                    |                                                                                                                                                                                |                       |
| Certificate No: Z22-60106                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                    | Page 2 of 6                                                                                                                                                                    |                       |
| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                    | CAICT                                                                                                                                                                          |                       |
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |                       |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                    |                                                                                                                                                                                |                       |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                    |                                                                                                                                                                                |                       |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 49.20 - 4.56jΩ                                                     |                                                                                                                                                                                |                       |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | - 26.6dB                                                           |                                                                                                                                                                                |                       |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                    |                                                                                                                                                                                |                       |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1.083 ns                                                           |                                                                                                                                                                                |                       |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                    |                                                                                                                                                                                |                       |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for OC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                    |                                                                                                                                                                                |                       |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                    |                                                                                                                                                                                |                       |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | SPEAG                                                              |                                                                                                                                                                                |                       |
| Certificate No: Z22-60106                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                    | Page 4 of 6                                                                                                                                                                    |                       |

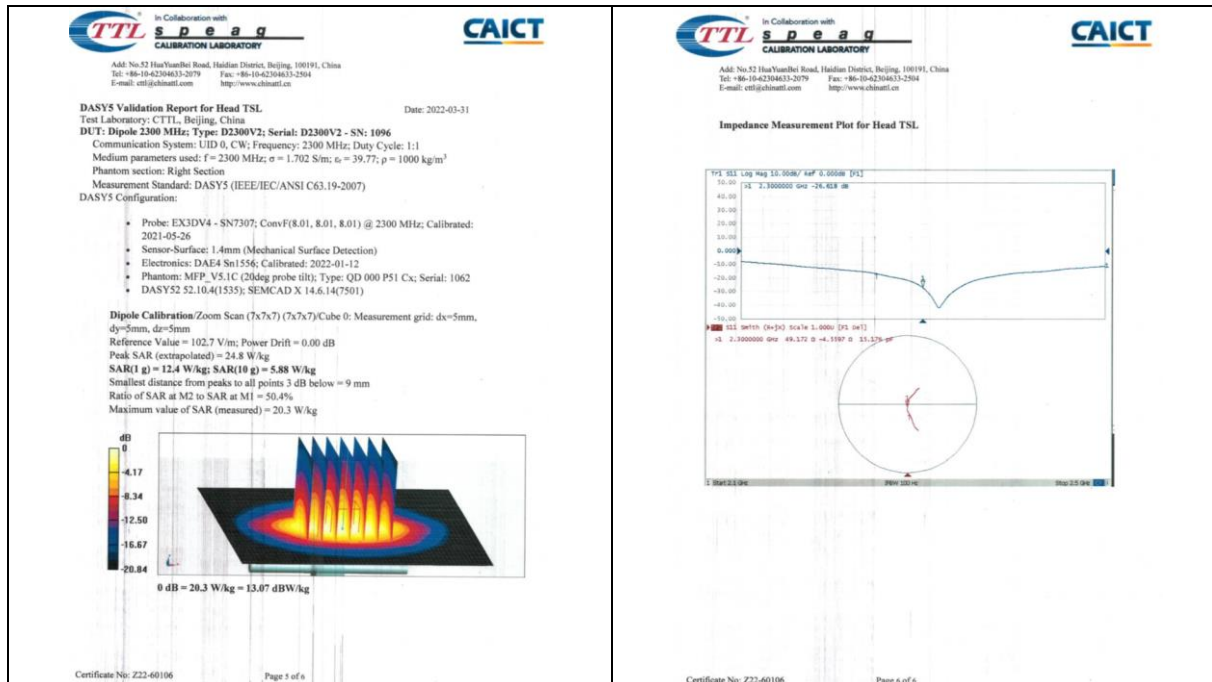

## 1.10 D2450V2 - SN 817

**TTL** In Collaboration with **CAICT**  
**SPEAG**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62504633-2079 Fax: +86-10-62504633-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

Client: **SGS-CN** Certificate No: **Z22-60107**

**CALIBRATION CERTIFICATE**

Object: **D2450V2 - SN: 817**

Calibration Procedure(s): **FF-Z11-003-01**  
Calibration Procedures for dipole validation kits

Calibration date: **April 1, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date (Calibrated by: Certificate No.) | Scheduled Calibration |
|------------------------|---------|-------------------------------------------|-----------------------|
| Power Meter: NRP2      | 106277  | 24-Sep-21 (CTTL No.J21X08320)             | Sep-22                |
| Power sensor: NRP8S    | 104291  | 24-Sep-21 (CTTL No.J21X08320)             | Sep-22                |
| Reference Probe EX3DV4 | SN 7307 | 26-May-21(SPEAG.No EX3-7307_May21)        | May-22                |
| DAE4                   | SN 1556 | 12-Jan-22(CTTL-SPEAG.No Z22-60007)        | Jan-23                |

| Secondary Standards     | ID #       | Cal Date (Calibrated by: Certificate No.) | Scheduled Calibration |
|-------------------------|------------|-------------------------------------------|-----------------------|
| Signal Generator E4438C | MY49071430 | 13-Jan-22 (CTTL No.J22X00409)             | Jan-23                |
| Network Analyzer E5071C | MY46110673 | 14-Jan-22 (CTTL No.J22X00406)             | Jan-23                |

Calibrated by: **Zhao Jing** SAR Test Engineer  
Reviewed by: **Lin Hao** SAR Test Engineer  
Approved by: **Qi Danyuan** SAR Project Leader

Issued: April 6, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60107 Page 1 of 6

**TTL** In Collaboration with **CAICT**  
**SPEAG**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62504633-2079 Fax: +86-10-62504633-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

**Glossary:**  
TSL: tissue simulating liquid  
ConvF: sensitivity in TSL / NORMx.y.z  
N/A: not applicable or not measured

**Calibration is Performed According to the Following Standards:**  
a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices-Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020  
b) KDB 865864, "SAR Measurement Requirements for 100 MHz to 6 GHz"


**Additional Documentation:**  
c) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60107 Page 2 of 6

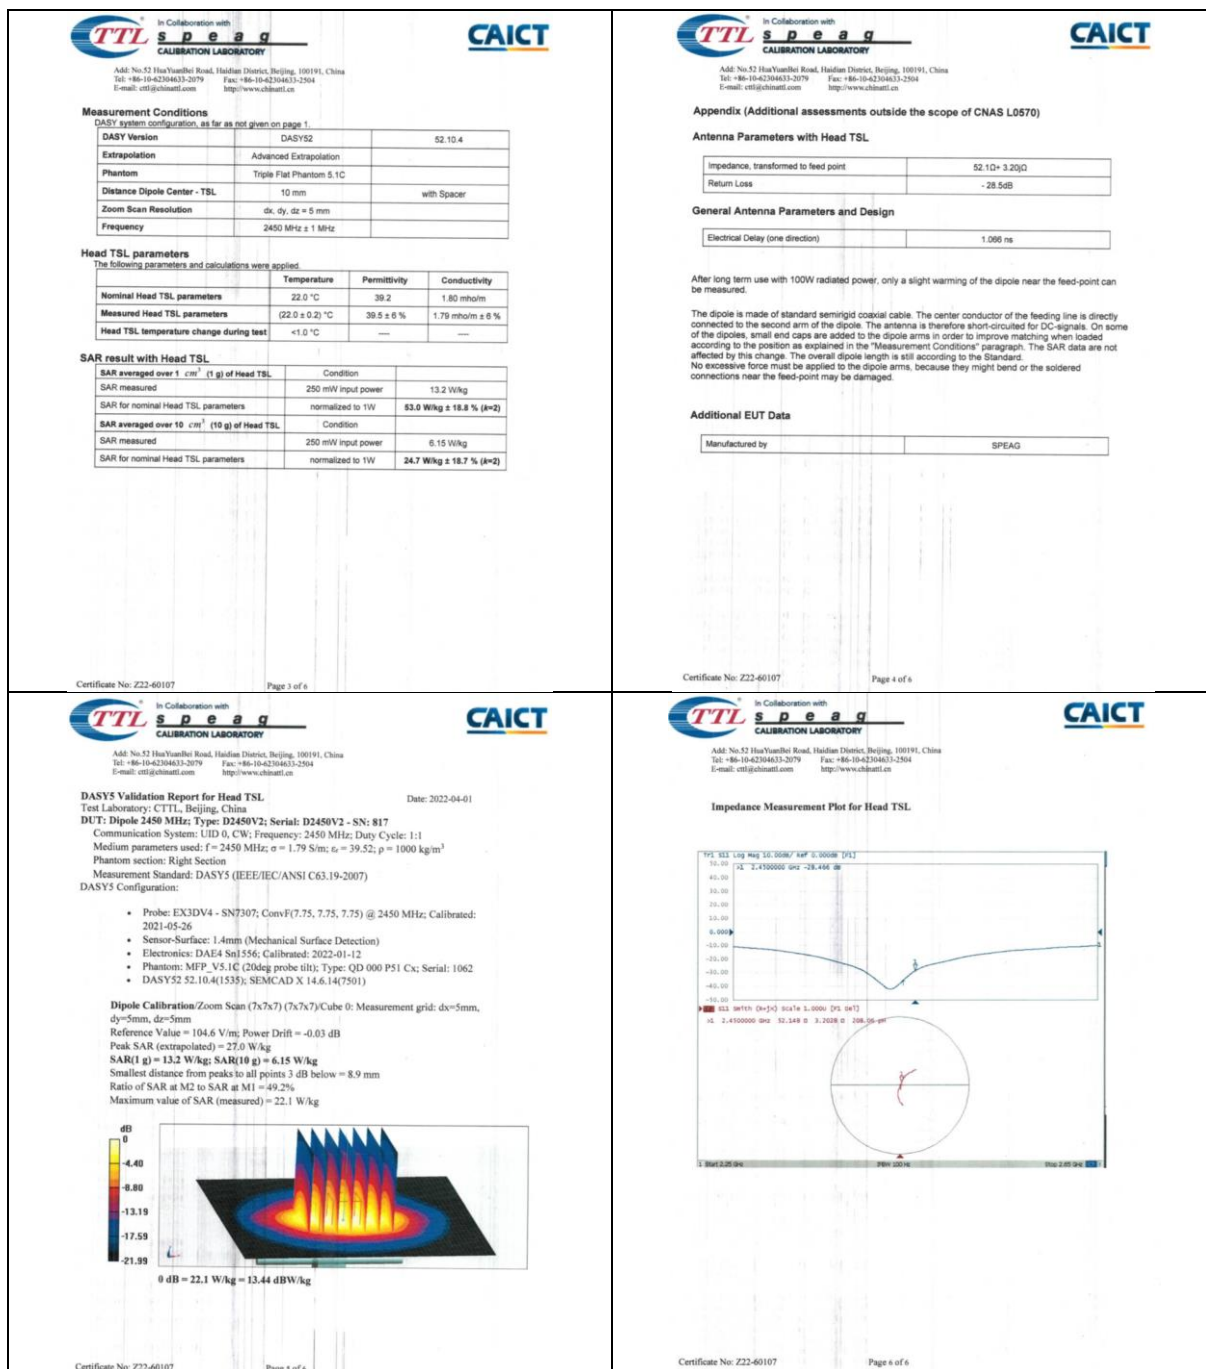




## 1.11 D2600V2 - SN 1158

| TTL Speaq Calibration Laboratory                                                                                                                                                                                                                                           |                                                                    | CAICT                                                                                                                                                                           |                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191<br>Tel: +86-10-42304633-2512 Fax: +86-10-42304633-2504<br>E-mail: cti@chinafl.com.cn http://www.chinafl.cn                                                                                                   |                                                                    | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2579 Fax: +86-10-42304633-2504<br>E-mail: cti@chinafl.com.cn http://www.chinafl.cn |                        |
| Client: SGS-CN                                                                                                                                                                                                                                                             |                                                                    | Certificate No: Z22-40108                                                                                                                                                       |                        |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                             |                                                                    |                                                                                                                                                                                 |                        |
| Object                                                                                                                                                                                                                                                                     | D2600V2 - SN: 1158                                                 |                                                                                                                                                                                 |                        |
| Calibration Procedure(s)                                                                                                                                                                                                                                                   | FF-Z11-003-01<br>Calibration Procedures for dipole validation kits |                                                                                                                                                                                 |                        |
| Calibration date:                                                                                                                                                                                                                                                          | March 31, 2022                                                     |                                                                                                                                                                                 |                        |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. |                                                                    |                                                                                                                                                                                 |                        |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.                                                                                                                                                 |                                                                    |                                                                                                                                                                                 |                        |
| Calibration Equipment used (M&TE critical for calibration)                                                                                                                                                                                                                 |                                                                    |                                                                                                                                                                                 |                        |
| Primary Standards                                                                                                                                                                                                                                                          | ID #                                                               | Cal Date (Calibrated by Certificate No.)                                                                                                                                        | Scheduled Calibration  |
| Power Meter NRP2                                                                                                                                                                                                                                                           | 106277                                                             | 24-Sep-21 (CTTL No.J21X08326)                                                                                                                                                   | Sep-22                 |
| Power sensor NRP8S                                                                                                                                                                                                                                                         | 104291                                                             | 24-Sep-21 (CTTL No.J21X08326)                                                                                                                                                   | Sep-22                 |
| Reference Probe EX3DV4                                                                                                                                                                                                                                                     | SN 7307                                                            | 26-May-21 (SPEAG No EX3-7307_May21)                                                                                                                                             | May-22                 |
| DAE4                                                                                                                                                                                                                                                                       | SN 1158                                                            | 12-Jan-22 (CTTL-SPEAG No Z22-60007)                                                                                                                                             | Jan-23                 |
| Secondary Standards                                                                                                                                                                                                                                                        | ID #                                                               | Cal Date (Calibrated by Certificate No.)                                                                                                                                        | Scheduled Calibration  |
| Signal Generator E4438C                                                                                                                                                                                                                                                    | MY49071430                                                         | 13-Jan-22 (CTTL No.J22X00406)                                                                                                                                                   | Jan-23                 |
| Network Analyzer E5071C                                                                                                                                                                                                                                                    | MY48110673                                                         | 14-Jan-22 (CTTL No.J22X00406)                                                                                                                                                   | Jan-23                 |
| Calibrated by:                                                                                                                                                                                                                                                             | Name: Zhao Jing                                                    | Function: SAR Test Engineer                                                                                                                                                     | Signature: [Signature] |
| Reviewed by:                                                                                                                                                                                                                                                               | Name: Lin Hao                                                      | Function: SAR Test Engineer                                                                                                                                                     | Signature: [Signature] |
| Approved by:                                                                                                                                                                                                                                                               | Name: Qi Dianyuan                                                  | Function: SAR Project Leader                                                                                                                                                    | Signature: [Signature] |
| Issued: April 6, 2022                                                                                                                                                                                                                                                      |                                                                    |                                                                                                                                                                                 |                        |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                            |                                                                    |                                                                                                                                                                                 |                        |
| Certificate No: Z22-40108                                                                                                                                                                                                                                                  |                                                                    | Page 1 of 6                                                                                                                                                                     |                        |

| TTL Speaq Calibration Laboratory                                                                                                                                                |                          | CAICT                                                                                                                                                                           |                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2579 Fax: +86-10-42304633-2504<br>E-mail: cti@chinafl.com.cn http://www.chinafl.cn |                          | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2579 Fax: +86-10-42304633-2504<br>E-mail: cti@chinafl.com.cn http://www.chinafl.cn |                  |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1:                                                                                      |                          |                                                                                                                                                                                 |                  |
| DASY Version                                                                                                                                                                    | DASY52                   | 52.10.4                                                                                                                                                                         |                  |
| Extrapolation                                                                                                                                                                   | Advanced Extrapolation   |                                                                                                                                                                                 |                  |
| Phantom                                                                                                                                                                         | Triple Flat Phantom 5.1C |                                                                                                                                                                                 |                  |
| Distance Dipole Center - TSL                                                                                                                                                    | 10 mm                    | with Spacer                                                                                                                                                                     |                  |
| Zoom Scan Resolution                                                                                                                                                            | dx, dy, dz = 5 mm        |                                                                                                                                                                                 |                  |
| Frequency                                                                                                                                                                       | 2600 MHz ± 1 MHz         |                                                                                                                                                                                 |                  |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied:                                                                                           |                          |                                                                                                                                                                                 |                  |
|                                                                                                                                                                                 | Temperature              | Permittivity                                                                                                                                                                    | Conductivity     |
| Nominal Head TSL parameters                                                                                                                                                     | 22.0 °C                  | 39.0                                                                                                                                                                            | 1.96 mho/m       |
| Measured Head TSL parameters                                                                                                                                                    | (22.0 ± 0.2) °C          | 36.7 ± 6 %                                                                                                                                                                      | 1.96 mho/m ± 6 % |
| Head TSL temperature change during test                                                                                                                                         | <1.0 °C                  | ---                                                                                                                                                                             | ---              |
| <b>SAR result with Head TSL</b>                                                                                                                                                 |                          |                                                                                                                                                                                 |                  |
| SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL                                                                                                                           | Condition                |                                                                                                                                                                                 |                  |
| SAR measured                                                                                                                                                                    | 250 mW input power       | 13.7 W/kg                                                                                                                                                                       |                  |
| SAR for nominal Head TSL parameters                                                                                                                                             | normalized to 1W         | 54.8 W/kg ± 18.8 % (k=2)                                                                                                                                                        |                  |
| SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL                                                                                                                         | Condition                |                                                                                                                                                                                 |                  |
| SAR measured                                                                                                                                                                    | 250 mW input power       | 6.12 W/kg                                                                                                                                                                       |                  |
| SAR for nominal Head TSL parameters                                                                                                                                             | normalized to 1W         | 24.6 W/kg ± 18.7 % (k=2)                                                                                                                                                        |                  |

| TTL Speaq Calibration Laboratory                                                                                                                                                                                                                                                                                       |                                | CAICT                                                                                                                                                                           |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2579 Fax: +86-10-42304633-2504<br>E-mail: cti@chinafl.com.cn http://www.chinafl.cn                                                                                                                                        |                                | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2579 Fax: +86-10-42304633-2504<br>E-mail: cti@chinafl.com.cn http://www.chinafl.cn |  |
| <b>Glossary:</b>                                                                                                                                                                                                                                                                                                       |                                |                                                                                                                                                                                 |  |
| TSL                                                                                                                                                                                                                                                                                                                    | tissue simulating liquid       |                                                                                                                                                                                 |  |
| ConvF                                                                                                                                                                                                                                                                                                                  | sensitivity in TSL / NORMx.y.z |                                                                                                                                                                                 |  |
| N/A                                                                                                                                                                                                                                                                                                                    | not applicable or not measured |                                                                                                                                                                                 |  |
| <b>Calibration is Performed According to the Following Standards:</b>                                                                                                                                                                                                                                                  |                                |                                                                                                                                                                                 |  |
| a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices - Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 |                                |                                                                                                                                                                                 |  |
| b) KDB 865864, "SAR Measurement Requirements for 100 MHz to 6 GHz"                                                                                                                                                                                                                                                     |                                |                                                                                                                                                                                 |  |
| <b>Additional Documentation:</b>                                                                                                                                                                                                                                                                                       |                                |                                                                                                                                                                                 |  |
| c) DASY4/S System Handbook                                                                                                                                                                                                                                                                                             |                                |                                                                                                                                                                                 |  |
| <b>Methods Applied and Interpretation of Parameters:</b>                                                                                                                                                                                                                                                               |                                |                                                                                                                                                                                 |  |
| • <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.                                                                                                                   |                                |                                                                                                                                                                                 |  |
| • <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.                                                                                                 |                                |                                                                                                                                                                                 |  |
| • <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.        |                                |                                                                                                                                                                                 |  |
| • <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.                                                                                                                                                                                                |                                |                                                                                                                                                                                 |  |
| • <b>SAR measured:</b> SAR measured at the stated antenna input power.                                                                                                                                                                                                                                                 |                                |                                                                                                                                                                                 |  |
| • <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.                                                                                                                                                                                                                |                                |                                                                                                                                                                                 |  |
| • <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.                                                                                                                                                                                                     |                                |                                                                                                                                                                                 |  |
| The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.                                                                                        |                                |                                                                                                                                                                                 |  |

| TTL Speaq Calibration Laboratory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                | CAICT                                                                                                                                                                           |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2579 Fax: +86-10-42304633-2504<br>E-mail: cti@chinafl.com.cn http://www.chinafl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2579 Fax: +86-10-42304633-2504<br>E-mail: cti@chinafl.com.cn http://www.chinafl.cn |  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                |                                                                                                                                                                                 |  |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                |                                                                                                                                                                                 |  |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 49.90 - 6.49jΩ |                                                                                                                                                                                 |  |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | - 23.8dB       |                                                                                                                                                                                 |  |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                |                                                                                                                                                                                 |  |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1.053 ns       |                                                                                                                                                                                 |  |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                                                                                                                                                                                 |  |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged. |                |                                                                                                                                                                                 |  |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                |                                                                                                                                                                                 |  |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SPEAG          |                                                                                                                                                                                 |  |

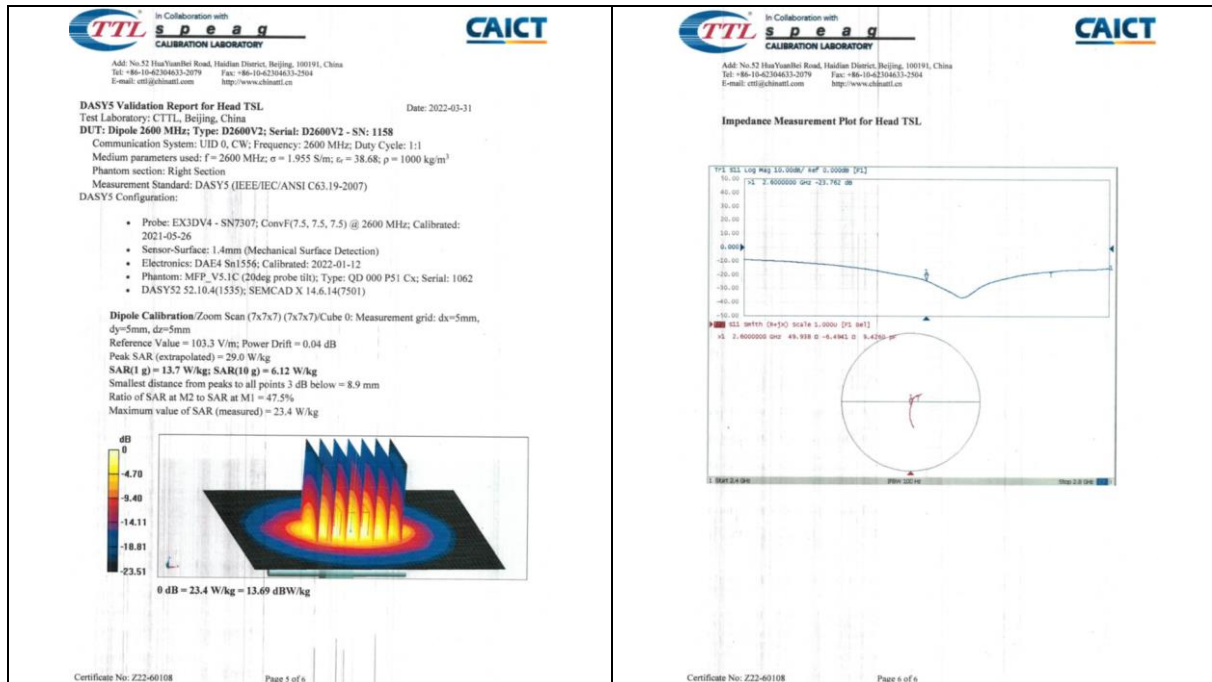

## 1.12 D5GHZV2 - SN 1095

**TTL Speaq**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62104633-2079 Fax: +86-10-62104633-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

**CAICT**

**Client: SGS-CN Certificate No: Z22-60187**

**CALIBRATION CERTIFICATE**

Object: D5GHZV2 - SN: 1095

Calibration Procedure(s): FF-Z11-003-01  
Calibration Procedures for dipole validation kits

Calibration date: June 1, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (23±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date (Calibrated by: Certificate No.) | Scheduled Calibration |
|------------------------|---------|-------------------------------------------|-----------------------|
| Power Meter NRP2       | 106277  | 24-Sep-21 (CTTL No.J21X08328)             | Sep-22                |
| Power sensor NRP8S     | 104291  | 24-Sep-21 (CTTL No.J21X08328)             | Sep-22                |
| Reference Probe EX3DV4 | SN 7464 | 26-Jan-22(SPEAG No EX3-7464, Jan22)       | Jan-23                |
| DAE4                   | SN 1556 | 12-Jan-22(CTTL-SPEAG No.Z22-60007)        | Jan-23                |

| Secondary Standards     | ID #       | Cal Date (Calibrated by: Certificate No.) | Scheduled Calibration |
|-------------------------|------------|-------------------------------------------|-----------------------|
| Signal Generator E4438C | MY48071430 | 13-Jan-22 (CTTL No. J22X00409)            | Jan-23                |
| Network Analyzer E5071C | MY46110673 | 14-Jan-22 (CTTL No. J22X00406)            | Jan-23                |

Calibrated by: Zhao Jing SAR Test Engineer

Reviewed by: Lin Hao SAR Test Engineer

Approved by: Qi Dianyan SAR Project Leader

Issued: June 6, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60187 Page 1 of 10

**TTL Speaq**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62104633-2079 Fax: +86-10-62104633-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

**CAICT**

**Glossary:**

TSL: Issue simulating liquid

CompF: sensitivity in TSL / NORMx,y,z

N/A: not applicable or not measured

**Calibration is Performed According to the Following Standards:**

a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices-Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020

b) KDB 665664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

c) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60187 Page 2 of 10

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

|                              |                                                                              |                                  |
|------------------------------|------------------------------------------------------------------------------|----------------------------------|
| DASY Version                 | DASY2                                                                        | 52.10.4                          |
| Extrapolation                | Advanced Extrapolation                                                       |                                  |
| Phantom                      | Triple Flat Phantom 5.1C                                                     |                                  |
| Distance Dipole Center - TSL | 10 mm                                                                        | with Spacer                      |
| Zoom Scan Resolution         | dx, dy = 4 mm, dz = 1.4 mm                                                   | Graded Ratio = 1.4 (Z direction) |
| Frequency                    | 5200 MHz ± 1 MHz<br>5200 MHz ± 1 MHz<br>5500 MHz ± 1 MHz<br>5800 MHz ± 1 MHz |                                  |

**Head TSL parameters at 5200MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 36.0         | 4.66 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.4 ± 6 %   | 4.62 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C         | —            | —                |

**SAR result with Head TSL at 5200MHz**

|                                                         | Condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | 250 mW input power | 7.79 W/kg                |
| SAR measured                                            | normalized to 1W   | 77.6 W/kg ± 24.4 % (k=2) |
| SAR for nominal Head TSL parameters                     | Condition          |                          |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | 250 mW input power | 2.22 W/kg                |
| SAR measured                                            | normalized to 1W   | 22.1 W/kg ± 24.2 % (k=2) |

**Head TSL parameters at 5300MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.9         | 4.76 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.2 ± 6 %   | 4.73 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C         | —            | —                |

**SAR result with Head TSL at 5300MHz**

|                                                         | Condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | 100 mW input power | 7.94 W/kg                |
| SAR measured                                            | normalized to 1W   | 79.1 W/kg ± 24.4 % (k=2) |
| SAR for nominal Head TSL parameters                     | Condition          |                          |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | 100 mW input power | 2.27 W/kg                |
| SAR measured                                            | normalized to 1W   | 22.6 W/kg ± 24.2 % (k=2) |

**Head TSL parameters at 5500MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.8         | 4.96 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.8 ± 6 %   | 4.94 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C         | —            | —                |

**SAR result with Head TSL at 5500MHz**

|                                                         | Condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | 100 mW input power | 6.29 W/kg                |
| SAR measured                                            | normalized to 1W   | 62.6 W/kg ± 24.4 % (k=2) |
| SAR for nominal Head TSL parameters                     | Condition          |                          |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | 100 mW input power | 2.34 W/kg                |
| SAR measured                                            | normalized to 1W   | 23.3 W/kg ± 24.2 % (k=2) |

**Head TSL parameters at 5600MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.7 ± 6 %   | 5.05 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C         | —            | —                |

**SAR result with Head TSL at 5600MHz**

|                                                         | Condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | 100 mW input power | 8.12 W/kg                |
| SAR measured                                            | normalized to 1W   | 80.8 W/kg ± 24.4 % (k=2) |
| SAR for nominal Head TSL parameters                     | Condition          |                          |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | 100 mW input power | 2.30 W/kg                |
| SAR measured                                            | normalized to 1W   | 22.9 W/kg ± 24.2 % (k=2) |

**Head TSL parameters at 5800MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.3         | 5.27 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.4 ± 6 %   | 5.25 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C         | —            | —                |

**SAR result with Head TSL at 5800MHz**

|                                                         | Condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | 100 mW input power | 7.71 W/kg                |
| SAR measured                                            | normalized to 1W   | 76.7 W/kg ± 24.4 % (k=2) |
| SAR for nominal Head TSL parameters                     | Condition          |                          |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | 100 mW input power | 2.16 W/kg                |
| SAR measured                                            | normalized to 1W   | 21.8 W/kg ± 24.2 % (k=2) |

**Appendix (Additional assessments outside the scope of CNAS L0570)****Antenna Parameters with Head TSL at 5200MHz**

|                                      |              |
|--------------------------------------|--------------|
| Impedance, transformed to feed point | 48.1D-5.03jΩ |
| Return Loss                          | -23.6dB      |

**Antenna Parameters with Head TSL at 5300MHz**

|                                      |              |
|--------------------------------------|--------------|
| Impedance, transformed to feed point | 47.8D-2.42jΩ |
| Return Loss                          | -28.5dB      |

**Antenna Parameters with Head TSL at 5500MHz**

|                                      |              |
|--------------------------------------|--------------|
| Impedance, transformed to feed point | 50.3D-4.26jΩ |
| Return Loss                          | -27.4dB      |

**Antenna Parameters with Head TSL at 5600MHz**

|                                      |              |
|--------------------------------------|--------------|
| Impedance, transformed to feed point | 54.5D-4.80jΩ |
| Return Loss                          | -24.0dB      |

**Antenna Parameters with Head TSL at 5800MHz**

|                                      |              |
|--------------------------------------|--------------|
| Impedance, transformed to feed point | 51.5D-5.61jΩ |
| Return Loss                          | -24.9dB      |

| <div data-bbox="272 253 523 324"><p>In Collaboration with<br/><b>TTL</b><br/>CALIBRATION LABORATORY</p><p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br/>Tel: +86-10-62302117<br/>E-mail: cti@china.ttl.com</p></div> <div data-bbox="632 253 705 286"><p><b>CAICT</b></p></div> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.101 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.  
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.

Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|

Certificate No: Z22-60187

Page 7 of 10



## 2 DAE4 - SN 1245

| <p>Schmid &amp; Partner Engineering AG<br/>Zugstrasse 43, 8004 Zurich, Switzerland<br/>Phone +41 44 245 9700, Fax +41 44 245 9779<br/>www.speag.ch, info@speag.ch</p> <p style="text-align: center;"><b>s p e a g</b></p> <p style="text-align: center;"><b>IMPORTANT NOTICE</b></p> <p><b>USAGE OF THE DAE4</b></p> <p>The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:</p> <p><b>Battery Exchange:</b> The battery cover of the DAE4 unit is fixed using a screw, over tightening the screw may cause the threads inside the DAE to wear out.</p> <p><b>Shipping of the DAE:</b> Before shipping the DAE to SPEAG for calibration, remove the batteries and pack the DAE in an anti-static bag. This anti-static bag shall then be packed into a larger box or container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.</p> <p><b>E-Stop Failures:</b> Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and get accumulated in the E-stop. To prevent E-stop failure, the customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.</p> <p><b>Repair:</b> Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.</p> <p><b>DASY Configuration File:</b> Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 M<math>\Omega</math> is given in the corresponding configuration file.</p> <p><b>Important Note:</b><br/>Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.</p> <p><b>Important Note:</b><br/>Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.</p> <p><b>Important Note:</b><br/>To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.</p> <p>TH_EH190306AE DAE4.docx<br/>07.03.2019</p> | <p>Calibration Laboratory of<br/>Schmid &amp; Partner<br/>Engineering AG<br/>Zugstrasse 43, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS)<br/>The Swiss Accreditation Service is one of the signatories to the EA<br/>Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: <b>SGS</b><br/>Kunshan City, China</p> <p>Certificate No.: <b>DAE4-1245_Apr23</b></p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: <b>DAE4 - SD 000 D04 BM - SN: 1245</b></p> <p>Calibration procedure(s): <b>QA CAL-06.v30</b><br/>Calibration procedure for the data acquisition electronics (DAE)</p> <p>Calibration date: <b>April 25, 2023</b></p> <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 <math>\pm</math> 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (MATE critical for calibration)</p> <table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Kathrein Multimeter Type 2001</td><td>SN: 0810278</td><td>29-Aug-22 (No. 34389)</td><td>Aug-23</td></tr></tbody></table> <table border="1"><thead><tr><th>Secondary Standards</th><th>ID #</th><th>Check Date (in house)</th><th>Scheduled Check</th></tr></thead><tbody><tr><td>Auto DAE Calibration Unit</td><td>SE UMS 002 AA 1001</td><td>27-Jan-23 (in house check)</td><td>In house check: Jan-24</td></tr><tr><td>Calibrator flow 12.1</td><td>SE UMS 006 AA 1002</td><td>27-Jan-23 (in house check)</td><td>In house check: Jan-24</td></tr></tbody></table> <p>Calibrated by: <b>Dominique Sauter</b> (Name), <b>Laboratory Technician</b> (Function), <i>[Signature]</i> (Signature)</p> <p>Approved by: <b>Sven Kuhn</b> (Name), <b>Technical Manager</b> (Function), <i>[Signature]</i> (Signature)</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.<br/>Issued April 25, 2023</p> <p>Certificate No.: DAE4-1245_Apr23<br/>Page 1 of 5</p> | Primary Standards          | ID #                      | Cal Date (Certificate No.) | Scheduled Calibration | Kathrein Multimeter Type 2001 | SN: 0810278               | 29-Aug-22 (No. 34389)     | Aug-23                    | Secondary Standards | ID #                      | Check Date (in house)     | Scheduled Check           | Auto DAE Calibration Unit                 | SE UMS 002 AA 1001 | 27-Jan-23 (in house check) | In house check: Jan-24 | Calibrator flow 12.1 | SE UMS 006 AA 1002 | 27-Jan-23 (in house check) | In house check: Jan-24 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------|----------------------------|-----------------------|-------------------------------|---------------------------|---------------------------|---------------------------|---------------------|---------------------------|---------------------------|---------------------------|-------------------------------------------|--------------------|----------------------------|------------------------|----------------------|--------------------|----------------------------|------------------------|
| Primary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | ID #                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Cal Date (Certificate No.) | Scheduled Calibration     |                            |                       |                               |                           |                           |                           |                     |                           |                           |                           |                                           |                    |                            |                        |                      |                    |                            |                        |
| Kathrein Multimeter Type 2001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | SN: 0810278                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 29-Aug-22 (No. 34389)      | Aug-23                    |                            |                       |                               |                           |                           |                           |                     |                           |                           |                           |                                           |                    |                            |                        |                      |                    |                            |                        |
| Secondary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ID #                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Check Date (in house)      | Scheduled Check           |                            |                       |                               |                           |                           |                           |                     |                           |                           |                           |                                           |                    |                            |                        |                      |                    |                            |                        |
| Auto DAE Calibration Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | SE UMS 002 AA 1001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 27-Jan-23 (in house check) | In house check: Jan-24    |                            |                       |                               |                           |                           |                           |                     |                           |                           |                           |                                           |                    |                            |                        |                      |                    |                            |                        |
| Calibrator flow 12.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | SE UMS 006 AA 1002                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 27-Jan-23 (in house check) | In house check: Jan-24    |                            |                       |                               |                           |                           |                           |                     |                           |                           |                           |                                           |                    |                            |                        |                      |                    |                            |                        |
| <p>Calibration Laboratory of<br/>Schmid &amp; Partner<br/>Engineering AG<br/>Zugstrasse 43, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS)<br/>The Swiss Accreditation Service is one of the signatories to the EA<br/>Multilateral Agreement for the recognition of calibration certificates</p> <p>Accreditation No.: <b>SCS 0108</b></p> <p><b>Glossary</b></p> <p>DAE: data acquisition electronics</p> <p>Connector angle: information used in DASY system to align probe sensor X to the robot coordinate system.</p> <p><b>Methods Applied and Interpretation of Parameters</b></p> <ul style="list-style-type: none"><li>• <b>DC Voltage Measurement:</b> Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.</li><li>• <b>Connector angle:</b> The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.</li><li>• The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.</li><li>• <b>DC Voltage Measurement Linearity:</b> Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.</li><li>• <b>Common mode sensitivity:</b> Influence of a positive or negative common mode voltage on the differential measurement.</li><li>• <b>Channel separation:</b> Influence of a voltage on the neighbor channels not subject to an input voltage.</li><li>• <b>AD Converter Values with inputs shorted:</b> Values on the internal AD converter corresponding to zero input voltage.</li><li>• <b>Input Offset Measurement:</b> Output voltage and statistical results over a large number of zero voltage measurements.</li><li>• <b>Input Offset Current:</b> Typical value for information; Maximum channel input offset current, not considering the input resistance.</li><li>• <b>Input resistance:</b> Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.</li><li>• <b>Low Battery Alarm Voltage:</b> Typical value for information. Below this voltage, a battery alarm signal is generated.</li><li>• <b>Power consumption:</b> Typical value for information. Supply currents in various operating modes.</li></ul> <p>Certificate No.: DAE4-1245_Apr23<br/>Page 2 of 5</p>                                                                                                                                                                                                                                                      | <p><b>DC Voltage Measurement</b></p> <p>AD - Converter Resolution nominal<br/>High Range: 1LSB = 5.1 <math>\mu</math>V, full range = -100...+300 mV<br/>Low Range: 1LSB = 61 nV, full range = -1...+30 mV</p> <p>DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec</p> <table border="1"><thead><tr><th>Calibration Factors</th><th>X</th><th>Y</th><th>Z</th></tr></thead><tbody><tr><td>High Range</td><td>405.243 <math>\pm</math> 0.02% (k=2)</td><td>403.938 <math>\pm</math> 0.02% (k=2)</td><td>405.064 <math>\pm</math> 0.02% (k=2)</td></tr><tr><td>Low Range</td><td>3.99474 <math>\pm</math> 1.50% (k=2)</td><td>3.99478 <math>\pm</math> 1.50% (k=2)</td><td>4.00994 <math>\pm</math> 1.50% (k=2)</td></tr></tbody></table> <p><b>Connector Angle</b></p> <table border="1"><thead><tr><th>Connector Angle to be used in DASY system</th><th></th></tr></thead><tbody><tr><td></td><td>32.0 <math>\pm</math> 1 <math>^\circ</math></td></tr></tbody></table> <p>Certificate No.: DAE4-1245_Apr23<br/>Page 3 of 5</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Calibration Factors        | X                         | Y                          | Z                     | High Range                    | 405.243 $\pm$ 0.02% (k=2) | 403.938 $\pm$ 0.02% (k=2) | 405.064 $\pm$ 0.02% (k=2) | Low Range           | 3.99474 $\pm$ 1.50% (k=2) | 3.99478 $\pm$ 1.50% (k=2) | 4.00994 $\pm$ 1.50% (k=2) | Connector Angle to be used in DASY system |                    |                            | 32.0 $\pm$ 1 $^\circ$  |                      |                    |                            |                        |
| Calibration Factors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | X                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Y                          | Z                         |                            |                       |                               |                           |                           |                           |                     |                           |                           |                           |                                           |                    |                            |                        |                      |                    |                            |                        |
| High Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 405.243 $\pm$ 0.02% (k=2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 403.938 $\pm$ 0.02% (k=2)  | 405.064 $\pm$ 0.02% (k=2) |                            |                       |                               |                           |                           |                           |                     |                           |                           |                           |                                           |                    |                            |                        |                      |                    |                            |                        |
| Low Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 3.99474 $\pm$ 1.50% (k=2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 3.99478 $\pm$ 1.50% (k=2)  | 4.00994 $\pm$ 1.50% (k=2) |                            |                       |                               |                           |                           |                           |                     |                           |                           |                           |                                           |                    |                            |                        |                      |                    |                            |                        |
| Connector Angle to be used in DASY system                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                            |                           |                            |                       |                               |                           |                           |                           |                     |                           |                           |                           |                                           |                    |                            |                        |                      |                    |                            |                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 32.0 $\pm$ 1 $^\circ$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                            |                           |                            |                       |                               |                           |                           |                           |                     |                           |                           |                           |                                           |                    |                            |                        |                      |                    |                            |                        |

## Appendix (Additional assessments outside the scope of SCS0108)

## 1. DC Voltage Linearity

| High Range        | Reading (µV) | Difference (µV) | Error (%) |
|-------------------|--------------|-----------------|-----------|
| Channel X + Input | 19998.60     | 2.90            | 0.00      |
| Channel X - Input | 20005.77     | 2.75            | 0.01      |
| Channel Y + Input | 19999.65     | 2.19            | -0.01     |
| Channel Y - Input | 19999.60     | 1.08            | 0.00      |
| Channel Z + Input | 20003.12     | 0.26            | 0.00      |
| Channel Z - Input | -20000.51    | 0.53            | -0.00     |
| Channel X + Input | 19999.62     | -1.05           | -0.00     |
| Channel Z + Input | 20002.17     | -0.70           | -0.00     |
| Channel Z - Input | -20001.94    | -0.91           | 0.00      |

| Low Range         | Reading (µV) | Difference (µV) | Error (%) |
|-------------------|--------------|-----------------|-----------|
| Channel X + Input | 2002.91      | 0.81            | 0.04      |
| Channel X - Input | 203.06       | 0.73            | 0.36      |
| Channel Y + Input | -195.56      | 0.88            | -0.45     |
| Channel Y - Input | 2002.33      | 0.29            | 0.01      |
| Channel Z + Input | 201.91       | -0.39           | -0.19     |
| Channel Z - Input | -196.22      | -0.79           | 0.40      |
| Channel X + Input | 2002.20      | 0.24            | 0.01      |
| Channel Z + Input | 201.28       | -0.68           | -0.44     |
| Channel Z - Input | -196.93      | -1.36           | 0.69      |

## 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Common mode Input Voltage (mV) | High Range Average Reading (µV) | Low Range Average Reading (µV) |
|--------------------------------|---------------------------------|--------------------------------|
| Channel X                      |                                 |                                |
| 200                            | -6.42                           | -8.27                          |
| -200                           | 8.81                            | 8.00                           |
| Channel Y                      |                                 |                                |
| 200                            | 7.04                            | 7.13                           |
| -200                           | -14.70                          | -15.29                         |
| Channel Z                      |                                 |                                |
| 200                            | 4.52                            | -5.35                          |
| -200                           | 3.90                            | 3.52                           |

## 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Input Voltage (mV) | Channel X (µV) | Channel Y (µV) | Channel Z (µV) |
|--------------------|----------------|----------------|----------------|
| Channel X          | 200            |                |                |
| Channel Y          | 200            | 9.08           | -3.29          |
| Channel Z          | 200            | 10.03          | 7.20           |

Certificate No: DAE4-1245\_Apr23

Page 4 of 5

## 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 16001            | 16100           |
| Channel Y | 16079            | 16051           |
| Channel Z | 16040            | 15991           |

## 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Average (µV) | min. Offset (µV) | max. Offset (µV) | Std. Deviation (µV) |
|-----------|--------------|------------------|------------------|---------------------|
| Channel X | 0.77         | -0.83            | 1.89             | 0.49                |
| Channel Y | -0.24        | -1.72            | 1.19             | 0.52                |
| Channel Z | -0.85        | -2.62            | 0.99             | 0.61                |

## 6. Input Offset Current

Nominal input circuitry offset current on all channels: &lt;25nA

## 7. Input Resistance (Typical values for information)

|           | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200            | 200              |
| Channel Y | 200            | 200              |
| Channel Z | 200            | 200              |

## 8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9              |
| Supply (- Vcc) | -7.6              |

## 9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01             | +6            | +14               |
| Supply (- Vcc) | -0.01             | -8            | -9                |

Certificate No: DAE4-1245\_Apr23

Page 5 of 5

## 3 EX3DV4 - SN 3801

## Calibration Laboratory of

Schmid & Partner  
Engineering AG  
Zugstrasse 43, 8004 Zurich, SwitzerlandSchweizerischer Kalibrierdienst  
Service suisse d'étalonnage  
Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client

Auden

Taoyuan City

Certificate No.

EX-3801\_Jun23

## CALIBRATION CERTIFICATE

Object

EX3DV4 - SN3801

Calibration procedure(s)

QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6,  
QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes

Calibration date

June 23, 2023

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.  
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.  
Calibration Equipment used (MATE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)         | Scheduled Calibration |
|----------------------------|-----------------|------------------------------------|-----------------------|
| Power meter 10092          | SR 104778       | 30-Mar-23 (No. 217-03804/03895)    | Mar-24                |
| Power sensor NRP-Z91       | SR 102844       | 30-Mar-23 (No. 217-03804)          | Mar-24                |
| DCP GAK-3.5 (range 4mV)    | SR 1246         | 20-Oct-22 (DCP GAK-3.5 L48, Oct22) | Oct-23                |
| DCP GAK-12                 | SR 1016         | 20-Oct-22 (DCP GAK-12 1916, Oct22) | Oct-23                |
| Reference 30 dB Attenuator | SR 025555 (20x) | 30-Mar-23 (No. 217-03805)          | Mar-24                |
| DAE4                       | SR 860          | 16-Mar-23 (No. SAE4-860, Mar23)    | Mar-24                |
| Reference Probe E52574     | SR 3013         | 06-Jun-23 (No. E52-3013, Jun23)    | Jun-24                |

| Secondary Standards     | ID             | Check Date (In House)             | Scheduled Check       |
|-------------------------|----------------|-----------------------------------|-----------------------|
| Power meter E44198      | SR 084793874   | 06-Apr-19 (in house check Jun-22) | In house check Jun-24 |
| Power sensor E4419A     | SR MV148887    | 06-Apr-19 (in house check Jun-22) | In house check Jun-24 |
| Power sensor E4419A     | SR 50011019    | 06-Apr-19 (in house check Jun-22) | In house check Jun-24 |
| RF generator HP 8640C   | SR U3540301700 | 04-Aug-19 (in house check Jun-22) | In house check Jun-24 |
| Network Analyzer B8568A | SR U041086977  | 31-Mar-14 (in house check Oct-22) | In house check Oct-24 |

Name

Jeton Kaestli

Function

Laboratory Technician

Signature

Approved by

Sven Kühn

Technical Manager

Signature

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX-3801\_Jun23

Page 1 of 22

## Calibration Laboratory of

Schmid & Partner  
Engineering AG  
Zugstrasse 43, 8004 Zurich, SwitzerlandSchweizerischer Kalibrierdienst  
Service suisse d'étalonnage  
Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

## Glossary

TSL: tissue simulating liquid  
NORM<sub>x,y,z</sub>: sensitivity in free space  
Conf#: sensitivity in TSL - NORM<sub>x,y,z</sub>  
DCP: diode compression point  
CF: crest factor (1 duty cycle) of the RF signal  
A, B, C, D: modulation dependent linearization parameters  
Polarization  $\psi$ :  $\psi$  notation around probe axis  
Polarization  $\theta$ :  $\theta$  notation around an axis that is in the plane normal to probe axis (at measurement center), i.e.,  $\theta = 0$  is normal to probe axis  
Connector Angle: information used in DASY system to align probe sensor X to the robot coordinate system

## Calibration is Performed According to the Following Standards:

a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.  
b) K2B 805664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>: Assessed for E-field polarization  $\theta = 0$  ( $\theta = 90^\circ$  MHz in TEM-cell;  $f > 100$  MHz; R22 waveguide); NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E-field uncertainty inside TSL (see below Conf#).
- NORM<sub>x,y,z</sub> - NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of Conf#.
- DCP<sub>x,y,z</sub>: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A, B, C, D: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Conf# and Boundary Effect Parameter: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f > 300$  MHz) and made waveguide using analytical field distributions based on power measurements for  $f > 300$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha), depth of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> - Conf# whereby the uncertainty corresponds to that given for Conf#. A frequency dependent Conf# is used in DASY version 4.4 and higher which allows extending the validity from <50 MHz to >100 MHz.
- Spherical Isotropy (3D deviation from isotropy): In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMs (no uncertainty required).

Certificate No: EX-3801\_Jun23

Page 2 of 22

EX3DV4 - SN3801

June 23, 2023

## Parameters of Probe: EX3DV4 - SN3801

## Basic Calibration Parameters

|                                     | Sensor X | Sensor Y | Sensor Z | Unc (k = 2) |
|-------------------------------------|----------|----------|----------|-------------|
| Norm ( $\mu V/V/m^2$ ) <sup>A</sup> | 0.51     | 0.58     | 0.42     | ±10.1%      |
| DCP (mV) <sup>B</sup>               | 162.0    | 101.5    | 104.0    | ±4.7%       |

## Calibration Results for Modulation Response

| UID   | Communication System Name   | A<br>dB                       | B<br>dB $\sqrt{V/V}$    | C                       | D<br>dB                | VR<br>mV | Max<br>dev. | Max<br>Unc <sup>C</sup><br>k = 2 |
|-------|-----------------------------|-------------------------------|-------------------------|-------------------------|------------------------|----------|-------------|----------------------------------|
| 0     | CW                          | X 0.00<br>Y 0.00<br>Z 0.00    | 0.00<br>0.00<br>0.00    | 1.00<br>1.00<br>1.00    | 0.00<br>188.1<br>188.3 | ±3.3%    | ±4.7%       |                                  |
| 10352 | Pulse Waveform (200Hz, 19%) | X 20.00<br>Y 20.00<br>Z 20.00 | 91.23<br>96.19<br>95.50 | 20.86<br>20.56<br>20.50 | 10.00<br>80.0<br>80.0  | ±3.5%    | ±9.6%       |                                  |
| 10353 | Pulse Waveform (200Hz, 29%) | X 20.00<br>Y 20.00<br>Z 20.00 | 91.18<br>88.83<br>91.24 | 19.99<br>19.98<br>19.97 | 6.99<br>80.0<br>80.0   | ±1.8%    | ±9.6%       |                                  |
| 10354 | Pulse Waveform (200Hz, 49%) | X 20.00<br>Y 20.00<br>Z 20.00 | 92.89<br>98.29<br>91.43 | 19.05<br>18.48<br>18.43 | 3.88<br>95.0<br>95.0   | ±1.1%    | ±9.6%       |                                  |
| 10355 | Pulse Waveform (200Hz, 65%) | X 20.00<br>Y 20.00<br>Z 20.00 | 91.14<br>91.15<br>91.15 | 16.83<br>17.67<br>17.67 | 2.22<br>120.0<br>120.0 | ±1.0%    | ±9.6%       |                                  |
| 10387 | QPSK Waveform, 1MHz         | X 1.48<br>Y 1.38<br>Z 1.43    | 65.05<br>65.16<br>63.76 | 13.76<br>14.18<br>13.25 | 1.00<br>150.0<br>150.0 | ±3.1%    | ±8.6%       |                                  |
| 10388 | QPSK Waveform, 10MHz        | X 2.81<br>Y 2.11<br>Z 1.88    | 66.70<br>67.04<br>65.47 | 14.69<br>14.97<br>14.01 | 0.09<br>150.0<br>150.0 | ±1.0%    | ±8.6%       |                                  |
| 10396 | 64-QAM Waveform, 100MHz     | X 2.53<br>Y 3.08<br>Z 3.02    | 67.49<br>70.24<br>70.72 | 17.24<br>16.85<br>16.99 | 3.01<br>150.0<br>150.0 | ±0.7%    | ±8.6%       |                                  |
| 10398 | 64-QAM Waveform, 40MHz      | X 3.38<br>Y 3.45<br>Z 3.38    | 66.66<br>66.78<br>65.99 | 15.32<br>15.44<br>14.88 | 0.00<br>150.0<br>150.0 | ±2.6%    | ±8.6%       |                                  |
| 10414 | WLAN COOF, 64-QAM, 40MHz    | X 4.78<br>Y 4.85<br>Z 4.67    | 66.60<br>65.58<br>64.97 | 15.38<br>15.41<br>14.98 | 0.00<br>150.0<br>150.0 | ±4.6%    | ±8.6%       |                                  |

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm XYZ do not affect the E-field uncertainty result TSL (see Pages 5 and 6).<sup>B</sup> Limitation parameter uncertainty for maximum specified test strength.<sup>C</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: EX-3801\_Aun23

Page 3 of 22

EX3DV4 - SN3801

June 23, 2023

## Parameters of Probe: EX3DV4 - SN3801

## Sensor Model Parameters

|   | C1<br>dB | C2<br>dB | a<br>V <sup>-1</sup> | T1<br>mV/V <sup>2</sup> | T2<br>avg <sup>1-3</sup> | T3<br>mm | T4<br>g <sup>-2</sup> | T5<br>V <sup>-1</sup> | T6   |
|---|----------|----------|----------------------|-------------------------|--------------------------|----------|-----------------------|-----------------------|------|
| x | 41.4     | 310.28   | 35.39                | 15.41                   | 6.54                     | 5.19     | 0.06                  | 0.47                  | 1.01 |
| y | 46.4     | 347.24   | 35.39                | 26.16                   | 8.21                     | 5.10     | 0.72                  | 0.49                  | 1.01 |
| z | 42.7     | 333.62   | 34.88                | 17.55                   | 9.54                     | 5.07     | 1.53                  | 0.34                  | 1.01 |

## Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle                               | 153.7°     |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 237 mm     |
| Probe Body Diameter                           | 16 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 1 mm       |
| Probe Tip to Sensor X Calibration Point       | 2.5 mm     |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 1.4 mm     |

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

Certificate No: EX-3801\_Aun23

Page 4 of 22

EX3DV4 - SN3801

June 23, 2023

## Parameters of Probe: EX3DV4 - SN3801

## Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>A</sup> | Relative Permittivity <sup>B</sup> | Conductivity <sup>B</sup> (S/m) | Const# X | Const# Y | Const# Z | Alpha <sup>B</sup> | Depth <sup>B</sup> (mm) | Unc (k = 2) |
|----------------------|------------------------------------|---------------------------------|----------|----------|----------|--------------------|-------------------------|-------------|
| 150                  | 52.3                               | 0.76                            | 11.02    | 11.02    | 11.02    | 0.00               | 1.00                    | ±13.3%      |
| 450                  | 42.5                               | 0.27                            | 10.11    | 10.11    | 10.11    | 0.16               | 1.30                    | ±13.3%      |
| 750                  | 41.5                               | 0.09                            | 9.49     | 9.49     | 9.49     | 0.40               | 0.85                    | ±12.0%      |
| 855                  | 41.5                               | 0.90                            | 9.17     | 9.17     | 9.17     | 0.49               | 0.80                    | ±12.0%      |
| 800                  | 41.5                               | 0.97                            | 9.08     | 9.08     | 9.08     | 0.42               | 0.89                    | ±12.0%      |
| 1450                 | 40.5                               | 1.20                            | 8.32     | 8.32     | 8.32     | 0.36               | 0.80                    | ±12.0%      |
| 1750                 | 40.1                               | 1.37                            | 8.22     | 8.22     | 8.22     | 0.18               | 0.86                    | ±12.0%      |
| 1900                 | 40.0                               | 1.40                            | 7.93     | 7.93     | 7.93     | 0.27               | 0.86                    | ±12.0%      |
| 2100                 | 39.8                               | 1.49                            | 7.87     | 7.87     | 7.87     | 0.31               | 0.86                    | ±12.0%      |
| 2300                 | 39.8                               | 1.67                            | 7.62     | 7.62     | 7.62     | 0.30               | 0.90                    | ±12.0%      |
| 2450                 | 39.2                               | 1.80                            | 7.38     | 7.38     | 7.38     | 0.30               | 0.90                    | ±12.0%      |
| 2600                 | 39.0                               | 1.96                            | 7.16     | 7.16     | 7.16     | 0.32               | 0.90                    | ±12.0%      |
| 3300                 | 38.2                               | 2.71                            | 6.52     | 6.52     | 6.52     | 0.30               | 1.30                    | ±14.0%      |
| 3500                 | 37.9                               | 2.81                            | 6.46     | 6.46     | 6.46     | 0.35               | 1.30                    | ±14.0%      |
| 3700                 | 37.7                               | 3.12                            | 6.40     | 6.40     | 6.40     | 0.35               | 1.30                    | ±14.0%      |
| 3900                 | 37.5                               | 3.32                            | 6.33     | 6.33     | 6.33     | 0.40               | 1.80                    | ±14.0%      |
| 4100                 | 37.3                               | 3.53                            | 5.98     | 5.98     | 5.98     | 0.40               | 1.80                    | ±14.0%      |
| 4200                 | 37.1                               | 3.63                            | 5.95     | 5.95     | 5.95     | 0.40               | 1.80                    | ±14.0%      |
| 4400                 | 36.9                               | 3.84                            | 5.74     | 5.74     | 5.74     | 0.40               | 1.75                    | ±14.0%      |
| 4600                 | 36.7                               | 4.04                            | 5.73     | 5.73     | 5.73     | 0.40               | 1.75                    | ±14.0%      |
| 4800                 | 36.4                               | 4.25                            | 5.72     | 5.72     | 5.72     | 0.40               | 1.80                    | ±14.0%      |
| 4950                 | 36.3                               | 4.40                            | 5.38     | 5.38     | 5.38     | 0.40               | 1.80                    | ±14.0%      |
| 5250                 | 35.9                               | 4.71                            | 5.19     | 5.19     | 5.19     | 0.40               | 1.80                    | ±14.0%      |
| 5600                 | 35.5                               | 5.07                            | 4.60     | 4.60     | 4.60     | 0.40               | 1.80                    | ±14.0%      |
| 5750                 | 35.4                               | 5.22                            | 4.89     | 4.89     | 4.89     | 0.40               | 1.80                    | ±14.0%      |

<sup>C</sup> Frequency validity above 300 MHz or ±100 MHz only applies for DASY v4.4 and higher (see Page 3), else it is restricted to ±50 MHz. The uncertainty is the RSS of the Const# uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 60 and 70 MHz for Const# assessments at 20, 40, 60, 100 and 200 MHz respectively. Validity of Const# assessed at 60 MHz, and Const# assessed at 130 MHz is ±5-10 MHz. Above 5 GHz frequency validity can be extended to ±10 MHz.<sup>D</sup> The probes are calibrated using tissue simulating liquids (TSL) that deviate for x and y by less than ±5% from the target value (typically better than ±2%) and are valid for TSL with deviations of up to ±10%. If TSL with deviations from the target of less than ±5% are used, the calibration uncertainties are ±11.1% for 3-7 GHz and ±13.1% for 3-8 GHz.<sup>E</sup> Alpha/Depth are determined during calibration. DFEAD warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3-6 GHz at an distance larger than half the probe tip diameter from the boundary.

Certificate No: EX-3801\_Aun23

Page 5 of 22

EX3DV4 - SN3801

June 23, 2023

## Parameters of Probe: EX3DV4 - SN3801

## Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>A</sup> | Relative Permittivity <sup>B</sup> | Conductivity <sup>B</sup> (S/m) | Const# X | Const# Y | Const# Z | Alpha <sup>B</sup> | Depth <sup>B</sup> (mm) | Unc (k = 2) |
|----------------------|------------------------------------|---------------------------------|----------|----------|----------|--------------------|-------------------------|-------------|
| 6500                 | 34.8                               | 6.07                            | 5.20     | 5.20     | 5.20     | 5.20               | 2.50                    | ±18.6%      |


<sup>C</sup> Frequency validity of 6.5 GHz is ±800-700 MHz, and ±700 MHz at or above 700 MHz. The uncertainty is the RSS of the Const# uncertainty at calibration frequency and the uncertainty for the indicated frequency band. The probes are calibrated using tissue simulating liquids (TSL) that deviate for x and y by less than ±10% from the target value (typically better than ±5%) and are valid for TSL with deviations of up to ±10%.<sup>D</sup> Alpha/Depth are determined during calibration. DFEAD warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz, below ±2% for frequencies between 3-6 GHz, and below ±4% for frequencies between 6-10 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: EX-3801\_Aun23

Page 6 of 22

EX3DV4 - SN3801

June 23, 2023

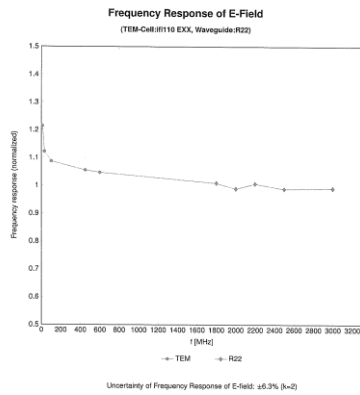


Certificate No: EX-3801\_Jun23

Page 7 of 22

EX3DV4 - SN3801

June 23, 2023

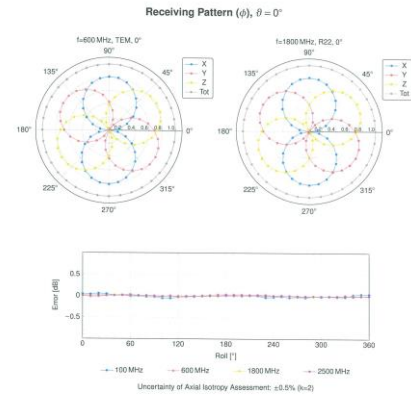


Certificate No: EX-3801\_Jun23

Page 8 of 22

EX3DV4 - SN3801

June 23, 2023


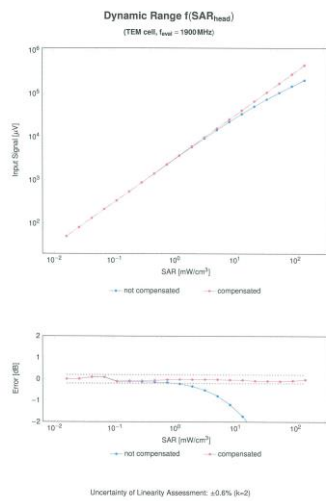


Certificate No: EX-3801\_Jun23

Page 9 of 22

EX3DV4 - SN3801

June 23, 2023

**Conversion Factor Assessment****Deviation from Isotropy in Liquid**Error ( $\phi, \theta$ ), f = 900 MHz

Certificate No: EX-3801\_Jun23

Page 10 of 22