



# RF Test Report

## For

**Applicant Name:** DONGGUAN CHENGXIANG INDUSTRIAL CO.,LTD  
**Address:** Southwest of Tai Yuen Industrial Zone Shi jie Town,Dongguan City,Guangdong Province,China  
**EUT Name:** MAGNETIC WIRELESS CHARGER WITH POWER BANK  
**Brand Name:** ADPROTECH, AAPROMAX  
**Model Number:** CX-ASM-M001  
**Series Model Number:** Refer to section 2

## Issued By

**Company Name:** **BTF Testing Lab (Shenzhen) Co., Ltd.**  
**Address:** F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China  
  
**Report Number:** BTF230712R00401  
**Test Standards:** 47 CFR Part 15 Subpart C  
**FCC ID:** 2BBZC-CX-M001  
**Test Conclusion:** Pass  
**Test Date:** 2023-07-10 to 2023-07-18  
**Date of Issue:** 2023-07-21

**Prepared By:**

Elma. Yang / Project Engineer

**Date:** 2023-07-21

**Approved By:**

Ryan CJ / EMC Manager

**Date:** 2023-07-21

*Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd. All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.*



Revision History		
Version	Issue Date	Revisions Content
R_V0	2023-07-21	Original
<i>Note:</i>	<i>Once the revision has been made, then previous versions reports are invalid.</i>	

## Table of Contents

1.	Introduction.....	4
1.1	Identification of Testing Laboratory .....	4
1.2	Identification of the Responsible Testing Location.....	4
1.3	Laboratory Condition .....	4
1.4	Announcement.....	4
2.	Product Information.....	5
2.1	Application Information .....	5
2.2	Manufacturer Information.....	5
2.3	Factory Information .....	5
2.4	General Description of Equipment under Test (EUT).....	5
2.5	Technical Information.....	5
3.	Summary of Test Results.....	6
3.1	Test Standards .....	6
3.2	Summary of Test Result .....	6
3.3	Uncertainty of Test .....	6
4.	Test Configuration.....	8
4.1	Environment Condition .....	8
4.2	Test Equipment List.....	8
4.3	Test Auxiliary Equipment .....	9
4.4	Test Setup .....	10
5.	Test Items.....	12
5.1	Antenna Requirements .....	12
5.2	20dB Occupied Bandwidth .....	13
5.3	AC Power Line Conducted Emissions .....	14
5.4	Radiated Spurious Emission .....	15
	ANNEX A Test Results .....	20
	A.1 20dB Occupied Bandwidth .....	20
	A.2 AC Power Line Conducted Emissions .....	21
	A.3 Radiated Spurious Emission .....	23
	ANNEX C EUT EXTERNAL PHOTOS.....	28
	ANNEX D EUT INTERNAL PHOTOS .....	29

## 1. Introduction

### 1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

### 1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
FCC Registration Number:	518915
Designation Number:	CN1330

### 1.3 Laboratory Condition

Ambient Temperature:	20°C to 25°C
Ambient Relative Humidity:	45% to 55%
Ambient Pressure:	100 kPa to 102 kPa

### 1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

## 2. Product Information

### 2.1 Application Information

Company Name:	DONGGUAN CHENGXIANG INDUSTRIAL CO.,LTD
Address:	Southwest of Tai Yuen Industrial Zone Shi jie Town, Dongguan City, Guangdong Province, China

### 2.2 Manufacturer Information

Company Name:	DONGGUAN CHENGXIANG INDUSTRIAL CO.,LTD
Address:	Southwest of Tai Yuen Industrial Zone Shi jie Town, Dongguan City, Guangdong Province, China

### 2.3 Factory Information

Company Name:	DONGGUAN CHENGXIANG INDUSTRIAL CO.,LTD
Address:	Southwest of Tai Yuen Industrial Zone Shi jie Town, Dongguan City, Guangdong Province, China

### 2.4 General Description of Equipment under Test (EUT)

EUT Name	MAGNETIC WIRELESS CHARGER WITH POWER BANK
Under Test Model Name	CX-ASM-M001
Series Model Name	CX-ASM-MC002, CX-ASM-MC003, PPBA1001 , PPBA1002, PPBA1003, A0302010, A0302019, A0302020
Description of Model name differentiation	Since according to the declaration from the applicant, the electrical circuit design, layout, components used, internal wiring and functions were identical for the above models, with only different on model.
Hardware Version	NA
Software and Firmware Version	NA

### 2.5 Technical Information

Modulation Type	FSK
Frequency Range	The frequency block is 111.0 KHz to 205.0KHz.
Antenna Type	Coil antenna

All channel was listed on the following table:

Channel number	Freq. (KHz)	Channel number	Freq. (KHz)
0	140		
1	162		

### 3. Summary of Test Results

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

#### 3.2 Summary of Test Result

No.	Description	FCC Part No.	Test Result	Test By	Verdict	Remark
1	Antenna Requirements	15.203	--	--	Pass	--
2	20dB Occupied Bandwidth	2.1049	ANNEX A.1	Chris Liu	Pass	--
3	AC Power Line Conducted Emissions	15.207	ANNEX A.2	Chris Liu	Pass	--
4	Spurious Emissions	15.209	ANNEX A.3	Chris Liu	Pass	--

#### 3.3 Uncertainty of Test

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2 and TR100 028-1/-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Occupied Channel Bandwidth	69 KHz
RF output power, conducted	0.87 dB
Power Spectral Density, conducted	0.69 dB
Unwanted Emissions, conducted	0.94 dB

All emissions, radiated(<1GHz)	4.12 dB
All emissions, radiated(>1GHz)	4.16 dB
Temperature	0.82 °C
Humidity	4.1 %

## 4. Test Configuration

### 4.1 Environment Condition

Environment Parameter	Selected Values During Tests			
	Temperature	Voltage	Relative Humidity	Ambient Pressure
Normal Temperature, Normal Voltage (NTNV)	20°C to 25°C	10W	30% to 60%	100 kPa to 102 kPa

### 4.2 Test Equipment List

Conducted Method Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
ESG VECTOR SIGNAL GENERATOR	Agilent	E4438C	MY45094854	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022.11.25	2023.11.24	<input checked="" type="checkbox"/>
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
RF Control Unit	TST	TST-Full	S01	/	/	<input checked="" type="checkbox"/>
RF Test software	TST	V2.0	/	/	/	<input checked="" type="checkbox"/>

Radiated Method Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021.11.28	2023.11.27	<input checked="" type="checkbox"/>
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021.11.28	2023.11.27	<input checked="" type="checkbox"/>
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/	<input checked="" type="checkbox"/>
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>

RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023.3.24	2024.3.23	<input checked="" type="checkbox"/>
RE Cable	Talent Microwave	A40-2.92M2.92 M-14M	22080539	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
RE Cable	Talent Microwave	A81-SMAMNM- 14M	22080538	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
Preamplifier	SCHWARZBECK	BBV9744	00246	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
Horn Antenna	Schwarzbeck	BBHA9120D	2597	2022.5.22	2024.5.21	<input checked="" type="checkbox"/>
Broadband Preamplifier	Schwarzbeck	BBV9718D	00008	2023.3.24	2024.3.23	<input checked="" type="checkbox"/>

#### Conducted disturbance Test


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESCI3	101422	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
V-LISN	SCHWARZBECK	NSLK 8127	01073	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
LISN	AFJ	LS16/110VAC	16010020076	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2022.11.24	2023.11.23	<input checked="" type="checkbox"/>
EZ_EMC	Frad	EMC-CON 3A1.1+	/	/	/	<input checked="" type="checkbox"/>

### 4.3 Test Auxiliary Equipment

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Mobile phone	Apple Inc	12	352011865761861	146.7mm*71.5mm*7.4mm	/	<input checked="" type="checkbox"/>
Wireless headset	Apple Inc	AirPods	NTQTQ21504000741	45.2mm*60.6mm*21.7mm	/	<input type="checkbox"/>
Watches	Apple Inc	SE	/	44mm	/	<input type="checkbox"/>


## 4.4 Test Setup

### Test Setup 1


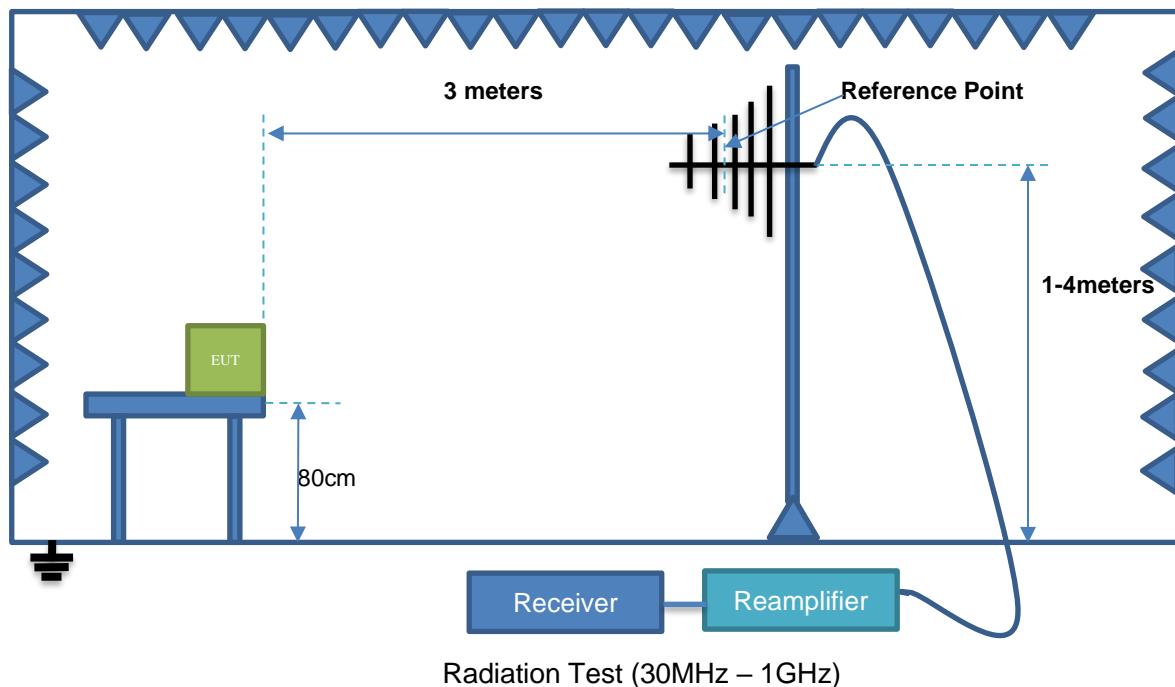


Radiation Test (30MHz – 1GHz)

### Test Setup 2

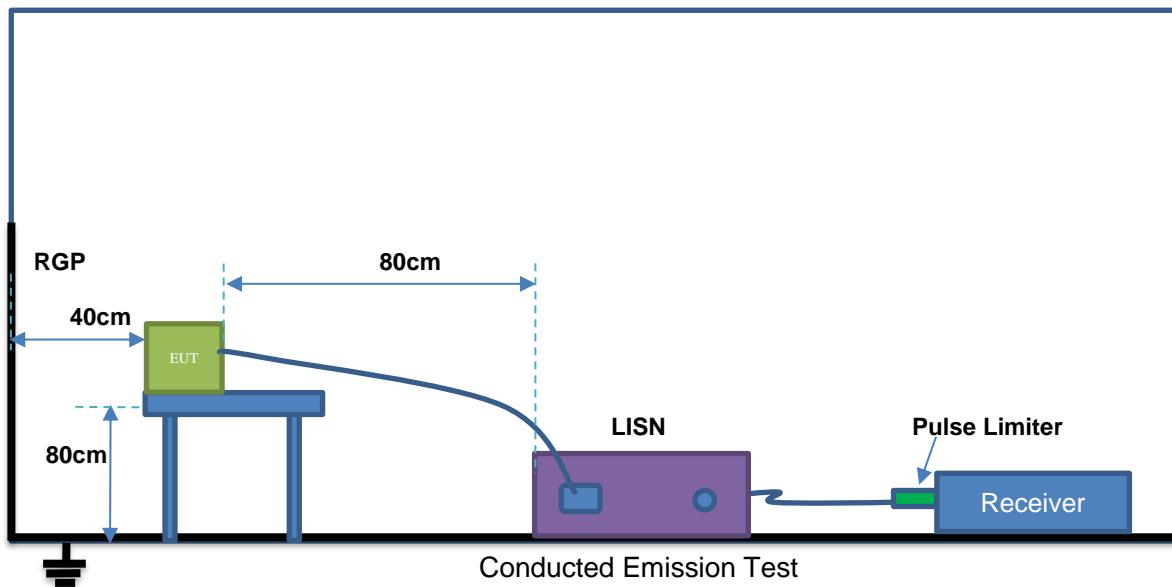

Conducted Emission Test

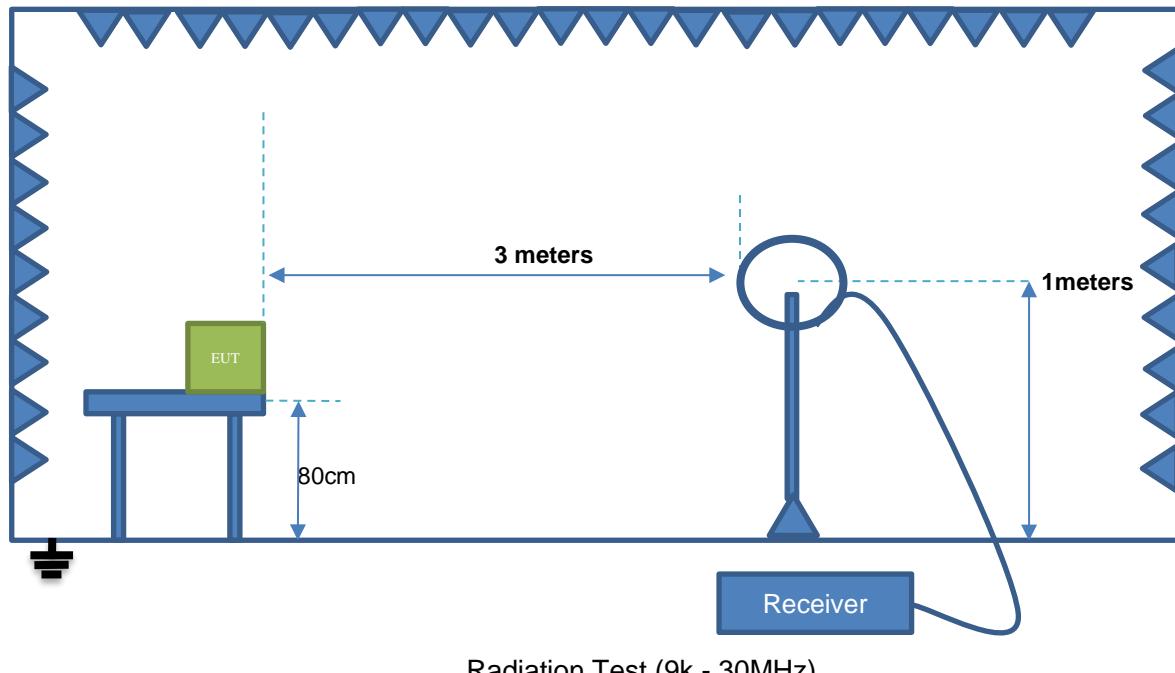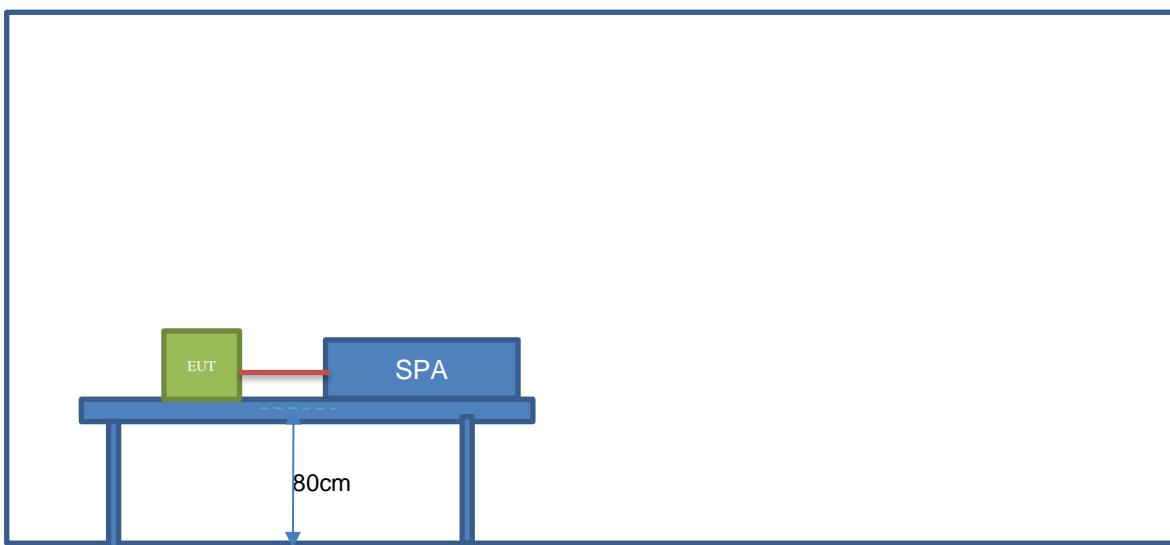**Test Setup 3**

**Test Setup 4**


## 5. Test Items

### 5.1 Antenna Requirements

FCC §15.203; RSS-247, 5.4(f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

## 5.2 20dB Occupied Bandwidth

### 5.2.1 Limit

FCC Part 2.1049.

### 5.2.2 Test Setup

See section 4.4 for test setup 4 description for the antenna port. The photo of test setup please refer to ANNEX B

### 5.2.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
 $RBW \geq 1\%$  of the 20 dB bandwidth,  $VBW \geq RBW$   
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

### 5.2.4 Test Result

Please refer to ANNEX A.1

## 5.3 AC Power Line Conducted Emissions

### 5.3.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.3.2 Test Setup

See section 4.4 for test setup description for setup 2. The photo of test setup please refer to ANNEX B

### 5.3.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.3.4 Test Result

Please refer to ANNEX A.2

NOTE:

1. Results (dB $\mu$ V) = Reading (dB $\mu$ V) + Factor (dB)  
The reading level is calculated by software which is not shown in the sheet
2. Factor = Insertion loss + Cable loss
3. Over limit = Results – Limit.

## 5.4 Radiated Spurious Emission

### 5.4.1 Limit

FCC §15.209&15.247(d) ; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a). According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ ) =  $20*\log[\text{Field Strength } (\mu\text{V}/\text{m})]$ .
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB $\mu$ V/m@3m (AV) and 74dB $\mu$ V/m@3m (PK).

### 5.4.2 Test Setup

See section 4.4 for test setup description for setup 1 and 3. The photo of test setup please refer to ANNEX B

### 5.4.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions

is required.

General Procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = EIRP - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.

- g) Perform radiated spurious emission test.

#### Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure:

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT (i.e., duty cycle  $\geq 98$  percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section 6.0.
- c)  $RBW = 1$  MHz (unless otherwise specified).
- d)  $VBW \geq 3 \times RBW$ .
- e) Detector = RMS, if  $\text{span}/(\# \text{ of points in sweep}) \leq (RBW/2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not

permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain:

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test:

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak Trace = max hold

#### 5.4.4 Test Result

Please refer to ANNEX A.3

NOTE:

1. Results (dBuV) = Reading (dBuV) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss


3. Over limit = Results – Limit.

## ANNEX A Test Results


### A.1 20dB Occupied Bandwidth

Freq. (kHz)	20 dB bandwidth Result (kHz)	Conclusion
140	0.826	PASS
162	0.819	PASS


140KHz:

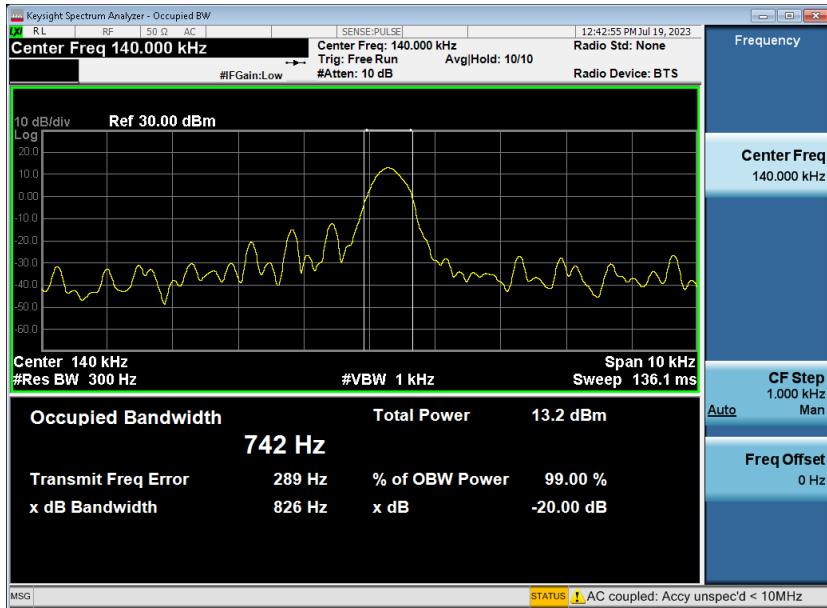


162KHz:

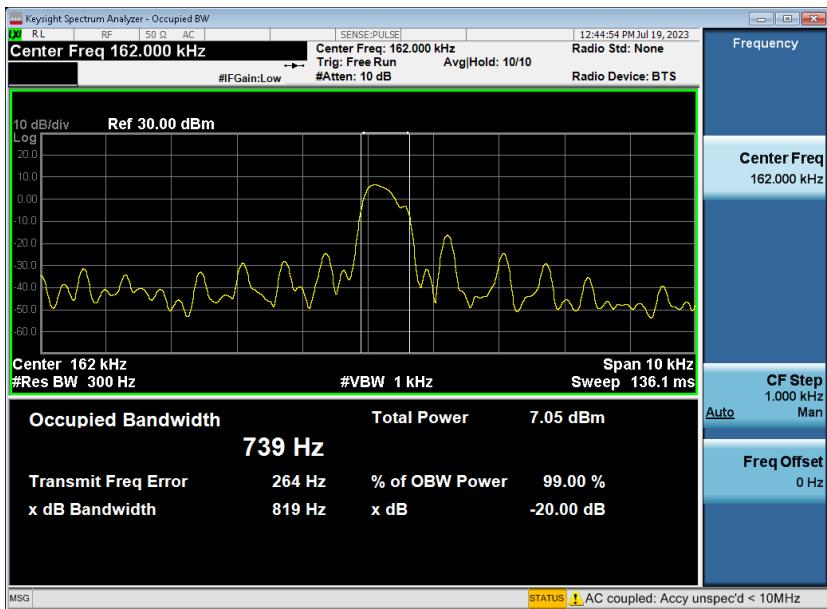

## A.2 AC Power Line Conducted Emissions

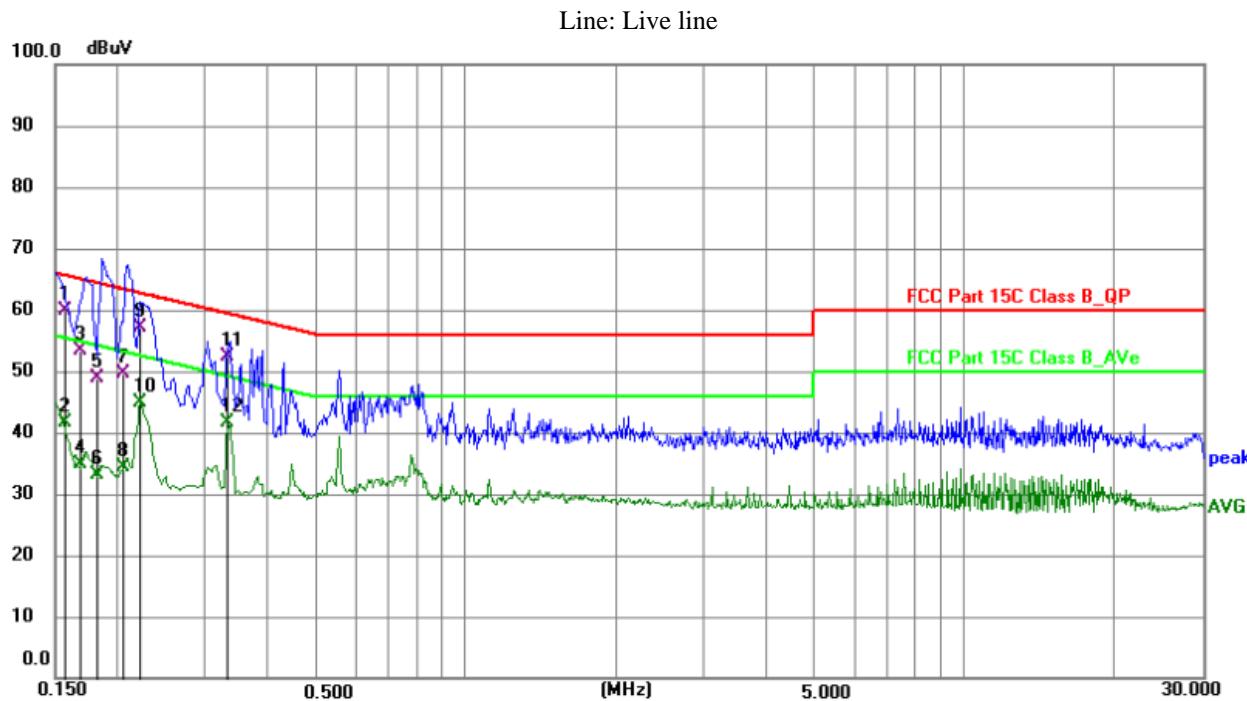

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1565	39.79	20.08	59.87	65.65	-5.78	QP	P	
2	0.1565	21.49	20.08	41.57	55.65	-14.08	AVG	P	
3	0.1688	33.37	20.09	53.46	65.02	-11.56	QP	P	
4	0.1688	14.74	20.09	34.83	55.02	-20.19	AVG	P	
5	0.1821	28.82	20.09	48.91	64.39	-15.48	QP	P	
6	0.1821	12.94	20.09	33.03	54.39	-21.36	AVG	P	
7	0.2054	29.62	20.09	49.71	63.39	-13.68	QP	P	
8	0.2054	14.35	20.09	34.44	53.39	-18.95	AVG	P	
9 *	0.2228	36.94	20.10	57.04	62.71	-5.67	QP	P	
10	0.2228	24.87	20.10	44.97	52.71	-7.74	AVG	P	
11	0.3326	32.22	20.12	52.34	59.39	-7.05	QP	P	
12	0.3326	21.47	20.12	41.59	49.39	-7.80	AVG	P	

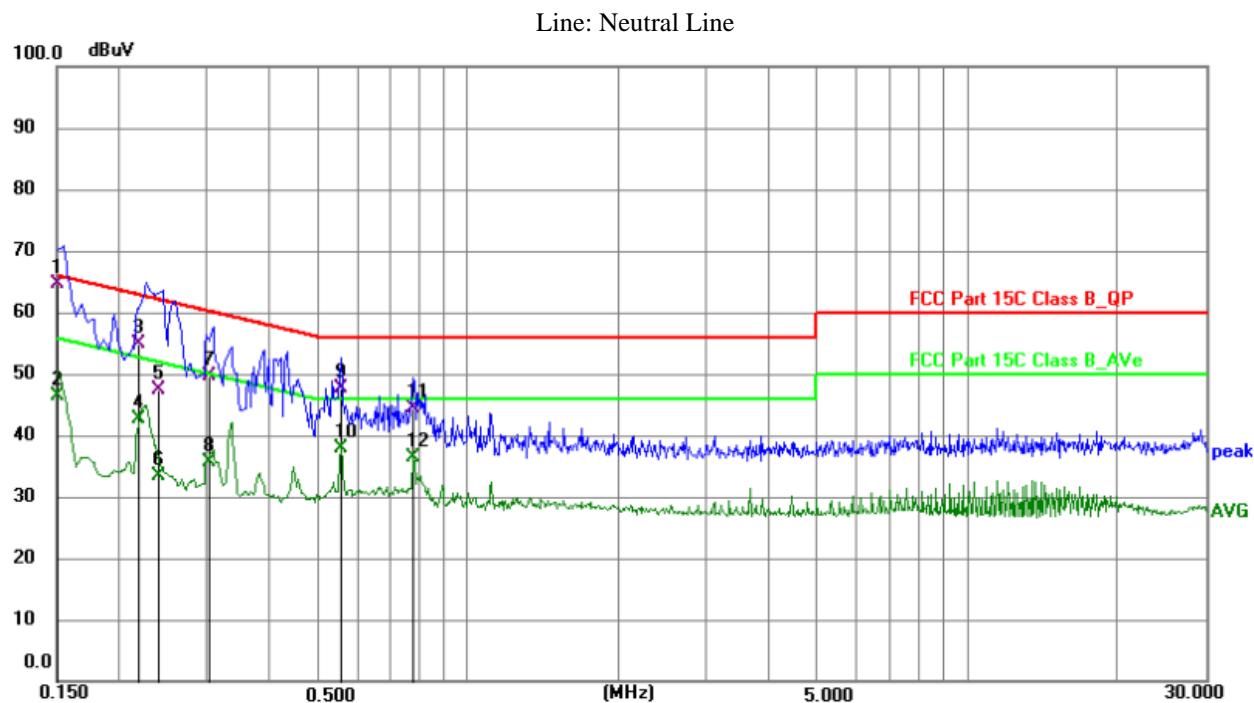

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1507	44.53	20.08	64.61	65.96	-1.35	QP	P	
2	0.1507	26.34	20.08	46.42	55.96	-9.54	AVG	P	
3	0.2192	34.87	20.10	54.97	62.85	-7.88	QP	P	
4	0.2192	22.54	20.10	42.64	52.85	-10.21	AVG	P	
5	0.2413	27.16	20.10	47.26	62.05	-14.79	QP	P	
6	0.2413	13.22	20.10	33.32	52.05	-18.73	AVG	P	
7	0.3039	29.56	20.12	49.68	60.14	-10.46	QP	P	
8	0.3039	15.41	20.12	35.53	50.14	-14.61	AVG	P	
9	0.5556	27.51	20.18	47.69	56.00	-8.31	QP	P	
10	0.5556	17.63	20.18	37.81	46.00	-8.19	AVG	P	
11	0.7796	24.25	20.24	44.49	56.00	-11.51	QP	P	
12	0.7796	16.12	20.24	36.36	46.00	-9.64	AVG	P	

### A.3 Radiated Spurious Emission


9 kHz ~ 30 MHz

Test Frequency:9K-150K


Freq (MHz)	Cable Loss (dB)	Antenn a Fact or (dB/m)	Preamp Gain (dB)	Read Level (dBuA)	Level (dBuA/m)	Limit Line (dBuA/m)	Over Limit (dB)	Detector
0.0264	2.24	17.7	31.53	76.81	65.25	119.17	-53.92	peak
0.0264	2.24	17.7	31.53	66.79	55.27	119.17	-63.9	Average
0.0354	2.31	17.8	32.54	79.36	66.94	116.62	-49.68	peak
0.0354	2.31	17.8	32.54	68.13	55.75	116.62	-60.87	Average
0.0621	2.39	17.9	31.69	58.46	47.07	111.74	-64.67	peak
0.0621	2.39	17.9	31.69	53.69	42.21	111.74	-69.53	Average
0.0752	2.45	17.7	31.77	49.64	38.08	110.08	-72	peak
0.0752	2.45	17.7	31.77	44.13	32.53	110.08	-77.55	Average
0.0658	2.51	18.1	31.89	48.66	37.38	111.24	-73.86	peak
0.0658	2.51	18.1	31.89	45.34	34.08	111.24	-77.16	Average
0.1256	2.87	18.2	32.34	83.69	72.42	105.62	-33.2	peak
0.1256	2.87	18.2	32.34	76.85	65.54	95.69	-30.15	Average

Test Frequency:150K-30M

Freq (MHz)	Cable Loss (dB)	Antenn a Facto r (dB/m)	Preamp Gain (dB)	Read Level (dBuA)	Level (dBuA/m)	Limit Line (dBuA/m)	Over Limit (dB)	Detector
0.3941	2.94	22.36	33.66	61.59	53.28	95.69	-42.41	peak
0.3941	2.94	22.36	33.66	56.98	48.67	95.69	-47.02	Average
0.6954	3.02	24.19	33.89	49.63	42.96	70.76	-27.8	QP
0.9423	3.06	26.34	33.89	43.65	39.16	68.12	-28.96	QP
1.1986	3.05	27.46	33.78	41.19	37.92	66.03	-28.11	QP
2.6549	3.08	29.31	33.64	37.65	36.40	69.54	-33.14	QP
7.6451	3.23	28.69	33.94	36.89	34.84	69.54	-34.7	QP


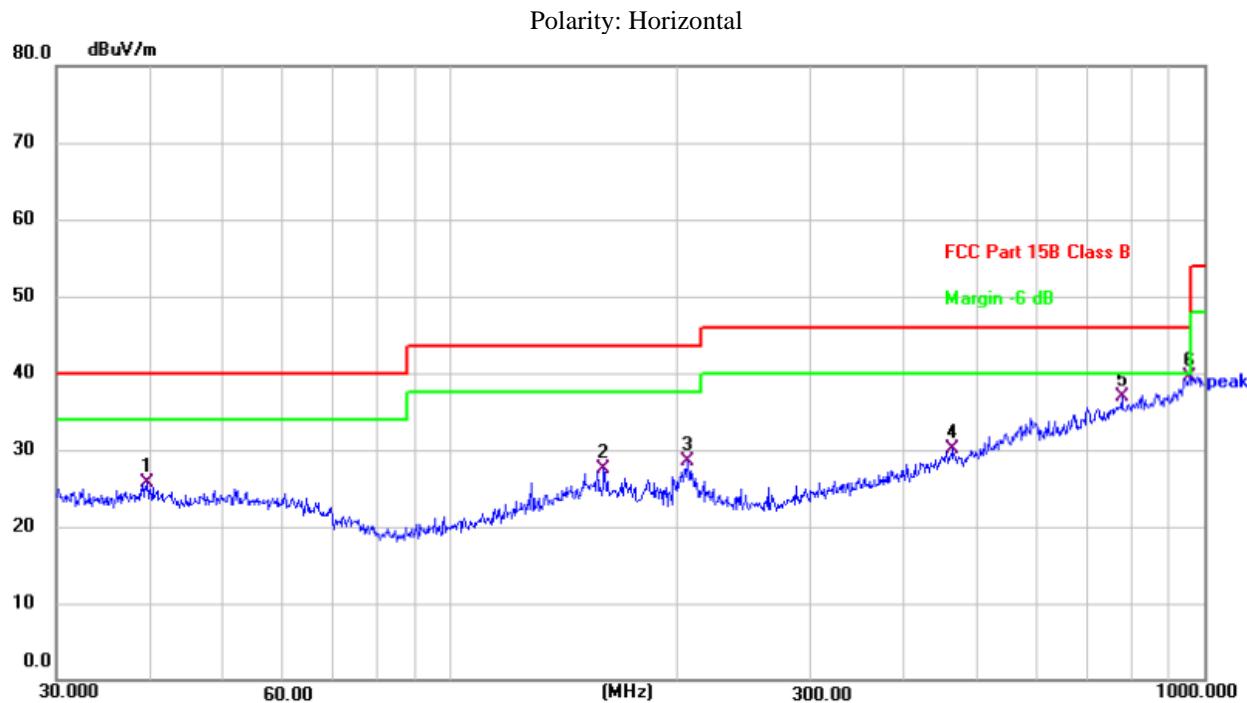
30 MHz ~ 1GHz


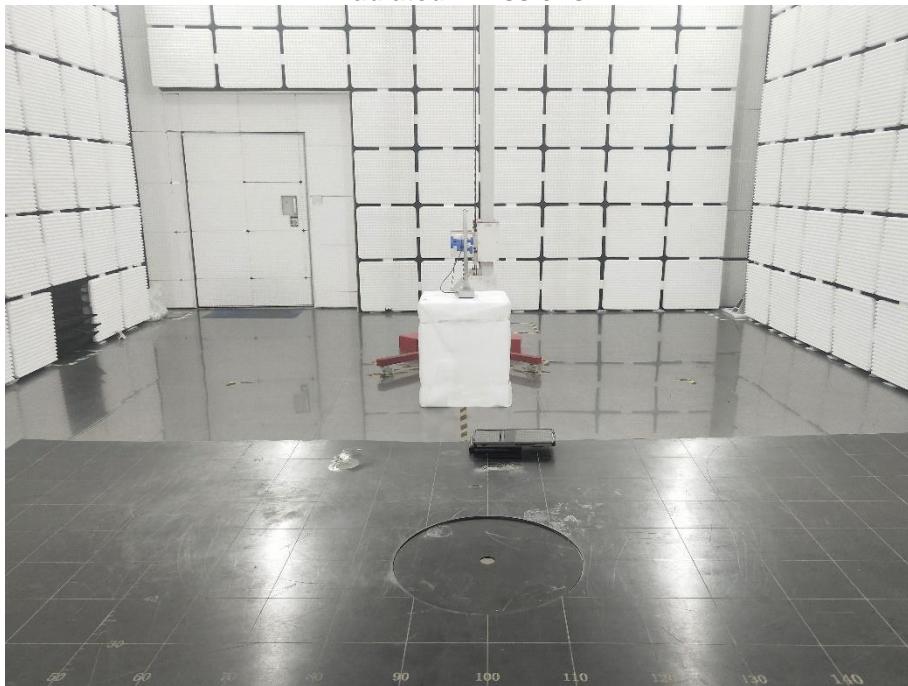
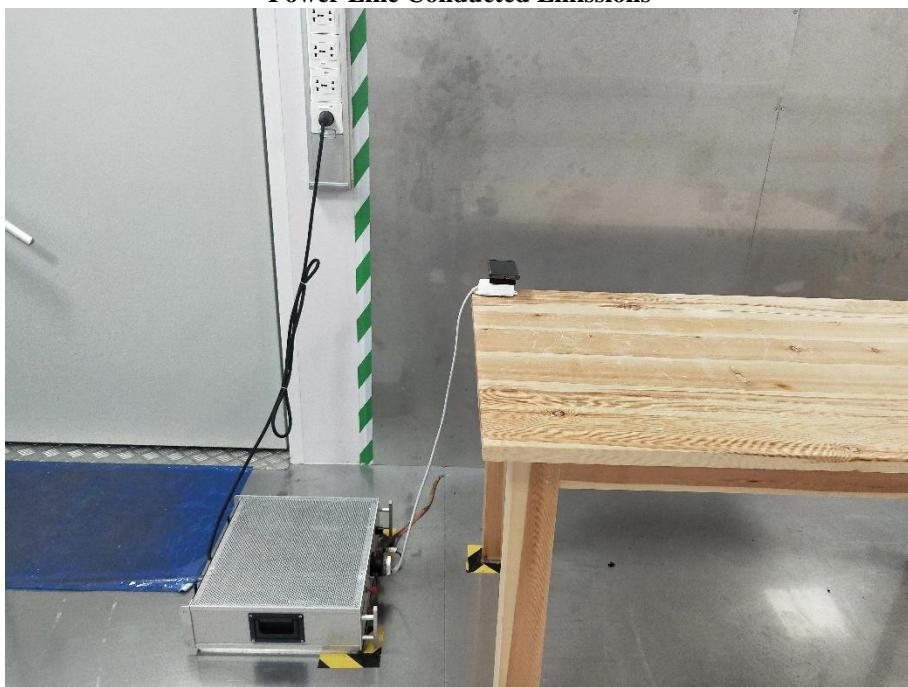
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	39.5757	42.57	-16.93	25.64	40.00	-14.36	QP	100	37	P	
2	159.7844	44.64	-17.23	27.41	43.50	-16.09	QP	299	12	P	
3	206.3975	49.79	-21.20	28.59	43.50	-14.91	QP	100	297	P	
4	463.9696	43.91	-13.84	30.07	46.00	-15.93	QP	299	12	P	
5	776.8778	45.28	-8.43	36.85	46.00	-9.15	QP	299	12	P	
6 *	955.4381	46.36	-6.91	39.45	46.00	-6.55	QP	299	222	P	

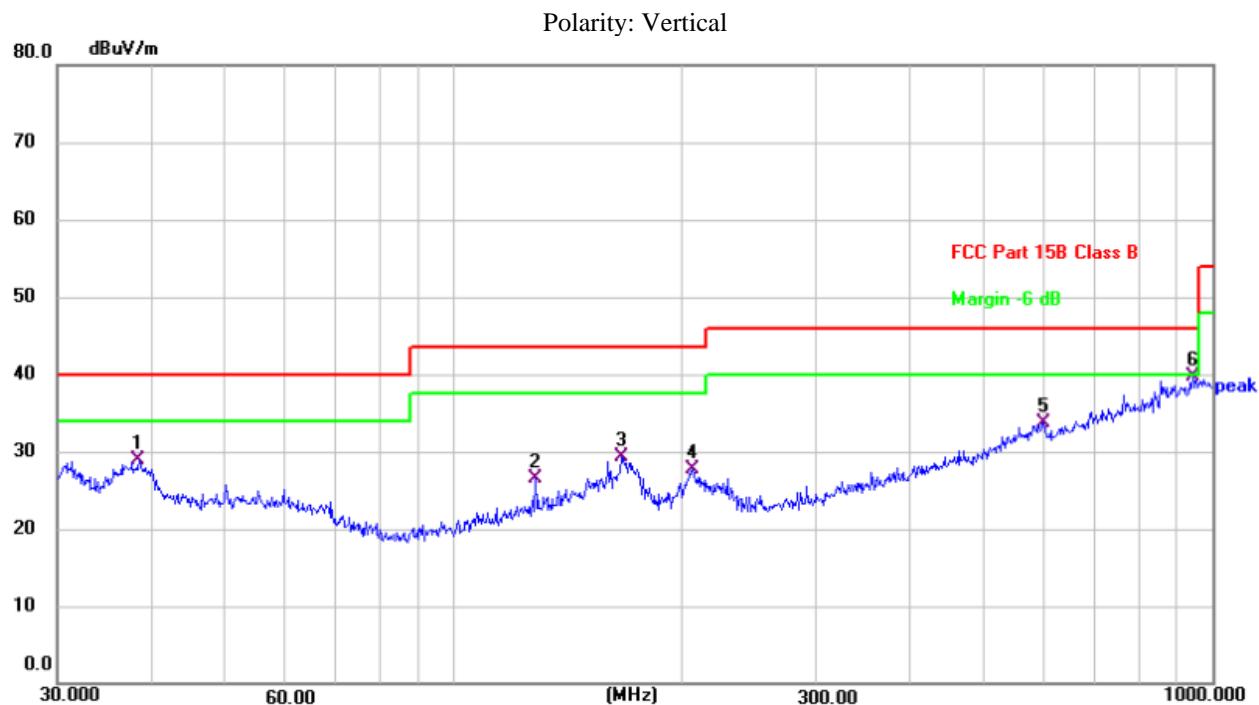

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	38.4809	46.01	-17.05	28.96	40.00	-11.04	QP	100	348	P	
2	128.1130	44.71	-18.26	26.45	43.50	-17.05	QP	199	356	P	
3	166.0680	47.07	-17.86	29.21	43.50	-14.29	QP	100	312	P	
4	206.3976	48.88	-21.20	27.68	43.50	-15.82	QP	100	348	P	
5	599.3212	45.26	-11.59	33.67	46.00	-12.33	QP	199	10	P	
6 *	942.1305	46.72	-7.11	39.61	46.00	-6.39	QP	300	228	P	

## ANNEX BTEST SETUP PHOTOS

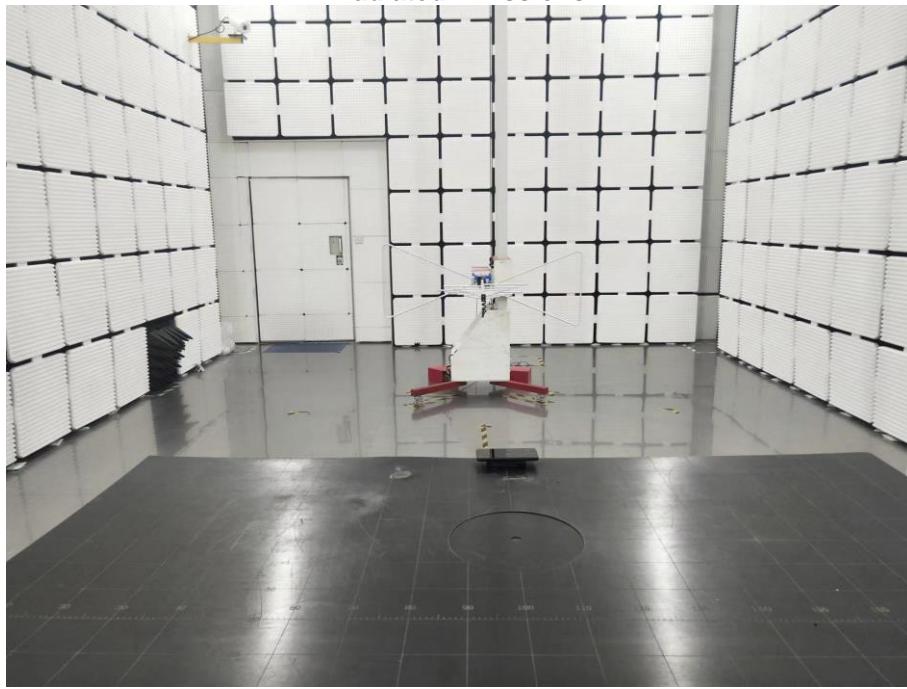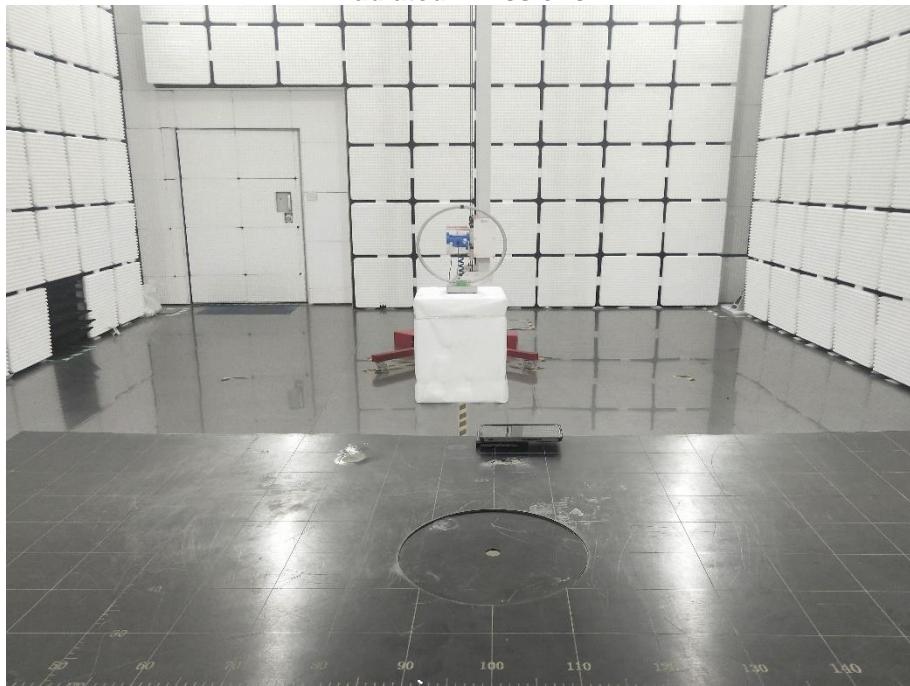**Radiated Emissions****Radiated Emissions**

**Radiated Emissions****Power Line Conducted Emissions**

## ANNEX C EUT EXTERNAL PHOTOS

Please refer to the External Appendix EUT Photos.

## ANNEX D EUT INTERNAL PHOTOS

Please refer to the Internal Appendix EUT Photos.



Test Report Number: BTF230712R00401



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,  
Bao'an District, Shenzhen, China

[www.btf-lab.com](http://www.btf-lab.com)

**--END OF REPORT--**