


14. Band Edge Compliance

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/04/01
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/08/25
RF cable	Yuhu Technology	JCTB810-NJ-NJ- 9M	DDT-ZC02538	2026/03/28
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28
RF cable	Yuhu Technology	ZT26S-SMAJ- SMAJ-1M	DDT-ZC02037	2026/03/28
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ- 1.5M	DDT-ZC02762	2026/03/28

14.2. Block diagram of test setup

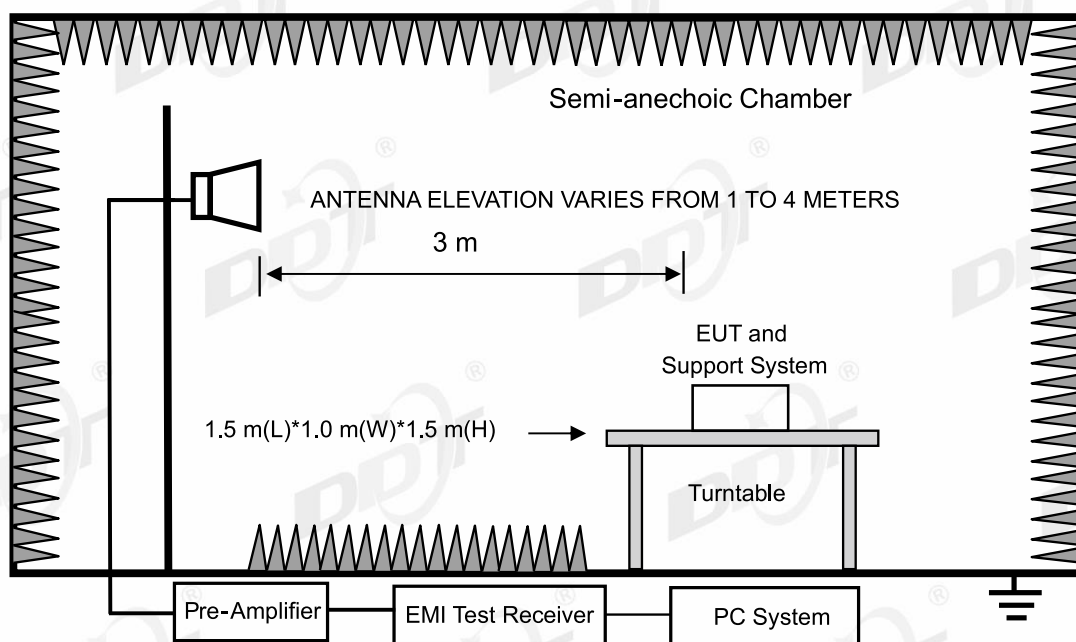

14.3. Limits

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

Same with Emissions in Restricted Frequency Bands except change investigated frequency range from 5.15-5.25 GHz, 5250-5350 GHz, 5470-5725 GHz, 5.725-5.85 GHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

14.6. Test result

PASS. (See below detailed test result)

14.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX 11A 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\53

Memo:

Sample Numble:S25030626-001 Power Setting:12

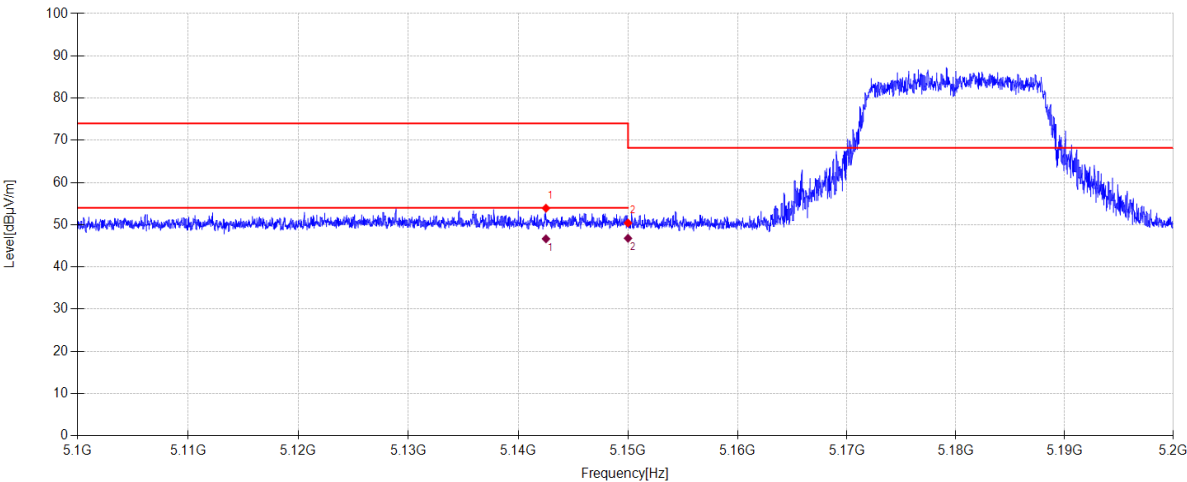

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5142.520	44.85	33.40	5.27	-29.60	53.92	74.00	20.08	PK	Horizontal
2	5150.000	41.33	33.40	5.28	-29.60	50.41	68.20	17.79	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5142.520	37.59	33.40	5.27	46.66	54.0	7.34	AV	Horizontal	
2	5150.000	37.71	33.40	5.28	46.79	54.0	7.21	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX 11A 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\54
Memo: Sample Numbler:S25030626-001 Power Setting:12

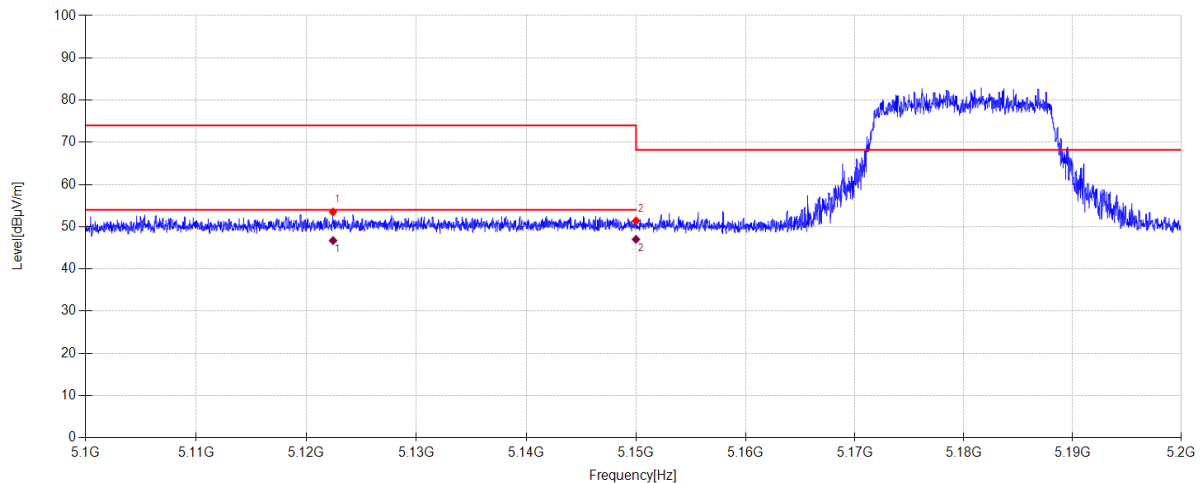

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5122.430	44.44	33.40	5.26	-29.60	53.50	74.00	20.50	PK	Vertical
2	5150.000	42.31	33.40	5.28	-29.60	51.39	68.20	16.81	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5122.430	37.66	33.40	5.26	46.72	54.0	7.28	AV	Vertical
2	5150.000	37.93	33.40	5.28	47.01	54.0	6.99	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX 11A 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\55
Memo: Sample Numbler:S25030626-001 Power Setting:12

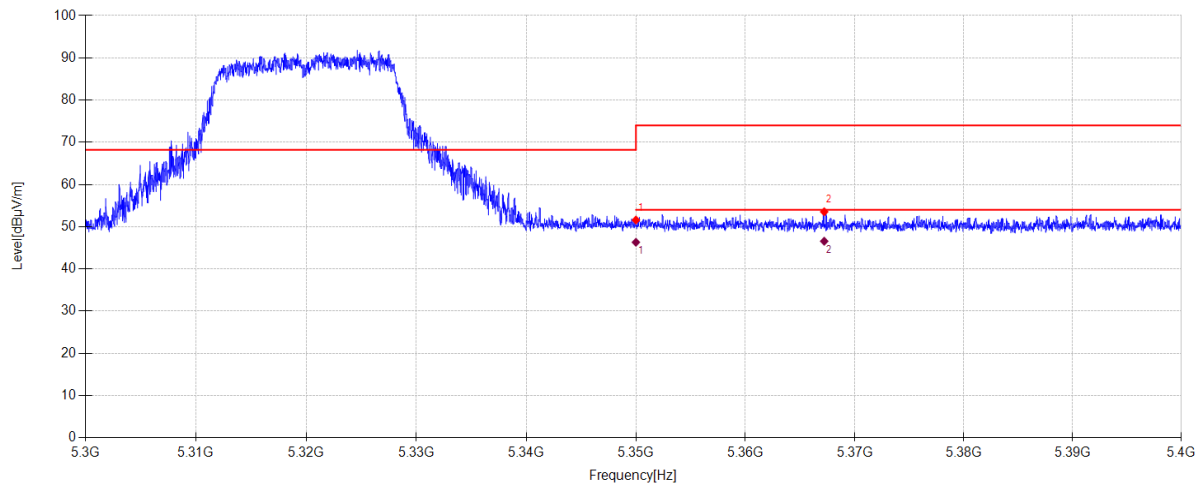

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.68	33.10	5.41	-29.60	51.59	68.20	16.61	PK	Horizontal
2	5367.210	44.62	33.10	5.42	-29.60	53.54	74.00	20.46	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.41	33.10	5.41	46.32	54.0	7.68	AV	Horizontal
2	5367.210	37.65	33.10	5.42	46.57	54.0	7.43	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX 11A 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\56
Memo: Sample Numbler:S25030626-001 Power Setting:12

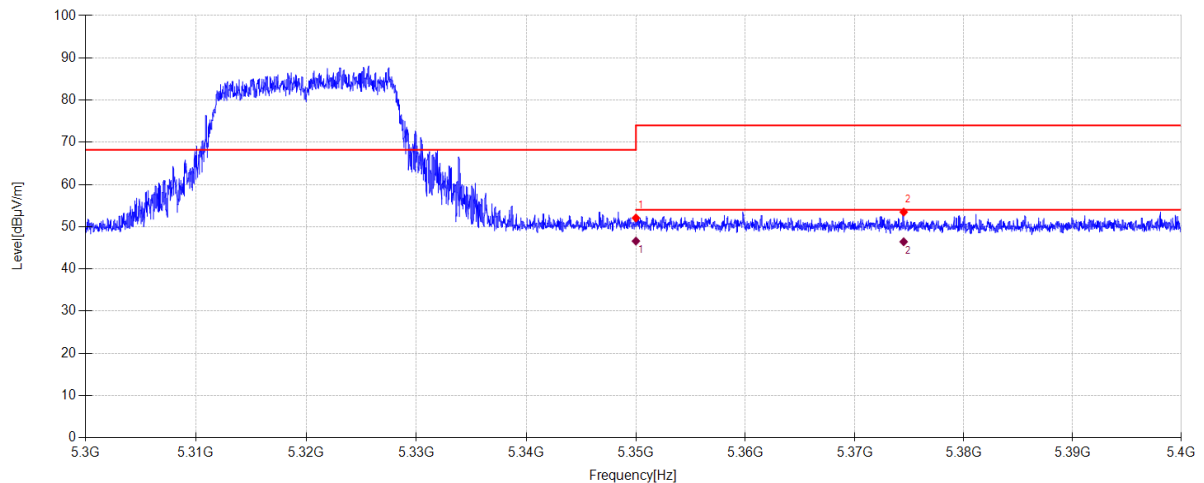

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.17	33.10	5.41	-29.60	52.08	68.20	16.12	PK	Vertical
2	5374.490	44.54	33.10	5.43	-29.60	53.47	74.00	20.53	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.69	33.10	5.41	46.60	54.0	7.40	AV	Vertical
2	5374.490	37.51	33.10	5.43	46.44	54.0	7.56	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX 11A 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\57
Memo: Sample Numbler:S25030626-001 Power Setting:12

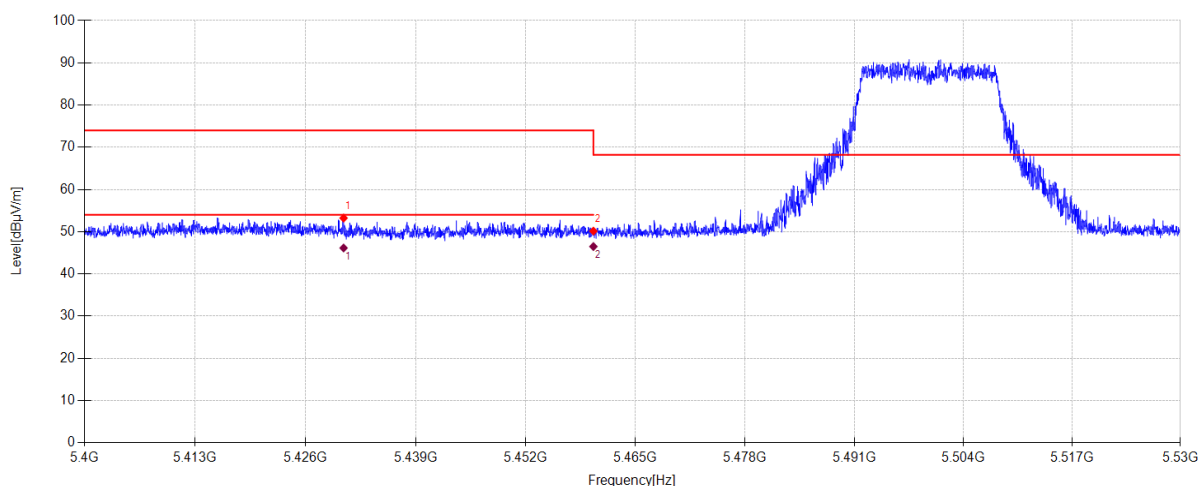

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5430.472	44.34	33.04	5.46	-29.60	53.24	74.00	20.76	PK	Horizontal
2	5460.000	41.27	33.00	5.48	-29.60	50.15	68.20	18.05	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5430.472	37.25	33.04	5.46	46.15	54.0	7.85	AV	Horizontal
2	5460.000	37.61	33.00	5.48	46.49	54.0	7.51	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX 11A 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\58
Memo: Sample Numbler:S25030626-001 Power Setting:12

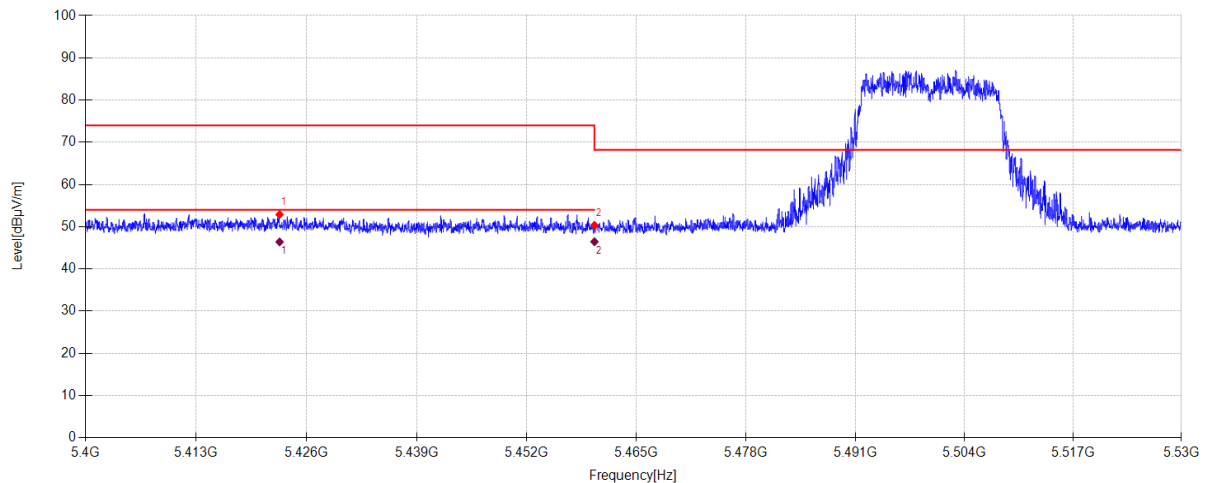

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5422.815	43.97	33.05	5.46	-29.60	52.88	74.00	21.12	PK	Vertical
2	5460.000	41.47	33.00	5.48	-29.60	50.35	68.20	17.85	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5422.815	37.49	33.05	5.46	46.40	54.0	7.60	AV	Vertical
2	5460.000	37.57	33.00	5.48	46.45	54.0	7.55	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX 11A 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\59

Memo:

Sample Numbler:S25030626-001 Power Setting:12

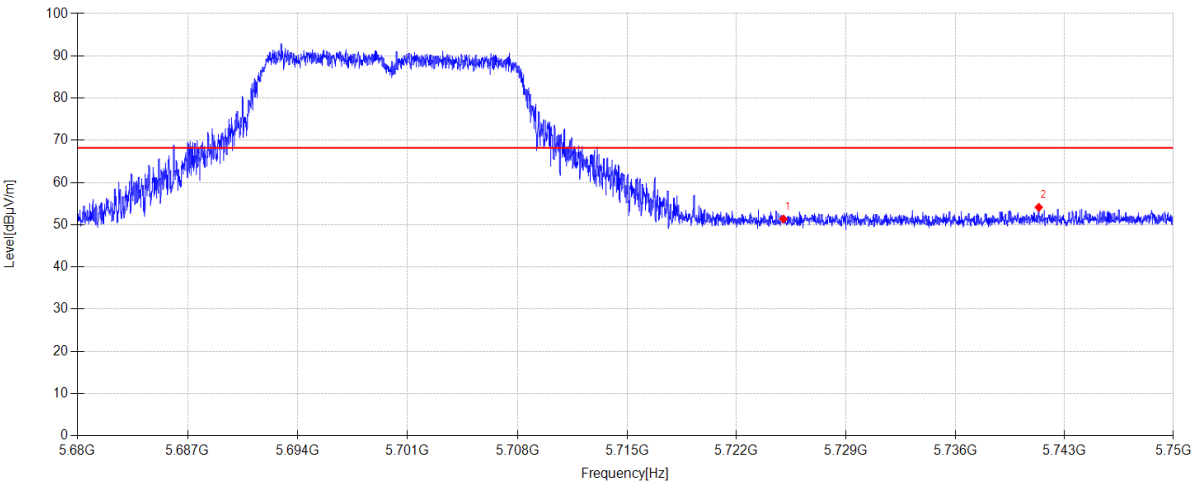

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.55	33.75	5.66	-29.60	51.36	68.20	16.84	PK	Horizontal
2	5741.362	44.21	33.85	5.67	-29.60	54.13	68.20	14.07	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX 11A 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\60

Memo:

Sample Numbler:S25030626-001 Power Setting:12

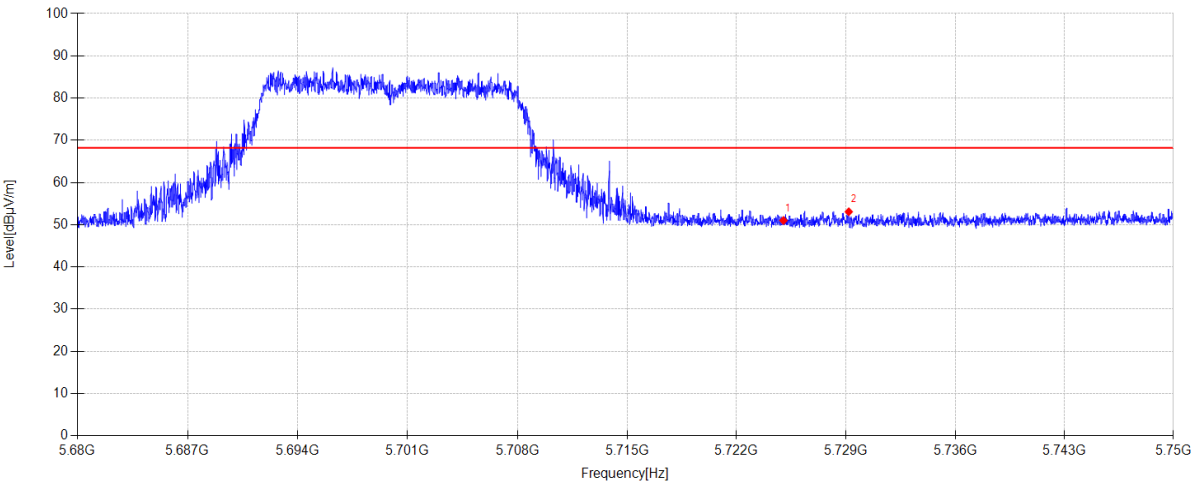


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.19	33.75	5.66	-29.60	51.00	68.20	17.20	PK	Vertical
2	5729.182	43.23	33.78	5.66	-29.60	53.07	68.20	15.13	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX N20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\51
Memo: Sample Numbler:S25030626-001 Power Setting:12

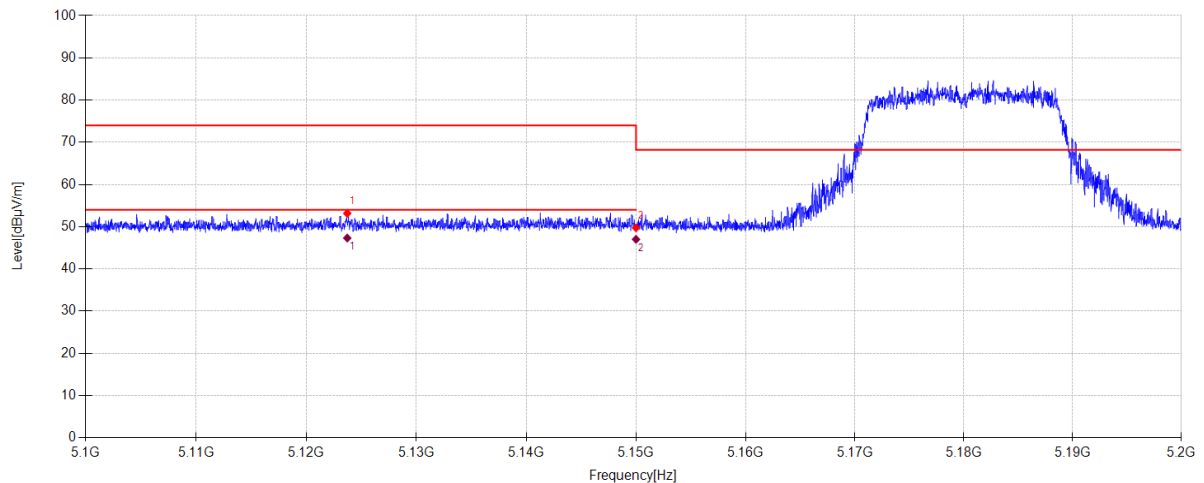

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5123.720	44.11	33.40	5.26	-29.60	53.17	74.00	20.83	PK	Horizontal
2	5150.000	40.66	33.40	5.28	-29.60	49.74	68.20	18.46	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5123.720	38.26	33.40	5.26	47.32	54.0	6.68	AV	Horizontal
2	5150.000	37.94	33.40	5.28	47.02	54.0	6.98	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX N20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\52
Memo: Sample Numbler:S25030626-001 Power Setting:12

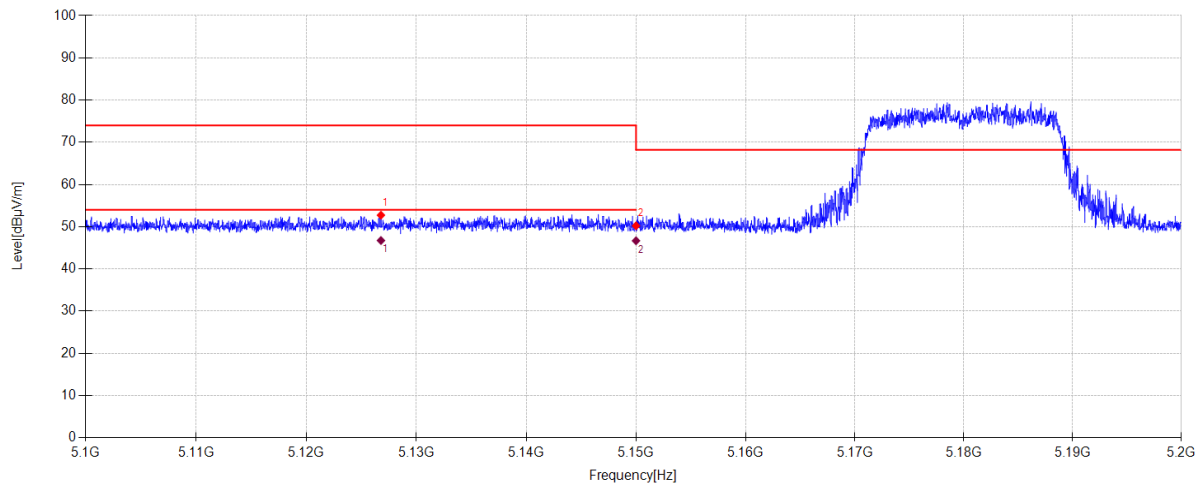

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5126.780	43.68	33.40	5.26	-29.60	52.74	74.00	21.26	PK	Vertical
2	5150.000	41.14	33.40	5.28	-29.60	50.22	68.20	17.98	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5126.780	37.68	33.40	5.26	46.74	54.0	7.26	AV	Vertical
2	5150.000	37.59	33.40	5.28	46.67	54.0	7.33	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX N20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\49
Memo: Sample Numble:S25030626-001 Power Setting:12

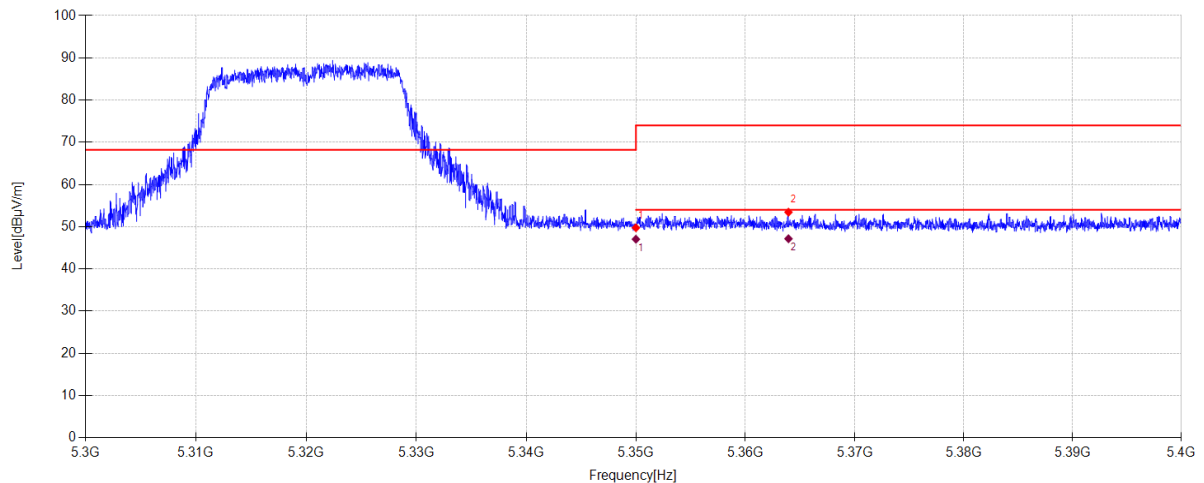

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.85	33.10	5.41	-29.60	49.76	68.20	18.44	PK	Horizontal
2	5363.940	44.53	33.10	5.42	-29.60	53.45	74.00	20.55	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.13	33.10	5.41	47.04	54.0	6.96	AV	Horizontal
2	5363.940	38.24	33.10	5.42	47.16	54.0	6.84	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX N20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\50
Memo: Sample Numbler:S25030626-001 Power Setting:12

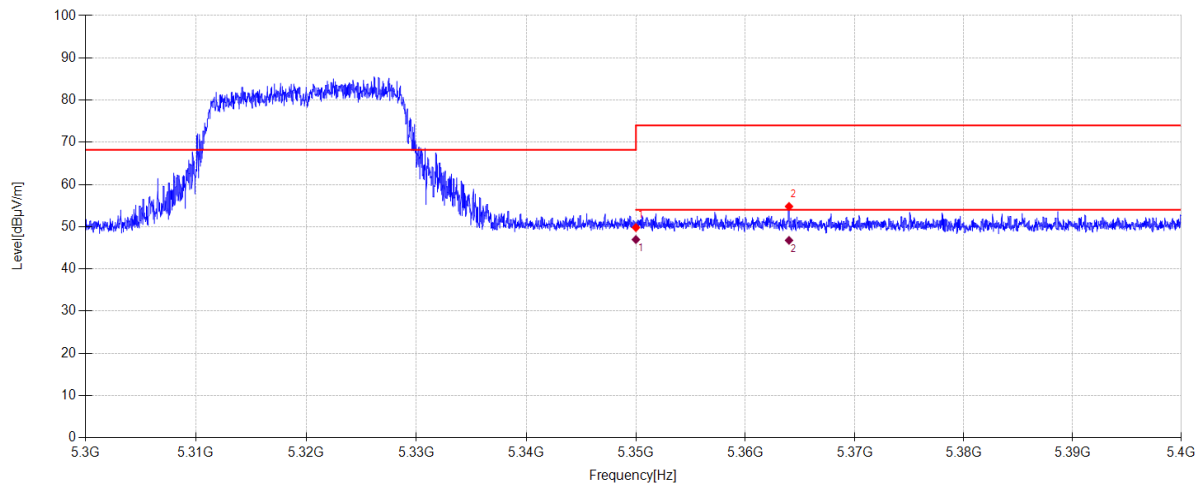

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.89	33.10	5.41	-29.60	49.80	68.20	18.40	PK	Vertical
2	5363.990	45.88	33.10	5.42	-29.60	54.80	74.00	19.20	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.05	33.10	5.41	46.96	54.0	7.04	AV	Vertical
2	5363.990	37.85	33.10	5.42	46.77	54.0	7.23	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX N20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\47
Memo: Sample Numble:S25030626-001 Power Setting:12

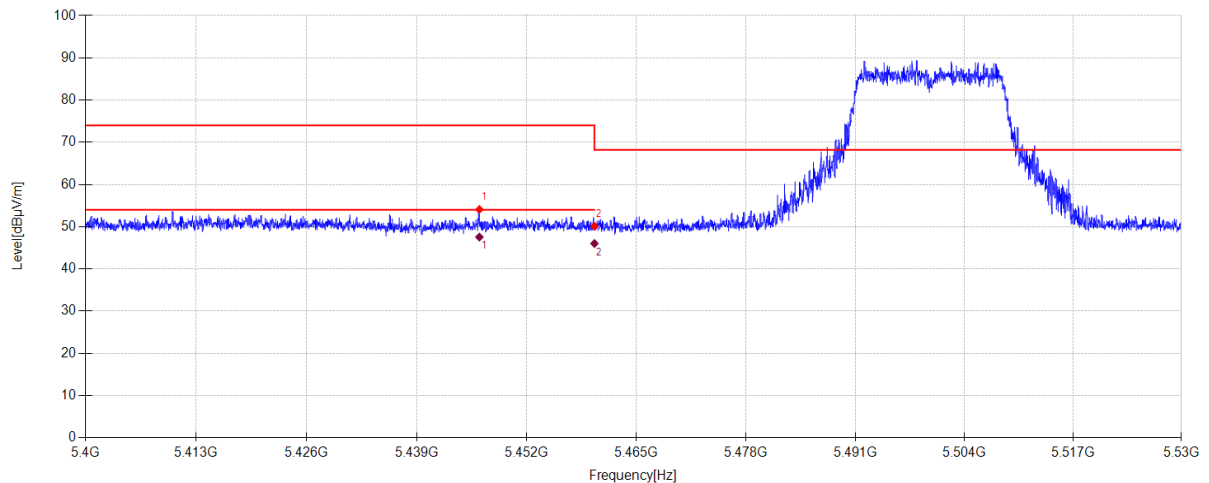

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.384	45.21	33.01	5.47	-29.60	54.09	74.00	19.91	PK	Horizontal
2	5460.000	41.24	33.00	5.48	-29.60	50.12	68.20	18.08	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.384	38.68	33.01	5.47	47.56	54.0	6.44	AV	Horizontal
2	5460.000	37.14	33.00	5.48	46.02	54.0	7.98	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX N20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\48
Memo: Sample Numble:S25030626-001 Power Setting:12

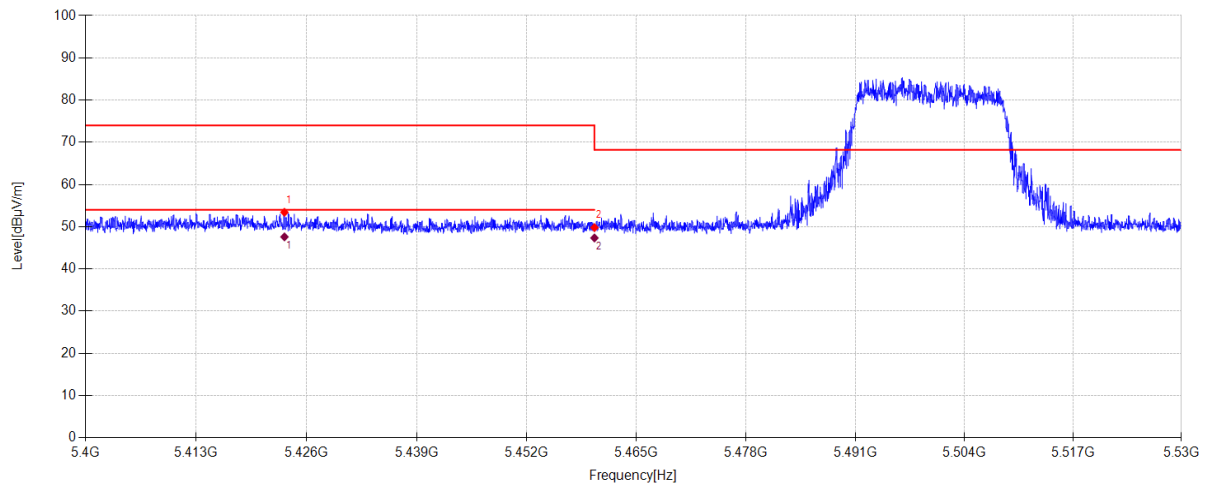

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5423.387	44.51	33.05	5.46	-29.60	53.42	74.00	20.58	PK	Vertical
2	5460.000	40.92	33.00	5.48	-29.60	49.80	68.20	18.40	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5423.387	38.68	33.05	5.46	47.59	54.0	6.41	AV	Vertical
2	5460.000	38.46	33.00	5.48	47.34	54.0	6.66	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX N20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\45

Memo:

Sample Numbler:S25030626-001 Power Setting:12

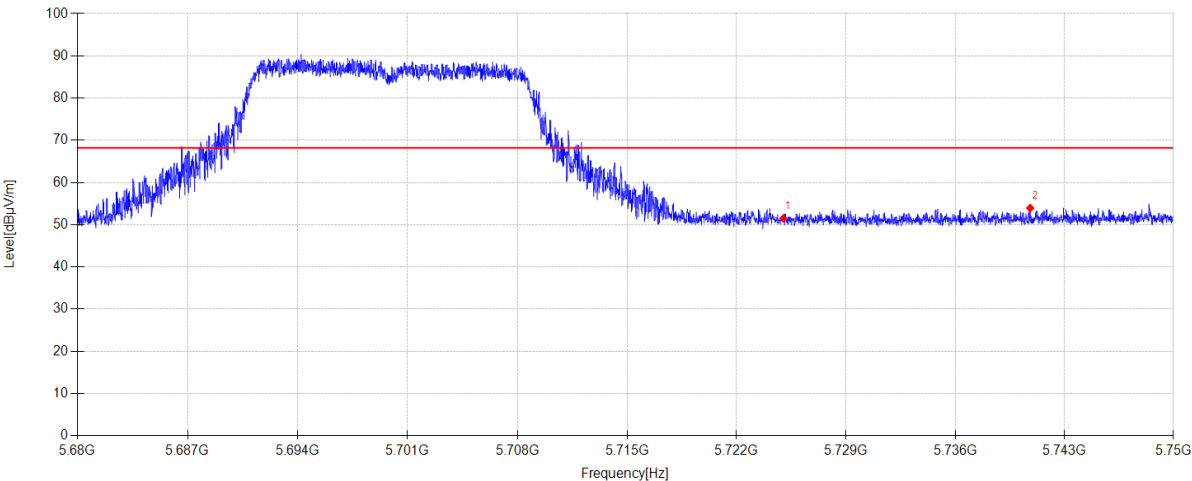

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.66	33.75	5.66	-29.60	51.47	68.20	16.73	PK	Horizontal
2	5740.809	44.04	33.84	5.67	-29.60	53.95	68.20	14.25	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX N20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\46

Memo:

Sample Numbler:S25030626-001 Power Setting:12

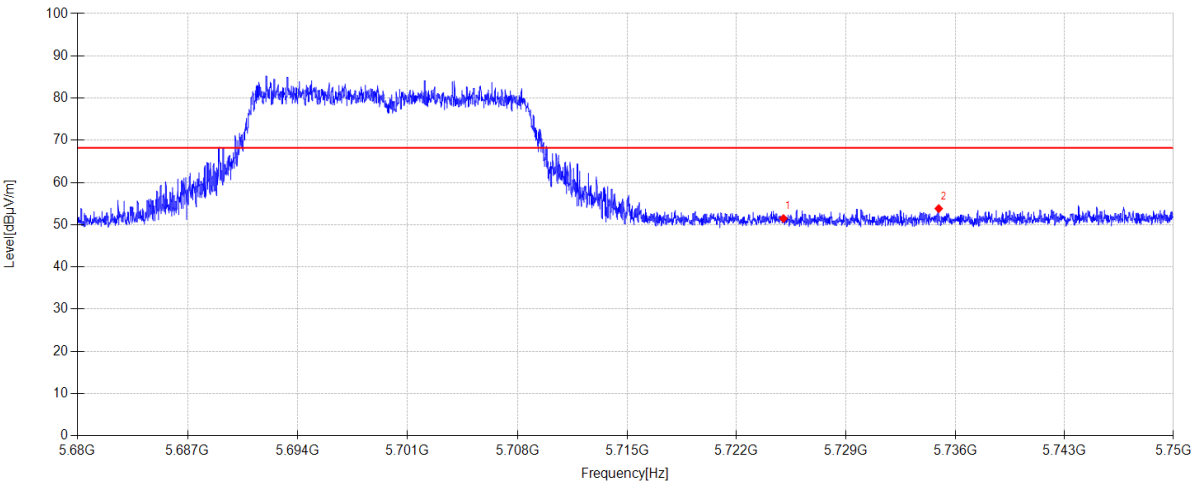

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.67	33.75	5.66	-29.60	51.48	68.20	16.72	PK	Vertical
2	5734.943	43.94	33.81	5.67	-29.60	53.82	68.20	14.38	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\67
Memo: Sample Numbler:S25030626-001 Power Setting:12

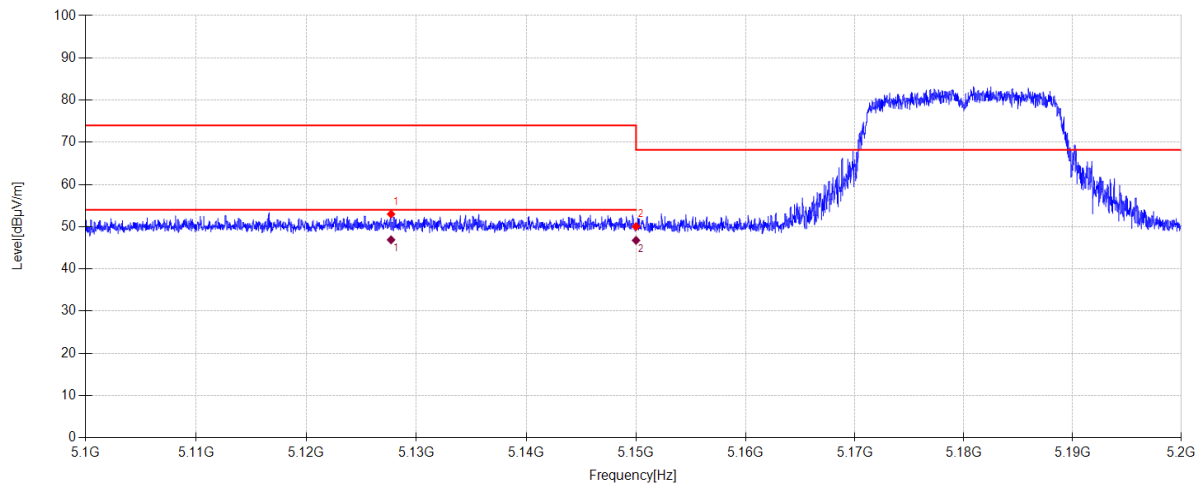

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5127.700	43.94	33.40	5.26	-29.60	53.00	74.00	21.00	PK	Horizontal
2	5150.000	40.96	33.40	5.28	-29.60	50.04	68.20	18.16	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5127.700	37.84	33.40	5.26	46.90	54.0	7.10	AV	Horizontal
2	5150.000	37.69	33.40	5.28	46.77	54.0	7.23	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\68
Memo: Sample Numbler:S25030626-001 Power Setting:12

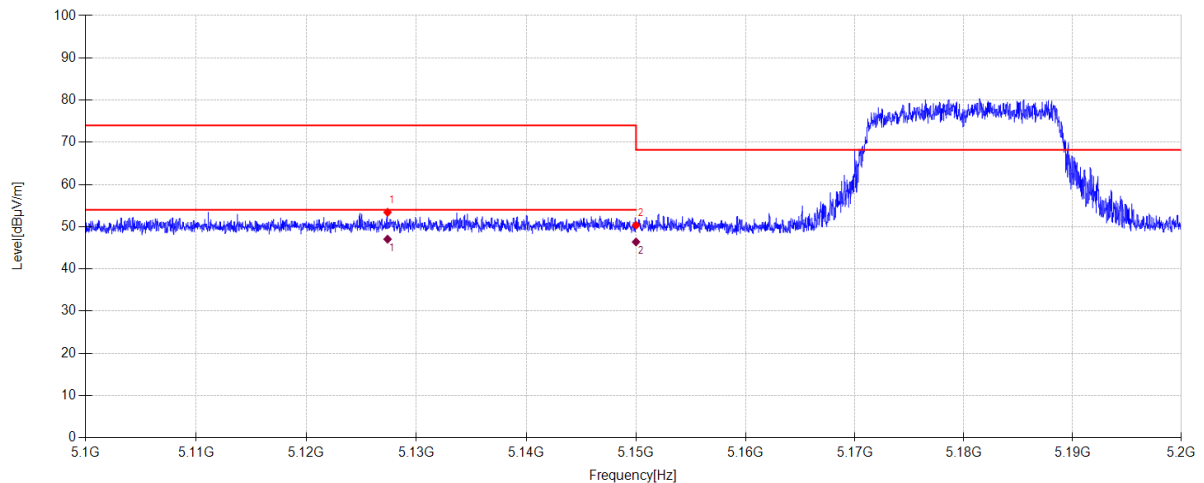

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5127.380	44.36	33.40	5.26	-29.60	53.42	74.00	20.58	PK	Vertical
2	5150.000	41.27	33.40	5.28	-29.60	50.35	68.20	17.85	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5127.380	37.99	33.40	5.26	47.05	54.0	6.95	AV	Vertical
2	5150.000	37.31	33.40	5.28	46.39	54.0	7.61	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\65
Memo: Sample Numbler:S25030626-001 Power Setting:12

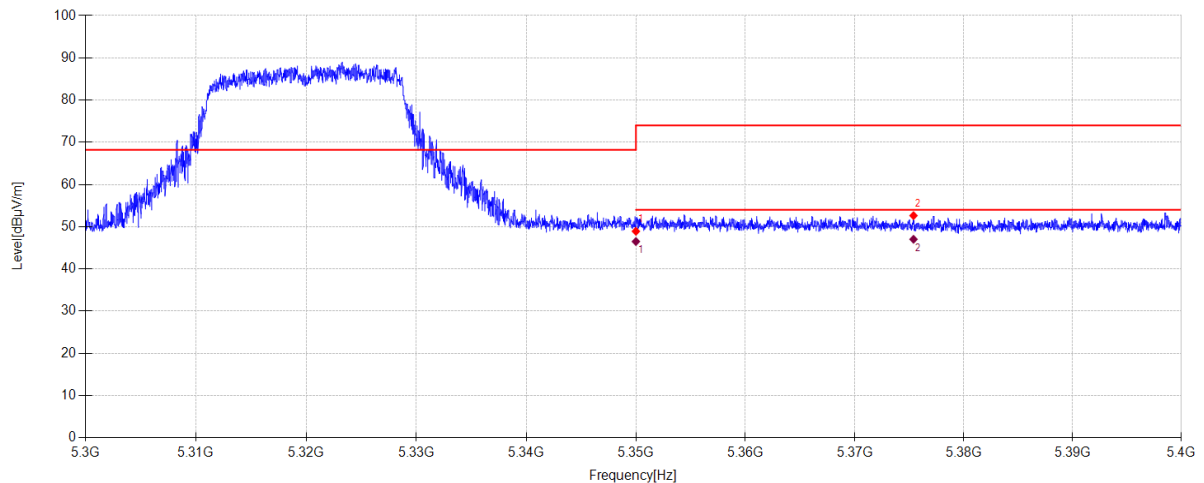

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.01	33.10	5.41	-29.60	48.92	68.20	19.28	PK	Horizontal
2	5375.390	43.70	33.10	5.43	-29.60	52.63	74.00	21.37	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.59	33.10	5.41	46.50	54.0	7.50	AV	Horizontal
2	5375.390	38.09	33.10	5.43	47.02	54.0	6.98	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\66
Memo: Sample Numbler:S25030626-001 Power Setting:12

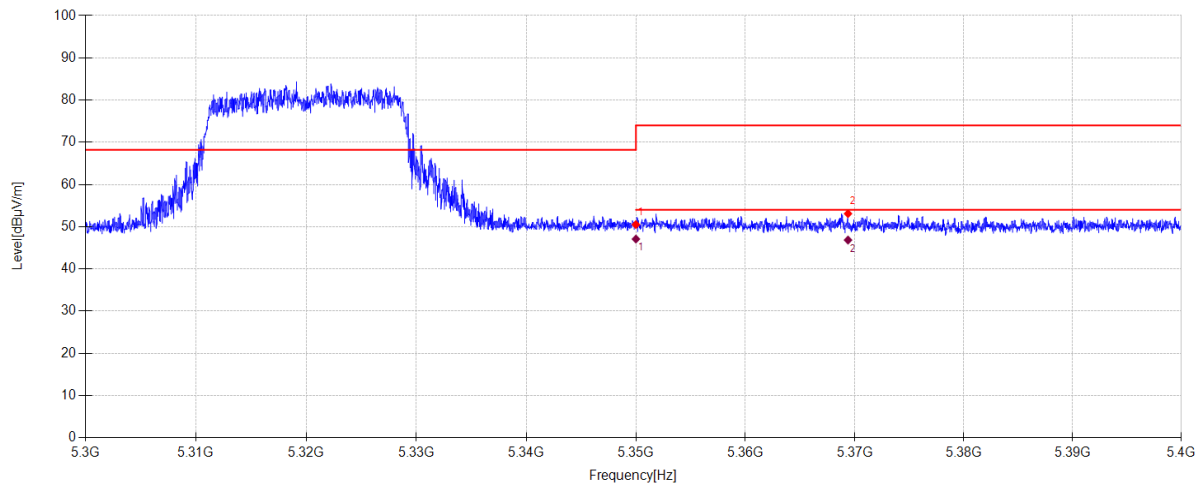

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.60	33.10	5.41	-29.60	50.51	68.20	17.69	PK	Vertical
2	5369.390	44.18	33.10	5.42	-29.60	53.10	74.00	20.90	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.17	33.10	5.41	47.08	54.0	6.92	AV	Vertical
2	5369.390	37.92	33.10	5.42	46.84	54.0	7.16	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\63
Memo: Sample Numbler:S25030626-001 Power Setting:12

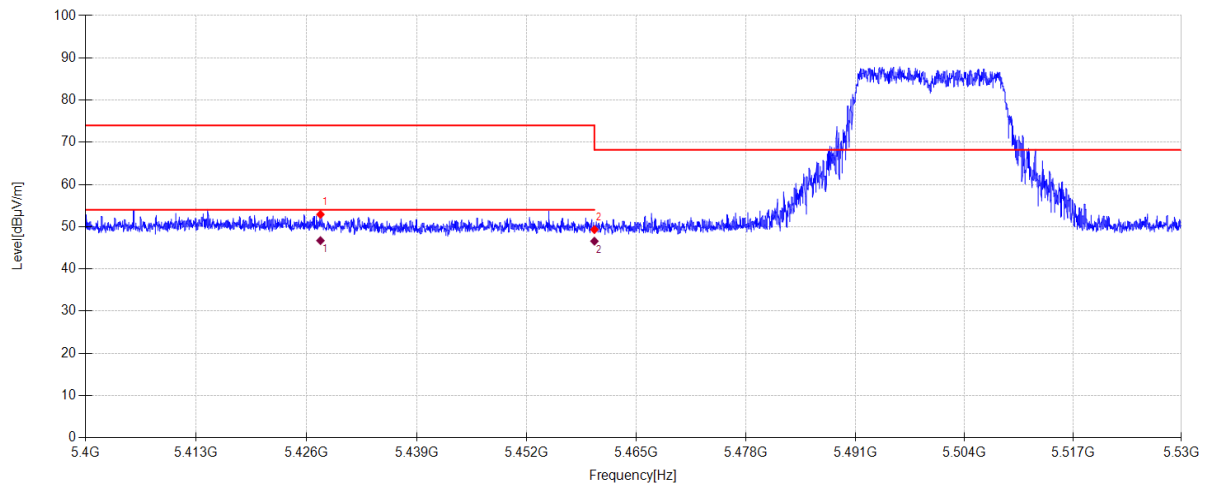

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5427.625	44.01	33.04	5.46	-29.60	52.91	74.00	21.09	PK	Horizontal
2	5460.000	40.44	33.00	5.48	-29.60	49.32	68.20	18.88	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5427.625	37.81	33.04	5.46	46.71	54.0	7.29	AV	Horizontal
2	5460.000	37.69	33.00	5.48	46.57	54.0	7.43	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\64
Memo: Sample Numbler:S25030626-001 Power Setting:12

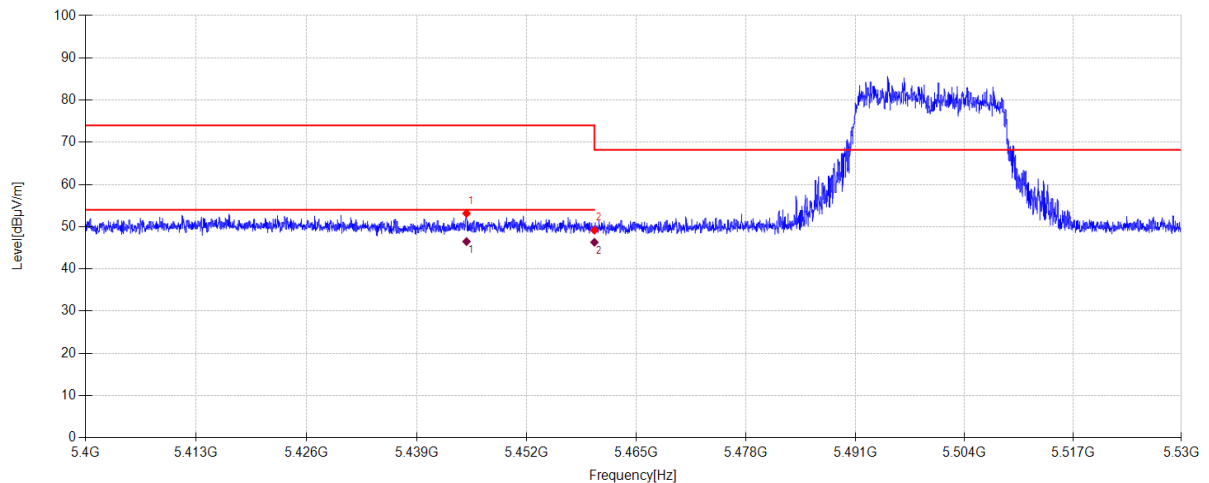

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5444.863	44.28	33.01	5.47	-29.60	53.16	74.00	20.84	PK	Vertical
2	5460.000	40.31	33.00	5.48	-29.60	49.19	68.20	19.01	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5444.863	37.61	33.01	5.47	46.49	54.0	7.51	AV	Vertical
2	5460.000	37.44	33.00	5.48	46.32	54.0	7.68	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AC20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\61

Memo:

Sample Numbler:S25030626-001 Power Setting:12

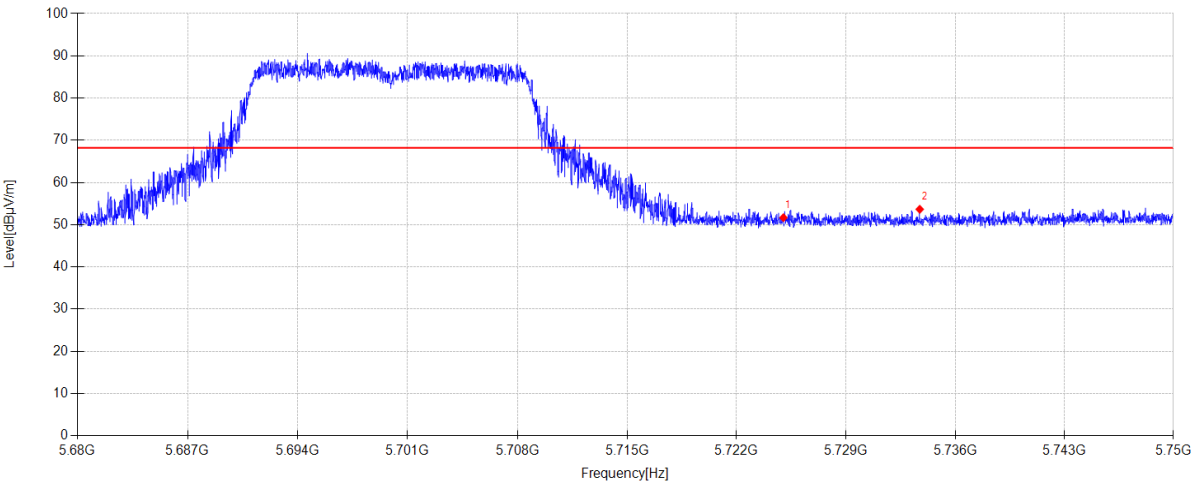

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.87	33.75	5.66	-29.60	51.68	68.20	16.52	PK	Horizontal
2	5733.725	43.80	33.80	5.66	-29.60	53.66	68.20	14.54	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AC20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\62

Memo:

Sample Numbler:S25030626-001 Power Setting:12

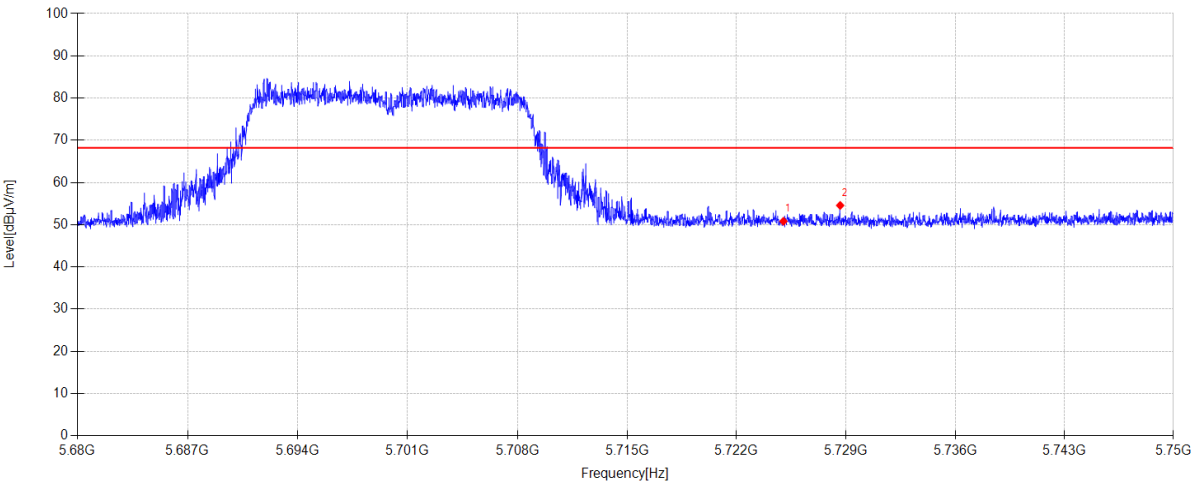


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.00	33.75	5.66	-29.60	50.81	68.20	17.39	PK	Vertical
2	5728.629	44.74	33.77	5.66	-29.60	54.57	68.20	13.63	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\69
Memo: Sample Numbler:S25030626-001 Power Setting:12

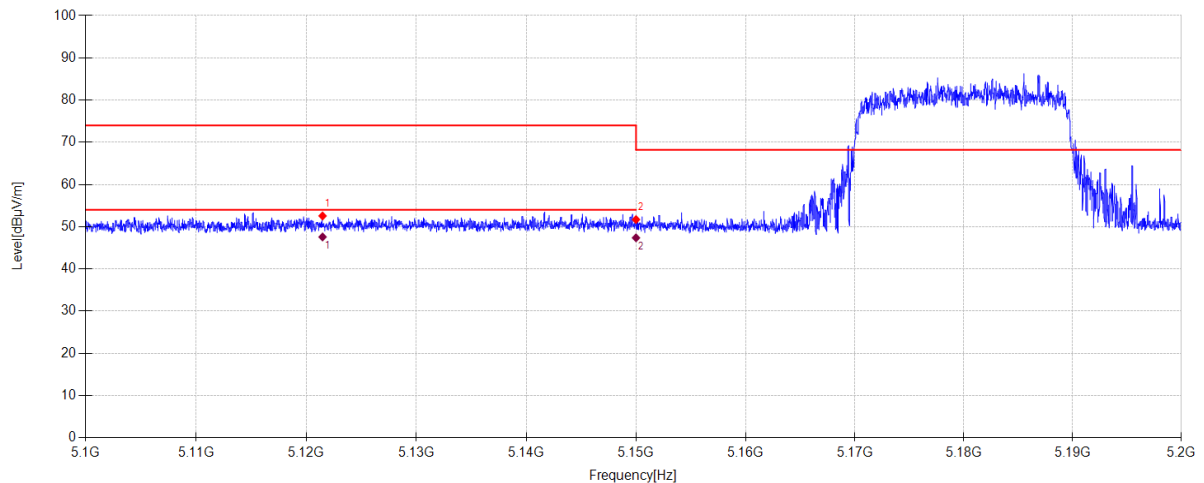

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5121.480	43.50	33.40	5.26	-29.60	52.56	74.00	21.44	PK	Horizontal
2	5150.000	42.62	33.40	5.28	-29.60	51.70	68.20	16.50	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5121.480	38.51	33.40	5.26	47.57	54.0	6.43	AV	Horizontal
2	5150.000	38.29	33.40	5.28	47.37	54.0	6.63	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\70
Memo: Sample Numbler:S25030626-001 Power Setting:12

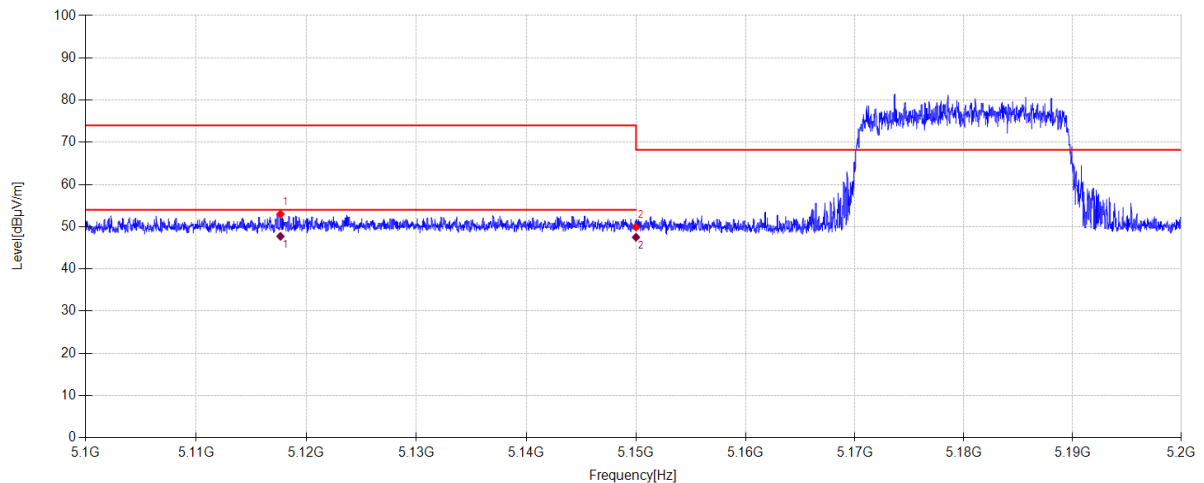

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5117.660	43.94	33.40	5.26	-29.60	53.00	74.00	21.00	PK	Vertical
2	5150.000	40.85	33.40	5.28	-29.60	49.93	68.20	18.27	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5117.660	38.67	33.40	5.26	47.73	54.0	6.27	AV	Vertical
2	5150.000	38.43	33.40	5.28	47.51	54.0	6.49	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\71
Memo: Sample Numbler:S25030626-001 Power Setting:12

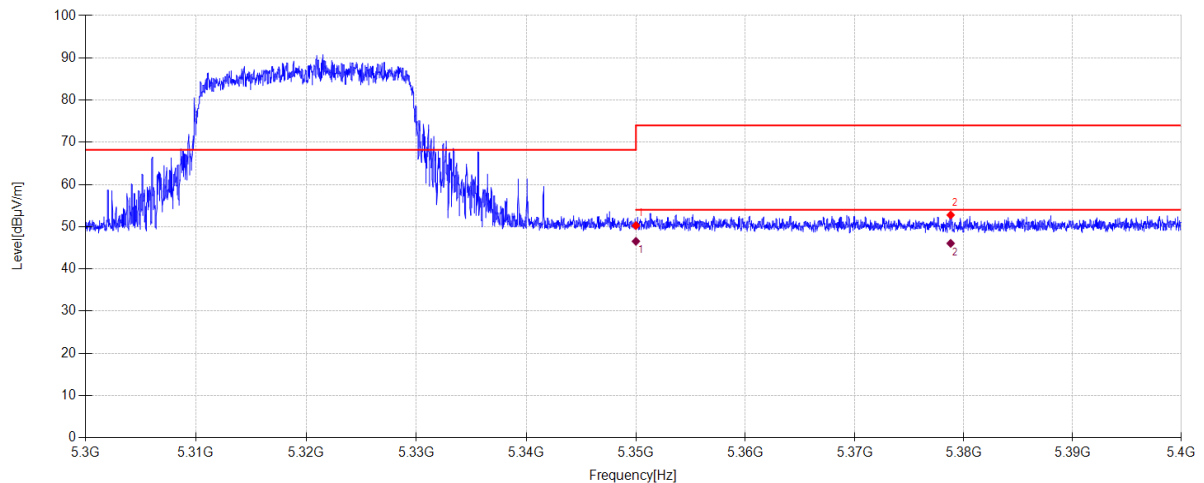

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.37	33.10	5.41	-29.60	50.28	68.20	17.92	PK	Horizontal
2	5378.800	43.84	33.10	5.43	-29.60	52.77	74.00	21.23	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.64	33.10	5.41	46.55	54.0	7.45	AV	Horizontal
2	5378.800	37.13	33.10	5.43	46.06	54.0	7.94	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\72
Memo: Sample Numbler:S25030626-001 Power Setting:12

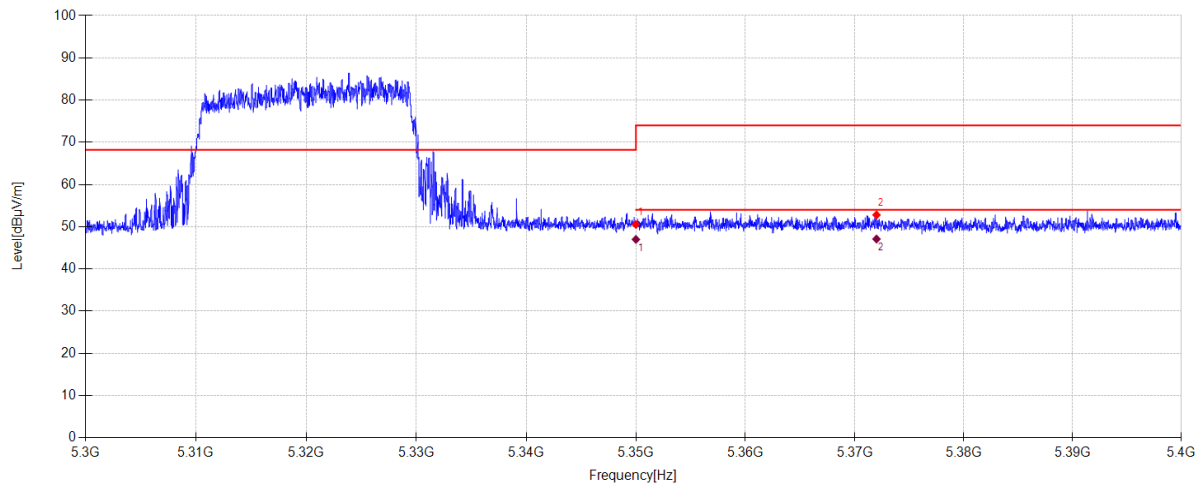

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.65	33.10	5.41	-29.60	50.56	68.20	17.64	PK	Vertical
2	5372.000	43.86	33.10	5.43	-29.60	52.79	74.00	21.21	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.08	33.10	5.41	46.99	54.0	7.01	AV	Vertical
2	5372.000	38.15	33.10	5.43	47.08	54.0	6.92	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\73
Memo: Sample Numble:S25030626-001 Power Setting:12

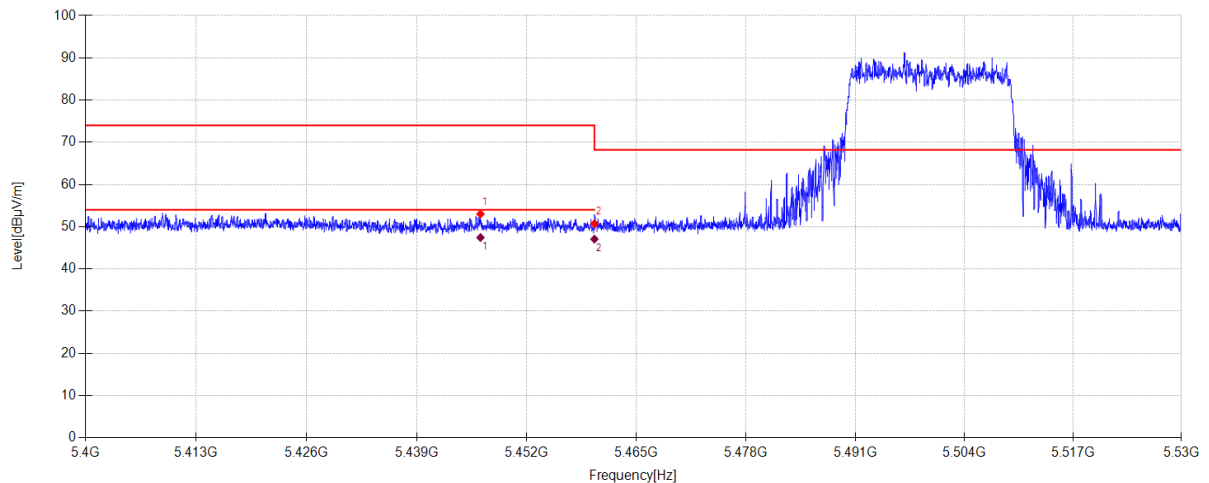

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.514	44.14	33.01	5.47	-29.60	53.02	74.00	20.98	PK	Horizontal
2	5460.000	41.82	33.00	5.48	-29.60	50.70	68.20	17.50	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.514	38.55	33.01	5.47	47.43	54.0	6.57	AV	Horizontal
2	5460.000	38.19	33.00	5.48	47.07	54.0	6.93	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\74
Memo: Sample Numbler:S25030626-001 Power Setting:12

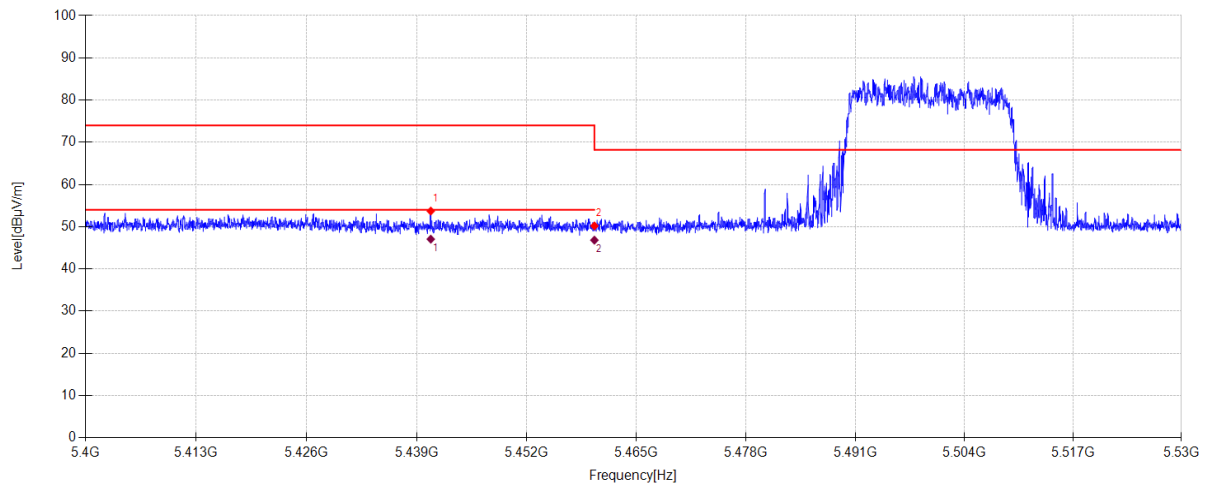

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5440.638	44.82	33.02	5.47	-29.60	53.71	74.00	20.29	PK	Vertical
2	5460.000	41.32	33.00	5.48	-29.60	50.20	68.20	18.00	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5440.638	38.16	33.02	5.47	47.05	54.0	6.95	AV	Vertical
2	5460.000	37.94	33.00	5.48	46.82	54.0	7.18	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AX20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\75

Memo:

Sample Numbler:S25030626-001 Power Setting:12

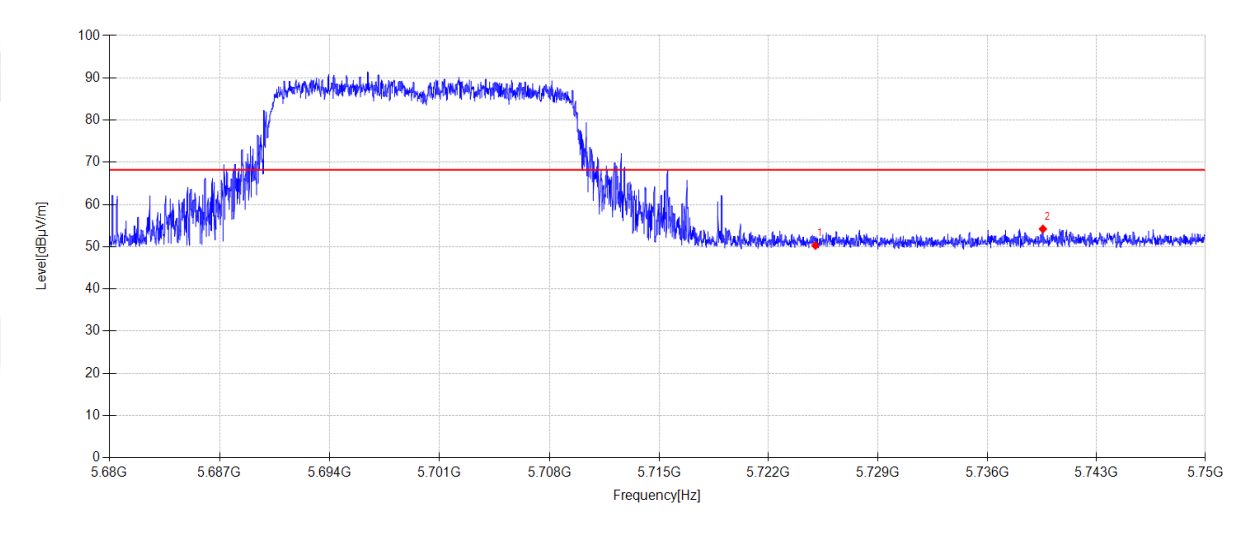

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.47	33.75	5.66	-29.60	50.28	68.20	17.92	PK	Horizontal
2	5739.570	44.29	33.84	5.67	-29.60	54.20	68.20	14.00	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AX20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\76

Memo:

Sample Numbler:S25030626-001 Power Setting:12

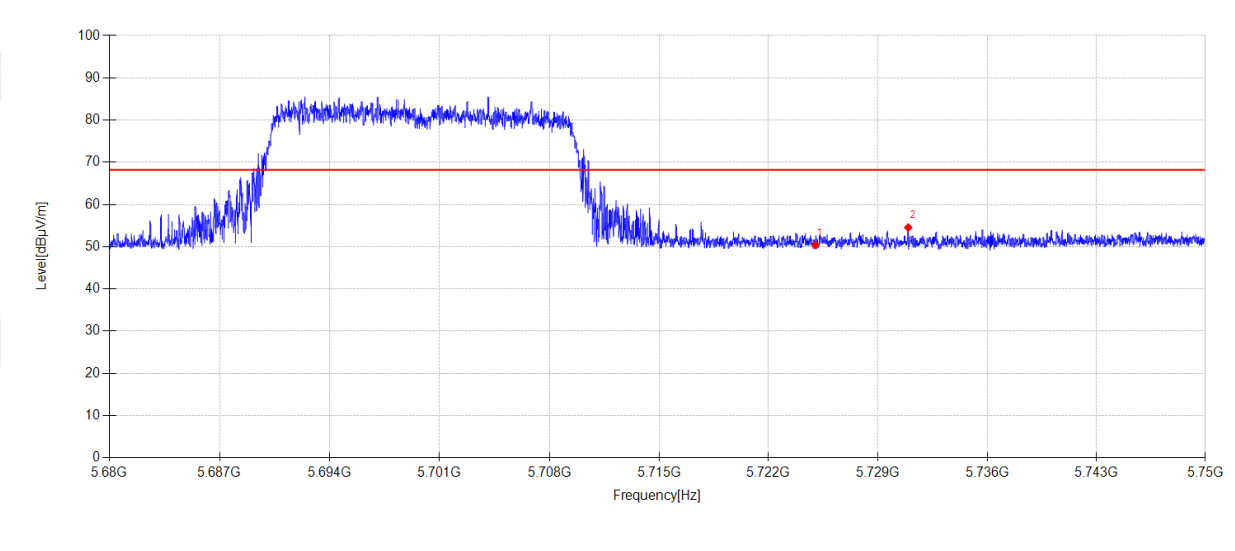

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.57	33.75	5.66	-29.60	50.38	68.20	17.82	PK	Vertical
2	5730.939	44.70	33.79	5.66	-29.60	54.55	68.20	13.65	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX N40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\99
Memo: Sample Numbler:S25030626-001 Power Setting:12

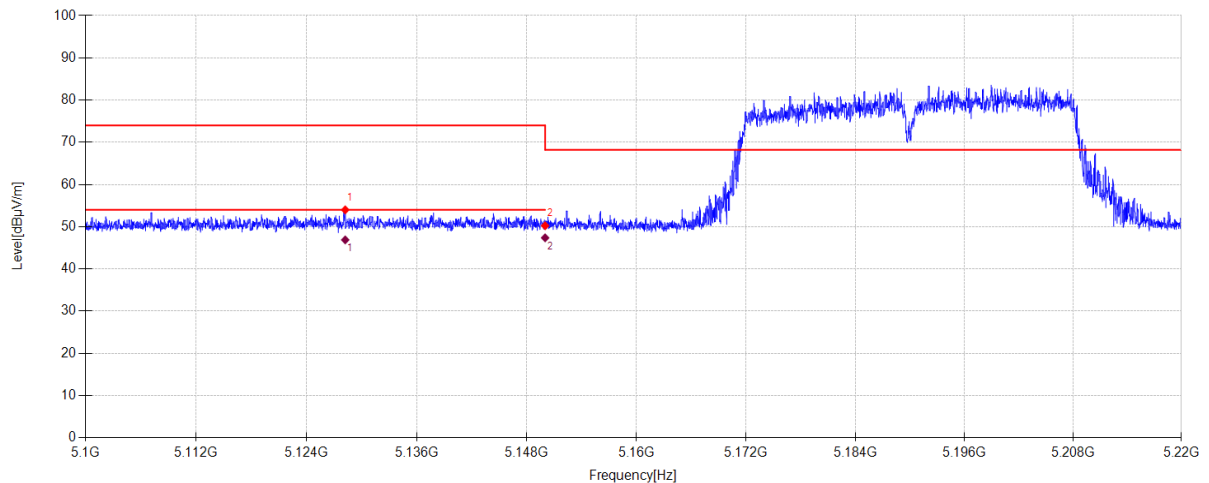

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5128.200	44.94	33.40	5.26	-29.60	54.00	74.00	20.00	PK	Horizontal
2	5150.000	41.16	33.40	5.28	-29.60	50.24	68.20	17.96	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5128.200	37.82	33.40	5.26	46.88	54.0	7.12	AV	Horizontal
2	5150.000	38.29	33.40	5.28	47.37	54.0	6.63	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX N40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\100
Memo: Sample Numble:S25030626-001 Power Setting:12

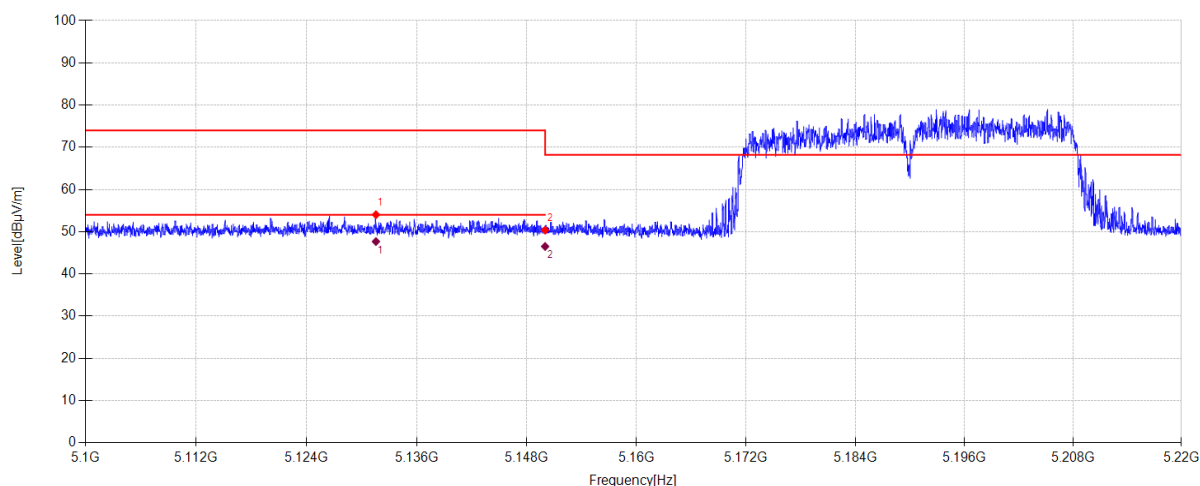

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5131.548	44.96	33.40	5.27	-29.60	54.03	74.00	19.97	PK	Vertical
2	5150.000	41.29	33.40	5.28	-29.60	50.37	68.20	17.83	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5131.548	38.61	33.40	5.27	47.68	54.0	6.32	AV	Vertical
2	5150.000	37.43	33.40	5.28	46.51	54.0	7.49	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX N40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\97
Memo: Sample Numble:S25030626-001 Power Setting:12

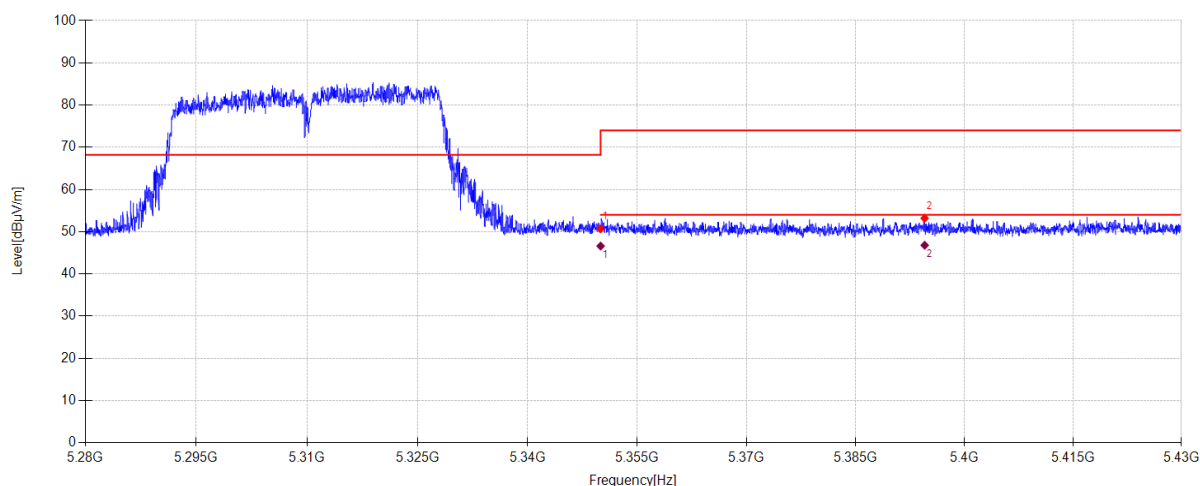

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.79	33.10	5.41	-29.60	50.70	68.20	17.50	PK	Horizontal
2	5394.495	44.26	33.10	5.44	-29.60	53.20	74.00	20.80	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.69	33.10	5.41	46.60	54.0	7.40	AV	Horizontal
2	5394.495	37.85	33.10	5.44	46.79	54.0	7.21	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX N40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\98

Memo:

Sample Numbler:S25030626-001 Power Setting:12

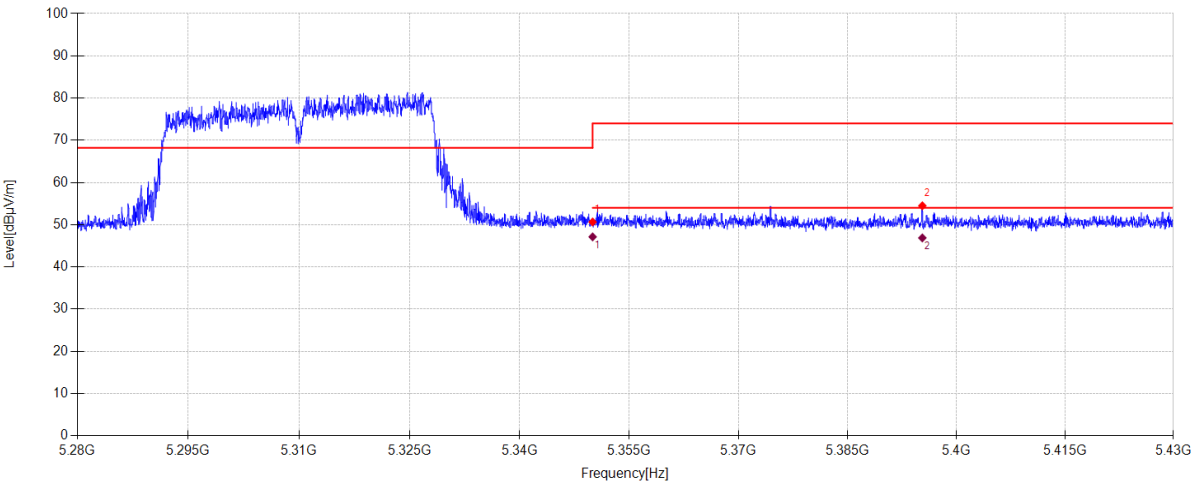

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.74	33.10	5.41	-29.60	50.65	68.20	17.55	PK	Vertical
2	5395.275	45.55	33.10	5.44	-29.60	54.49	74.00	19.51	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.21	33.10	5.41	47.12	54.0	6.88	AV	Vertical
2	5395.275	37.94	33.10	5.44	46.88	54.0	7.12	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX N40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\95
Memo: Sample Numbler:S25030626-001 Power Setting:12

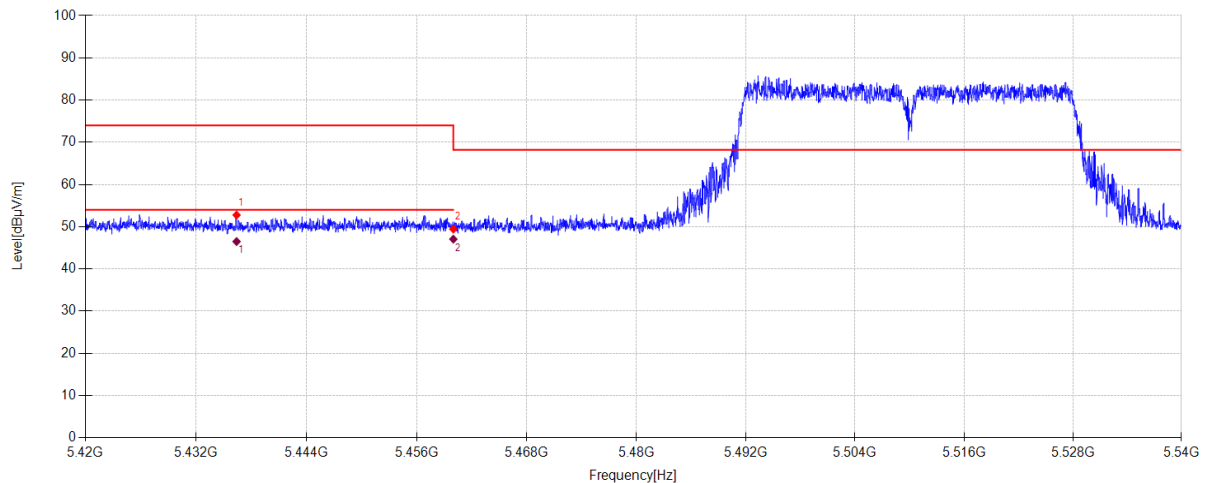

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.404	43.87	33.03	5.47	-29.60	52.77	74.00	21.23	PK	Horizontal
2	5460.000	40.57	33.00	5.48	-29.60	49.45	68.20	18.75	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.404	37.59	33.03	5.47	46.49	54.0	7.51	AV	Horizontal
2	5460.000	38.17	33.00	5.48	47.05	54.0	6.95	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX N40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\96
Memo: Sample Numbler:S25030626-001 Power Setting:12

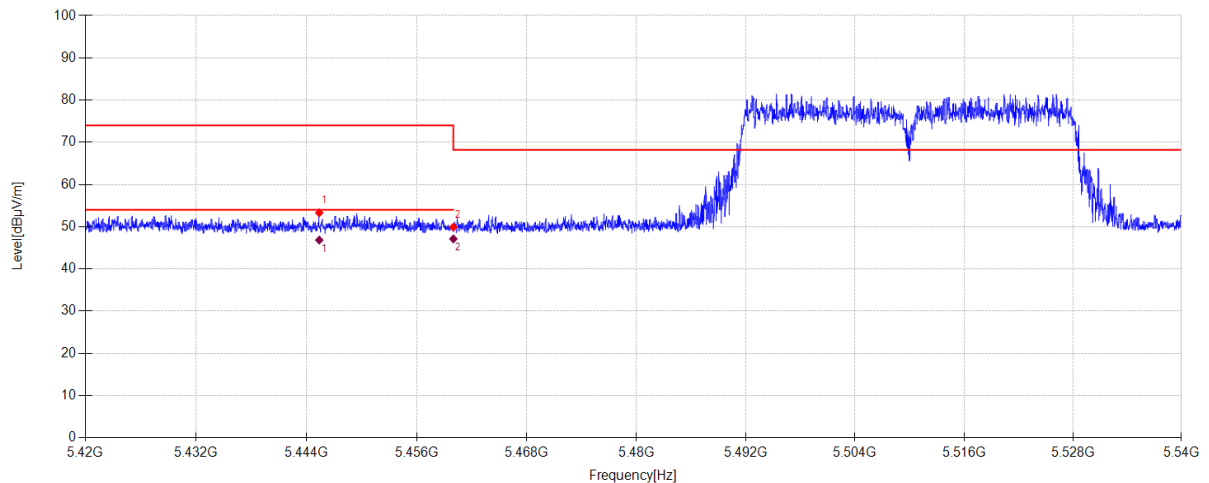

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5445.392	44.41	33.01	5.47	-29.60	53.29	74.00	20.71	PK	Vertical
2	5460.000	41.02	33.00	5.48	-29.60	49.90	68.20	18.30	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5445.392	37.96	33.01	5.47	46.84	54.0	7.16	AV	Vertical
2	5460.000	38.23	33.00	5.48	47.11	54.0	6.89	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\93

Memo:

Sample Numbler:S25030626-001 Power Setting:12

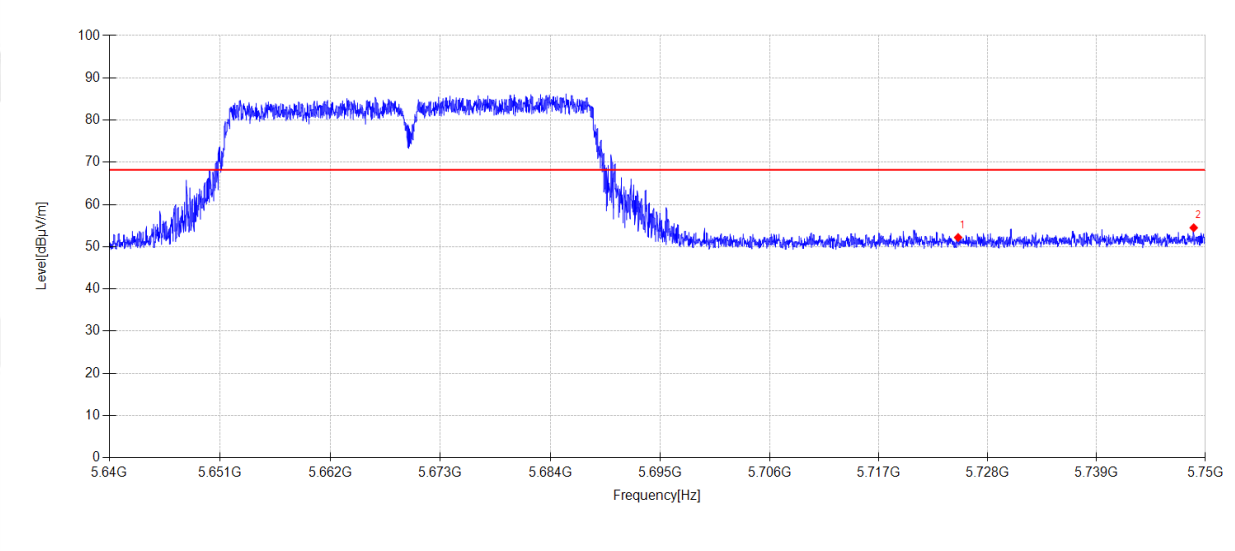

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.38	33.75	5.66	-29.60	52.19	68.20	16.01	PK	Horizontal
2	5748.823	44.53	33.89	5.67	-29.60	54.49	68.20	13.71	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\94

Memo:

Sample Numbler:S25030626-001 Power Setting:12

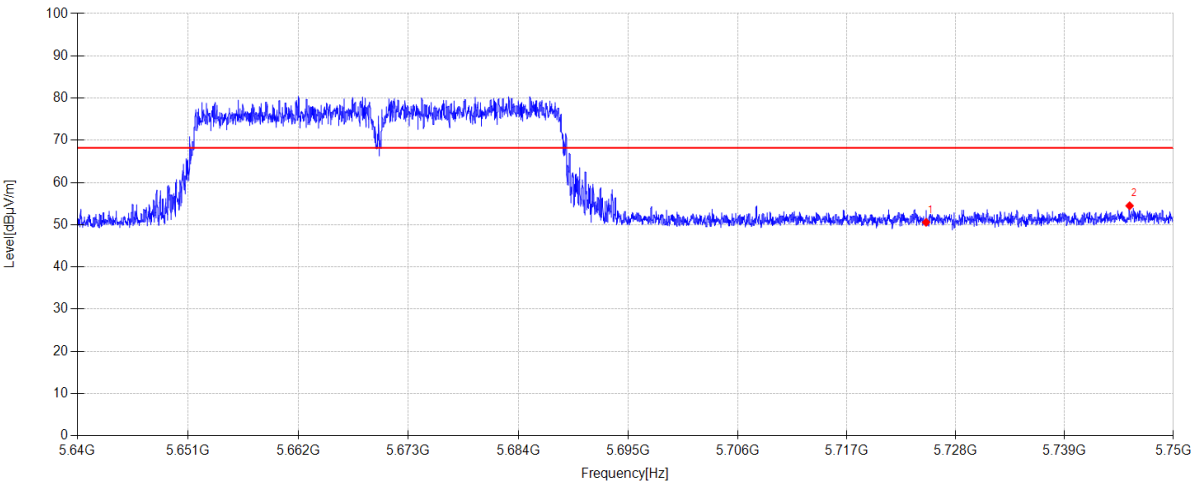

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.76	33.75	5.66	-29.60	50.57	68.20	17.63	PK	Vertical
2	5745.567	44.54	33.87	5.67	-29.60	54.48	68.20	13.72	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\85
Memo: Sample Numble:S25030626-001 Power Setting:12

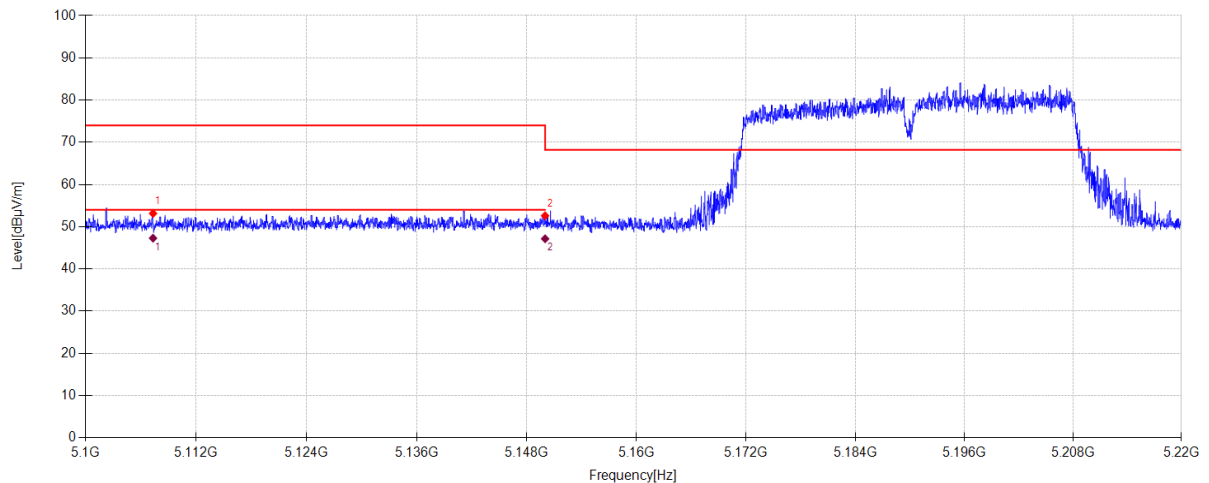

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5107.332	44.10	33.40	5.25	-29.60	53.15	74.00	20.85	PK	Horizontal
2	5150.000	43.52	33.40	5.28	-29.60	52.60	68.20	15.60	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5107.332	38.23	33.40	5.25	47.28	54.0	6.72	AV	Horizontal
2	5150.000	38.06	33.40	5.28	47.14	54.0	6.86	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\86
Memo: Sample Numble:S25030626-001 Power Setting:12

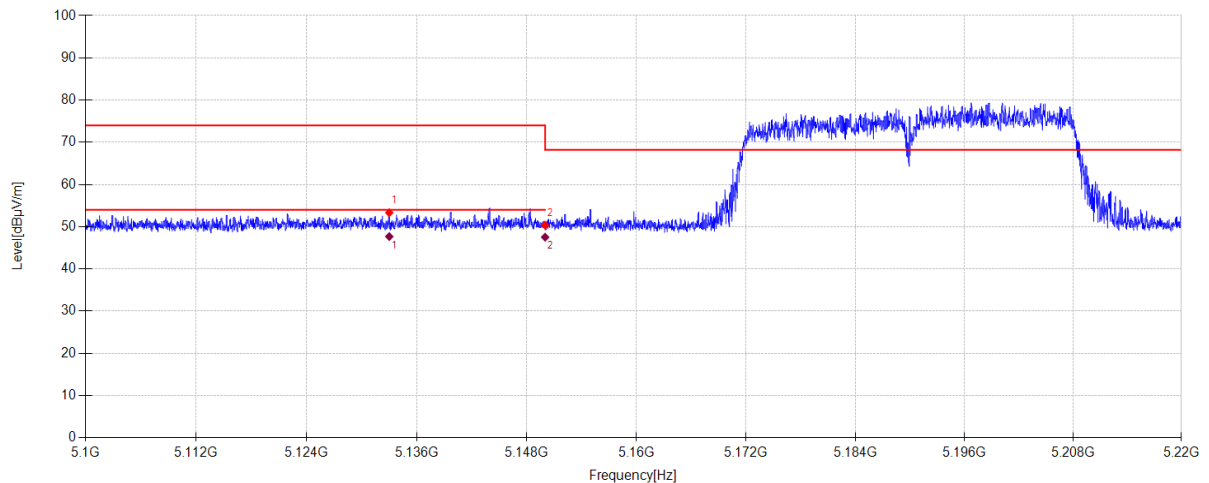

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5133.000	44.25	33.40	5.27	-29.60	53.32	74.00	20.68	PK	Vertical
2	5150.000	41.28	33.40	5.28	-29.60	50.36	68.20	17.84	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5133.000	38.61	33.40	5.27	47.68	54.0	6.32	AV	Vertical
2	5150.000	38.44	33.40	5.28	47.52	54.0	6.48	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\87
Memo: Sample Numbler:S25030626-001 Power Setting:12

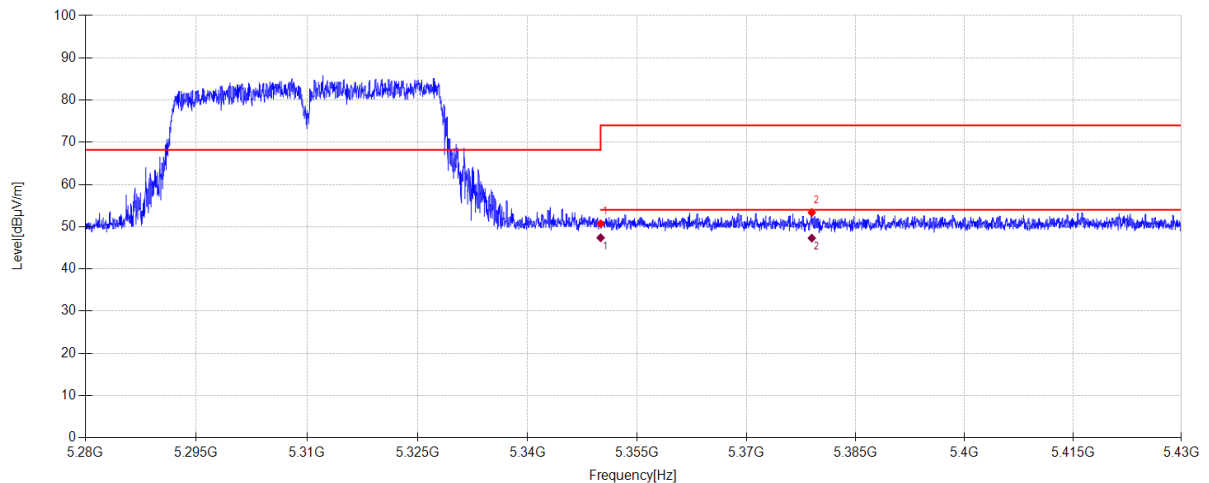

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.82	33.10	5.41	-29.60	50.73	68.20	17.47	PK	Horizontal
2	5378.955	44.42	33.10	5.43	-29.60	53.35	74.00	20.65	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.48	33.10	5.41	47.39	54.0	6.61	AV	Horizontal
2	5378.955	38.37	33.10	5.43	47.30	54.0	6.70	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\88
Memo: Sample Numbler:S25030626-001 Power Setting:12

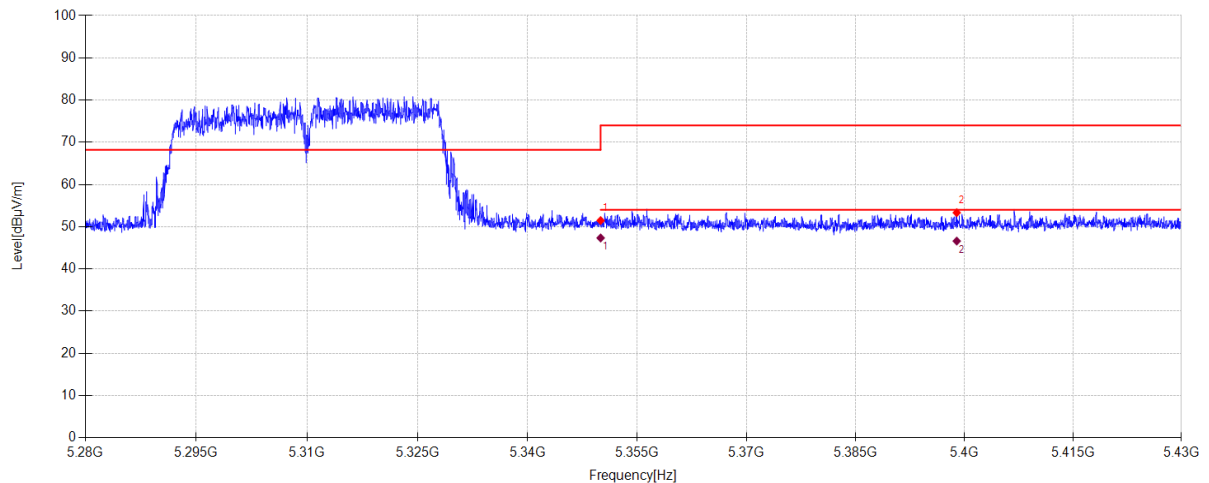

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.55	33.10	5.41	-29.60	51.46	68.20	16.74	PK	Vertical
2	5398.920	44.39	33.10	5.44	-29.60	53.33	74.00	20.67	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.43	33.10	5.41	47.34	54.0	6.66	AV	Vertical
2	5398.920	37.67	33.10	5.44	46.61	54.0	7.39	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\89
Memo: Sample Numbler:S25030626-001 Power Setting:12

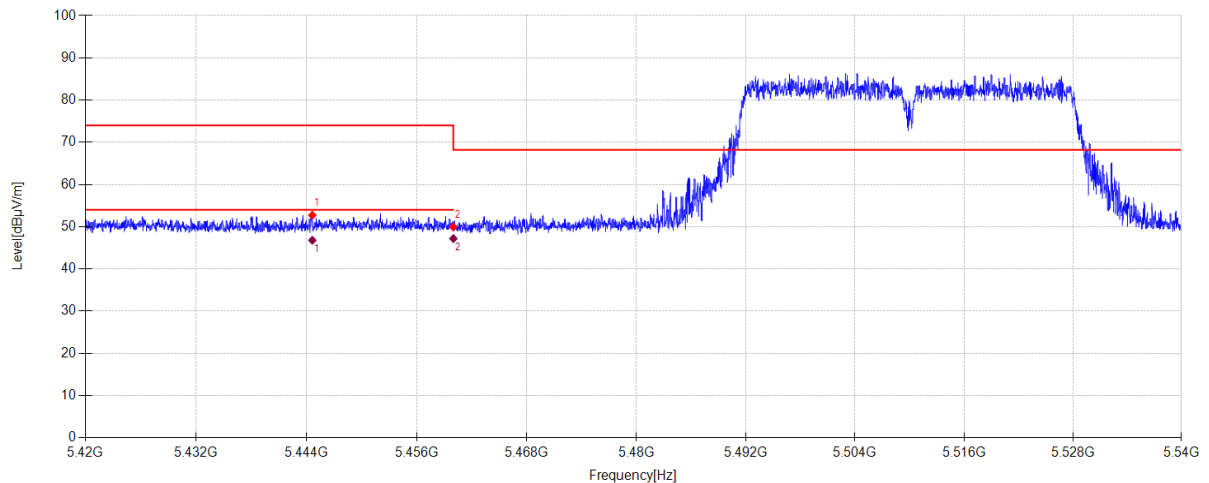

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5444.636	43.85	33.01	5.47	-29.60	52.73	74.00	21.27	PK	Horizontal
2	5460.000	41.04	33.00	5.48	-29.60	49.92	68.20	18.28	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5444.636	37.91	33.01	5.47	46.79	54.0	7.21	AV	Horizontal
2	5460.000	38.31	33.00	5.48	47.19	54.0	6.81	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\90
Memo: Sample Numbler:S25030626-001 Power Setting:12

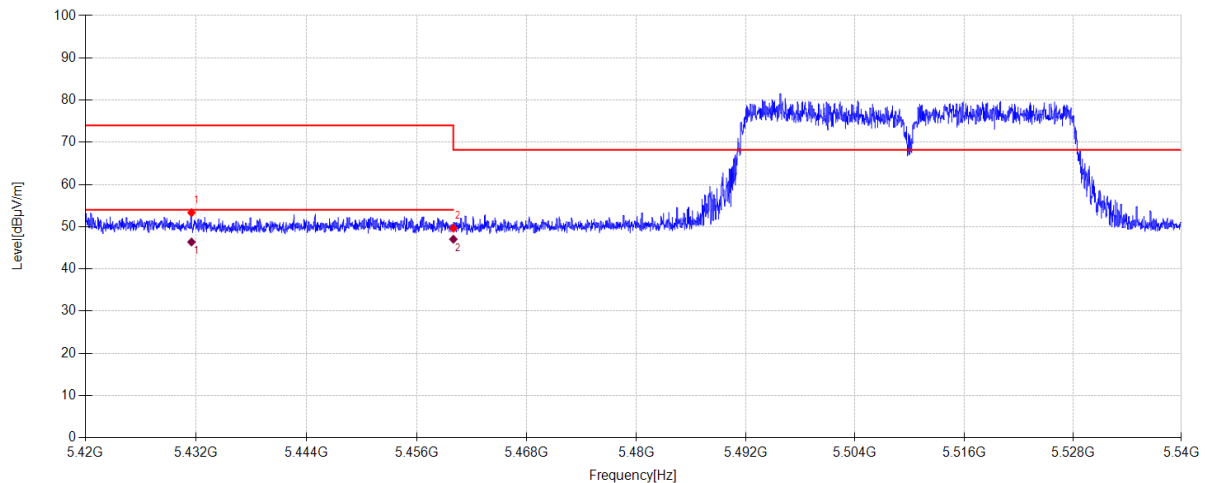

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5431.508	44.43	33.04	5.46	-29.60	53.33	74.00	20.67	PK	Vertical
2	5460.000	40.77	33.00	5.48	-29.60	49.65	68.20	18.55	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5431.508	37.47	33.04	5.46	46.37	54.0	7.63	AV	Vertical
2	5460.000	38.16	33.00	5.48	47.04	54.0	6.96	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AC40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\91

Memo:

Sample Numble:S25030626-001 Power Setting:12

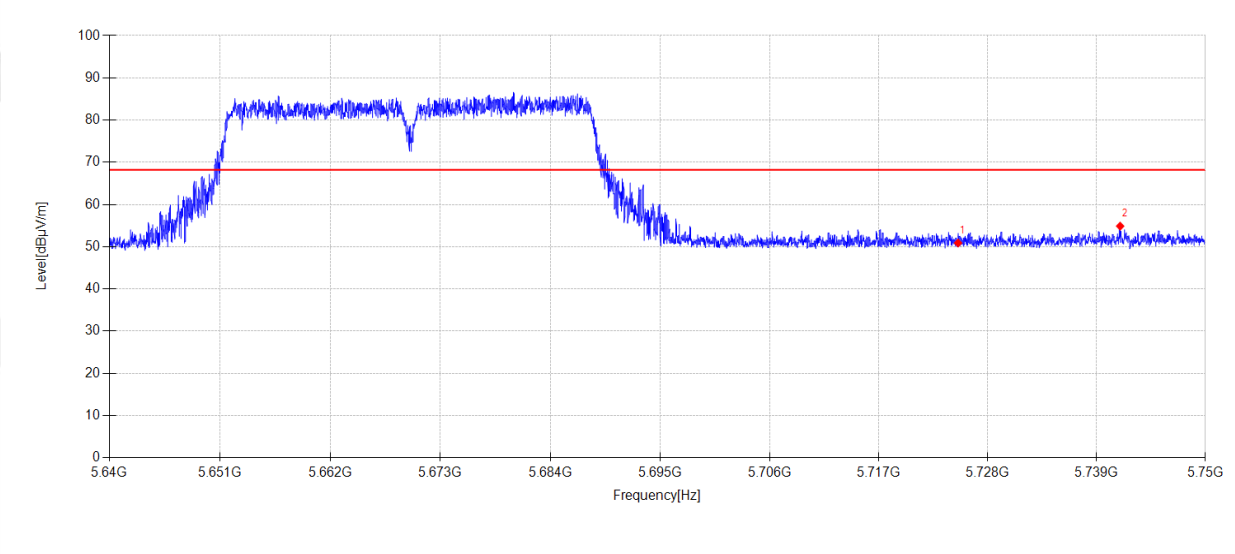

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.07	33.75	5.66	-29.60	50.88	68.20	17.32	PK	Horizontal
2	5741.376	44.96	33.85	5.67	-29.60	54.88	68.20	13.32	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AC40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\92

Memo:

Sample Numbler:S25030626-001 Power Setting:12

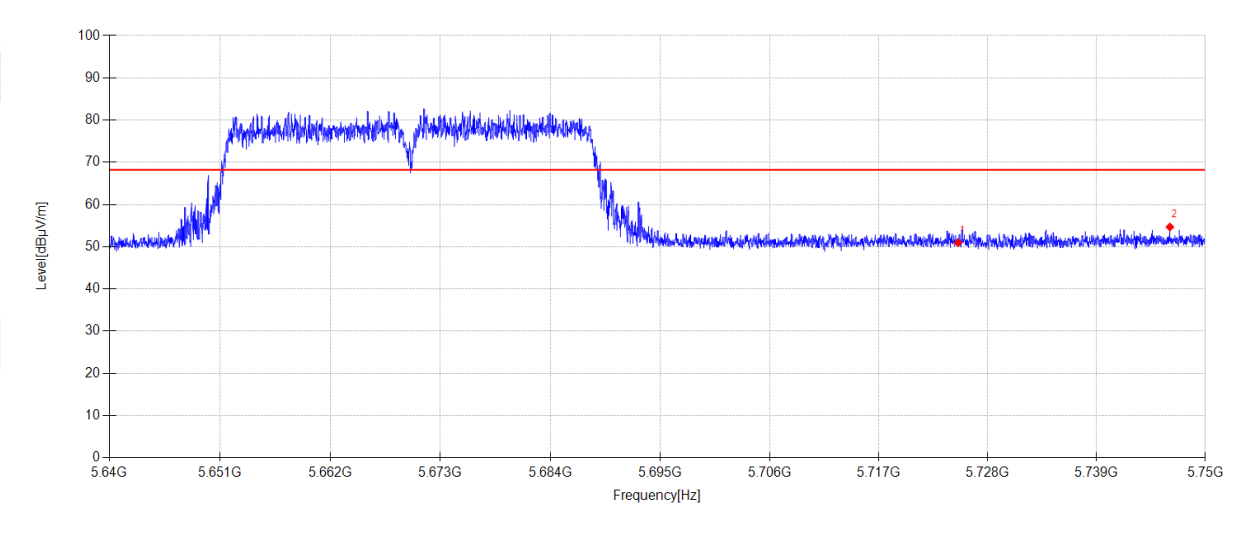


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.14	33.75	5.66	-29.60	50.95	68.20	17.25	PK	Vertical
2	5746.414	44.72	33.88	5.67	-29.60	54.67	68.20	13.53	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\83
Memo: Sample Numble:S25030626-001 Power Setting:12

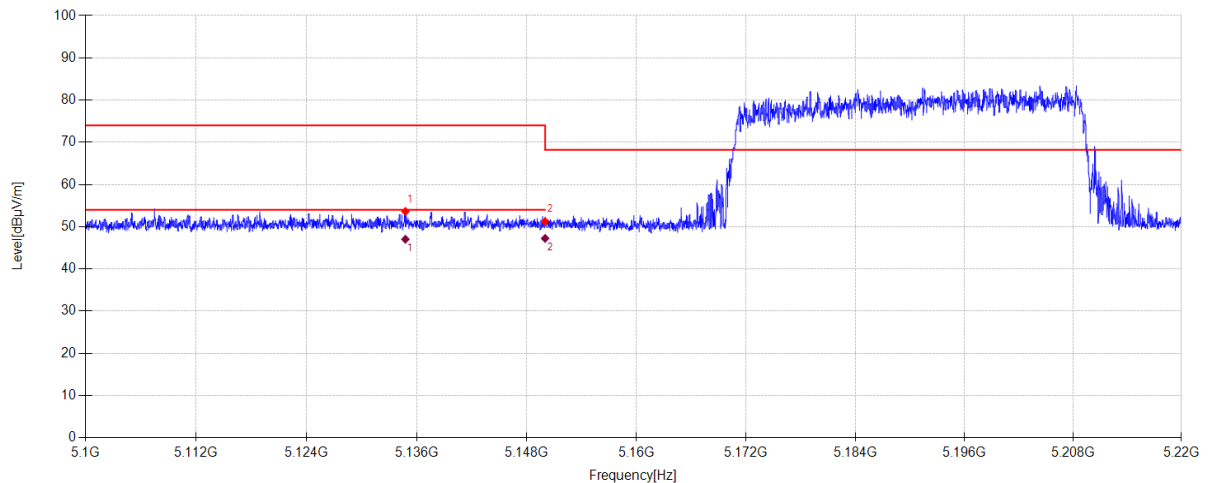

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5134.752	44.55	33.40	5.27	-29.60	53.62	74.00	20.38	PK	Horizontal
2	5150.000	42.14	33.40	5.28	-29.60	51.22	68.20	16.98	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5134.752	37.96	33.40	5.27	47.03	54.0	6.97	AV	Horizontal
2	5150.000	38.15	33.40	5.28	47.23	54.0	6.77	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\84
Memo: Sample Numbler:S25030626-001 Power Setting:12

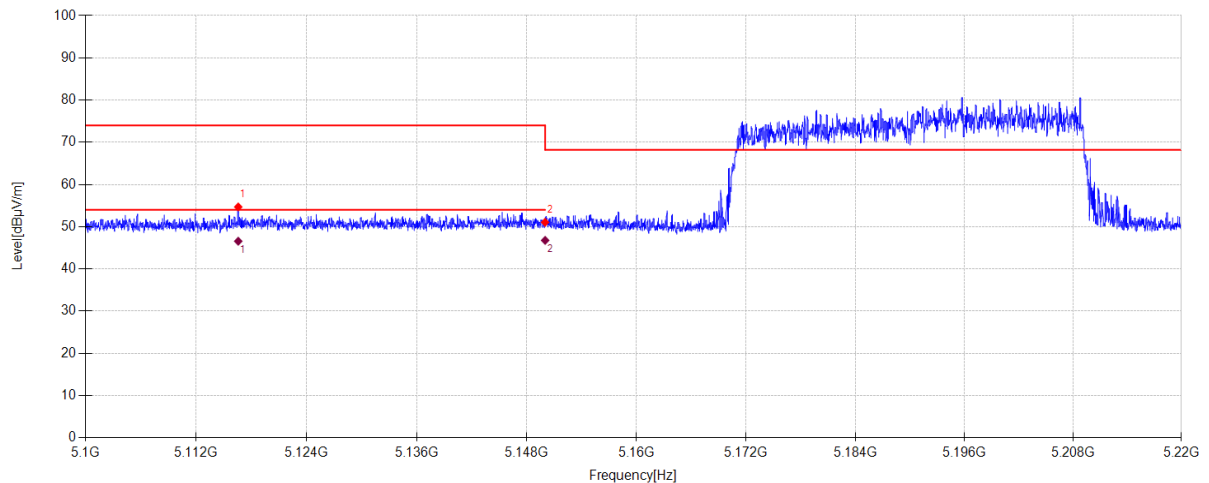

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5116.572	45.62	33.40	5.26	-29.60	54.68	74.00	19.32	PK	Vertical
2	5150.000	41.97	33.40	5.28	-29.60	51.05	68.20	17.15	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5116.572	37.51	33.40	5.26	46.57	54.0	7.43	AV	Vertical
2	5150.000	37.69	33.40	5.28	46.77	54.0	7.23	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AX40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\81

Memo:

Sample Numbler:S25030626-001 Power Setting:12

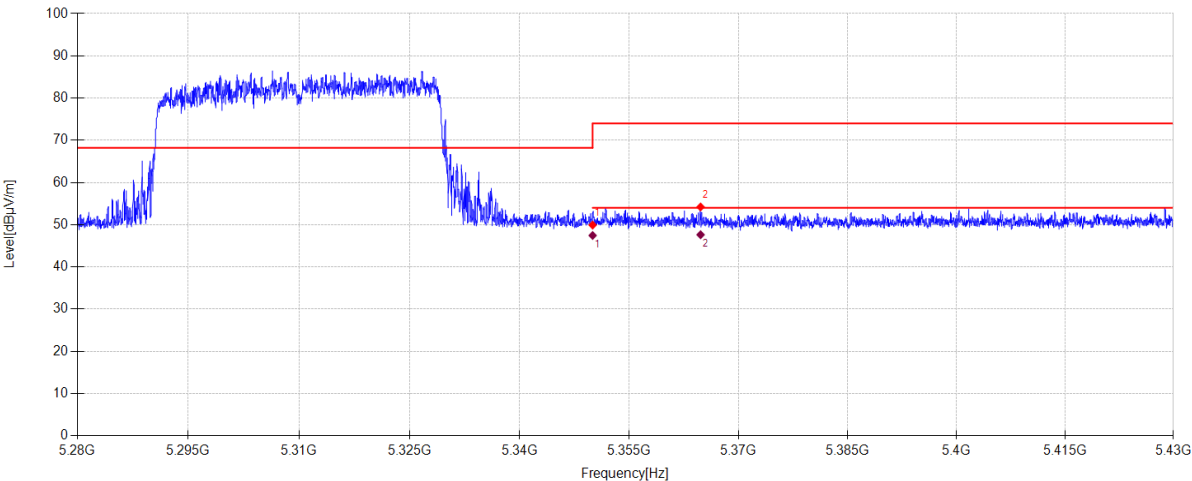

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.02	33.10	5.41	-29.60	49.93	68.20	18.27	PK	Horizontal
2	5364.780	45.29	33.10	5.42	-29.60	54.21	74.00	19.79	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.54	33.10	5.41	47.45	54.0	6.55	AV	Horizontal
2	5364.780	38.71	33.10	5.42	47.63	54.0	6.37	AV	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\82
Memo: Sample Numbler:S25030626-001 Power Setting:12

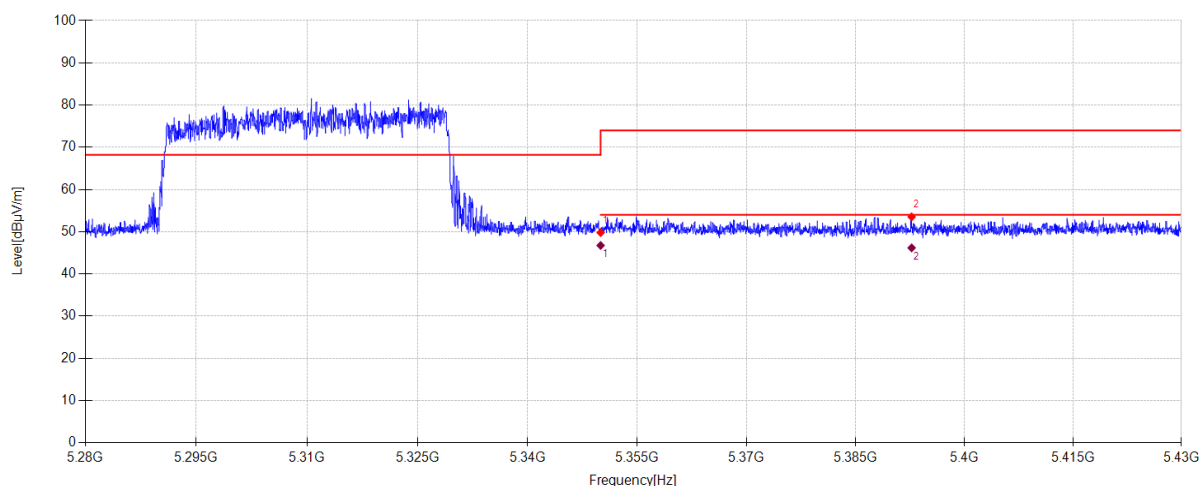

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.88	33.10	5.41	-29.60	49.79	68.20	18.41	PK	Vertical
2	5392.695	44.58	33.10	5.44	-29.60	53.52	74.00	20.48	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.83	33.10	5.41	46.74	54.0	7.26	AV	Vertical
2	5392.695	37.24	33.10	5.44	46.18	54.0	7.82	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\79
Memo: Sample Numbler:S25030626-001 Power Setting:12

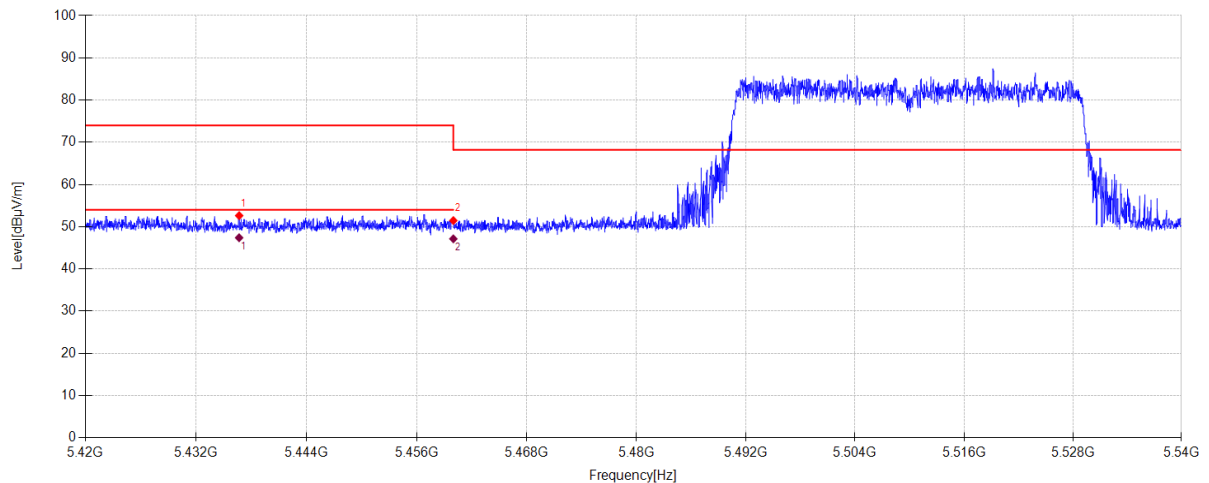

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.680	43.73	33.03	5.47	-29.60	52.63	74.00	21.37	PK	Horizontal
2	5460.000	42.58	33.00	5.48	-29.60	51.46	68.20	16.74	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.680	38.49	33.03	5.47	47.39	54.0	6.61	AV	Horizontal
2	5460.000	38.25	33.00	5.48	47.13	54.0	6.87	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\80
Memo: Sample Numbler:S25030626-001 Power Setting:12

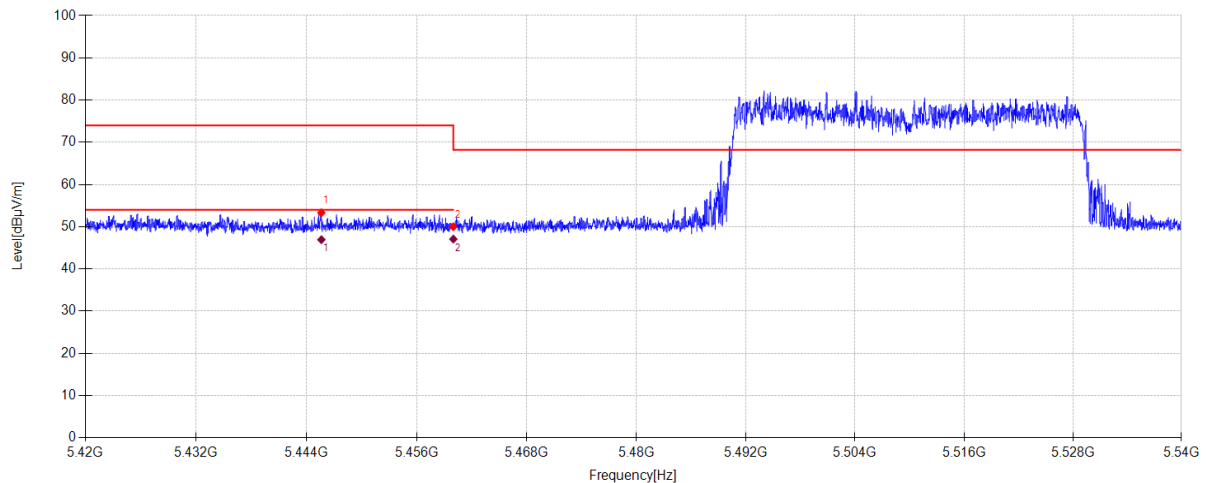

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5445.620	44.43	33.01	5.47	-29.60	53.31	74.00	20.69	PK	Vertical
2	5460.000	41.11	33.00	5.48	-29.60	49.99	68.20	18.21	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5445.620	38.05	33.01	5.47	46.93	54.0	7.07	AV	Vertical
2	5460.000	38.19	33.00	5.48	47.07	54.0	6.93	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AX40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\77

Memo:

Sample Numbler:S25030626-001 Power Setting:12

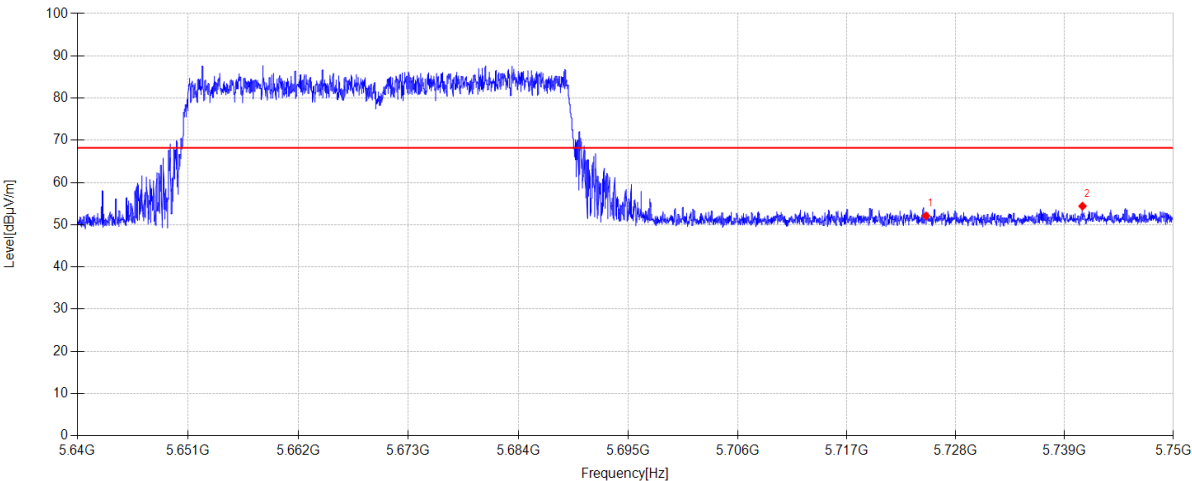

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.29	33.75	5.66	-29.60	52.10	68.20	16.10	PK	Horizontal
2	5740.804	44.49	33.84	5.67	-29.60	54.40	68.20	13.80	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AX40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\78

Memo:

Sample Numbler:S25030626-001 Power Setting:12

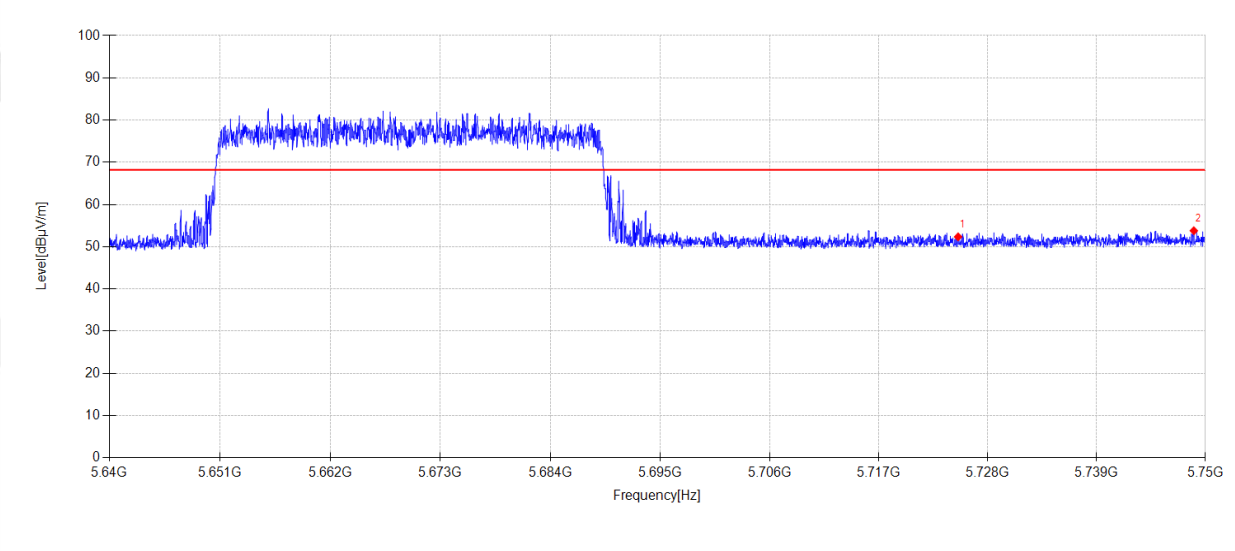

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.53	33.75	5.66	-29.60	52.34	68.20	15.86	PK	Vertical
2	5748.834	43.83	33.89	5.67	-29.60	53.79	68.20	14.41	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\101
Memo: Sample Numbler:S25030626-001 Power Setting:12

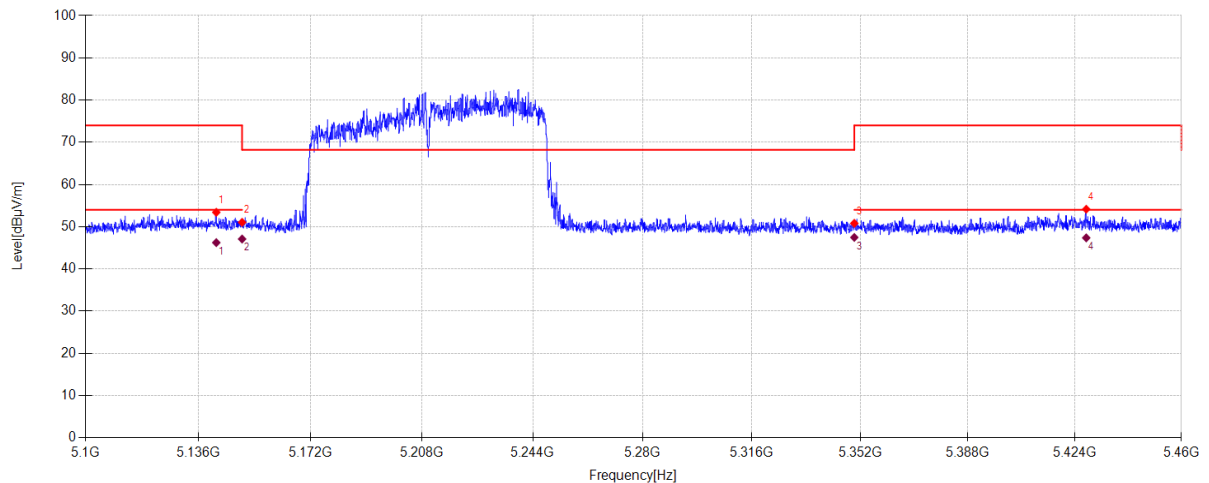

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.724	44.34	33.40	5.27	-29.60	53.41	74.00	20.59	PK	Horizontal
2	5150.000	41.96	33.40	5.28	-29.60	51.04	68.20	17.16	PK	Horizontal
3	5350.000	41.89	33.10	5.41	-29.60	50.80	68.20	17.40	PK	Horizontal
4	5427.780	45.25	33.04	5.46	-29.60	54.15	74.00	19.85	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.724	37.17	33.40	5.27	46.24	54.0	7.76	AV	Horizontal
2	5150.000	38.01	33.40	5.28	47.09	54.0	6.91	AV	Horizontal
3	5350.000	38.55	33.10	5.41	47.46	54.0	6.54	AV	Horizontal
4	5427.780	38.46	33.04	5.46	47.36	54.0	6.64	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\102
Memo: Sample Numbler:S25030626-001 Power Setting:12

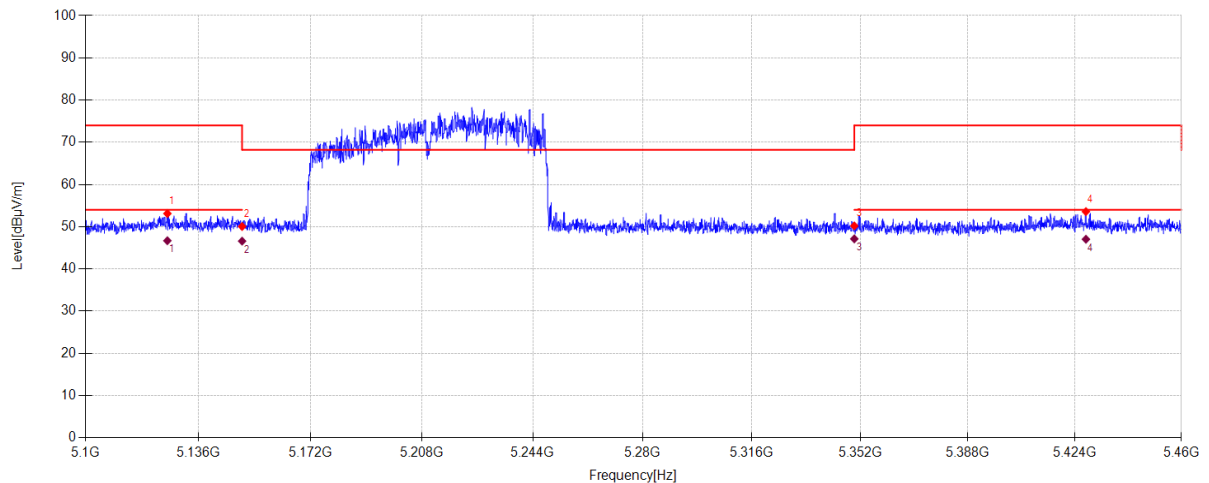

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5126.100	44.06	33.40	5.26	-29.60	53.12	74.00	20.88	PK	Vertical
2	5150.000	40.97	33.40	5.28	-29.60	50.05	68.20	18.15	PK	Vertical
3	5350.000	41.30	33.10	5.41	-29.60	50.21	68.20	17.99	PK	Vertical
4	5427.672	44.69	33.04	5.46	-29.60	53.59	74.00	20.41	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5126.100	37.63	33.40	5.26	46.69	54.0	7.31	AV	Vertical
2	5150.000	37.51	33.40	5.28	46.59	54.0	7.41	AV	Vertical
3	5350.000	38.22	33.10	5.41	47.13	54.0	6.87	AV	Vertical
4	5427.672	38.13	33.04	5.46	47.03	54.0	6.97	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC80 5290MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\103
Memo: Sample Numble:S25030626-001 Power Setting:12

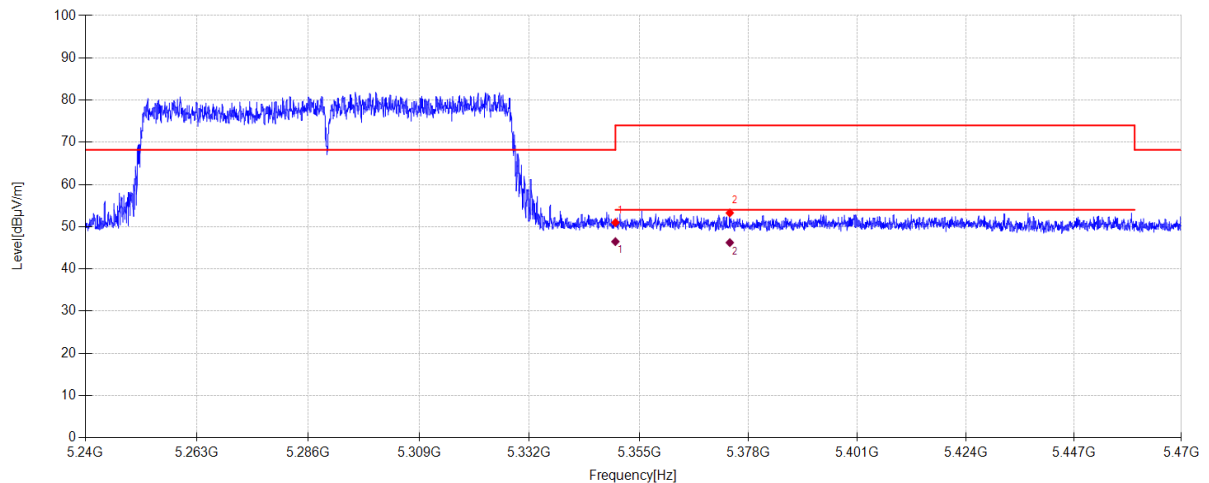

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.08	33.10	5.41	-29.60	50.99	68.20	17.21	PK	Horizontal
2	5374.044	44.34	33.10	5.43	-29.60	53.27	74.00	20.73	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.56	33.10	5.41	46.47	54.0	7.53	AV	Horizontal
2	5374.044	37.31	33.10	5.43	46.24	54.0	7.76	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC80 5290MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\104
Memo: Sample Numbler:S25030626-001 Power Setting:12

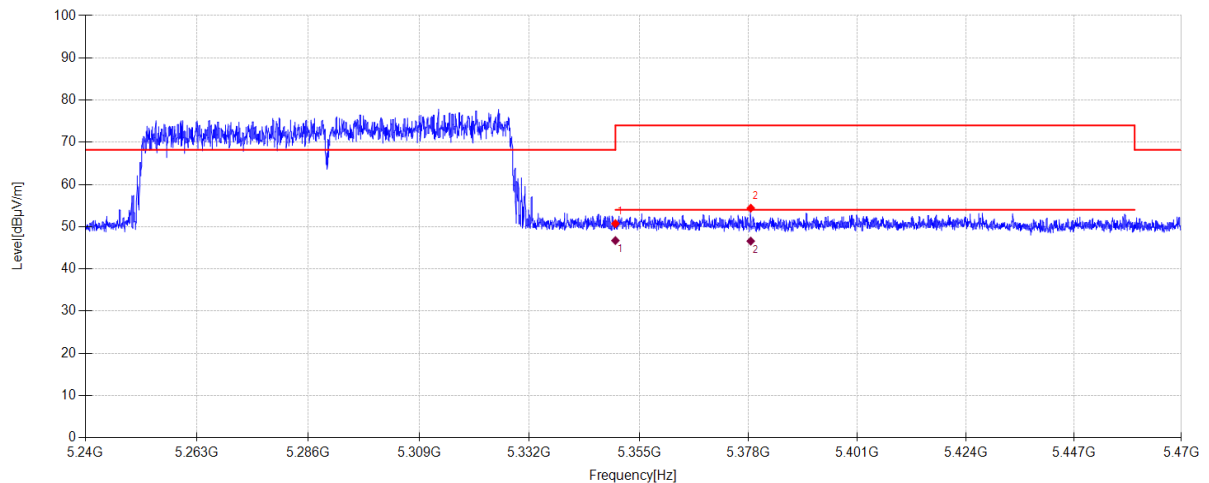

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.82	33.10	5.41	-29.60	50.73	68.20	17.47	PK	Vertical
2	5378.460	45.47	33.10	5.43	-29.60	54.40	74.00	19.60	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.81	33.10	5.41	46.72	54.0	7.28	AV	Vertical
2	5378.460	37.66	33.10	5.43	46.59	54.0	7.41	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\105
Memo: Sample Numbler:S25030626-001 Power Setting:12

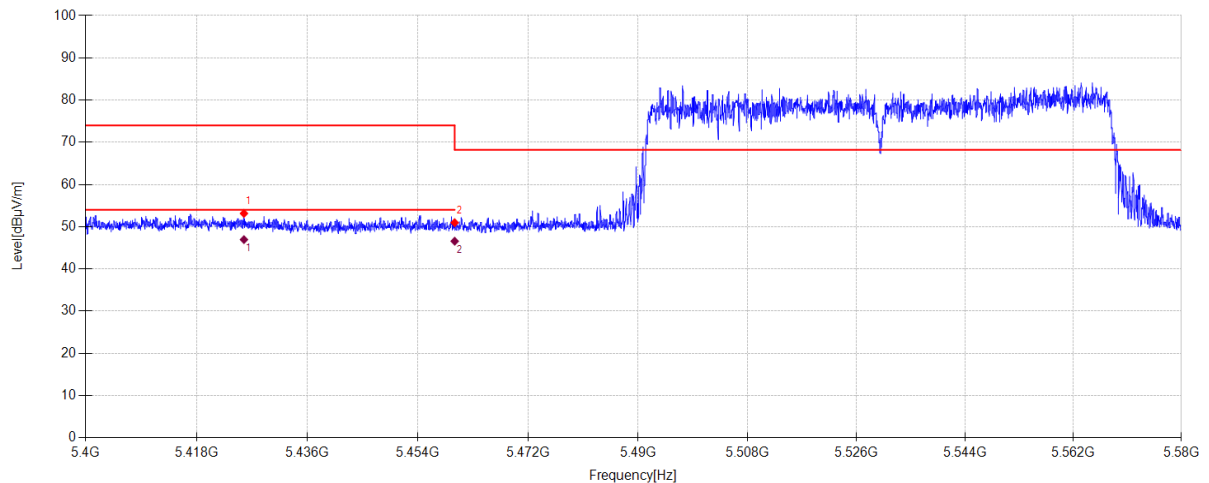

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5425.686	44.24	33.05	5.46	-29.60	53.15	74.00	20.85	PK	Horizontal
2	5460.000	42.08	33.00	5.48	-29.60	50.96	68.20	17.24	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5425.686	38.03	33.05	5.46	46.94	54.0	7.06	AV	Horizontal
2	5460.000	37.69	33.00	5.48	46.57	54.0	7.43	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AC80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\106
Memo: Sample Numbler:S25030626-001 Power Setting:12

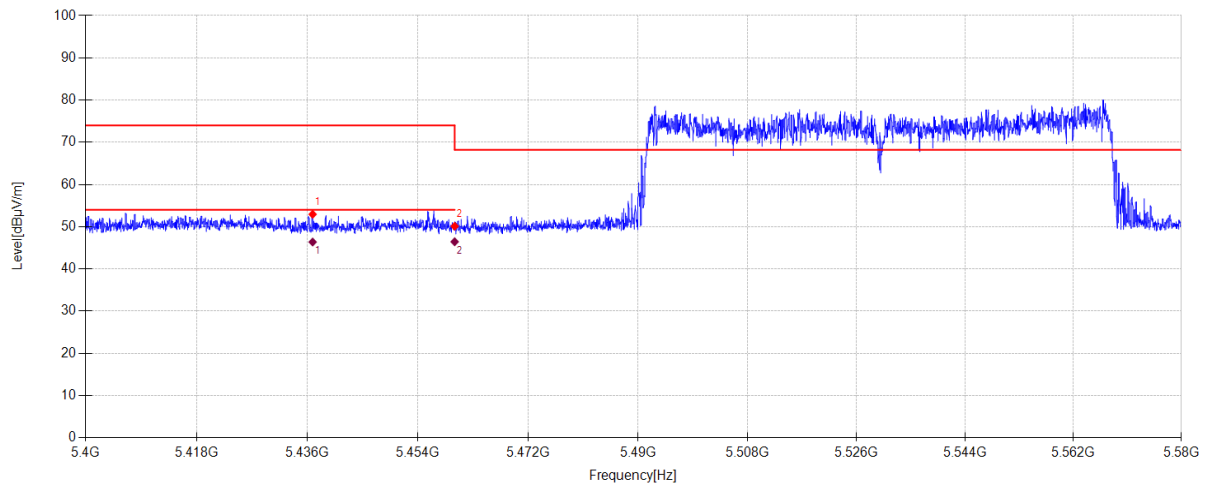

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.846	44.05	33.03	5.47	-29.60	52.95	74.00	21.05	PK	Vertical
2	5460.000	41.23	33.00	5.48	-29.60	50.11	68.20	18.09	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.846	37.48	33.03	5.47	46.38	54.0	7.62	AV	Vertical
2	5460.000	37.56	33.00	5.48	46.44	54.0	7.56	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\107

Memo:

Sample Numbler:S25030626-001 Power Setting:12

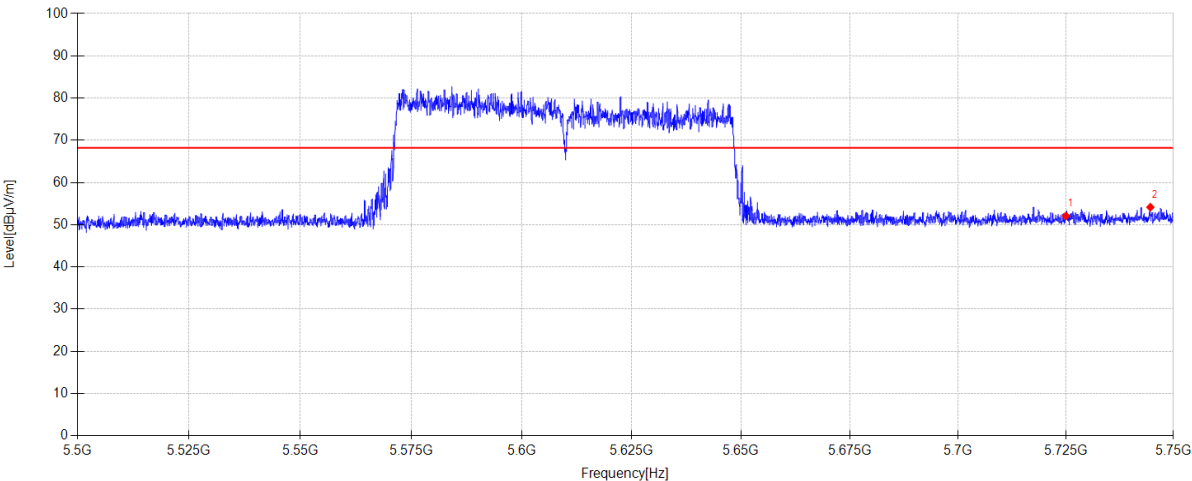

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.26	33.75	5.66	-29.60	52.07	68.20	16.13	PK	Horizontal
2	5744.650	44.21	33.87	5.67	-29.60	54.15	68.20	14.05	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\108

Memo:

Sample Numbler:S25030626-001 Power Setting:12

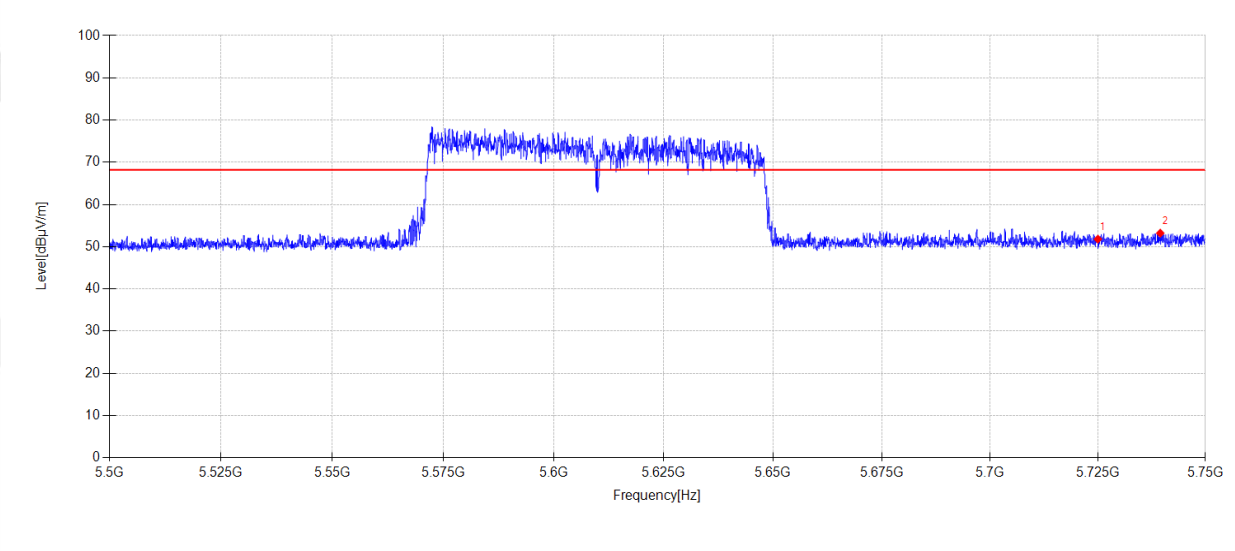


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.99	33.75	5.66	-29.60	51.80	68.20	16.40	PK	Vertical
2	5739.500	43.30	33.84	5.67	-29.60	53.21	68.20	14.99	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\109
Memo: Sample Numbler:S25030626-001 Power Setting:12

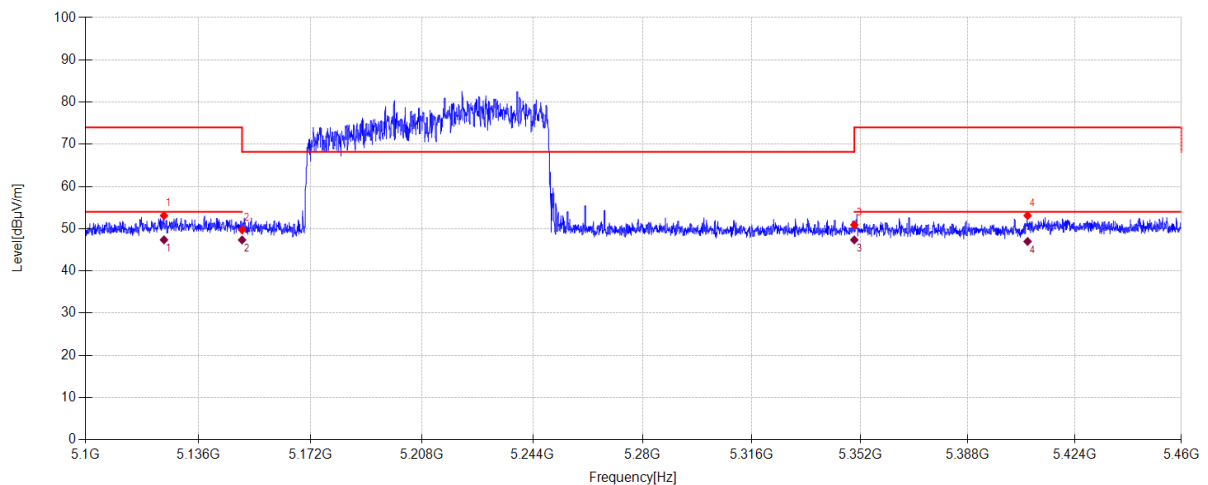

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5125.020	44.04	33.40	5.26	-29.60	53.10	74.00	20.90	PK	Horizontal
2	5150.000	40.67	33.40	5.28	-29.60	49.75	68.20	18.45	PK	Horizontal
3	5350.000	42.01	33.10	5.41	-29.60	50.92	68.20	17.28	PK	Horizontal
4	5408.016	44.19	33.08	5.45	-29.60	53.12	74.00	20.88	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5125.020	38.31	33.40	5.26	47.37	54.0	6.63	AV	Horizontal
2	5150.000	38.26	33.40	5.28	47.34	54.0	6.66	AV	Horizontal
3	5350.000	38.44	33.10	5.41	47.35	54.0	6.65	AV	Horizontal
4	5408.016	38.05	33.08	5.45	46.98	54.0	7.02	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\110
Memo: Sample Numbler:S25030626-001 Power Setting:12

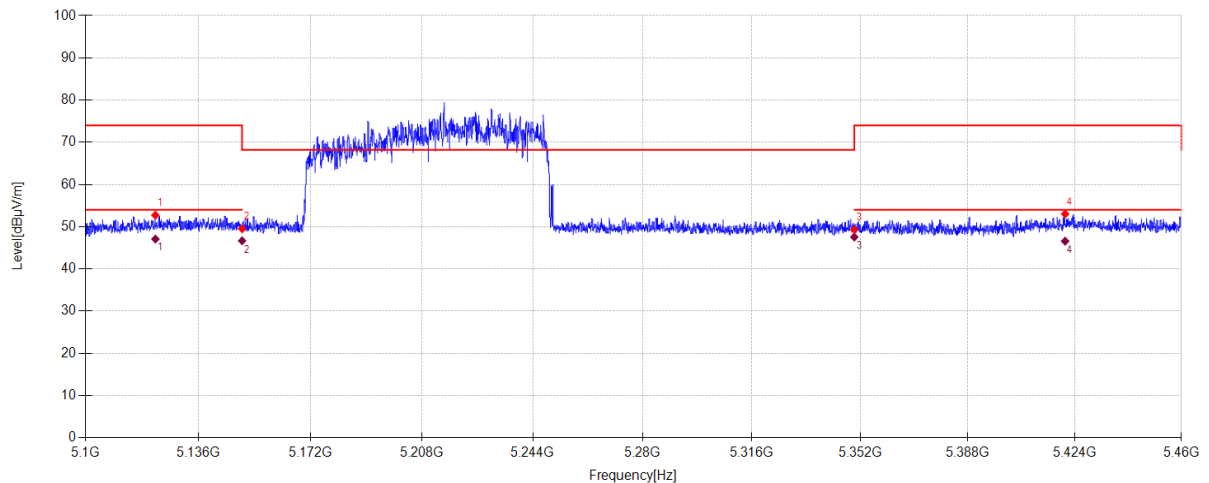

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5122.284	43.67	33.40	5.26	-29.60	52.73	74.00	21.27	PK	Vertical
2	5150.000	40.44	33.40	5.28	-29.60	49.52	68.20	18.68	PK	Vertical
3	5350.000	40.38	33.10	5.41	-29.60	49.29	68.20	18.91	PK	Vertical
4	5420.652	44.11	33.06	5.46	-29.60	53.03	74.00	20.97	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5122.284	38.02	33.40	5.26	47.08	54.0	6.92	AV	Vertical
2	5150.000	37.59	33.40	5.28	46.67	54.0	7.33	AV	Vertical
3	5350.000	38.64	33.10	5.41	47.55	54.0	6.45	AV	Vertical
4	5420.652	37.66	33.06	5.46	46.58	54.0	7.42	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX80 5290MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\111
Memo: Sample Numble:S25030626-001 Power Setting:12

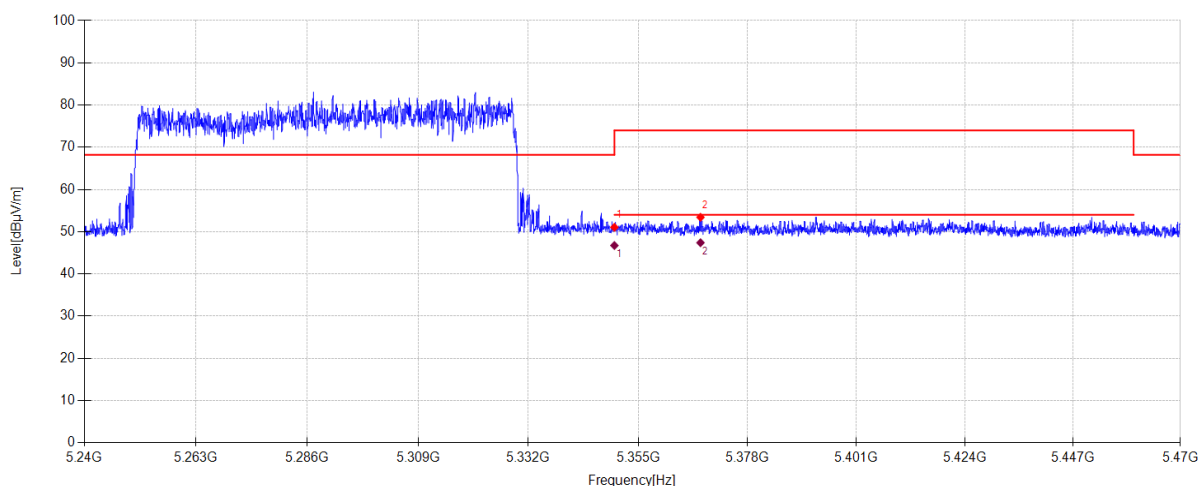

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.14	33.10	5.41	-29.60	51.05	68.20	17.15	PK	Horizontal
2	5368.087	44.50	33.10	5.42	-29.60	53.42	74.00	20.58	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.83	33.10	5.41	46.74	54.0	7.26	AV	Horizontal
2	5368.087	38.48	33.10	5.42	47.40	54.0	6.60	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX80 5290MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\112
Memo: Sample Numbler:S25030626-001 Power Setting:12

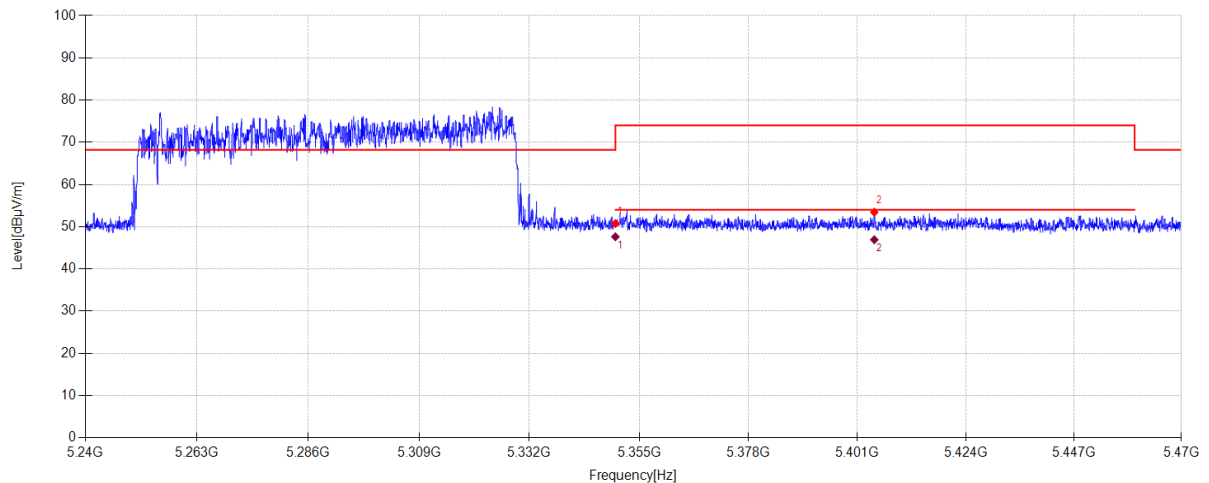

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.84	33.10	5.41	-29.60	50.75	68.20	17.45	PK	Vertical
2	5404.565	44.50	33.09	5.45	-29.60	53.44	74.00	20.56	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.71	33.10	5.41	47.62	54.0	6.38	AV	Vertical
2	5404.565	37.98	33.09	5.45	46.92	54.0	7.08	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\113
Memo: Sample Numbler:S25030626-001 Power Setting:12

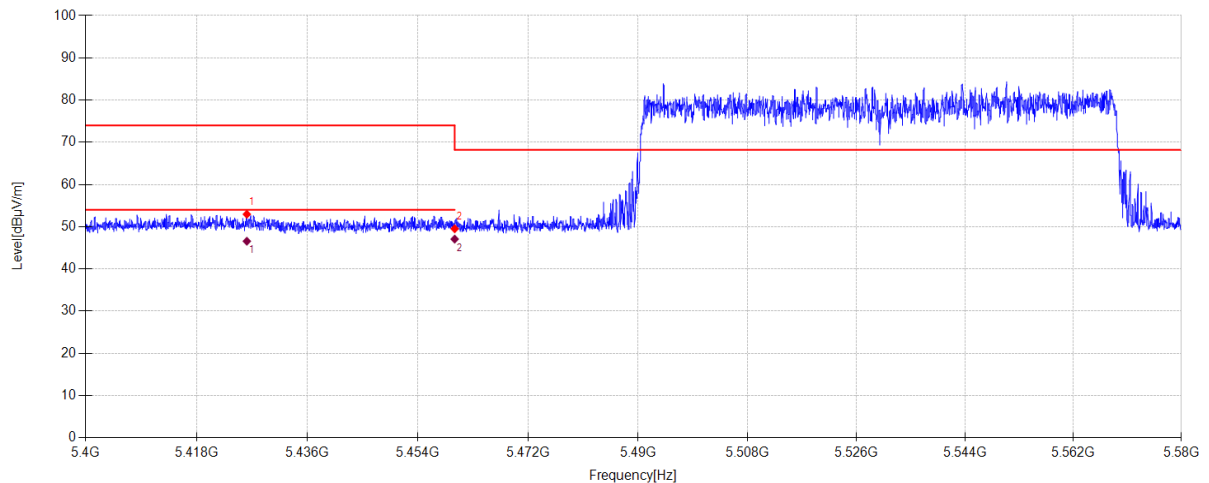

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5426.154	44.05	33.05	5.46	-29.60	52.96	74.00	21.04	PK	Horizontal
2	5460.000	40.64	33.00	5.48	-29.60	49.52	68.20	18.68	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5426.154	37.65	33.05	5.46	46.56	54.0	7.44	AV	Horizontal
2	5460.000	38.19	33.00	5.48	47.07	54.0	6.93	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-04-12 **Tested By:** Nan Zhong
EUT: Wine Cooler **Model Number:** ROCCO2023
Test Mode: TX AX80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.8°C;Humi:47.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\114
Memo: Sample Numbler:S25030626-001 Power Setting:12

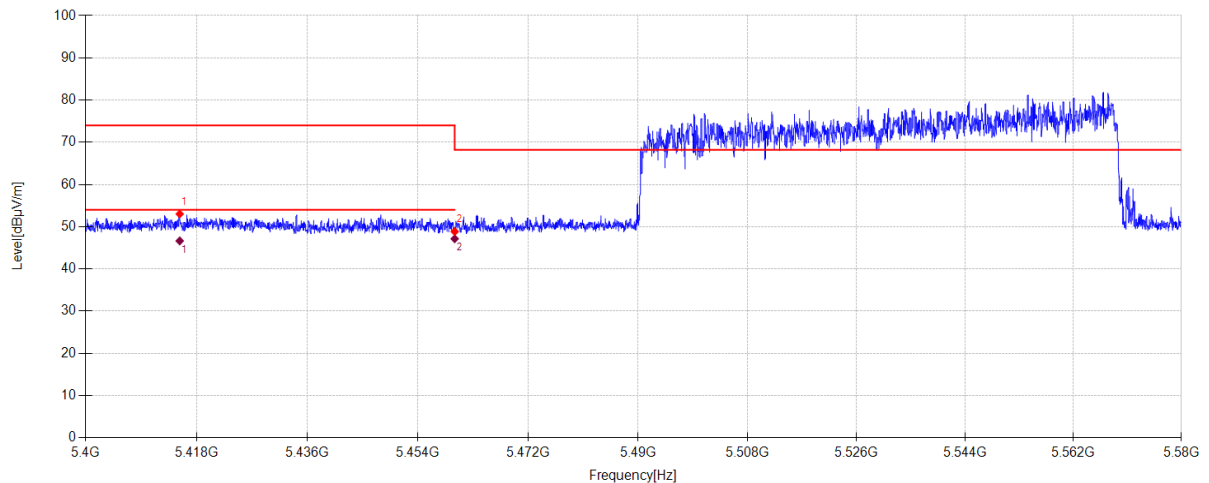

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5415.264	44.10	33.07	5.45	-29.60	53.02	74.00	20.98	PK	Vertical
2	5460.000	39.98	33.00	5.48	-29.60	48.86	68.20	19.34	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5415.264	37.72	33.07	5.45	46.64	54.0	7.36	AV	Vertical
2	5460.000	38.26	33.00	5.48	47.14	54.0	6.86	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AX80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\115

Memo:

Sample Numbler:S25030626-001 Power Setting:12

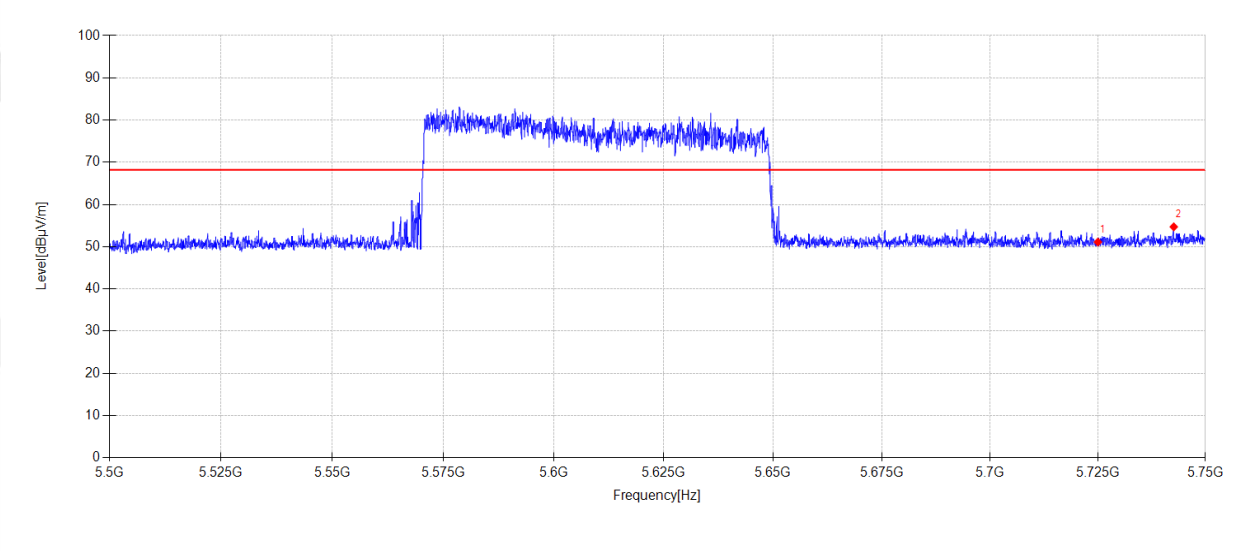

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.30	33.75	5.66	-29.60	51.11	68.20	17.09	PK	Horizontal
2	5742.650	44.78	33.86	5.67	-29.60	54.71	68.20	13.49	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-12

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AX80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G 5G\116

Memo:

Sample Numbler:S25030626-001 Power Setting:12

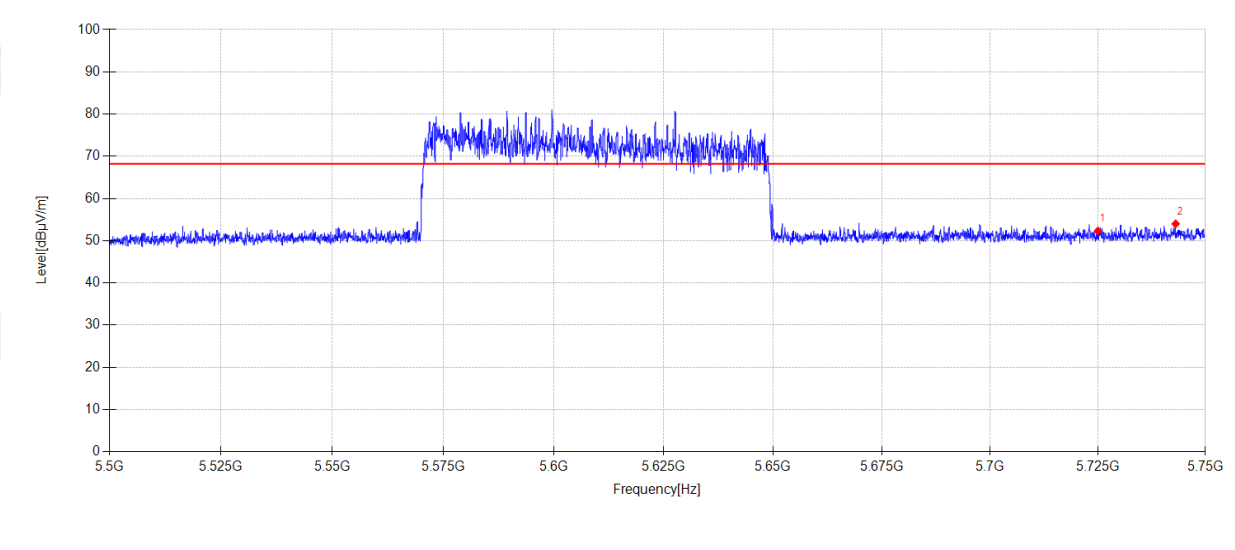

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.50	33.75	5.66	-29.60	52.31	68.20	15.89	PK	Vertical
2	5743.075	44.07	33.86	5.67	-29.60	54.00	68.20	14.20	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-15

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G KUAYUE\21

Memo:

Sample Numbler:S25030626-001 Power Setting:16

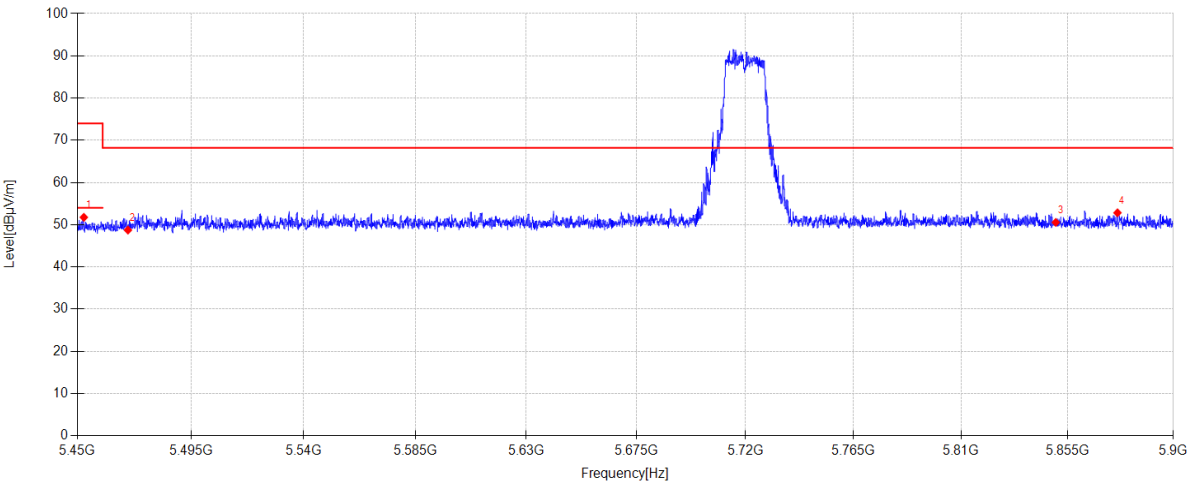

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.565	42.87	33.00	5.48	-29.60	51.75	74.00	22.25	PK	Horizontal
2	5470.000	39.85	33.00	5.49	-29.60	48.74	68.20	19.46	PK	Horizontal
3	5850.000	40.41	34.00	5.74	-29.60	50.55	68.20	17.65	PK	Horizontal
4	5876.195	42.62	34.05	5.76	-29.60	52.83	68.20	15.37	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-15

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G KUAYUE\22

Memo:

Sample Numbler:S25030626-001 Power Setting:16

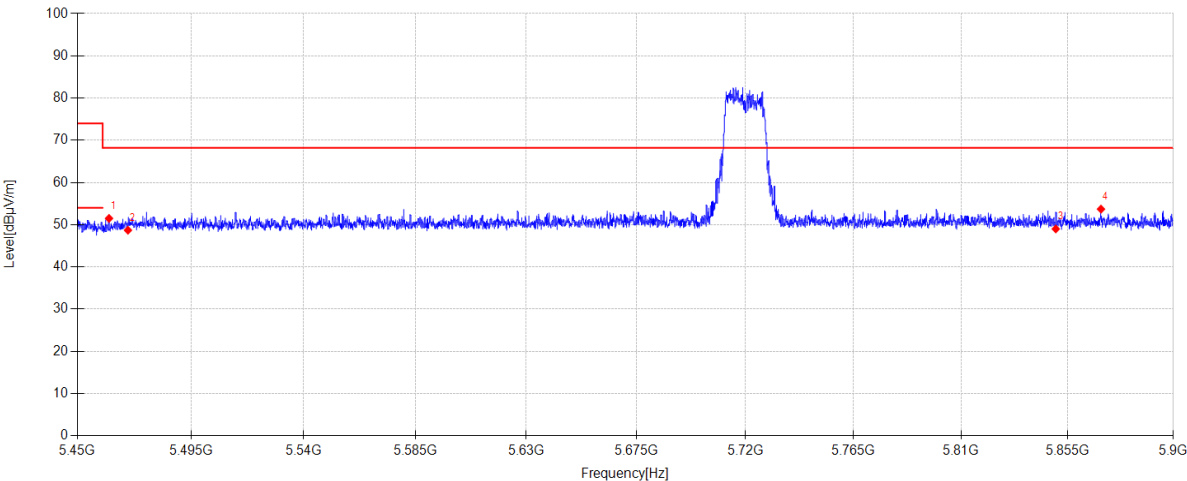

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5462.510	42.60	33.00	5.49	-29.60	51.49	68.20	16.71	PK	Vertical
2	5470.000	39.81	33.00	5.49	-29.60	48.70	68.20	19.50	PK	Vertical
3	5850.000	38.86	34.00	5.74	-29.60	49.00	68.20	19.20	PK	Vertical
4	5869.175	43.51	34.04	5.75	-29.60	53.70	68.20	14.50	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-15

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX N20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G KUAYUE\19

Memo:

Sample Numbler:S25030626-001 Power Setting:16

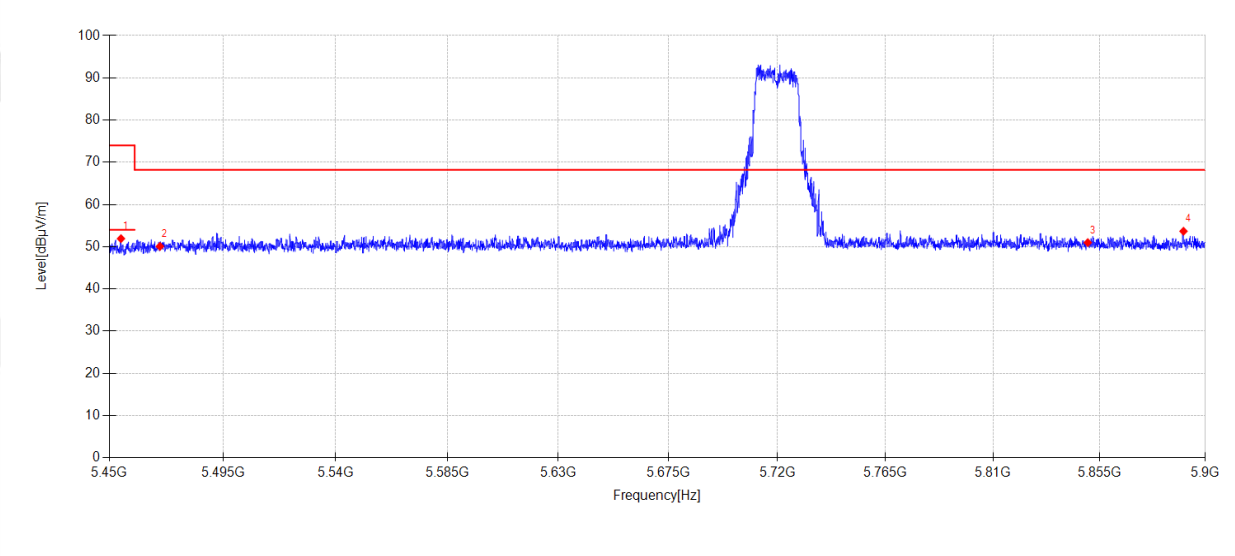

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.590	43.03	33.00	5.48	-29.60	51.91	74.00	22.09	PK	Horizontal
2	5470.000	41.19	33.00	5.49	-29.60	50.08	68.20	18.12	PK	Horizontal
3	5850.000	40.84	34.00	5.74	-29.60	50.98	68.20	17.22	PK	Horizontal
4	5890.685	43.42	34.08	5.77	-29.60	53.67	68.20	14.53	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-15

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX N20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G KUAYUE\20

Memo:

Sample Numbler:S25030626-001 Power Setting:16

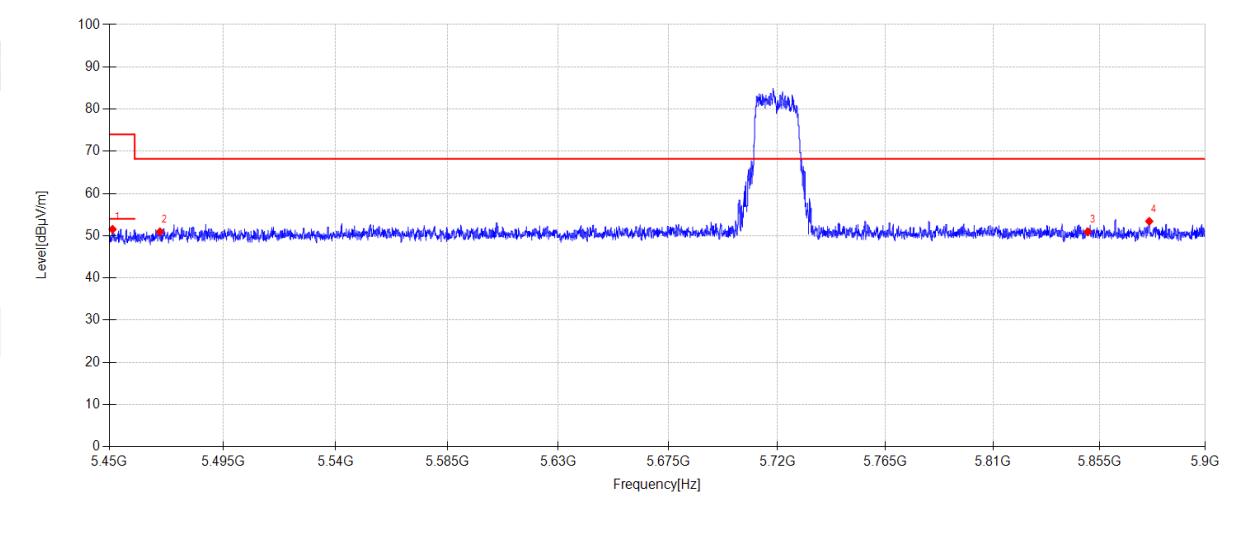

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.260	42.64	33.00	5.48	-29.60	51.52	74.00	22.48	PK	Vertical
2	5470.000	42.06	33.00	5.49	-29.60	50.95	68.20	17.25	PK	Vertical
3	5850.000	40.82	34.00	5.74	-29.60	50.96	68.20	17.24	PK	Vertical
4	5876.105	43.21	34.05	5.76	-29.60	53.42	68.20	14.78	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-04-15

Tested By:

Nan Zhong

EUT:

Wine Cooler

Model Number:

ROCCO2023

Test Mode:

TX AC20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.8°C;Humi:47.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25030626-1E\FCC ABOVE1G KUAYUE\23

Memo:

Sample Numbler:S25030626-001 Power Setting:16

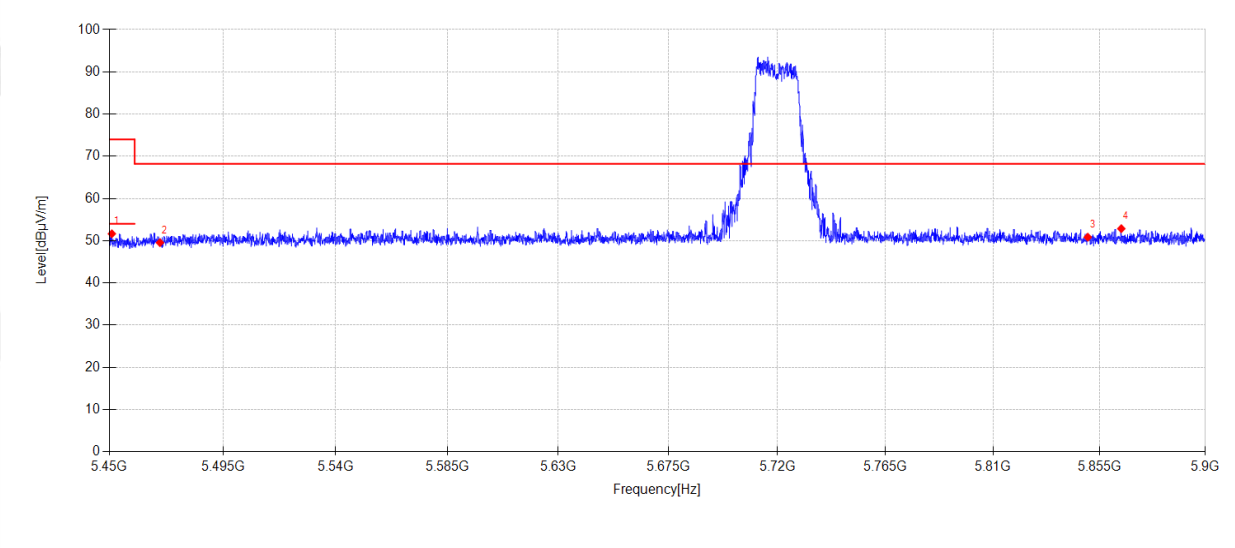

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5450.990	42.77	33.00	5.48	-29.60	51.65	74.00	22.35	PK	Horizontal
2	5470.000	40.66	33.00	5.49	-29.60	49.55	68.20	18.65	PK	Horizontal
3	5850.000	40.70	34.00	5.74	-29.60	50.84	68.20	17.36	PK	Horizontal
4	5864.225	42.68	34.03	5.75	-29.60	52.86	68.20	15.34	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.