




Shenzhen UnionTrust Quality and Technology Co., Ltd.

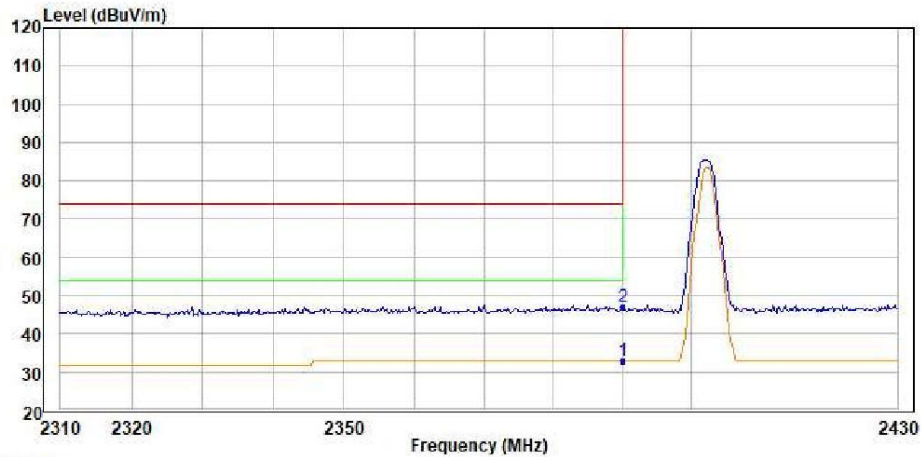


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	32.93	31.43	31.55	10.00	7.35	47.40	54.00	-21.07	Average
2 PK	2390.000	46.90	45.40	31.55	10.00	7.35	47.40	74.00	-27.10	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

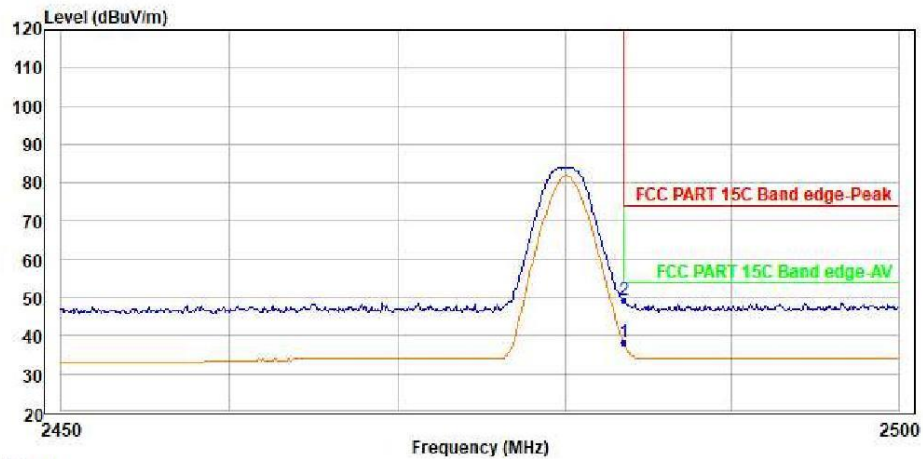


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	38.29	36.54	31.68	10.00	7.47	47.40	54.00	-15.71	Average
2	PK 2483.500	49.12	47.37	31.68	10.00	7.47	47.40	74.00	-24.88	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

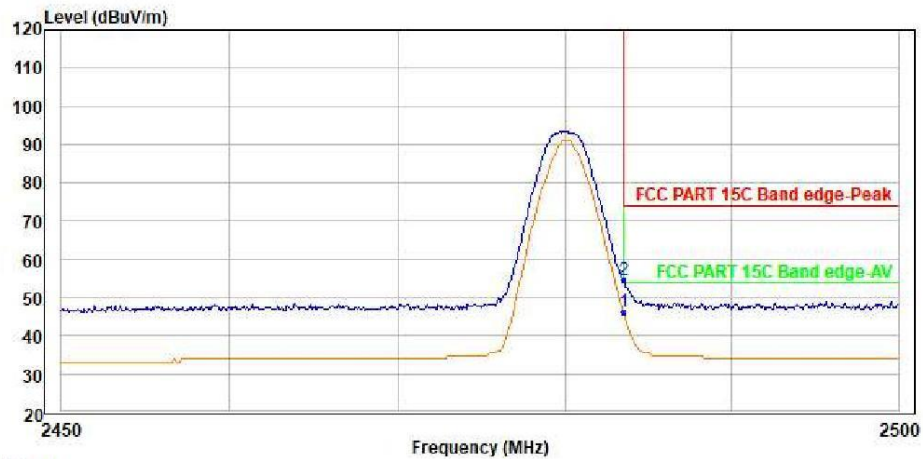


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	46.25	44.50	31.68	10.00	7.47	47.40	54.00	-7.75	Average
2	PK 2483.500	54.66	52.91	31.68	10.00	7.47	47.40	74.00	-19.34	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

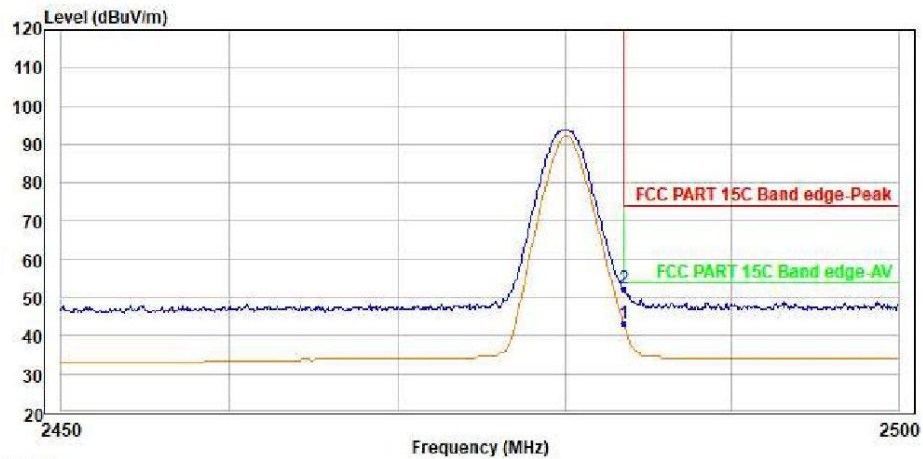


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	43.29	41.54	31.68	10.00	7.47	47.40	54.00	-10.71	Average
2	PK 2483.500	52.18	50.43	31.68	10.00	7.47	47.40	74.00	-21.82	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

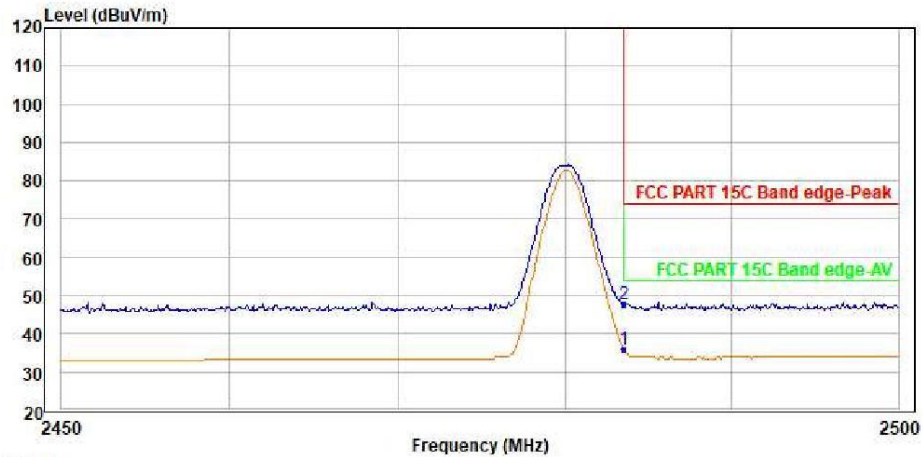

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	36.11	34.36	31.68	10.00	7.47	47.40	54.00	-17.89	Average
2	PK 2483.500	47.78	46.03	31.68	10.00	7.47	47.40	74.00	-26.22	Peak

Appendix A.3: Test Results of Radiated Spurious Emissions, 2.4GHz Wi-Fi


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz



Shenzhen UnionTrust Quality and Technology Co., Ltd.

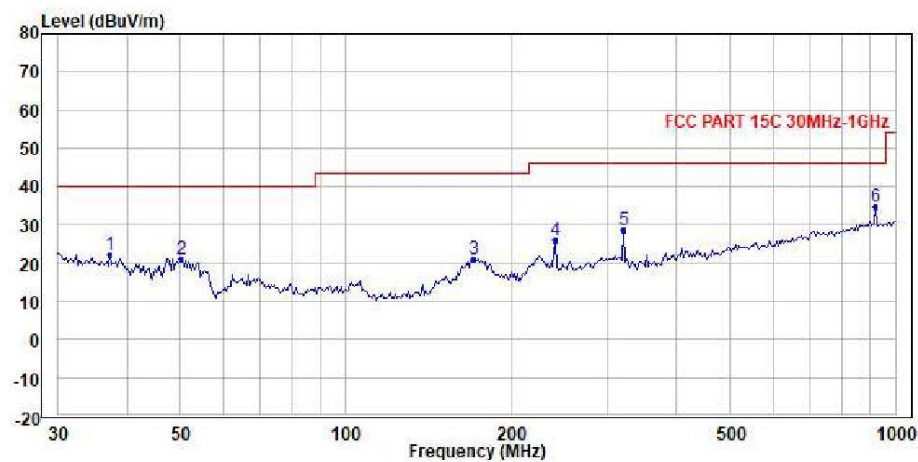


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_LINK
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	37.302	22.16	29.24	21.01	0.00	0.81	28.90	40.00	-17.84	Peak
2	50.108	21.20	34.84	14.47	0.00	0.79	28.90	40.00	-18.80	Peak
3	171.389	21.21	32.96	15.90	0.00	1.32	28.97	43.50	-22.29	Peak
4	240.144	25.97	36.59	16.90	0.00	1.52	29.04	46.00	-20.03	Peak
5	320.331	28.49	36.78	19.13	0.00	1.70	29.12	46.00	-17.51	Peak
6 PP	919.132	34.61	29.67	31.10	0.00	2.86	29.02	46.00	-11.39	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

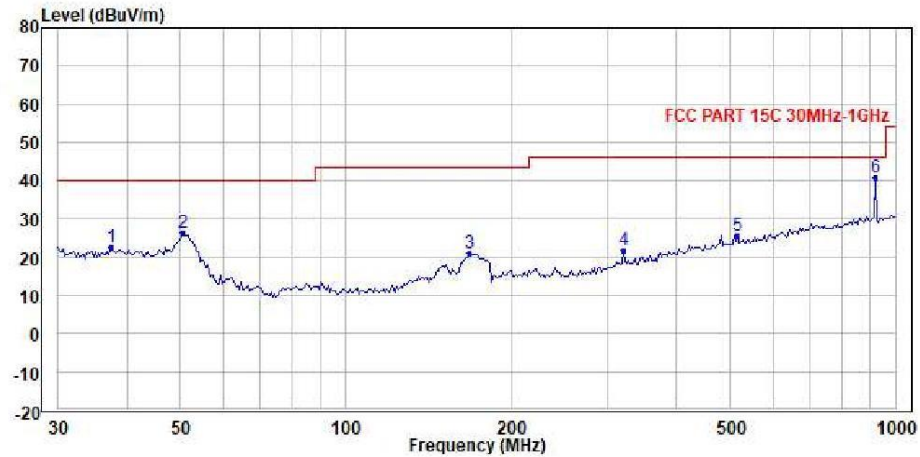

Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_LINK
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	37.565	22.52	29.67	20.93	0.00	0.82	28.90	40.00	-17.48	Peak
2	50.461	26.56	40.31	14.36	0.00	0.79	28.90	40.00	-13.44	Peak
3	167.814	21.13	33.35	15.44	0.00	1.31	28.97	43.50	-22.37	Peak
4	320.331	21.93	30.22	19.13	0.00	1.70	29.12	46.00	-24.07	Peak
5	516.565	25.66	27.68	25.26	0.00	2.09	29.37	46.00	-20.34	Peak
6 PP	919.132	40.94	36.00	31.10	0.00	2.86	29.02	46.00	-5.06	Peak

1GHz - 18GHz

Note: The highest waveform in the figure is 2.4GHz Wi-Fi Fundamental.



Shenzhen UnionTrust Quality and Technology Co., Ltd.

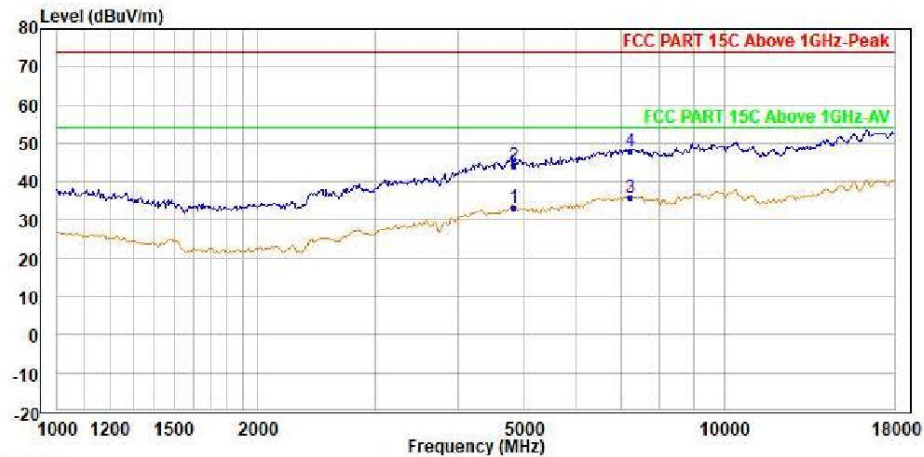


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.13	35.20	34.46	0.00	9.33	45.86	54.00	-20.87	Average
2	4824.000	44.40	46.47	34.46	0.00	9.33	45.86	74.00	-29.60	Peak
3 PP	7236.000	36.08	34.78	36.50	0.00	10.35	45.55	54.00	-17.92	Average
4 PK	7236.000	48.12	46.82	36.50	0.00	10.35	45.55	74.00	-25.88	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

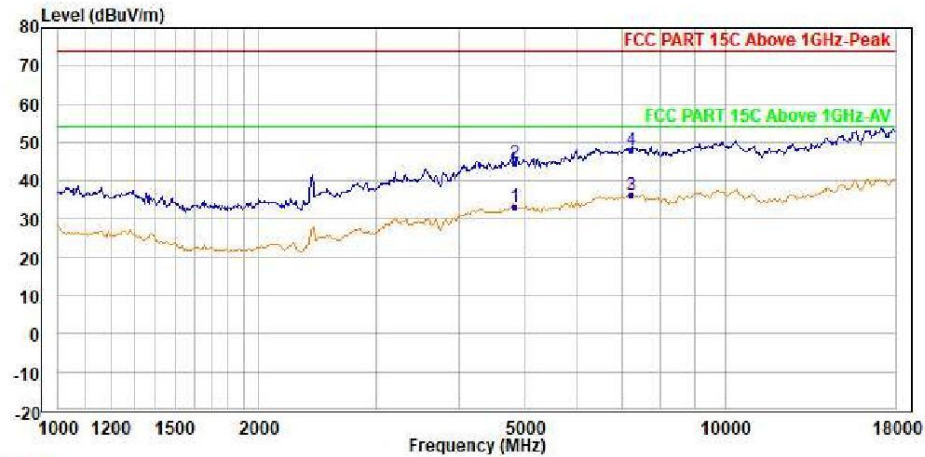


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.28	35.35	34.46	0.00	9.33	45.86	54.00	-20.72	Average
2	4824.000	44.61	46.68	34.46	0.00	9.33	45.86	74.00	-29.39	Peak
3 PP	7236.000	36.10	34.80	36.50	0.00	10.35	45.55	54.00	-17.90	Average
4 PK	7236.000	48.02	46.72	36.50	0.00	10.35	45.55	74.00	-25.98	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

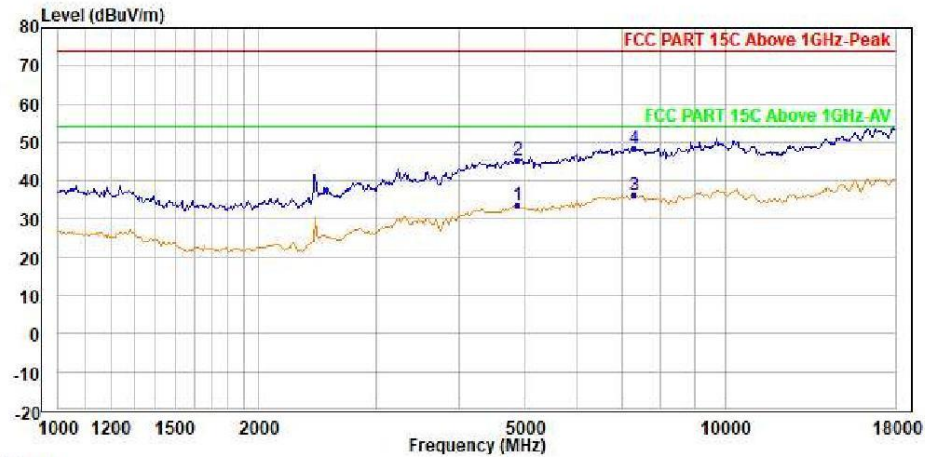


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	33.48	35.53	34.47	0.00	9.35	45.87	54.00	-20.52	Average
2	4874.000	45.31	47.36	34.47	0.00	9.35	45.87	74.00	-28.69	Peak
3 PP	7311.000	36.11	34.80	36.50	0.00	10.37	45.56	54.00	-17.89	Average
4 PK	7311.000	48.41	47.10	36.50	0.00	10.37	45.56	74.00	-25.59	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

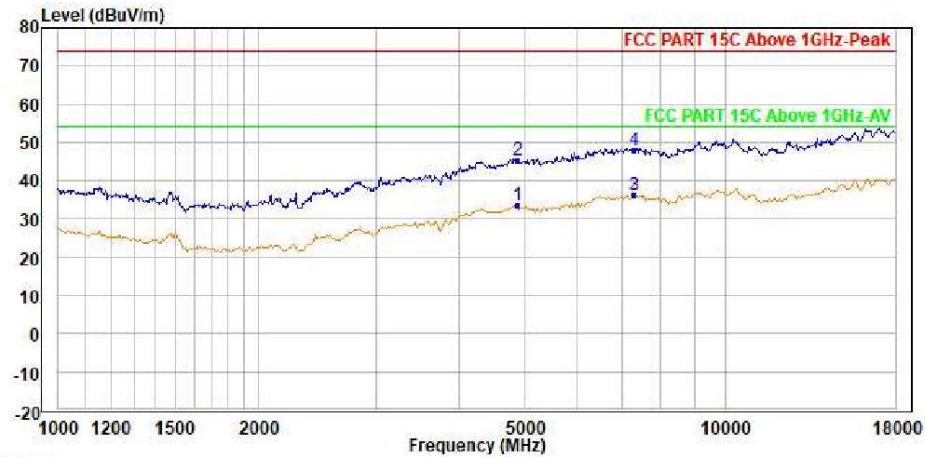


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	33.53	35.58	34.47	0.00	9.35	45.87	54.00	-20.47	Average
2	4874.000	45.29	47.34	34.47	0.00	9.35	45.87	74.00	-28.71	Peak
3 PP	7311.000	36.29	34.98	36.50	0.00	10.37	45.56	54.00	-17.71	Average
4 PK	7311.000	48.21	46.90	36.50	0.00	10.37	45.56	74.00	-25.79	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

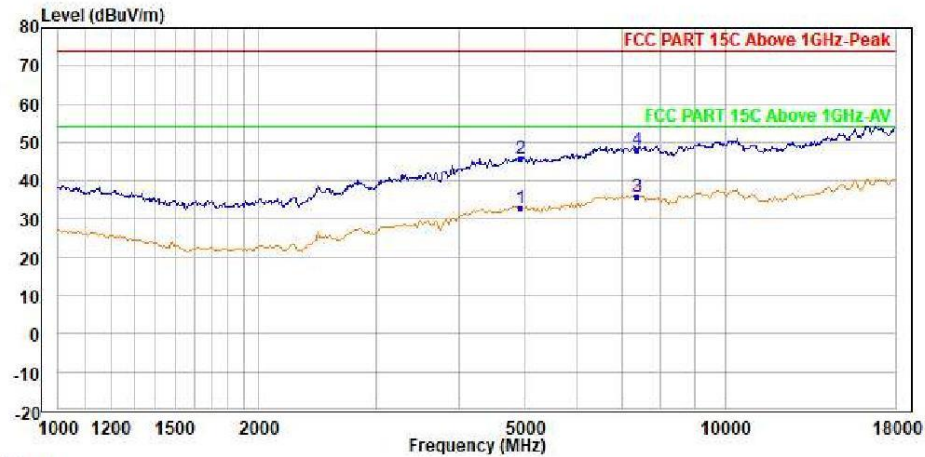


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	32.90	34.93	34.48	0.00	9.37	45.88	54.00	-21.10	Average
2	4924.000	45.59	47.62	34.48	0.00	9.37	45.88	74.00	-28.41	Peak
3 PP	7386.000	35.77	34.46	36.50	0.00	10.39	45.58	54.00	-18.23	Average
4 PK	7386.000	48.22	46.91	36.50	0.00	10.39	45.58	74.00	-25.78	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

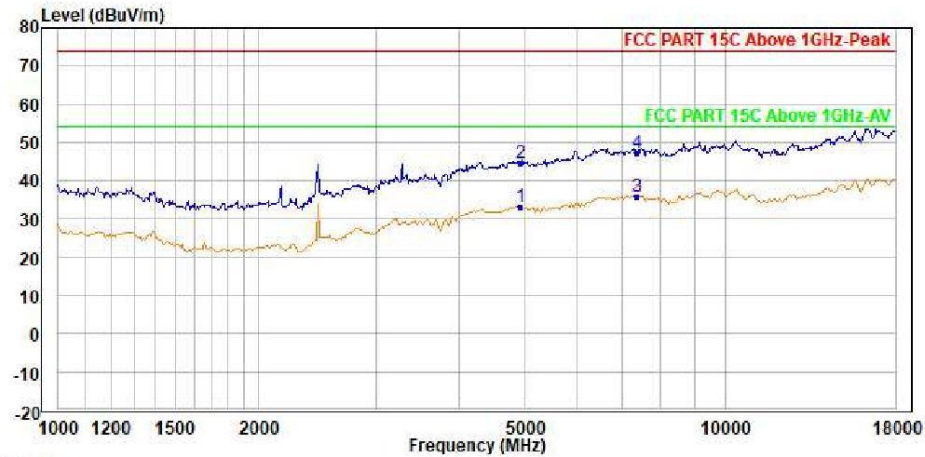


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.11	35.14	34.48	0.00	9.37	45.88	54.00	-20.89	Average
2	4924.000	44.80	46.83	34.48	0.00	9.37	45.88	74.00	-29.20	Peak
3	PP 7386.000	35.74	34.43	36.50	0.00	10.39	45.58	54.00	-18.26	Average
4	PK 7386.000	47.45	46.14	36.50	0.00	10.39	45.58	74.00	-26.55	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

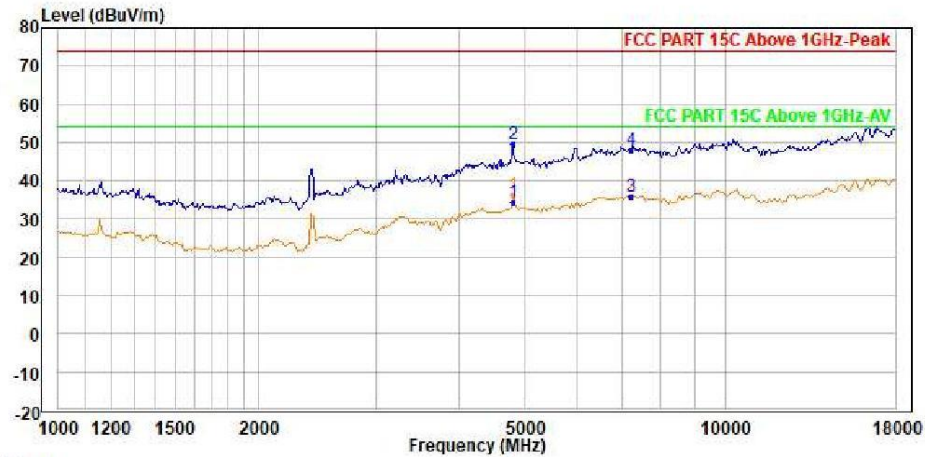


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4805.307	34.37	36.45	34.46	0.00	9.32	45.86	54.00	-19.63	Average
2 PK	4805.307	49.74	51.82	34.46	0.00	9.32	45.86	74.00	-24.26	Peak
3 PP	7236.000	36.05	34.75	36.50	0.00	10.35	45.55	54.00	-17.95	Average
4	7236.000	48.19	46.89	36.50	0.00	10.35	45.55	74.00	-25.81	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

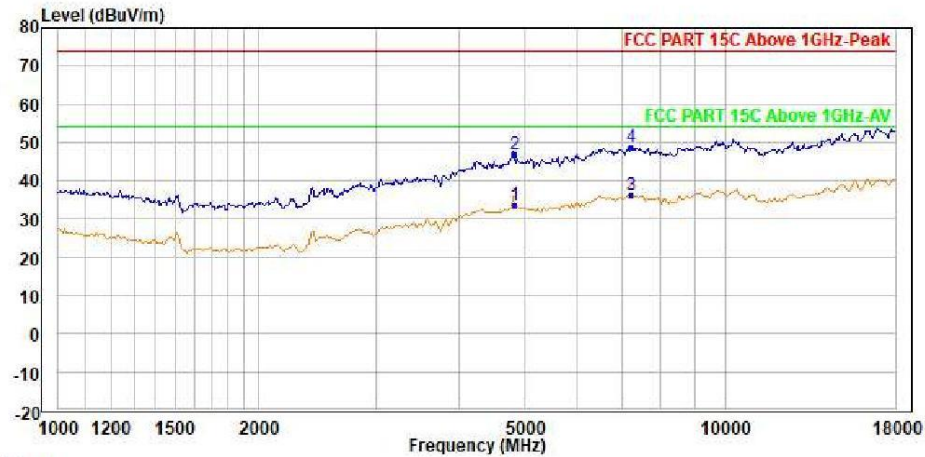


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.76	35.83	34.46	0.00	9.33	45.86	54.00	-20.24	Average
2	4824.000	46.77	48.84	34.46	0.00	9.33	45.86	74.00	-27.23	Peak
3 PP	7236.000	36.10	34.80	36.50	0.00	10.35	45.55	54.00	-17.90	Average
4 PK	7236.000	48.95	47.65	36.50	0.00	10.35	45.55	74.00	-25.05	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

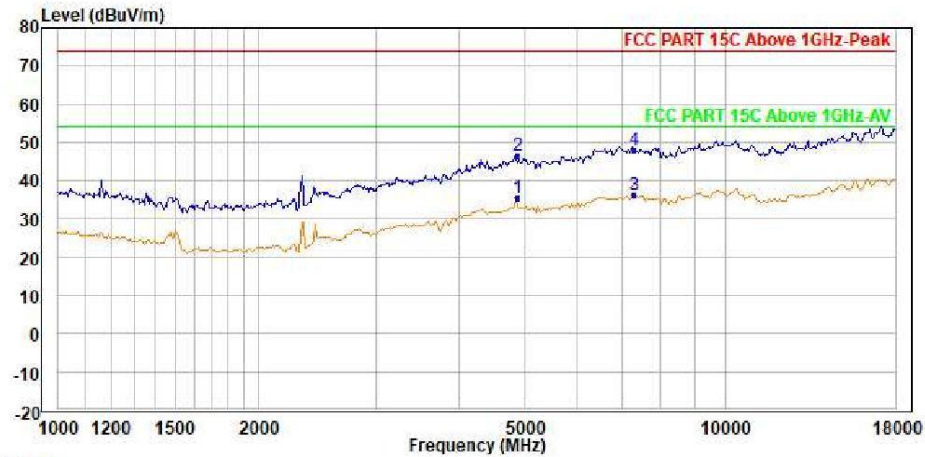


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	35.54	37.59	34.47	0.00	9.35	45.87	54.00	-18.46	Average
2	4874.000	46.71	48.76	34.47	0.00	9.35	45.87	74.00	-27.29	Peak
3 PP	7311.000	36.11	34.80	36.50	0.00	10.37	45.56	54.00	-17.89	Average
4 PK	7311.000	48.11	46.80	36.50	0.00	10.37	45.56	74.00	-25.89	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

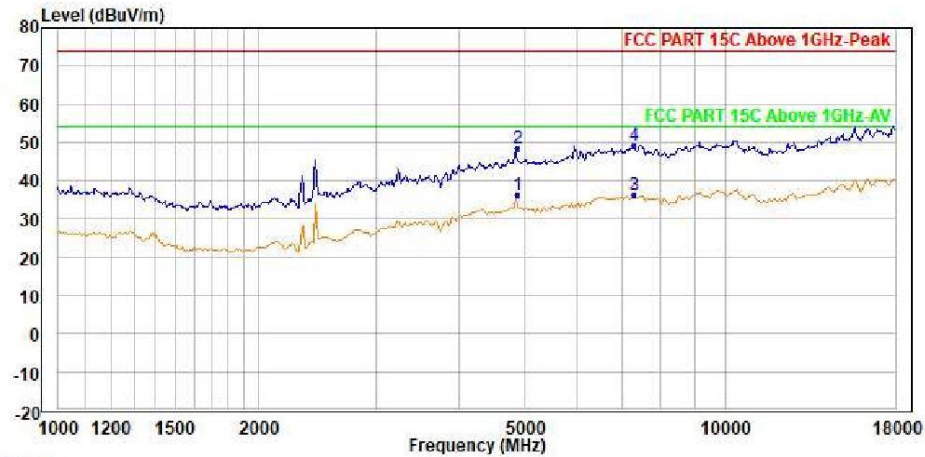


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	4874.000	36.31	38.36	34.47	0.00	9.35	45.87	54.00	-17.69	Average
2	4874.000	48.48	50.53	34.47	0.00	9.35	45.87	74.00	-25.52	Peak
3	7311.000	36.29	34.98	36.50	0.00	10.37	45.56	54.00	-17.71	Average
4 PK	7311.000	49.06	47.75	36.50	0.00	10.37	45.56	74.00	-24.94	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

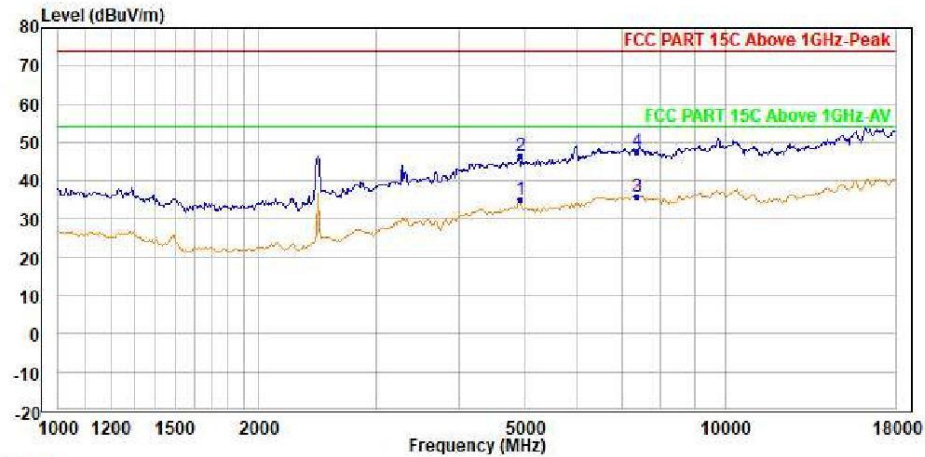


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	34.95	36.98	34.48	0.00	9.37	45.88	54.00	-19.05	Average
2	4924.000	46.61	48.64	34.48	0.00	9.37	45.88	74.00	-27.39	Peak
3 PP	7386.000	35.83	34.52	36.50	0.00	10.39	45.58	54.00	-18.17	Average
4 PK	7386.000	47.74	46.43	36.50	0.00	10.39	45.58	74.00	-26.26	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

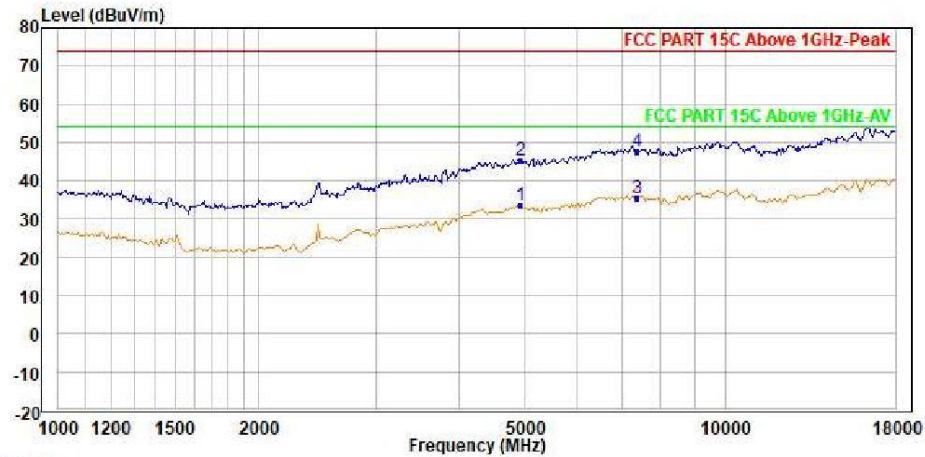


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.65	35.68	34.48	0.00	9.37	45.88	54.00	-20.35	Average
2	4924.000	45.50	47.53	34.48	0.00	9.37	45.88	74.00	-28.50	Peak
3 PP	7386.000	35.66	34.35	36.50	0.00	10.39	45.58	54.00	-18.34	Average
4 PK	7386.000	47.51	46.20	36.50	0.00	10.39	45.58	74.00	-26.49	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

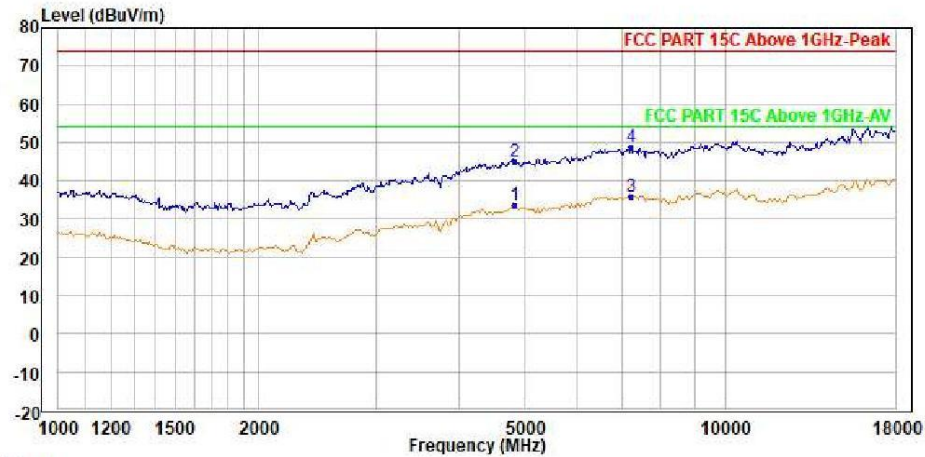


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.50	35.57	34.46	0.00	9.33	45.86	54.00	-20.50	Average
2	4824.000	45.07	47.14	34.46	0.00	9.33	45.86	74.00	-28.93	Peak
3 PP	7236.000	36.03	34.73	36.50	0.00	10.35	45.55	54.00	-17.97	Average
4 PK	7236.000	48.69	47.39	36.50	0.00	10.35	45.55	74.00	-25.31	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

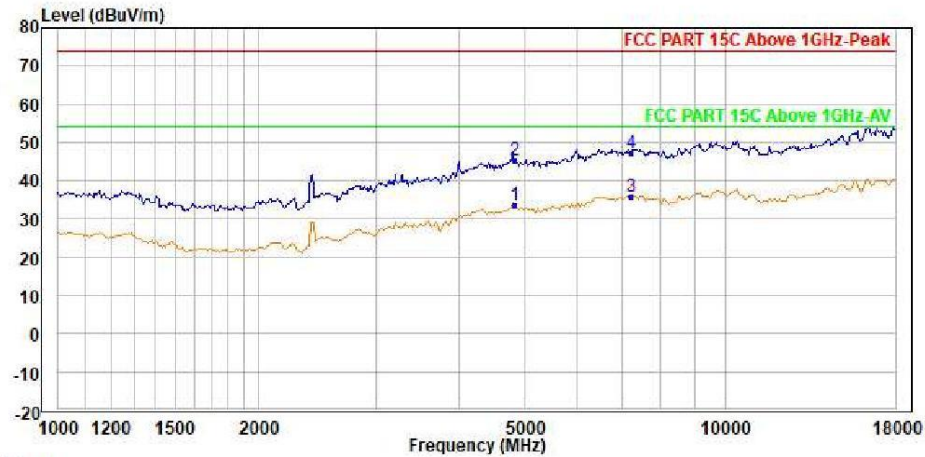


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.57	35.64	34.46	0.00	9.33	45.86	54.00	-20.43	Average
2	4824.000	45.29	47.36	34.46	0.00	9.33	45.86	74.00	-28.71	Peak
3	PP 7236.000	36.03	34.73	36.50	0.00	10.35	45.55	54.00	-17.97	Average
4	PK 7236.000	47.42	46.12	36.50	0.00	10.35	45.55	74.00	-26.58	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

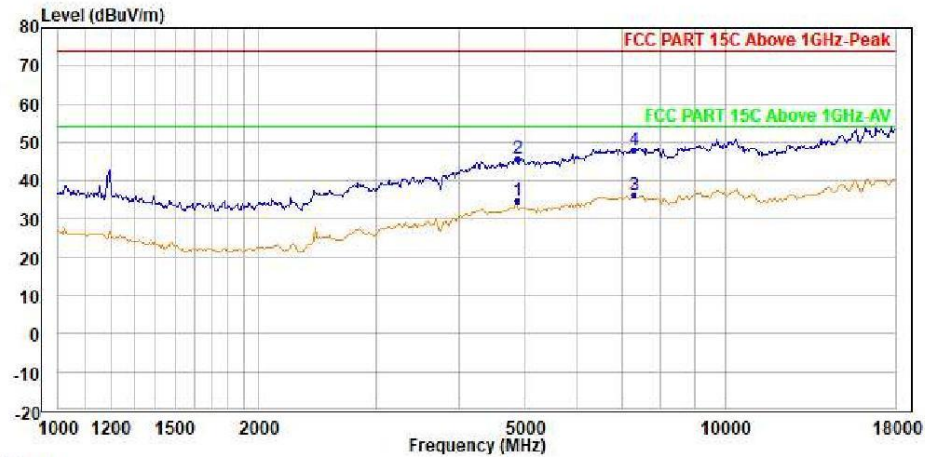


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.62	36.67	34.47	0.00	9.35	45.87	54.00	-19.38	Average
2	4874.000	45.59	47.64	34.47	0.00	9.35	45.87	74.00	-28.41	Peak
3	PP 7311.000	36.16	34.85	36.50	0.00	10.37	45.56	54.00	-17.84	Average
4	PK 7311.000	47.94	46.63	36.50	0.00	10.37	45.56	74.00	-26.06	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

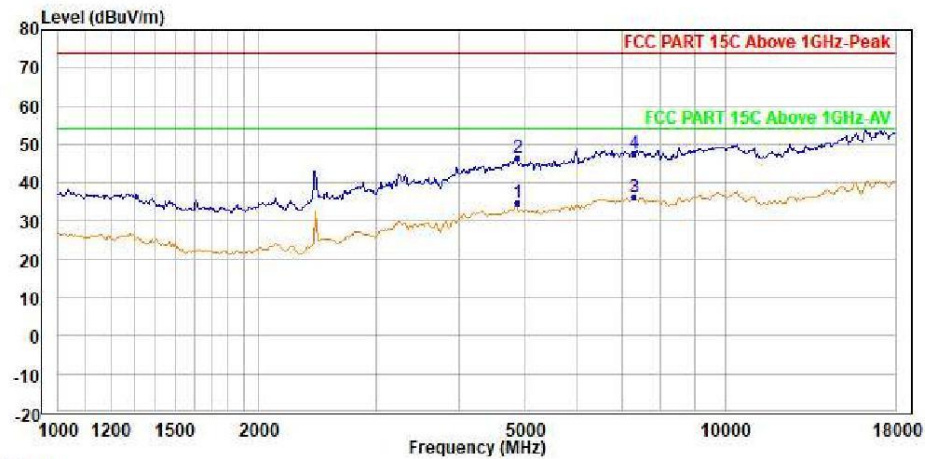


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.82	36.87	34.47	0.00	9.35	45.87	54.00	-19.18	Average
2	4874.000	46.72	48.77	34.47	0.00	9.35	45.87	74.00	-27.28	Peak
3	PP 7311.000	36.16	34.85	36.50	0.00	10.37	45.56	54.00	-17.84	Average
4	PK 7311.000	47.66	46.35	36.50	0.00	10.37	45.56	74.00	-26.34	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

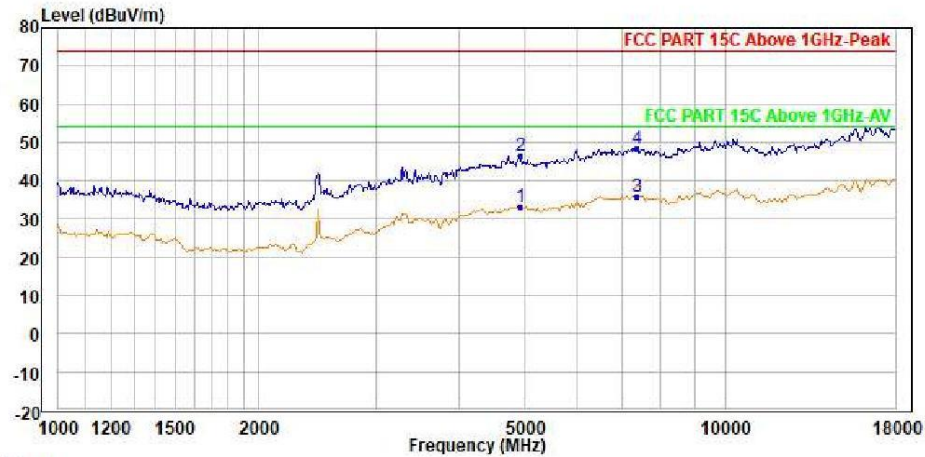


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.16	35.19	34.48	0.00	9.37	45.88	54.00	-20.84	Average
2	4924.000	46.40	48.43	34.48	0.00	9.37	45.88	74.00	-27.60	Peak
3 PP	7386.000	35.77	34.46	36.50	0.00	10.39	45.58	54.00	-18.23	Average
4 PK	7386.000	48.41	47.10	36.50	0.00	10.39	45.58	74.00	-25.59	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

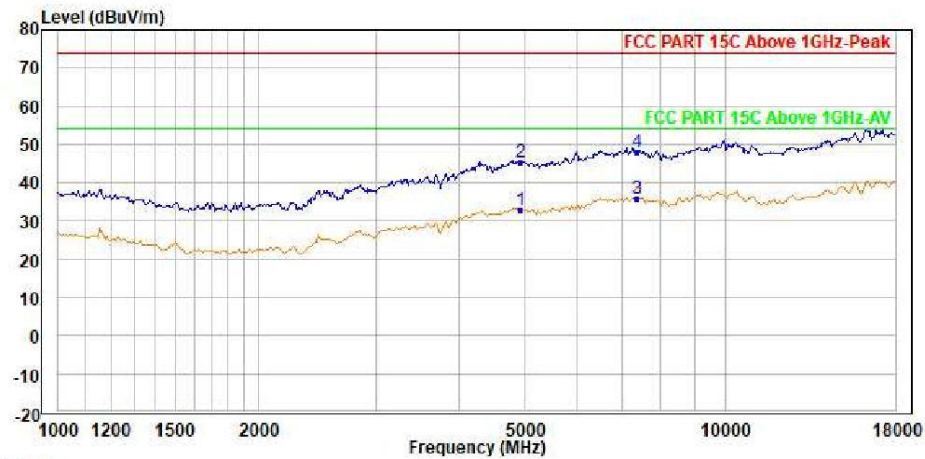

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	32.85	34.88	34.48	0.00	9.37	45.88	54.00	-21.15	Average
2	4924.000	45.34	47.37	34.48	0.00	9.37	45.88	74.00	-28.66	Peak
3 PP	7386.000	35.72	34.41	36.50	0.00	10.39	45.58	54.00	-18.28	Average
4 PK	7386.000	47.98	46.67	36.50	0.00	10.39	45.58	74.00	-26.02	Peak