




Shenzhen UnionTrust Quality and Technology Co., Ltd.

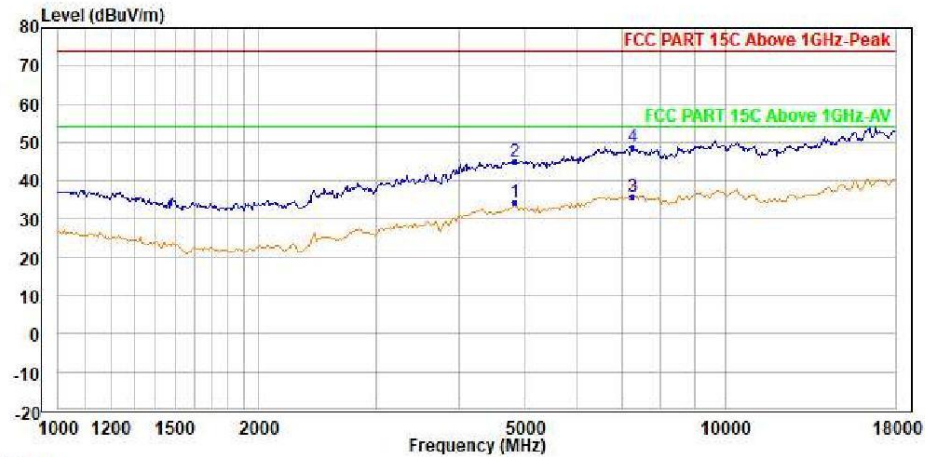


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	34.19	36.25	34.47	0.00	9.34	45.87	54.00	-19.81	Average
2	4844.000	45.11	47.17	34.47	0.00	9.34	45.87	74.00	-28.89	Peak
3	PP 7266.000	35.97	34.66	36.50	0.00	10.36	45.55	54.00	-18.03	Average
4	PK 7266.000	48.76	47.45	36.50	0.00	10.36	45.55	74.00	-25.24	Peak




Shenzhen UnionTrust Quality and Technology Co., Ltd.

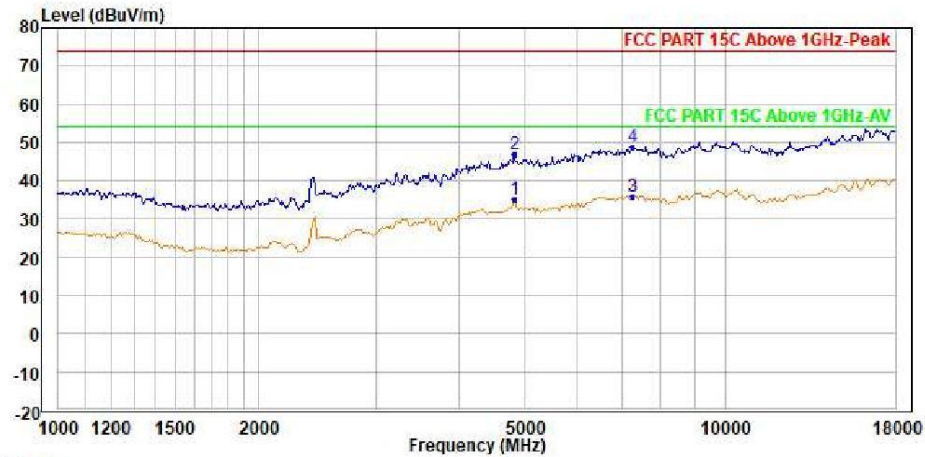

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	34.96	37.02	34.47	0.00	9.34	45.87	54.00	-19.04	Average
2	4844.000	46.84	48.90	34.47	0.00	9.34	45.87	74.00	-27.16	Peak
3 PP	7266.000	36.03	34.72	36.50	0.00	10.36	45.55	54.00	-17.97	Average
4 PK	7266.000	48.69	47.38	36.50	0.00	10.36	45.55	74.00	-25.31	Peak

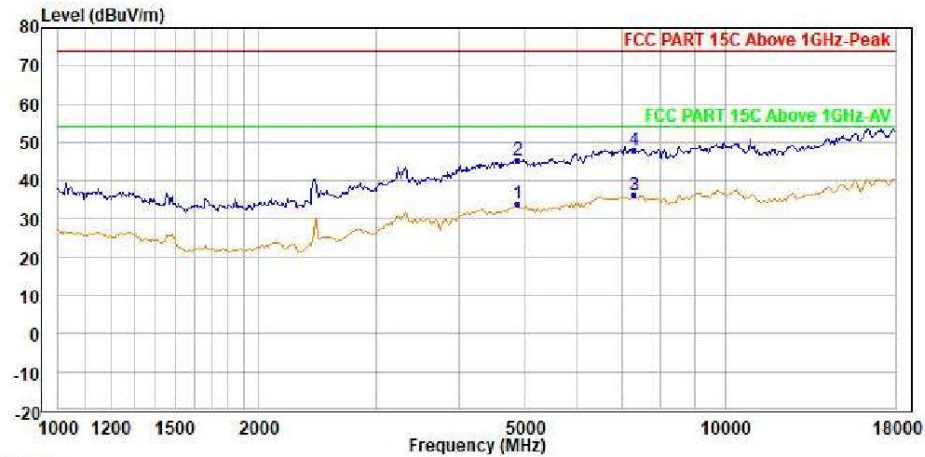


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.13	36.18	34.47	0.00	9.35	45.87	54.00	-19.87	Average
2	4874.000	45.50	47.55	34.47	0.00	9.35	45.87	74.00	-28.50	Peak
3	PP 7311.000	36.14	34.83	36.50	0.00	10.37	45.56	54.00	-17.86	Average
4	PK 7311.000	47.90	46.59	36.50	0.00	10.37	45.56	74.00	-26.10	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

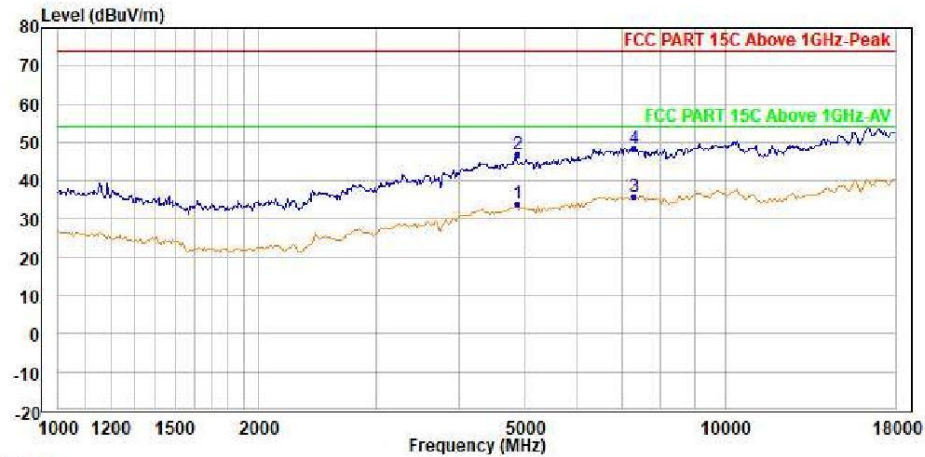


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	33.91	35.96	34.47	0.00	9.35	45.87	54.00	-20.09	Average
2	4874.000	46.91	48.96	34.47	0.00	9.35	45.87	74.00	-27.09	Peak
3 PP	7311.000	36.08	34.77	36.50	0.00	10.37	45.56	54.00	-17.92	Average
4 PK	7311.000	48.32	47.01	36.50	0.00	10.37	45.56	74.00	-25.68	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

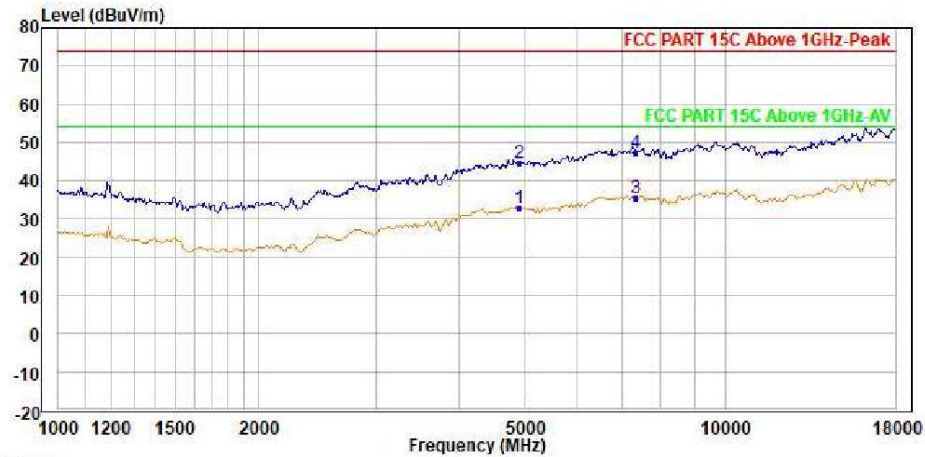


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	32.69	34.73	34.48	0.00	9.36	45.88	54.00	-21.31	Average
2	4904.000	44.59	46.63	34.48	0.00	9.36	45.88	74.00	-29.41	Peak
3 PP	7356.000	35.69	34.38	36.50	0.00	10.38	45.57	54.00	-18.31	Average
4 PK	7356.000	47.47	46.16	36.50	0.00	10.38	45.57	74.00	-26.53	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

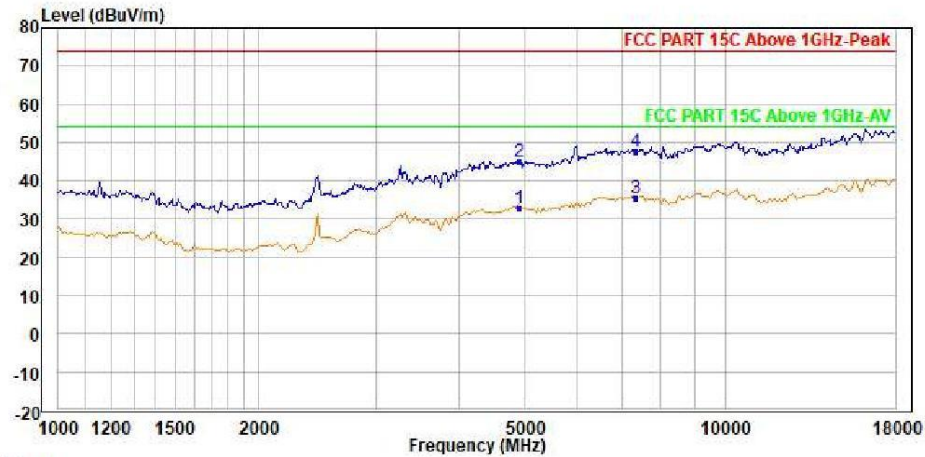


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	32.80	34.84	34.48	0.00	9.36	45.88	54.00	-21.20	Average
2	4904.000	44.93	46.97	34.48	0.00	9.36	45.88	74.00	-29.07	Peak
3 PP	7356.000	35.63	34.32	36.50	0.00	10.38	45.57	54.00	-18.37	Average
4 PK	7356.000	47.51	46.20	36.50	0.00	10.38	45.57	74.00	-26.49	Peak

Appendix A.4: Test Results of Radiated Emissions in Restricted Bands, 2.4GHz Wi-Fi



Shenzhen UnionTrust Quality and Technology Co., Ltd.

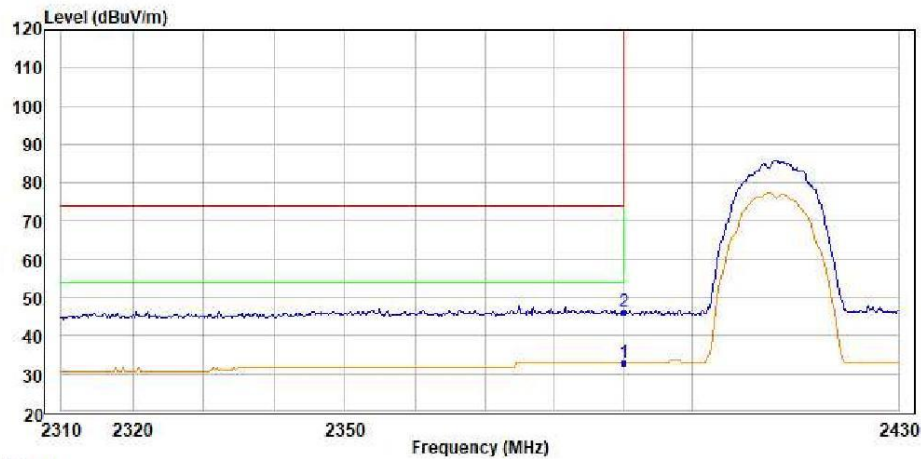


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%) : 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	32.93	31.43	31.55	10.00	7.35	47.40	54.00	-21.07	Average
2 PK	2390.000	46.11	44.61	31.55	10.00	7.35	47.40	74.00	-27.89	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

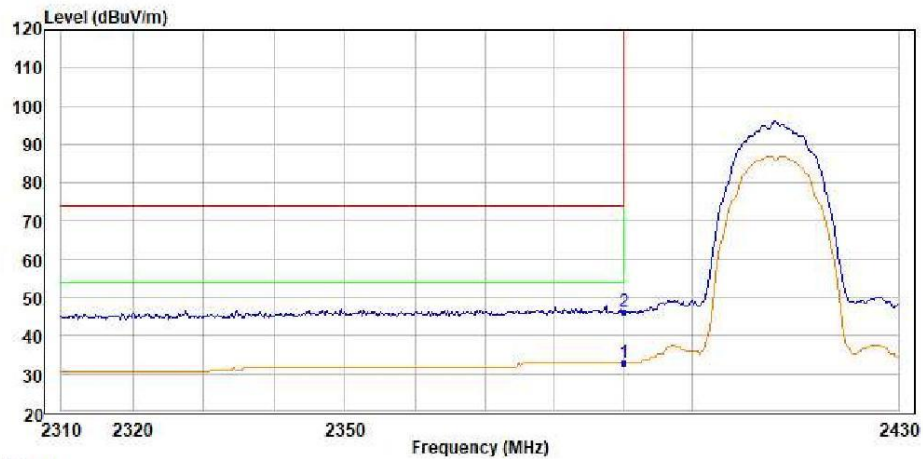


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	32.93	31.43	31.55	10.00	7.35	47.40	54.00	-21.07	Average
2	PK 2390.000	46.24	44.74	31.55	10.00	7.35	47.40	74.00	-27.76	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

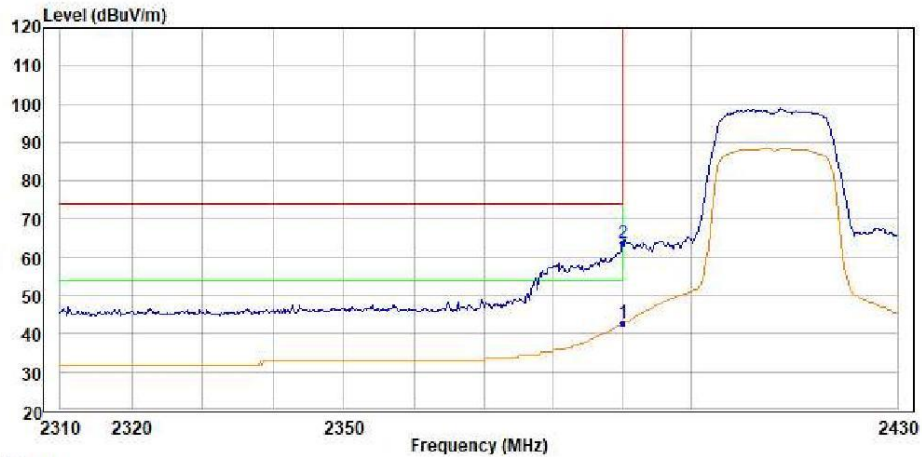


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	AV 2390.000	42.76	41.26	31.55	10.00	7.35	47.40	54.00	-11.24	Average
2	PP 2390.000	63.87	62.37	31.55	10.00	7.35	47.40	74.00	-10.13	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

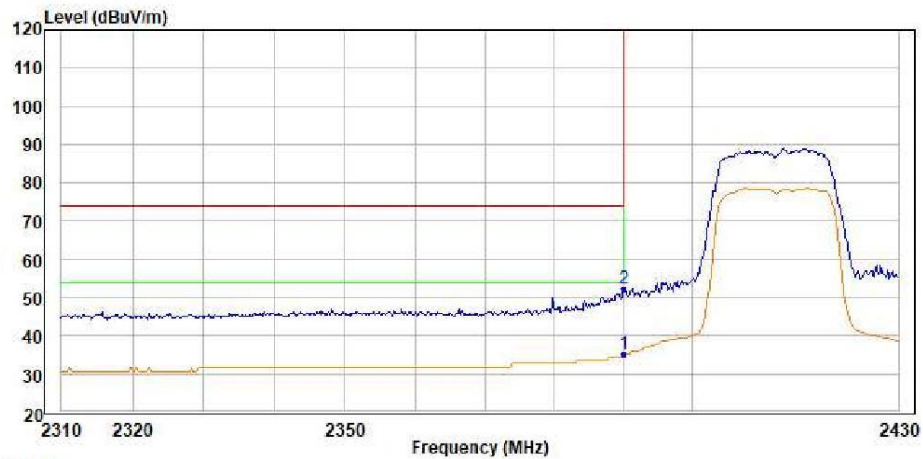


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	35.21	33.71	31.55	10.00	7.35	47.40	54.00	-18.79	Average
2 PK	2390.000	52.19	50.69	31.55	10.00	7.35	47.40	74.00	-21.81	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

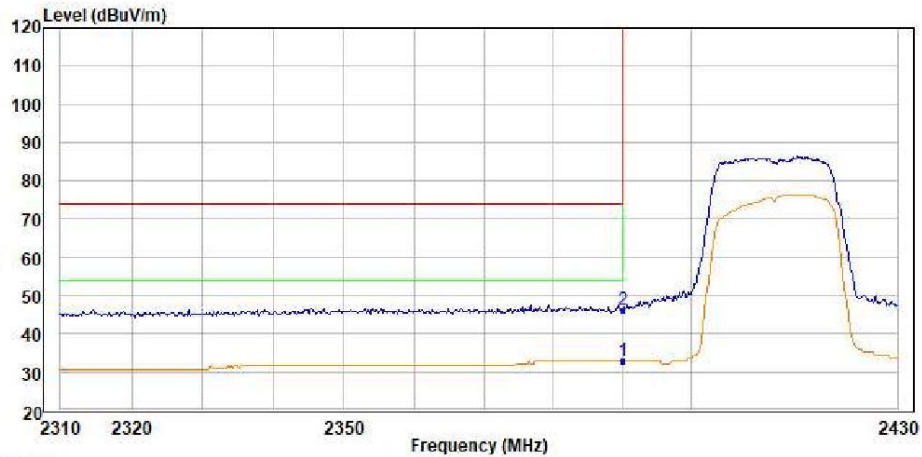


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	32.93	31.43	31.55	10.00	7.35	47.40	54.00	-21.07	Average
2	PK 2390.000	46.32	44.82	31.55	10.00	7.35	47.40	74.00	-27.68	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

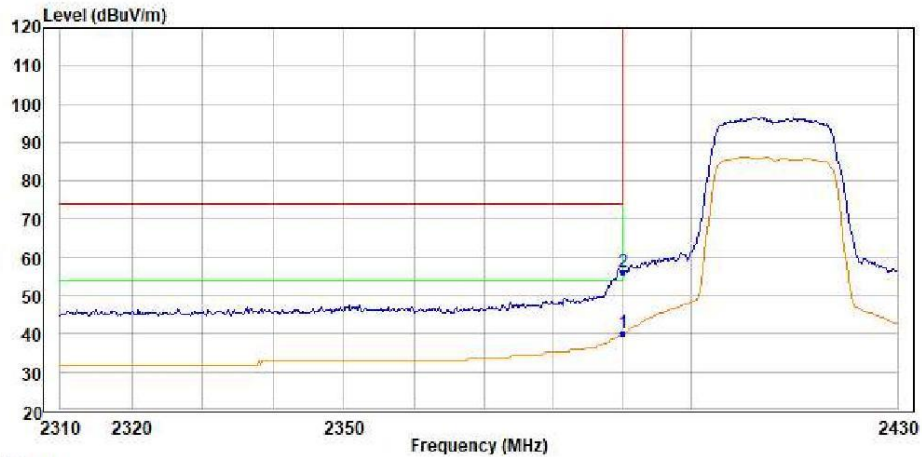


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	40.17	38.67	31.55	10.00	7.35	47.40	54.00	-13.83	Average
2 PK	2390.000	55.99	54.49	31.55	10.00	7.35	47.40	74.00	-18.01	Peak




Shenzhen UnionTrust Quality and Technology Co., Ltd.

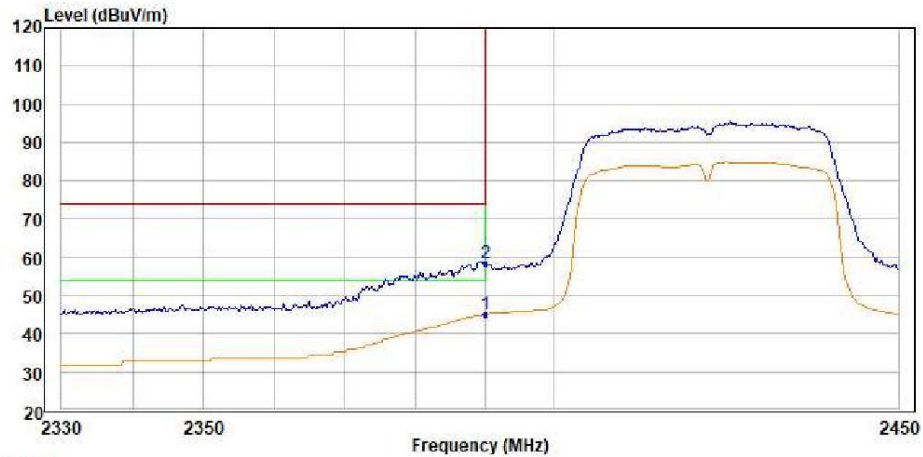

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	44.98	43.48	31.55	10.00	7.35	47.40	54.00	-9.02	Average
2 PK	2390.000	58.42	56.92	31.55	10.00	7.35	47.40	74.00	-15.58	Peak

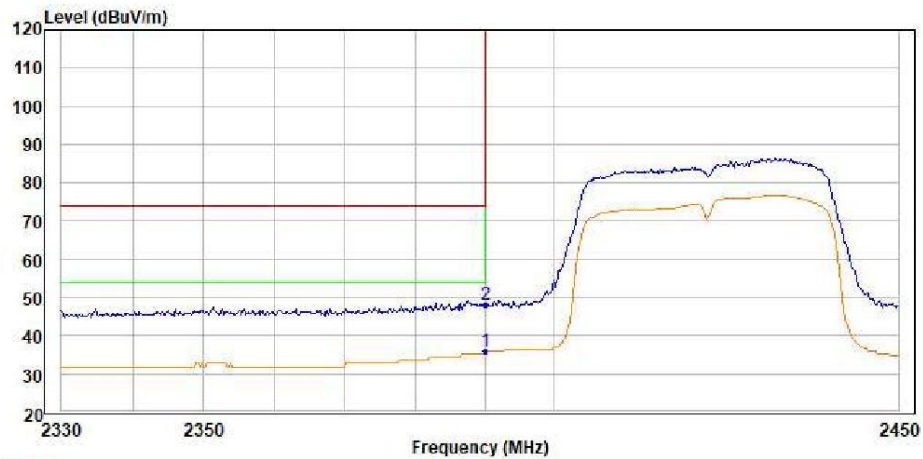


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	35.86	34.36	31.55	10.00	7.35	47.40	54.00	-18.14	Average
2	PK 2390.000	48.27	46.77	31.55	10.00	7.35	47.40	74.00	-25.73	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

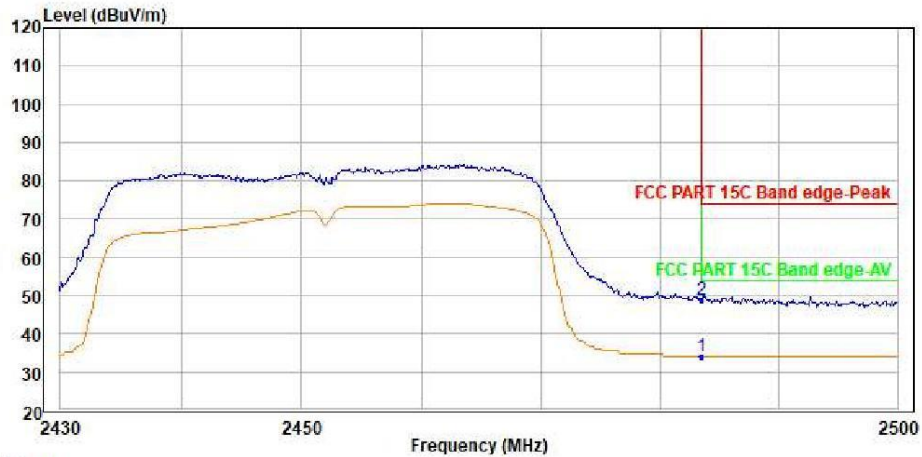


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	34.01	32.26	31.68	10.00	7.47	47.40	54.00	-19.99	Average
2	PK 2483.500	48.74	46.99	31.68	10.00	7.47	47.40	74.00	-25.26	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

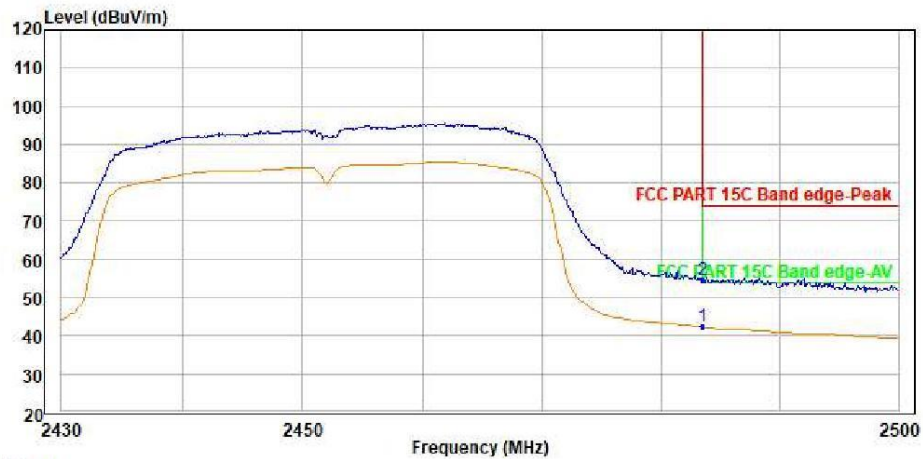


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	42.43	40.68	31.68	10.00	7.47	47.40	54.00	-11.57	Average
2	PK 2483.500	54.53	52.78	31.68	10.00	7.47	47.40	74.00	-19.47	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

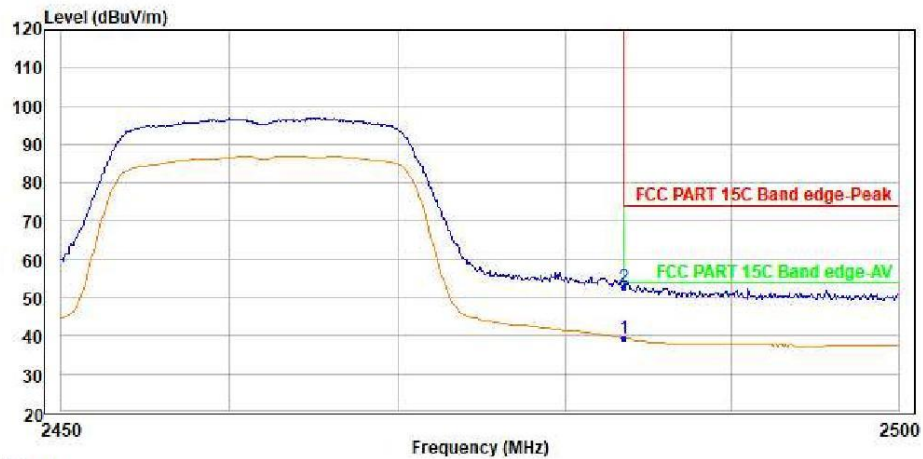


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	39.21	37.46	31.68	10.00	7.47	47.40	54.00	-14.79	Average
2 PK	2483.500	52.81	51.06	31.68	10.00	7.47	47.40	74.00	-21.19	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

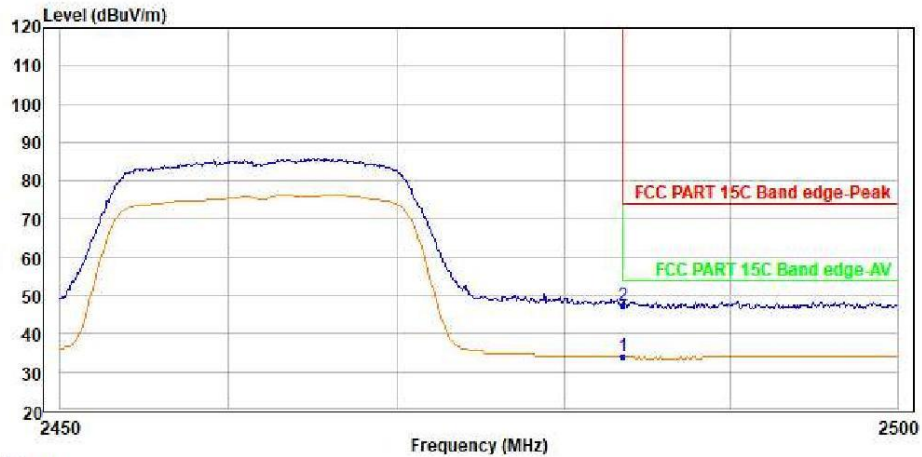


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	34.01	32.26	31.68	10.00	7.47	47.40	54.00	-19.99	Average
2	PK 2483.500	47.45	45.70	31.68	10.00	7.47	47.40	74.00	-26.55	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

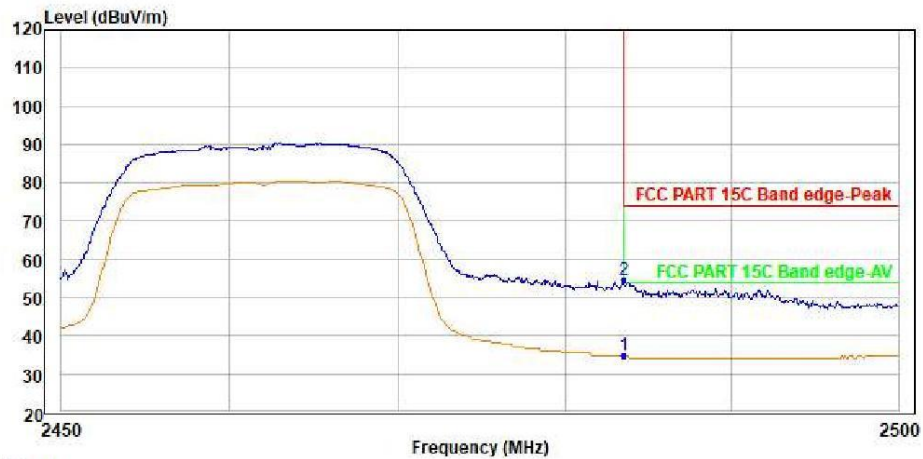


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	34.77	33.02	31.68	10.00	7.47	47.40	54.00	-19.23	Average
2	PK 2483.500	54.67	52.92	31.68	10.00	7.47	47.40	74.00	-19.33	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

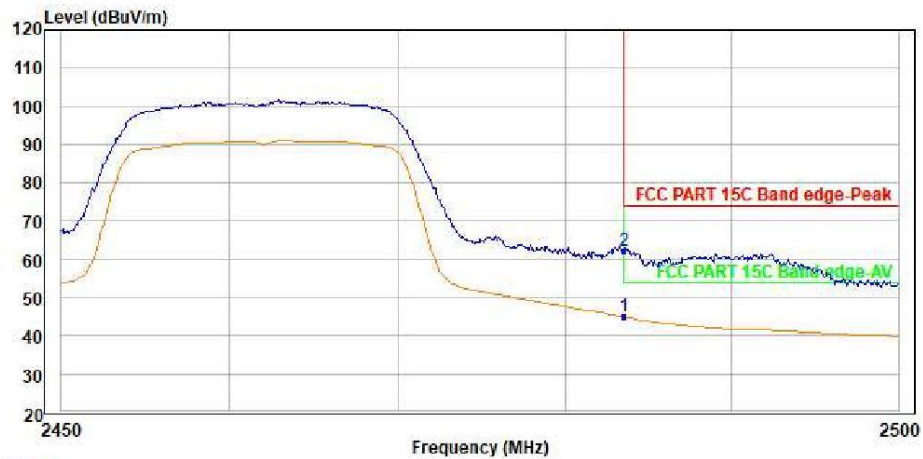


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	45.01	43.26	31.68	10.00	7.47	47.40	54.00	-8.99	Average
2	PK 2483.500	62.36	60.61	31.68	10.00	7.47	47.40	74.00	-11.64	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

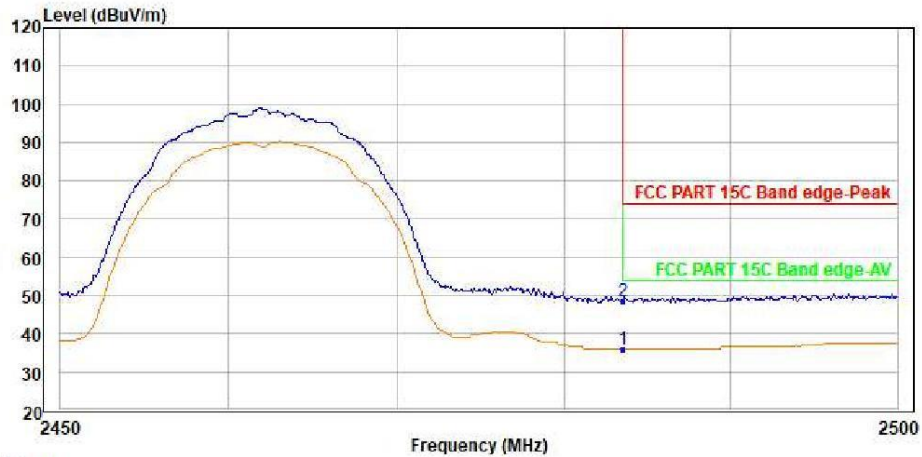


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	36.11	34.36	31.68	10.00	7.47	47.40	54.00	-17.89	Average
2	PK 2483.500	48.37	46.62	31.68	10.00	7.47	47.40	74.00	-25.63	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

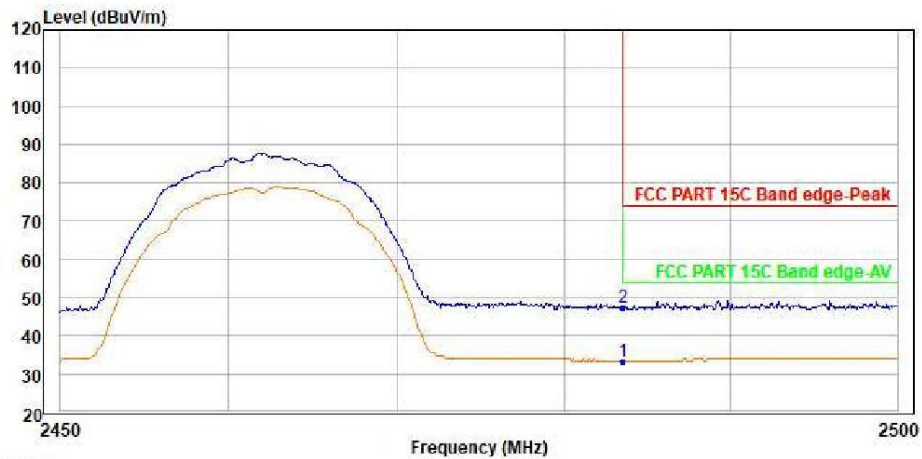


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/59.8(%)
Press : 99.7kpa
Product : ThermoMaven G4
Model No. : WT09
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	33.19	31.44	31.68	10.00	7.47	47.40	54.00	-20.81	Average
2	PK 2483.500	47.26	45.51	31.68	10.00	7.47	47.40	74.00	-26.74	Peak


Appendix A.5: Test Results of Conducted Emission on AC Mains

Site:	LAB	Phase: L1	Temperature(°C):25.1(°C)
Limit:	FCC Part15C CE-Class B_QP	atm.press.: 100.4 kpa	Humidity(%): 56.3%RH
EUT:	ThermoMaven G4	Test Time:	2024/9/10 9:36:00
M/N.:	WT09	Power Rating:	AC120V/60Hz
Mode:	TM1:Charging+Wi-Fi Link	Test Engineer:	linson
Note:			

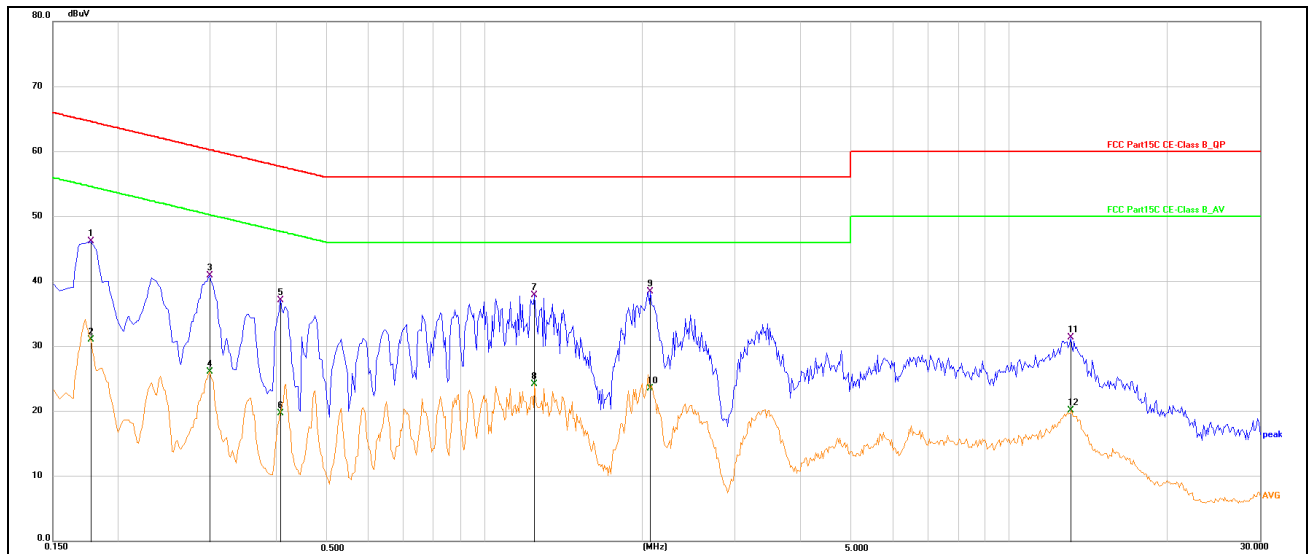


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1770	35.94	10.18	46.12	64.63	-18.51	QP
2	0.1770	20.87	10.18	31.05	54.63	-23.58	AVG
3	0.2983	30.73	10.21	40.94	60.29	-19.35	QP
4	0.2983	15.85	10.21	26.06	50.29	-24.23	AVG
5	0.4063	26.96	10.12	37.08	57.72	-20.64	QP
6	0.4063	9.56	10.12	19.68	47.72	-28.04	AVG
7	1.2435	27.51	10.32	37.83	56.00	-18.17	QP
8	1.2435	13.81	10.32	24.13	46.00	-21.87	AVG
9	2.0670	28.25	10.23	38.48	56.00	-17.52	QP
10	2.0670	13.29	10.23	23.52	46.00	-22.48	AVG
11	13.0875	20.82	10.49	31.31	60.00	-28.69	QP
12	13.0875	9.60	10.49	20.09	50.00	-29.91	AVG

Site:	LAB	Phase: N	Temperature(°C):25.1(°C)
Limit:	FCC Part15C CE-Class B_QP	atm.press.: 100.4 kpa	Humidity(%): 56.3%RH
EUT:	ThermoMaven G4	Test Time:	2024/9/10 9:39:50
M/N.:	WT09	Power Rating:	AC120V/60Hz
Mode:	TM1:Charging+Wi-Fi Link	Test Engineer:	linson
Note:			

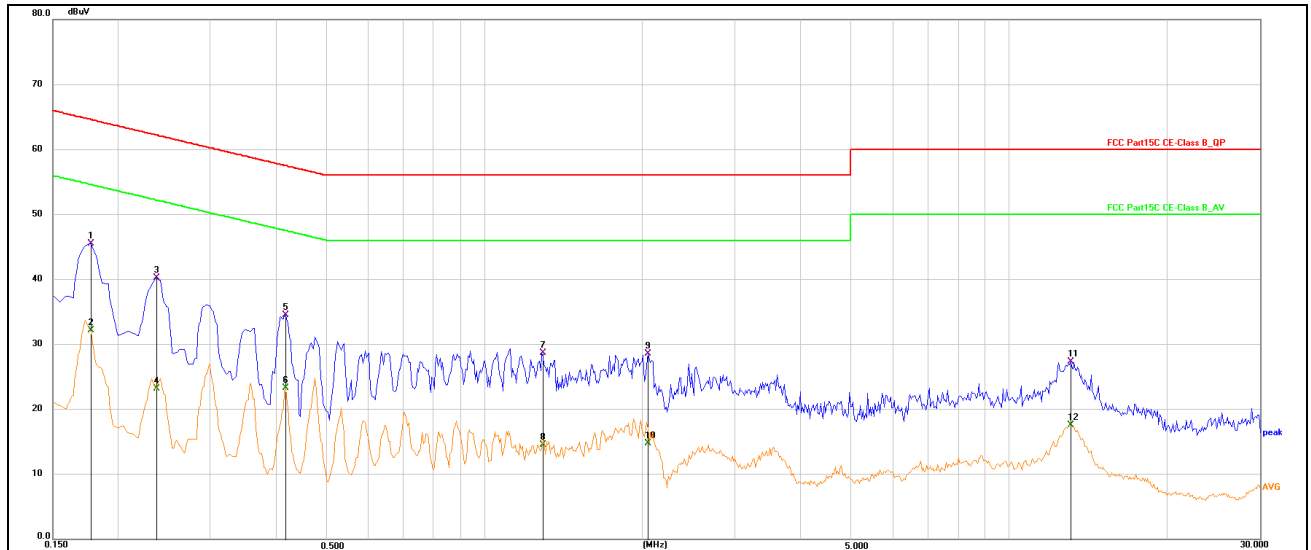


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1770	35.31	10.18	45.49	64.63	-19.14	QP
2	0.1770	21.92	10.18	32.10	54.63	-22.53	AVG
3	0.2354	30.01	10.17	40.18	62.26	-22.08	QP
4	0.2354	13.04	10.17	23.21	52.26	-29.05	AVG
5	0.4154	24.42	10.13	34.55	57.54	-22.99	QP
6	0.4154	13.16	10.13	23.29	47.54	-24.25	AVG
7	1.2839	18.41	10.31	28.72	56.00	-27.28	QP
8	1.2839	4.18	10.31	14.49	46.00	-31.51	AVG
9	2.0445	18.34	10.23	28.57	56.00	-27.43	QP
10	2.0445	4.57	10.23	14.80	46.00	-31.20	AVG
11	13.0830	16.81	10.49	27.30	60.00	-32.70	QP
12	13.0830	7.11	10.49	17.60	50.00	-32.40	AVG

Site:	LAB	Phase: L1	Temperature(°C):25.1(°C)
Limit:	FCC Part15C CE-Class B_QP	atm.press.: 100.4 kpa	Humidity(%): 56.3%RH
EUT:	ThermoMaven G4	Test Time:	2024/9/10 9:43:21
M/N.:	WT09	Power Rating:	AC120V/60Hz
Mode:	TM1:Charging+BLE Link	Test Engineer:	linson
Note:			

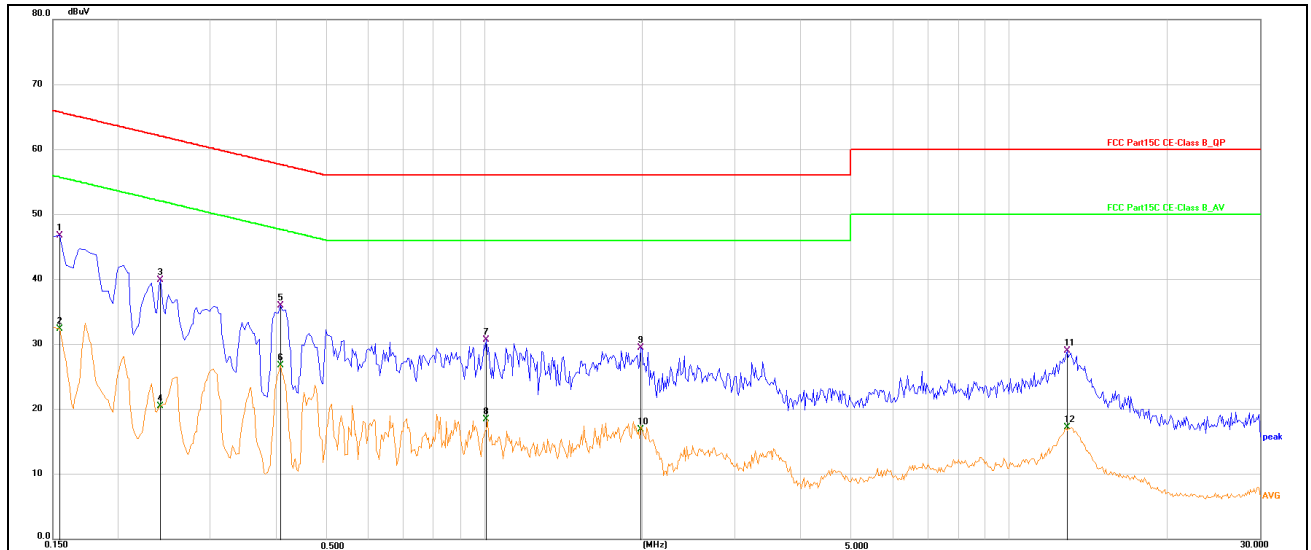

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1544	36.49	10.20	46.69	65.76	-19.07	QP
2	0.1544	22.22	10.20	32.42	55.76	-23.34	AVG
3	0.2400	29.70	10.19	39.89	62.10	-22.21	QP
4	0.2400	10.33	10.19	20.52	52.10	-31.58	AVG
5	0.4063	25.81	10.12	35.93	57.72	-21.79	QP
6	0.4063	16.64	10.12	26.76	47.72	-20.96	AVG
7	1.0050	20.29	10.35	30.64	56.00	-25.36	QP
8	1.0050	8.07	10.35	18.42	46.00	-27.58	AVG
9	1.9860	19.23	10.22	29.45	56.00	-26.55	QP
10	1.9860	6.71	10.22	16.93	46.00	-29.07	AVG
11	12.9120	18.47	10.50	28.97	60.00	-31.03	QP
12	12.9120	6.77	10.50	17.27	50.00	-32.73	AVG

Site:	LAB	Phase: N	Temperature(°C):25.1(°C)
Limit:	FCC Part15C CE-Class B_QP	atm.press.: 100.4 kpa	Humidity(%): 56.3%RH
EUT:	ThermoMaven G4	Test Time:	2024/9/10 9:45:49
M/N.:	WT09	Power Rating:	AC120V/60Hz
Mode:	TM1:Charging+BLE Link	Test Engineer:	linson
Note:			

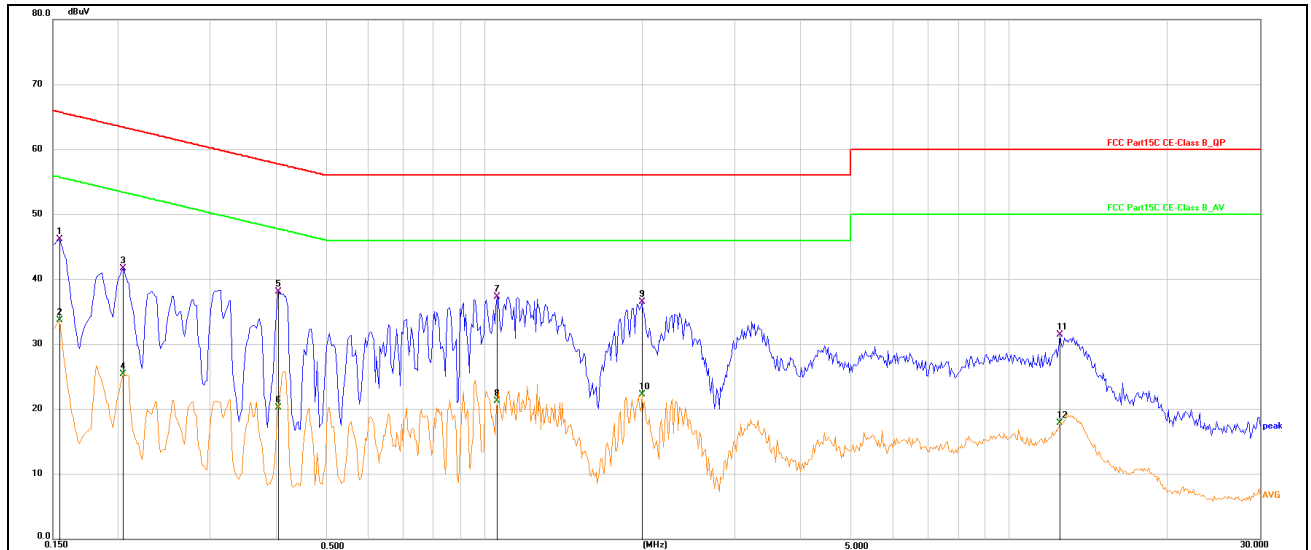

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1544	36.00	10.20	46.20	65.76	-19.56	QP
2	0.1544	23.55	10.20	33.75	55.76	-22.01	AVG
3	0.2040	31.51	10.16	41.67	63.45	-21.78	QP
4	0.2040	15.27	10.16	25.43	53.45	-28.02	AVG
5	0.4020	27.98	10.12	38.10	57.81	-19.71	QP
6	0.4020	10.14	10.12	20.26	47.81	-27.55	AVG
7	1.0590	27.02	10.34	37.36	56.00	-18.64	QP
8	1.0590	10.93	10.34	21.27	46.00	-24.73	AVG
9	1.9995	26.27	10.22	36.49	56.00	-19.51	QP
10	1.9995	12.08	10.22	22.30	46.00	-23.70	AVG
11	12.5024	21.01	10.49	31.50	60.00	-28.50	QP
12	12.5024	7.36	10.49	17.85	50.00	-32.15	AVG