




Shenzhen UnionTrust Quality and Technology Co., Ltd.

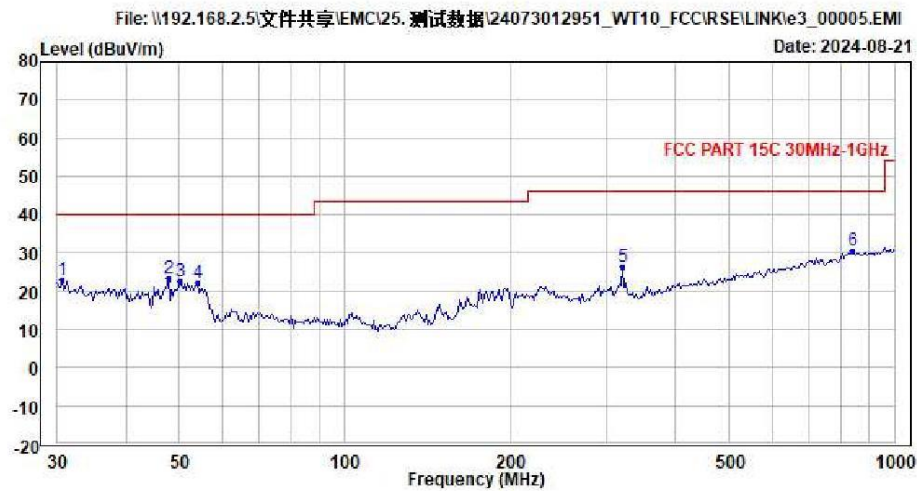


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2LE_LINK
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	30.639	23.02	28.29	22.99	0.64	0.00	28.90	40.00	-16.98	Peak
2	47.703	23.24	36.34	14.99	0.81	0.00	28.90	40.00	-16.76	Peak
3	50.108	22.46	36.10	14.47	0.79	0.00	28.90	40.00	-17.54	Peak
4	54.135	22.24	38.11	12.22	0.81	0.00	28.90	40.00	-17.76	Peak
5	320.331	26.33	34.62	19.13	1.70	0.00	29.12	46.00	-19.67	Peak
6 PP	838.887	30.62	26.91	30.20	2.65	0.00	29.14	46.00	-15.38	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

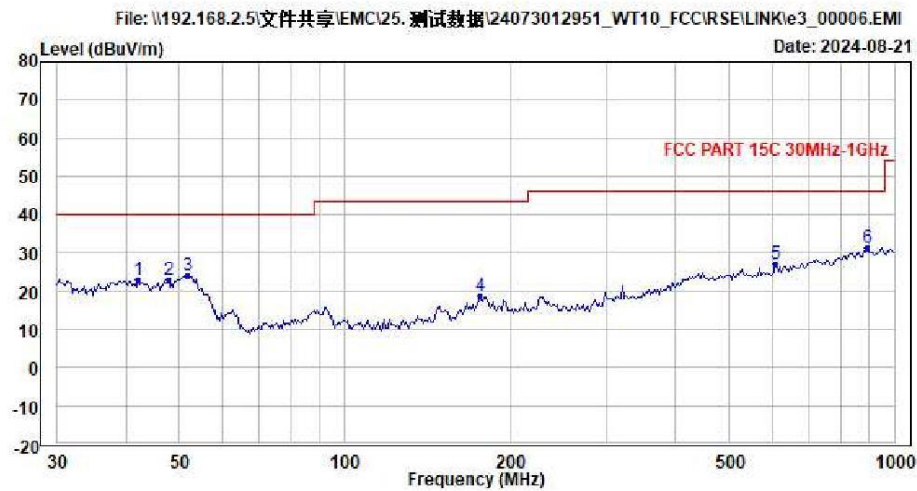

Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2LE_LINK
Remark :


	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	42.035	22.92	32.39	18.57	0.86	0.00	28.90	40.00	-17.08	Peak
2	47.703	23.00	36.10	14.99	0.81	0.00	28.90	40.00	-17.00	Peak
3	51.900	24.04	38.48	13.66	0.80	0.00	28.90	40.00	-15.96	Peak
4	176.275	18.79	30.33	16.10	1.34	0.00	28.98	43.50	-24.71	Peak
5	607.181	26.97	27.54	26.64	2.28	0.00	29.49	46.00	-19.03	Peak
6 PP	893.656	31.19	26.58	30.90	2.77	0.00	29.06	46.00	-14.81	Peak

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.



Shenzhen UnionTrust Quality and Technology Co., Ltd.

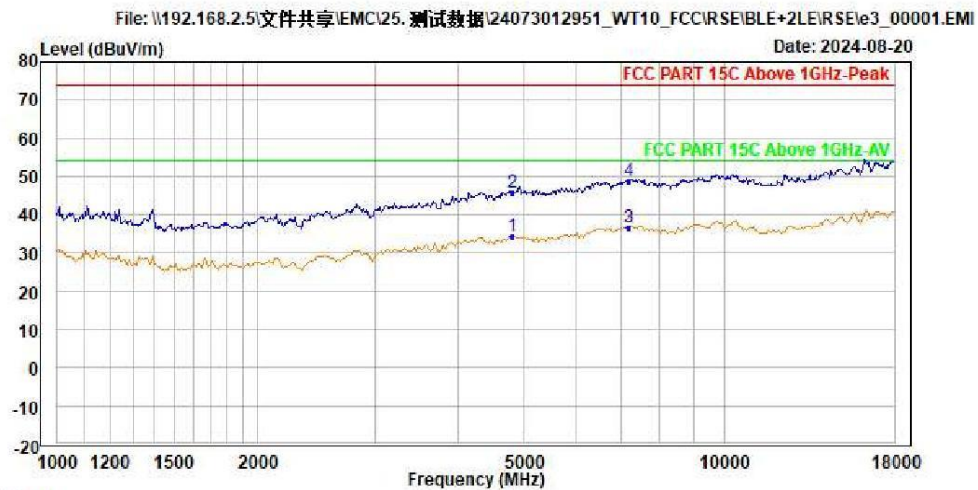


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : BLE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4804.000	34.33	36.41	34.46	9.32	0.00	45.86	54.00	-19.67	Average
2	4804.000	45.92	48.00	34.46	9.32	0.00	45.86	74.00	-28.08	Peak
3 PP	7206.000	36.78	35.48	36.50	10.34	0.00	45.54	54.00	-17.22	Average
4 PK	7206.000	48.92	47.62	36.50	10.34	0.00	45.54	74.00	-25.08	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\IRSE\BLE+2LE\IRSE\le3_00003.EMI

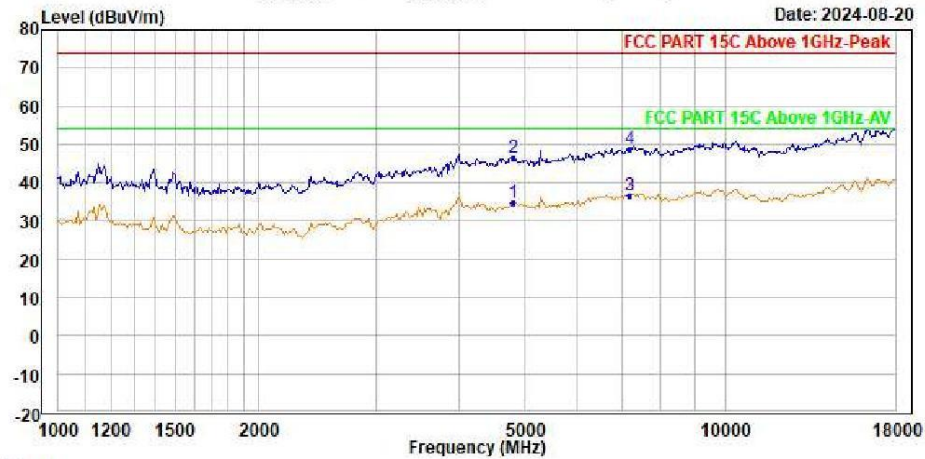


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : BLE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4804.000	34.72	36.80	34.46	9.32	0.00	45.86	54.00	-19.28	Average
2	4804.000	46.52	48.60	34.46	9.32	0.00	45.86	74.00	-27.48	Peak
3	PP 7206.000	36.78	35.48	36.50	10.34	0.00	45.54	54.00	-17.22	Average
4	PK 7206.000	48.76	47.46	36.50	10.34	0.00	45.54	74.00	-25.24	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\IRSE\BLE+2LE\IRSE\le3_00005.EMI

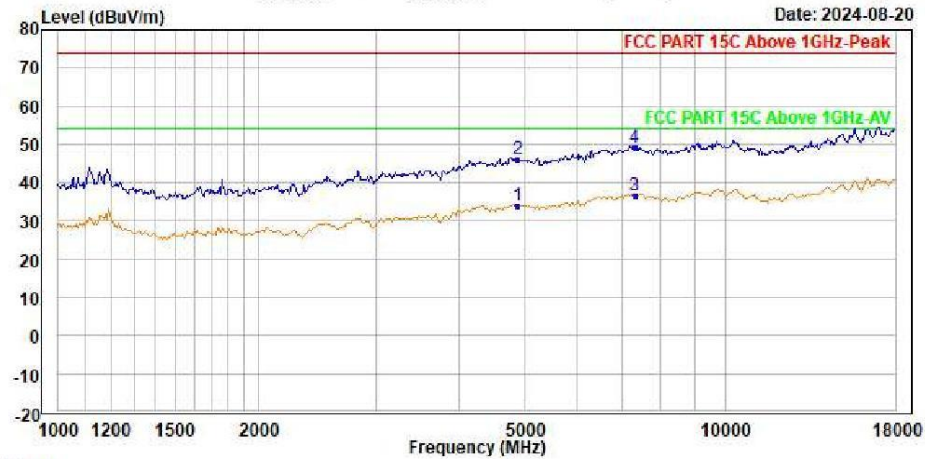


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : BLE_2440
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4880.000	34.12	36.17	34.48	9.35	0.00	45.88	54.00	-19.88	Average
2	4880.000	46.05	48.10	34.48	9.35	0.00	45.88	74.00	-27.95	Peak
3 PP	7320.000	36.77	35.46	36.50	10.37	0.00	45.56	54.00	-17.23	Average
4 PK	7320.000	49.13	47.82	36.50	10.37	0.00	45.56	74.00	-24.87	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\IRSE\BLE+2LE\IRSE\le3_00007.EMI

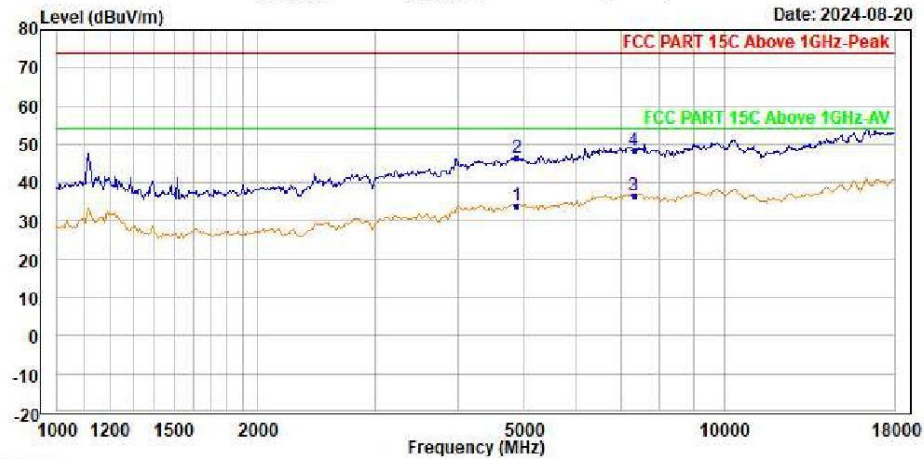


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : BLE_2440
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4880.000	34.12	36.17	34.48	9.35	0.00	45.88	54.00	-19.88	Average
2	4880.000	46.61	48.66	34.48	9.35	0.00	45.88	74.00	-27.39	Peak
3 PP	7320.000	36.80	35.49	36.50	10.37	0.00	45.56	54.00	-17.20	Average
4 PK	7320.000	48.62	47.31	36.50	10.37	0.00	45.56	74.00	-25.38	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\RFSE\BLE+2LE\RFSE\le3_00009.EMI

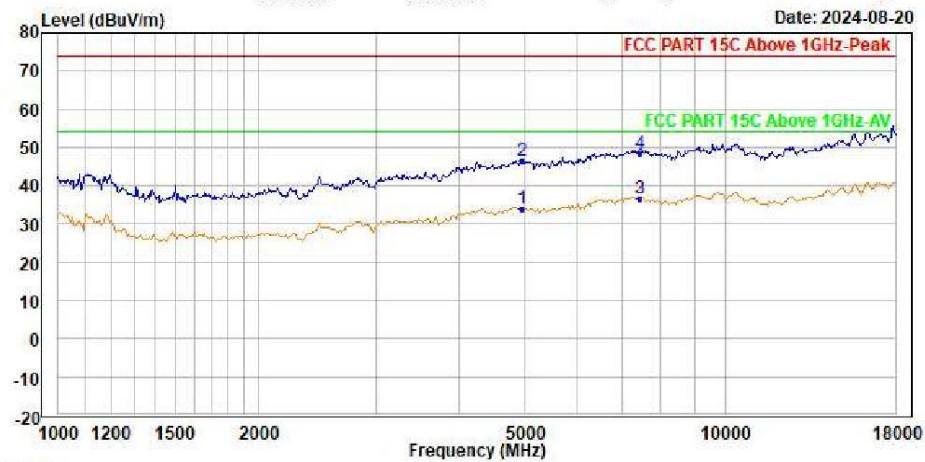


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : BLE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4960.000	34.06	36.08	34.49	9.38	0.00	45.89	54.00	-19.94	Average
2	4960.000	46.57	48.59	34.49	9.38	0.00	45.89	74.00	-27.43	Peak
3 PP	7440.000	36.49	35.17	36.50	10.41	0.00	45.59	54.00	-17.51	Average
4 PK	7440.000	48.51	47.19	36.50	10.41	0.00	45.59	74.00	-25.49	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\IRSE\BLE+2LE\IRSE\le3_00011.EMI

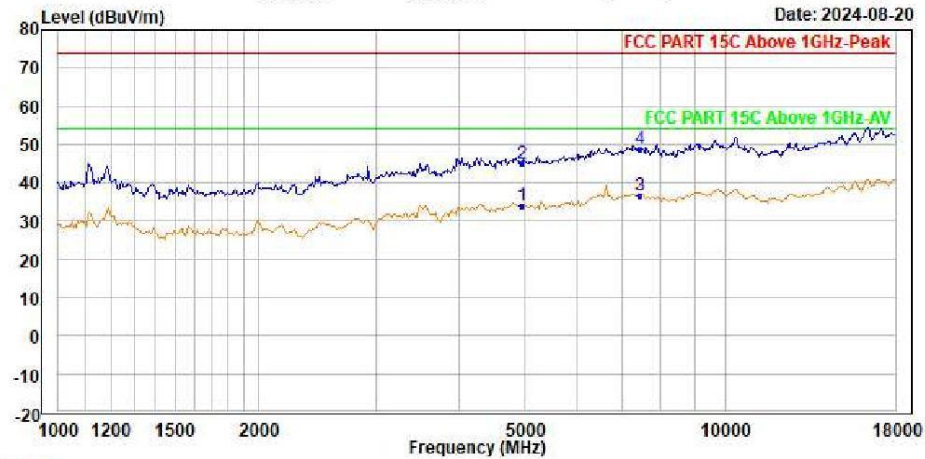


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : BLE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4960.000	34.01	36.03	34.49	9.38	0.00	45.89	54.00	-19.99	Average
2	4960.000	45.05	47.07	34.49	9.38	0.00	45.89	74.00	-28.95	Peak
3 PP	7440.000	36.49	35.17	36.50	10.41	0.00	45.59	54.00	-17.51	Average
4 PK	7440.000	48.84	47.52	36.50	10.41	0.00	45.59	74.00	-25.16	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\IRSE\BLE+2LE\IRSE\le3_00013.EMI

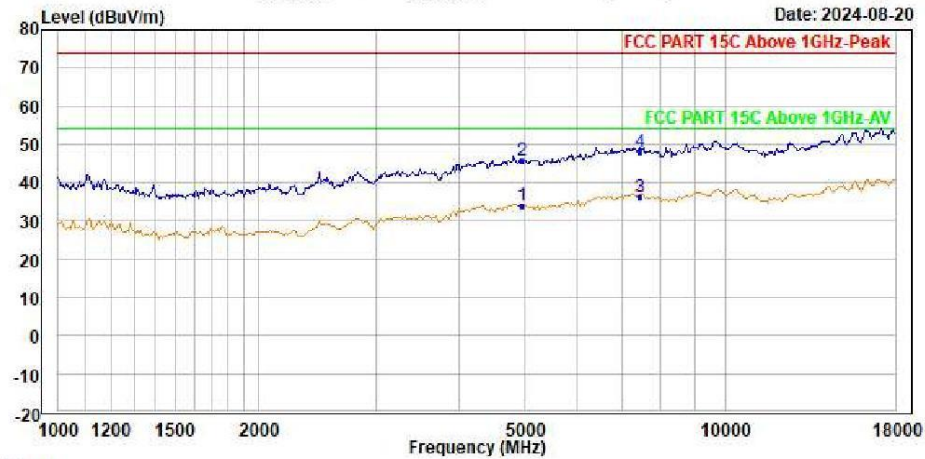


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2LE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4960.000	34.08	36.10	34.49	9.38	0.00	45.89	54.00	-19.92	Average
2	4960.000	45.88	47.90	34.49	9.38	0.00	45.89	74.00	-28.12	Peak
3 PP	7440.000	36.44	35.12	36.50	10.41	0.00	45.59	54.00	-17.56	Average
4 PK	7440.000	48.21	46.89	36.50	10.41	0.00	45.59	74.00	-25.79	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\IRSE\BLE+2LE\IRSE\le3_00015.EMI

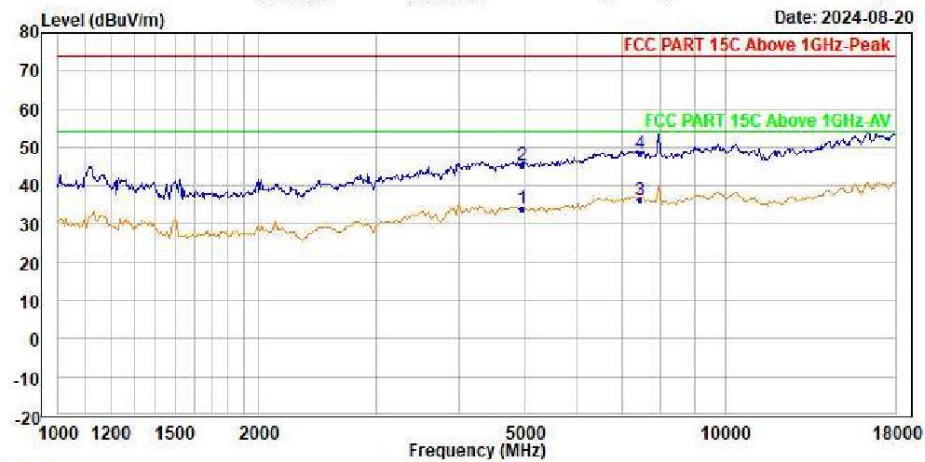


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2LE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4960.000	34.08	36.10	34.49	9.38	0.00	45.89	54.00	-19.92	Average
2	4960.000	45.35	47.37	34.49	9.38	0.00	45.89	74.00	-28.65	Peak
3 PP	7440.000	36.38	35.06	36.50	10.41	0.00	45.59	54.00	-17.62	Average
4 PK	7440.000	48.37	47.05	36.50	10.41	0.00	45.59	74.00	-25.63	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCCIRSE\BLE+2LE\IRSE\le3_00017.EMI

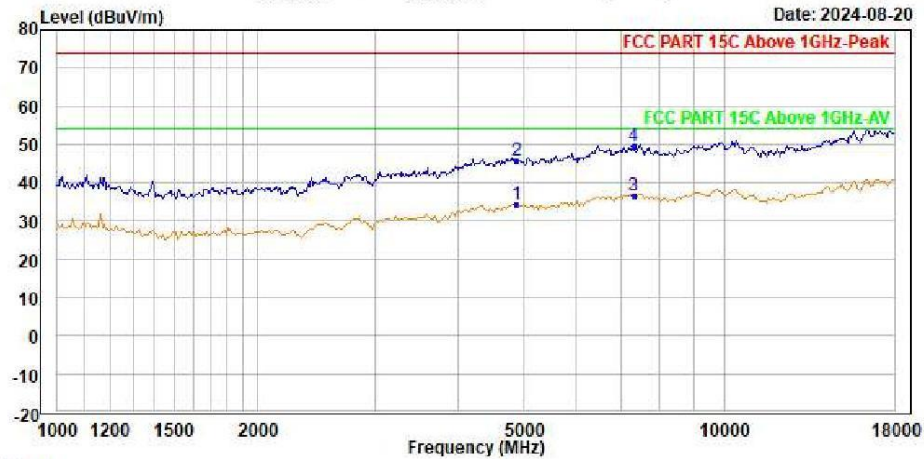


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2LE_2440
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4880.000	34.39	36.44	34.48	9.35	0.00	45.88	54.00	-19.61	Average
2	4880.000	45.95	48.00	34.48	9.35	0.00	45.88	74.00	-28.05	Peak
3 PP	7320.000	36.68	35.37	36.50	10.37	0.00	45.56	54.00	-17.32	Average
4 PK	7320.000	49.76	48.45	36.50	10.37	0.00	45.56	74.00	-24.24	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\IRSE\BLE+2LE\IRSE\le3_00019.EMI

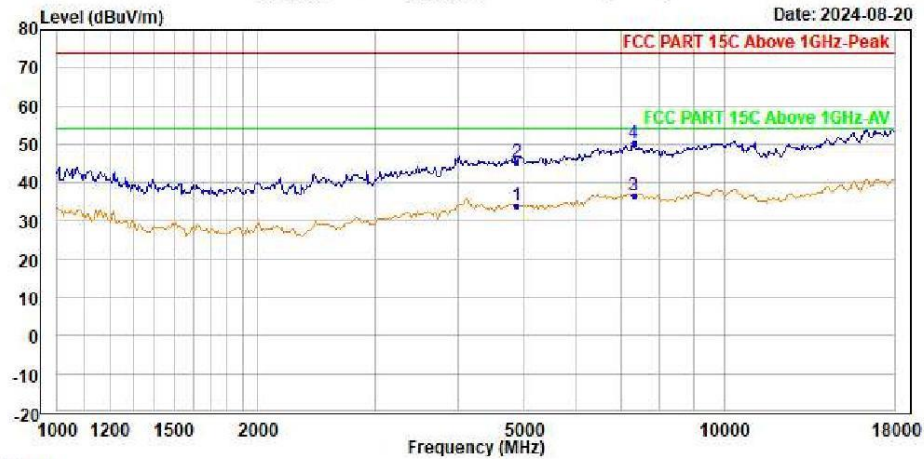


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2LE_2440
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4880.000	34.10	36.15	34.48	9.35	0.00	45.88	54.00	-19.90	Average
2	4880.000	45.51	47.56	34.48	9.35	0.00	45.88	74.00	-28.49	Peak
3 PP	7320.000	36.80	35.49	36.50	10.37	0.00	45.56	54.00	-17.20	Average
4 PK	7320.000	50.41	49.10	36.50	10.37	0.00	45.56	74.00	-23.59	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\IRSE\BLE+2LE\IRSE\le3_00021.EMI

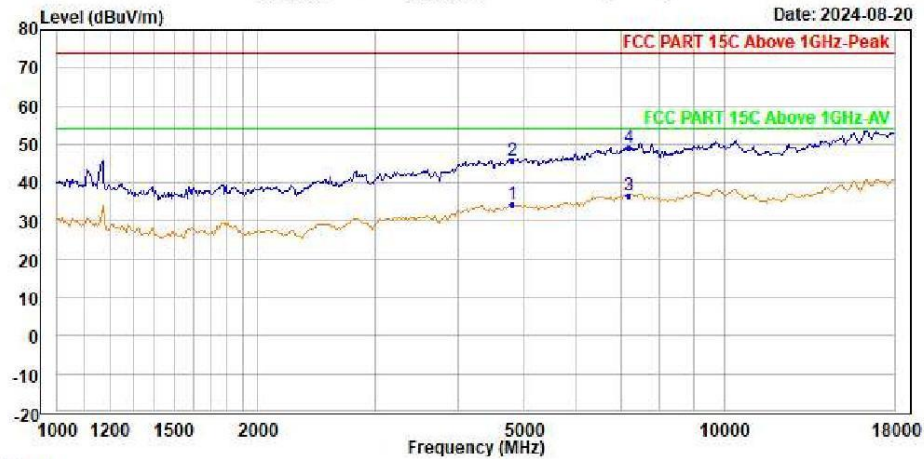


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2LE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4804.000	34.25	36.33	34.46	9.32	0.00	45.86	54.00	-19.75	Average
2	4804.000	45.93	48.01	34.46	9.32	0.00	45.86	74.00	-28.07	Peak
3	PP 7206.000	36.78	35.48	36.50	10.34	0.00	45.54	54.00	-17.22	Average
4	PK 7206.000	49.26	47.96	36.50	10.34	0.00	45.54	74.00	-24.74	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCCIRSE\BLE+2LE\IRSE\le3_00023.EMI

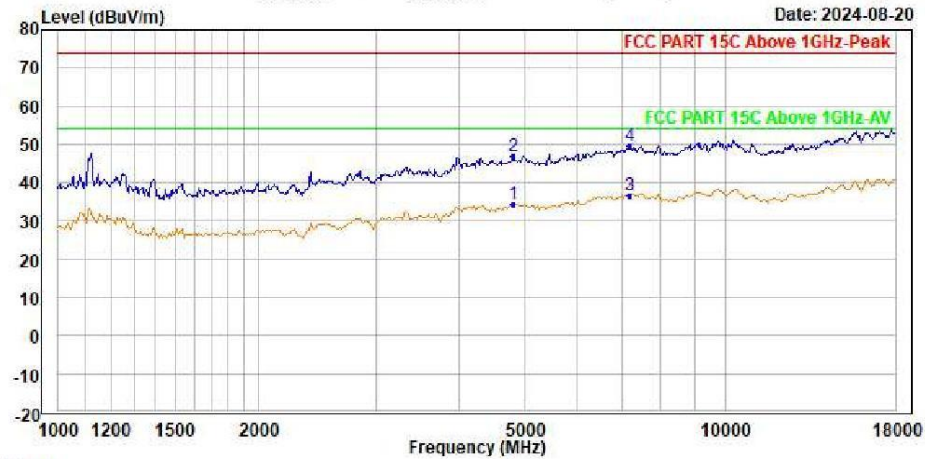


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2LE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4804.000	34.40	36.48	34.46	9.32	0.00	45.86	54.00	-19.60	Average
2	4804.000	46.75	48.83	34.46	9.32	0.00	45.86	74.00	-27.25	Peak
3	PP 7206.000	36.76	35.46	36.50	10.34	0.00	45.54	54.00	-17.24	Average
4	PK 7206.000	49.45	48.15	36.50	10.34	0.00	45.54	74.00	-24.55	Peak

Appendix A.6: Test Results of Radiated Emissions in Restricted Bands



Shenzhen UnionTrust Quality and Technology Co., Ltd.

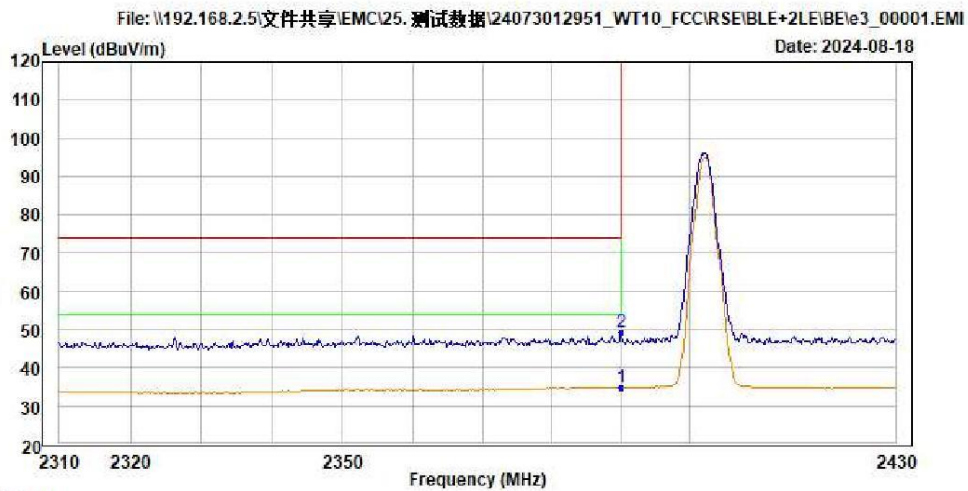


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%) : 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : BLE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	34.73	33.23	31.55	7.35	10.00	47.40	54.00	-19.27	Average
2	PK 2390.000	49.26	47.76	31.55	7.35	10.00	47.40	74.00	-24.74	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\IRSE\BLE+2LE\BEle3_00003.EMI

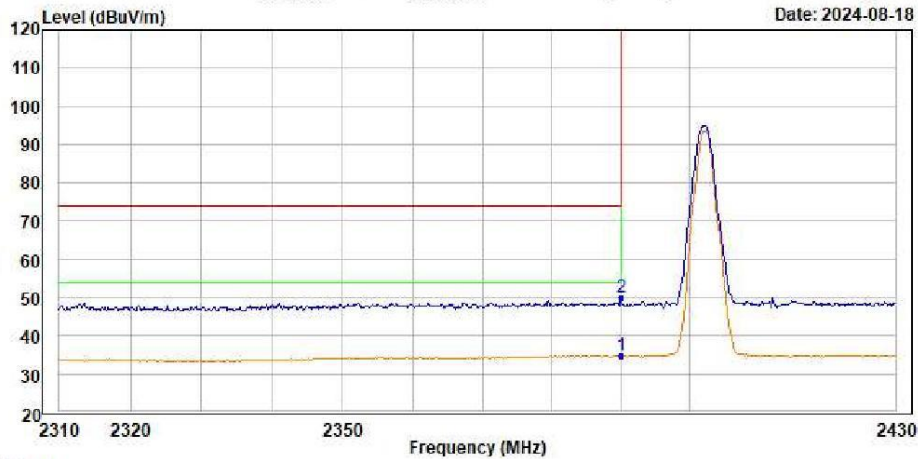


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : BLE_2402
Remark :

	Freq	Level	Read	Ant	Cable	Aux	Preamp	Limit	Over	Remark
			Level	Factor	Loss	Factor	Factor	Line	Limit	
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	34.68	33.18	31.55	7.35	10.00	47.40	54.00	-19.32	Average
2 PK	2390.000	49.90	48.40	31.55	7.35	10.00	47.40	74.00	-24.10	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\IRSE\BLE+2LE\BEle3_00005.EMI

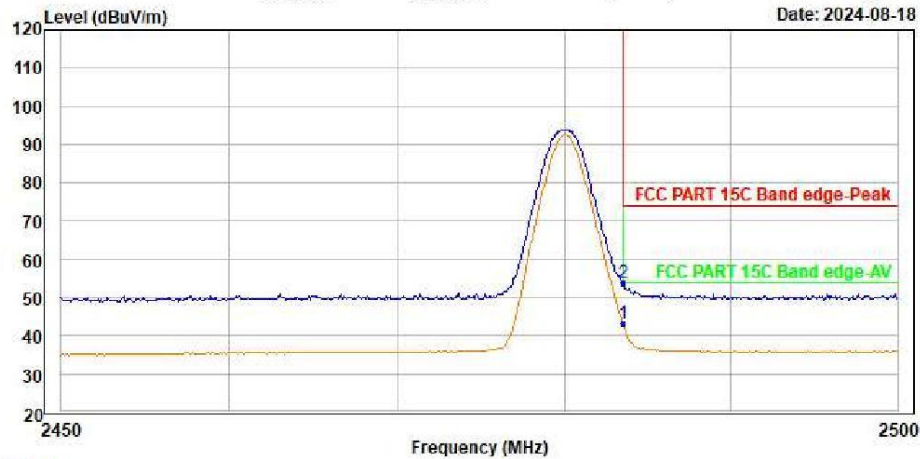


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : BLE_2480
Remark :

	Freq	Level	Read	Ant	Cable	Aux	Preamp	Limit	Over	Remark
			Level	Factor	Loss	Factor	Factor	Line	Limit	
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	43.32	41.57	31.68	7.47	10.00	47.40	54.00	-10.68	Average
2 PK	2483.500	53.85	52.10	31.68	7.47	10.00	47.40	74.00	-20.15	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\RF\BLE+2LE\BLE3_00007.EMI

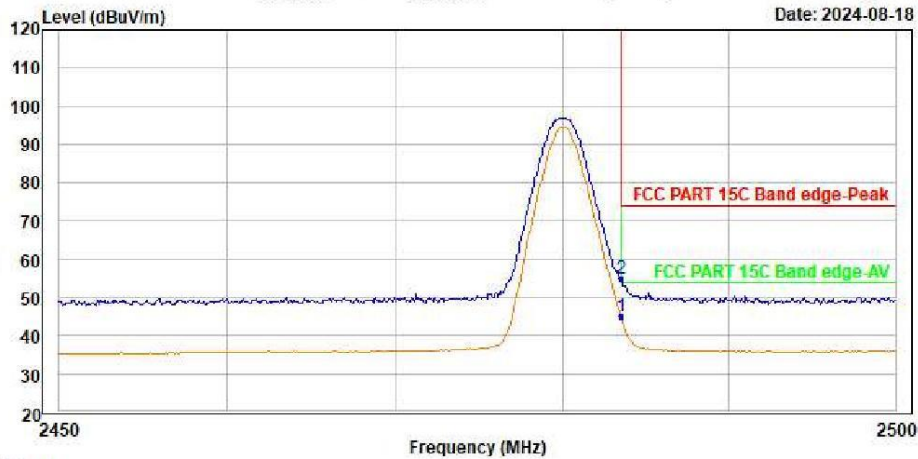


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : BLE_2480
Remark :

	Freq	Level	Read	Ant	Cable	Aux	Preamp	Limit	Over	Remark
			Level	Factor	Loss	Factor	Factor	Line	Limit	
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	45.20	43.45	31.68	7.47	10.00	47.40	54.00	-8.80	Average
2 PK	2483.500	54.86	53.11	31.68	7.47	10.00	47.40	74.00	-19.14	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

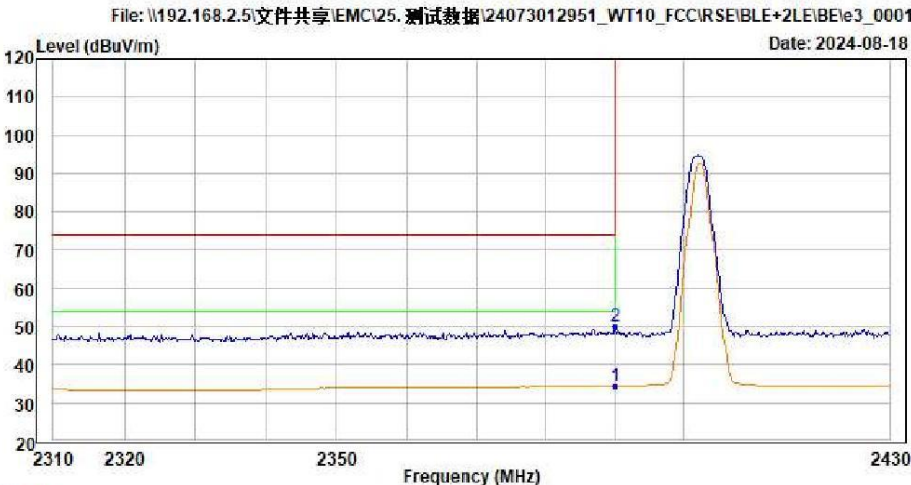


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
 Press : 100.4kpa
 Product : ThermoMaven G1 Wireless Thermometer
 Model No. : WT10
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2LE_2402
 Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	34.49	32.99	31.55	7.35	10.00	47.40	54.00	-19.51	Average
2	PK 2390.000	50.12	48.62	31.55	7.35	10.00	47.40	74.00	-23.88	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCCIRSE\BLE+2LE\BEle3_00015.EMI

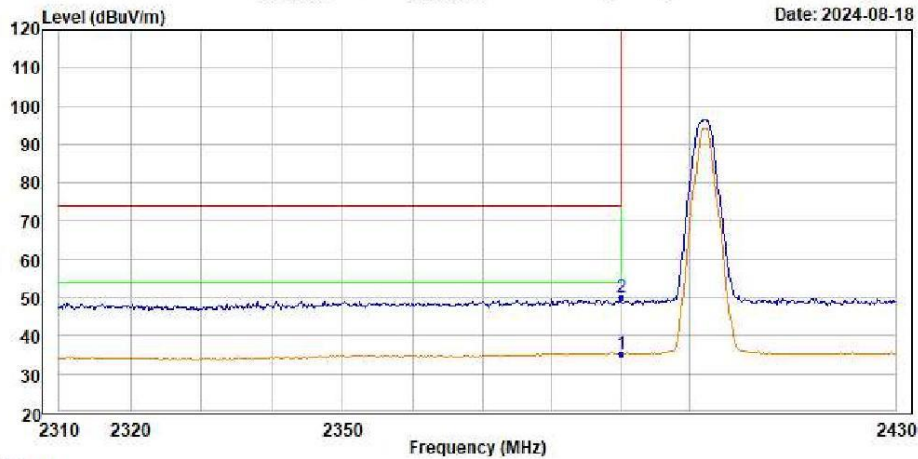


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2LE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	35.08	33.58	31.55	7.35	10.00	47.40	54.00	-18.92	Average
2	PK 2390.000	50.16	48.66	31.55	7.35	10.00	47.40	74.00	-23.84	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\RFSE\BLE+2LE\BLE3_00009.EMI

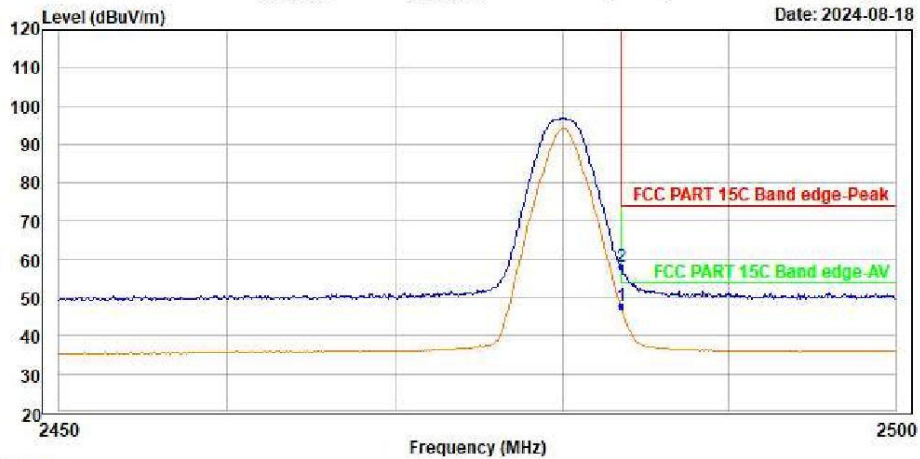


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2LE_2480
Remark :

	Freq	Level	Read	Ant	Cable	Aux	Preamp	Limit	Over	Remark
			Level	Factor	Loss	Factor	Factor	Line	Limit	
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	47.84	46.09	31.68	7.47	10.00	47.40	54.00	-6.16	Average
2 PK	2483.500	57.93	56.18	31.68	7.47	10.00	47.40	74.00	-16.07	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: \\192.168.2.5\文件共享\EMC\25. 测试数据\24073012951_WT10_FCC\IRSE\BLE+2LE\BEle3_00011.EMI

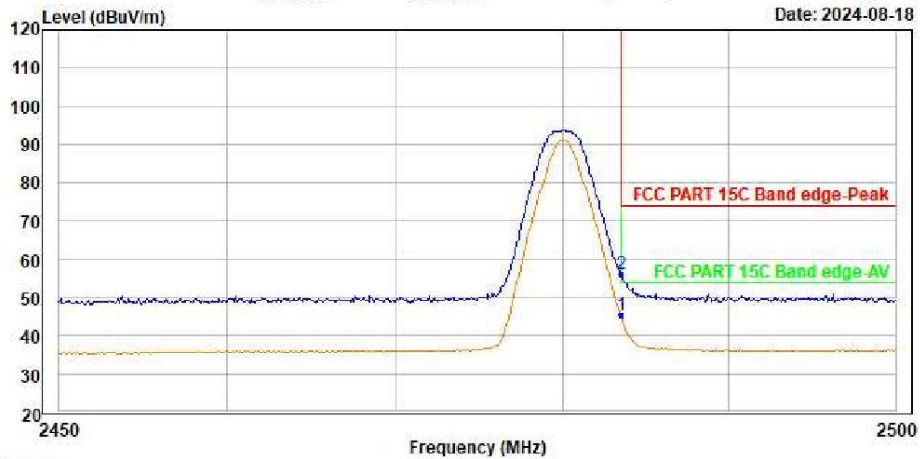


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.8(C)/56.4(%)
Press : 100.4kpa
Product : ThermoMaven G1 Wireless Thermometer
Model No. : WT10
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2LE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	45.40	43.65	31.68	7.47	10.00	47.40	54.00	-8.60	Average
2	PK 2483.500	56.27	54.52	31.68	7.47	10.00	47.40	74.00	-17.73	Peak


Appendix A.7: Test Results of Conducted Emission on AC Mains

Site:	LAB	Phase: L1	Temperature(°C):25.6(°C)
Limit:	FCC Part15C CE-Class B_QP	atm.press.: 100.4 kpa	Humidity(%): 61.6%RH
EUT:	ThermoMaven G1 Wireless Thermometer	Test Time:	2024/8/12 15:09:47
M/N.:	WT10	Power Rating:	AC120V/60Hz
Mode:	BLE Link	Test Engineer:	linson
Note:			

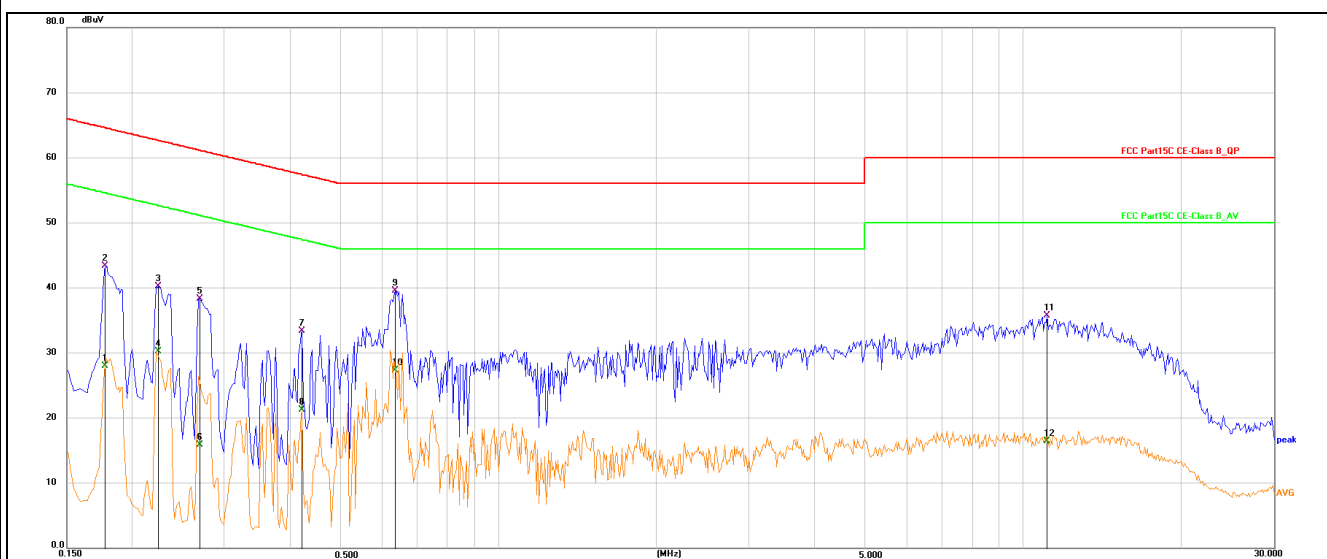

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1770	17.80	10.18	27.98	54.63	-26.65	AVG
2	0.1785	33.21	10.18	43.39	64.56	-21.17	QP
3	0.2242	30.04	10.17	40.21	62.66	-22.45	QP
4	0.2242	20.02	10.17	30.19	52.66	-22.47	AVG
5	0.2686	28.13	10.20	38.33	61.16	-22.83	QP
6	0.2686	5.72	10.20	15.92	51.16	-35.24	AVG
7	0.4200	23.25	10.13	33.38	57.45	-24.07	QP
8	0.4200	11.10	10.13	21.23	47.45	-26.22	AVG
9	0.6360	29.36	10.19	39.55	56.00	-16.45	QP
10	0.6360	17.17	10.19	27.36	46.00	-18.64	AVG
11	11.1165	25.28	10.48	35.76	60.00	-24.24	QP
12	11.1165	5.93	10.48	16.41	50.00	-33.59	AVG

Site:	LAB	Phase: N	Temperature(°C):25.6(°C)
Limit:	FCC Part15C CE-Class B_QP	atm.press.: 100.4 kpa	Humidity(%): 61.6%RH
EUT:	ThermoMaven G1 Wireless Thermometer	Test Time:	2024/8/12 15:11:46
M/N.:	WT10	Power Rating:	AC120V/60Hz
Mode:	BLE Link	Test Engineer:	linson
Note:			

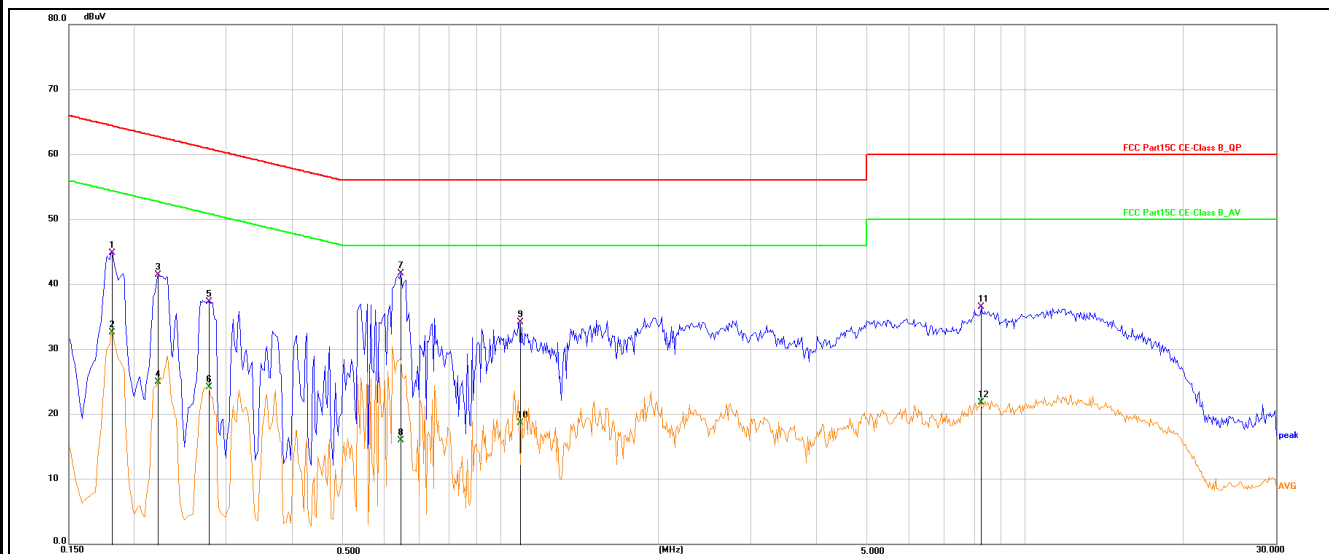

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1814	34.72	10.10	44.82	64.42	-19.60	QP
2	0.1814	22.53	10.10	32.63	54.42	-21.79	AVG
3	0.2220	31.44	10.06	41.50	62.74	-21.24	QP
4	0.2220	14.87	10.06	24.93	52.74	-27.81	AVG
5	0.2760	27.23	10.09	37.32	60.94	-23.62	QP
6	0.2760	14.06	10.09	24.15	50.94	-26.79	AVG
7	0.6450	31.39	10.25	41.64	56.00	-14.36	QP
8	0.6450	5.69	10.25	15.94	46.00	-30.06	AVG
9	1.0859	23.96	10.17	34.13	56.00	-21.87	QP
10	1.0859	8.47	10.17	18.64	46.00	-27.36	AVG
11	8.2454	26.17	10.34	36.51	60.00	-23.49	QP
12	8.2454	11.49	10.34	21.83	50.00	-28.17	AVG