



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

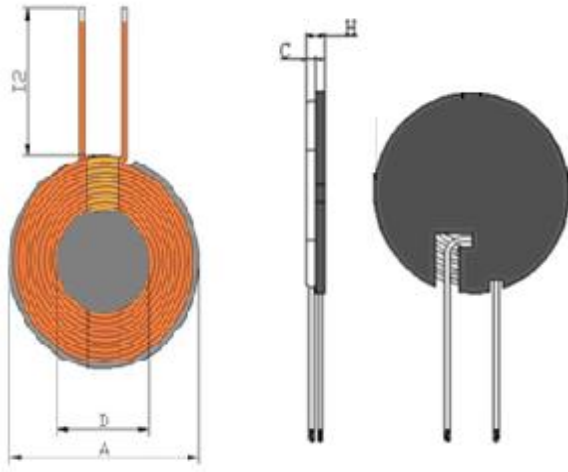

2. SCHEMATICS:



备注：加18MM小磁片 加背胶

A	D	C	I2	H			
43.5±0.5	19±0.5	0.8±0.05	140±3	2.5Max			

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	热风线Ø 0.08*80mm 2UEW	11TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	温度	HI-POT
TEST	线圈加磁片	S-F	常规状态	
CON	100KHz, 0.25V	AT 25°C		
SPEC	7.4uH±10%	65mΩ Max	80°C	


5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	热风线	热风线0.08*80股	NANJINGJINNINGCO,LTD	
2	无铅锡条	无铅锡条	QIAODO	
3	磁片	Ø 43.5*0.8锰锌硬磁片开L槽	TAIYI CO.,LTD	
4	胶水	黄胶9999	LIANCHENG CO.,LTD	
5	高温胶纸	8mm宽高温胶纸	CUDAK CO.,LTD	


HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	43.5开槽+磁吸线圈+小磁片+胶 140m
DRAWN BY	CHECKED BY		APPROVED BY
何伟华	韦立红		韦立红

SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

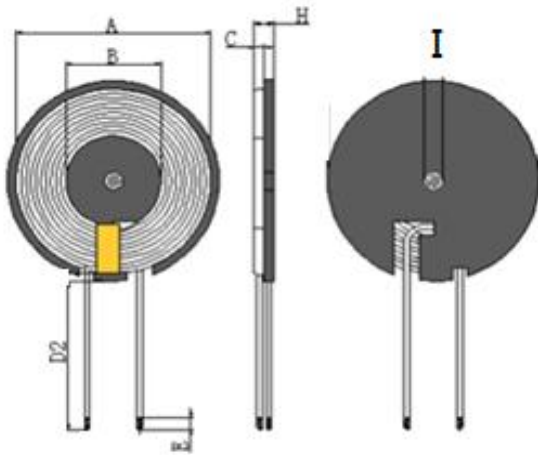

2. SCHEMATICS:



备注： 加背胶

A	B	C	D2	E	H	I			I
43.5±0.5	20.5±0.5	0.9±0.05	65±3	3±2	2.5MAX	5±1			

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	丝包线Ø 0.08*105mm 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L		HI-POT
TEST	线圈加磁片	S-F	单独线圈		
CON	100KHz, 0.25V	AT 25℃	100KHz, 0.25V		
SPEC	6.5uH±10%	65mΩ Max	3.8uH±10%		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	丝包线0.08*105股	丙酮丝包线0.08*105股	NANJINGJINNINGCO,LTD	
2	无铅锡条	无铅锡条	QIAODO	
3	磁片	Ø 50*0.8锰锌硬磁片开L槽	TAIYI CO.,LTD	
4	胶水	黄胶9999	LIANCHENG CO.,LTD	
5	高温胶纸	8mm宽高温胶纸	CUDAK CO.,LTD	
6	背胶	Ø 49*0.1/3M	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G43.5开槽+背胶+线长65mm
DRAWN BY	CHECKED BY		APPROVED BY
何伟华	韦红		韦红