

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称

CUSTOMER NAME:

产 品 名 称

PRODUCT NAME: 2.4G -2dBi

客 户 料 号

CUSTOMER P/N:

电子料号

P/N:


REV: A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:		
AUDITOR BY:		
APPROVED BY:		
DATE:	2016-07-06	


Specification Table :

Main technical parameters of the product


主要技术指标		Main technical specifications	
频率范围 (MHZ)	2400-2500	Frequency Range (MHZ)	2400-2500
特性阻抗(Ω)	50	Impedance(Ω)	50
增益(dBi)	2.5	Gain(dBi)	2.5
输出电压 驻波比	≤ 1.92	VSWR	≤ 1.92
最大功率	10W	Admitted Power	10W
极化方式	垂直极化	Polarization	Linear,Vertical
方向性	全向性	Radiation	Omni-directional
连接方式	RP-SMA	Connector Type	RP-SMA
天线方式	Dipole Antenna	Antenna Type	Dipole Antenna
物理性能		Physical Properties	
天线外套材料	TPEE	Antenna cover	TPEE
工作温度	-20℃~+70℃	Operating Temp	-20℃~+70℃
保存温度	-20℃~+70℃	Storage Temp	-20℃~+70℃

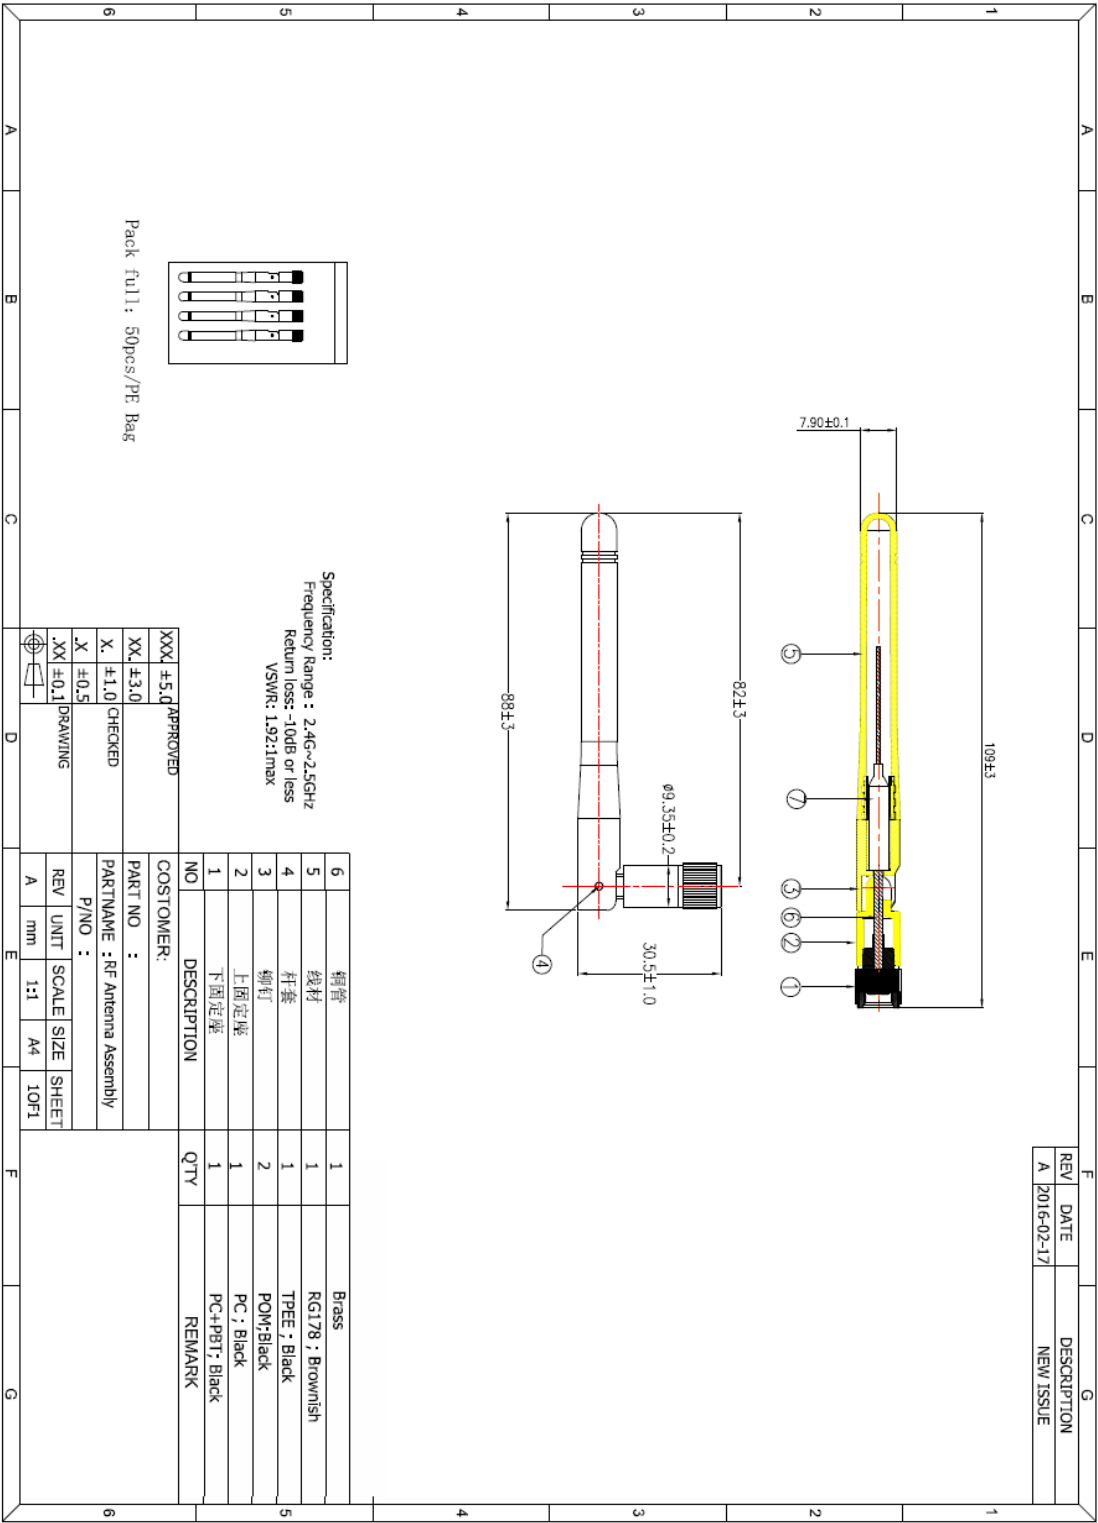


REPORT

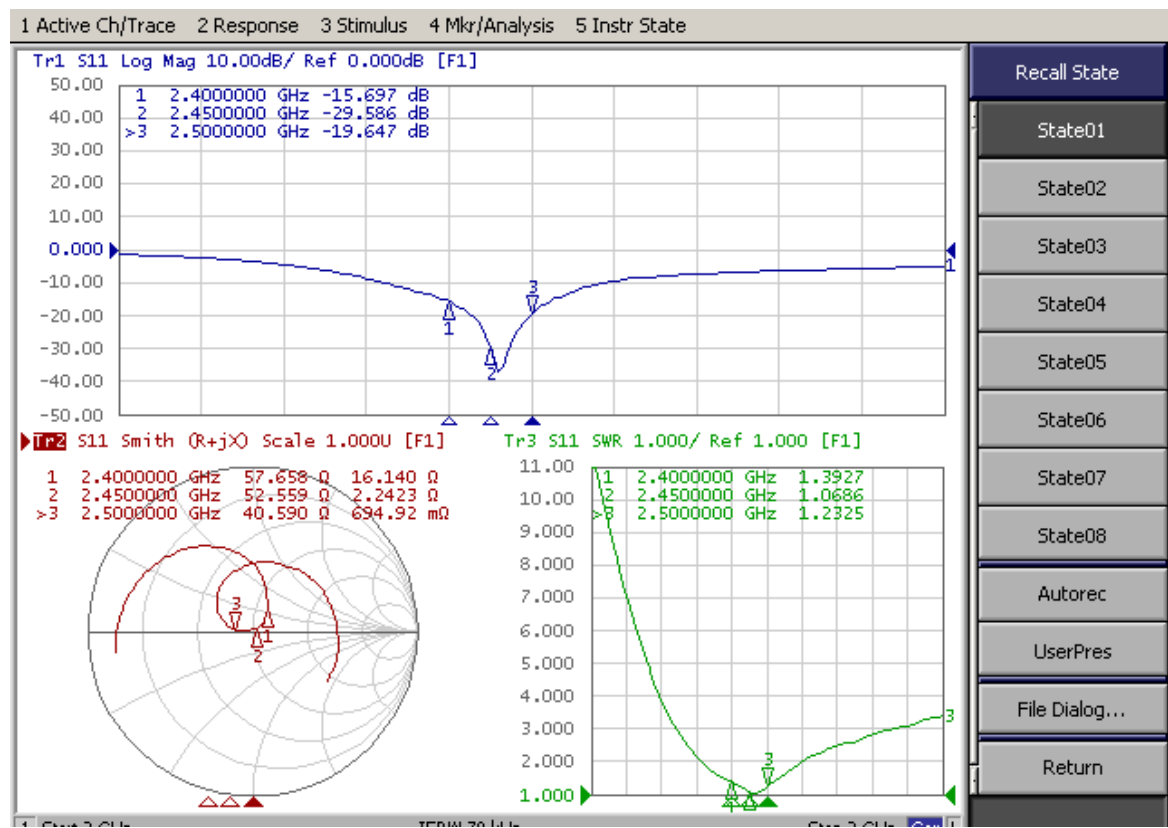


2D、3DRaditation Pattern






2.4GHz



Gain:2.11 dBi






Efficiency:75.6 1%



2.45GHz

Gain: 2.23dBi

Efficiency: 78.45%



2.5GHz

Gain: 2.50dBi

Efficiency: 79.32%