



Shenzhen HamyWe Technology Co., Ltd.
Address: 401, Building B, Jinghang Industrial Park, District
71, Xingdong Community, Xinan Street, Baoan District, Shenzhen

天线承认书

Parts Approval Sheet

Customer	星易美	Project	STM950-H2-320
Band	WIFI	Color	BLACK
PN	X2111	Version	V1
Customer material number			

DATE: 2023/07/27

R&D			QC
Issued by	Checked by	Confirmed by	Checked by
伍海沅	钟一铭	梁毅	文孝群
Customer Confirm			

Environmental requirements: ☒ ROHS

☐ REACH

☐ 无

Contents

Contents	2
1.Summary	3
2.General Description	3
2.1Antenna Components/Part revisions	3
2.2Definitions	3
3.Electrical Performance	4
3.1 Matching Circuit Description	4
3.2 Antenna TRP&TIS test results	5
3.3 Gain&Efficiency	6
3.4 3D Radiation Pattern	8
4 Antenna Engineer drawing	10
5.Reliability Testing Report	11

1.Summary

This report summarizes the electrical results of the our antenna to support the project STM950-H2-320.
The test fixture is made for further testing.

2.General Description

2.1Antenna Components/Part revisions

The antenna part number is T: A

2.2Definitions

VSWR: Voltage Standing Wave Rate

TRP: total radiated power

TIS: total isotropic sensitivity


3. Electrical Performance

3.1 Matching Circuit Description

匹配电路

匹配是否有改动

无

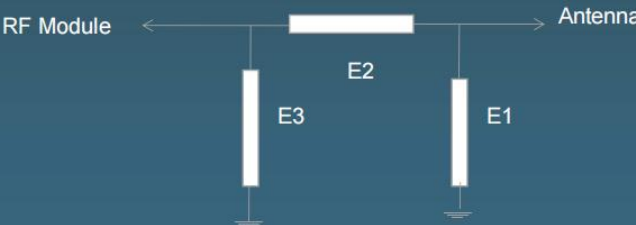




天线	
Element	Value
E1 (0201)	
E2 (0201)	
E3 (0201)	

3.2 Antenna TRP&TIS test results




OTA 数据(a 模)		
Channel	TRP	TIS
36	14.56	-71.02
149	14.69	-70.32
165	15.22	-70.99

3.3 Gain&Efficiency


频率 (MHZ)	增益 (DBI)	效率(%)
5150	3.46	56.32
5200	2.82	54.67
5250	2.73	54.22
5300	2.37	51.93
5350	2.81	52.11
5400	2.69	50.68
5450	2.34	47.96
5500	2.78	49.54
5550	2.01	47.46
5600	1.92	51.84
5650	2	48.9
5700	2.75	51.25
5750	2.91	57.48
5800	2.13	53.94
5850	3.18	59.2

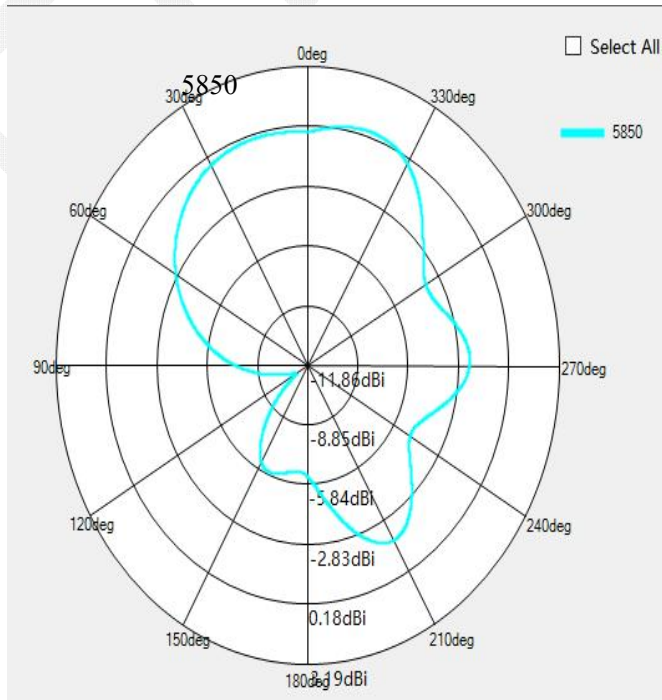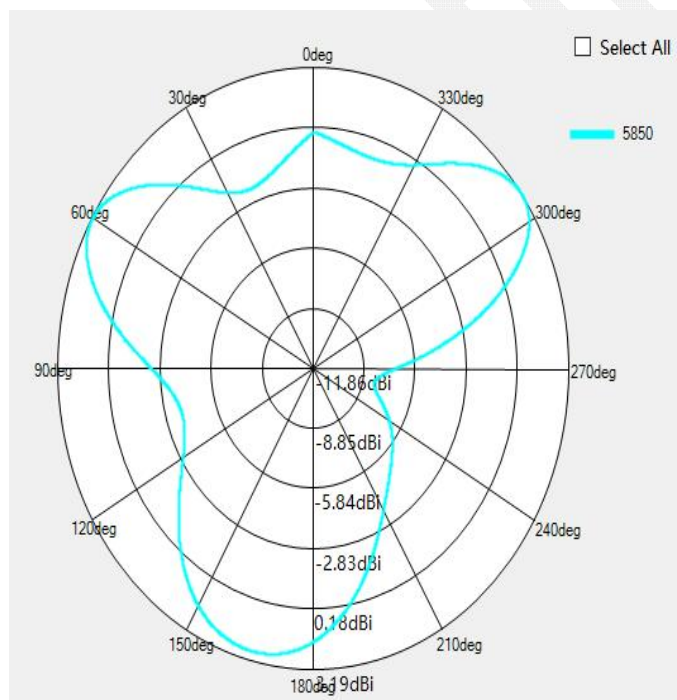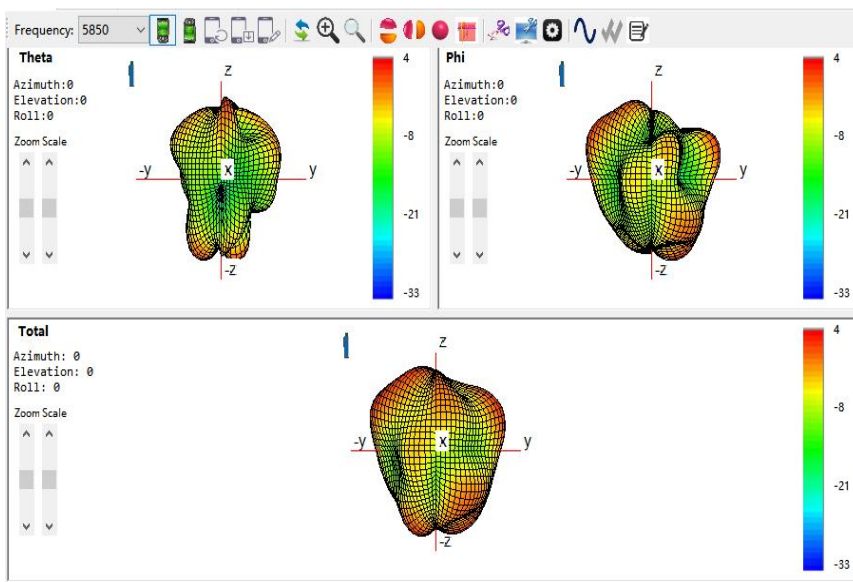

WIFI 5.8G 苹果图

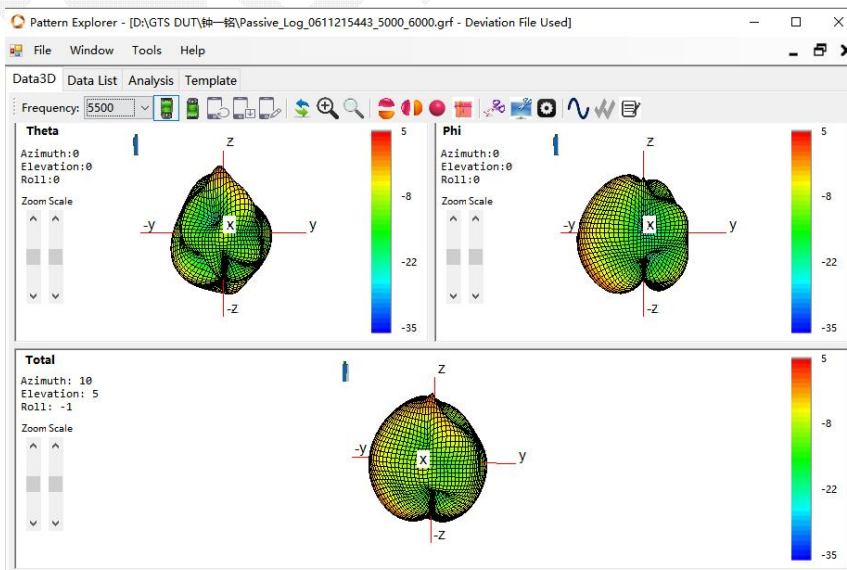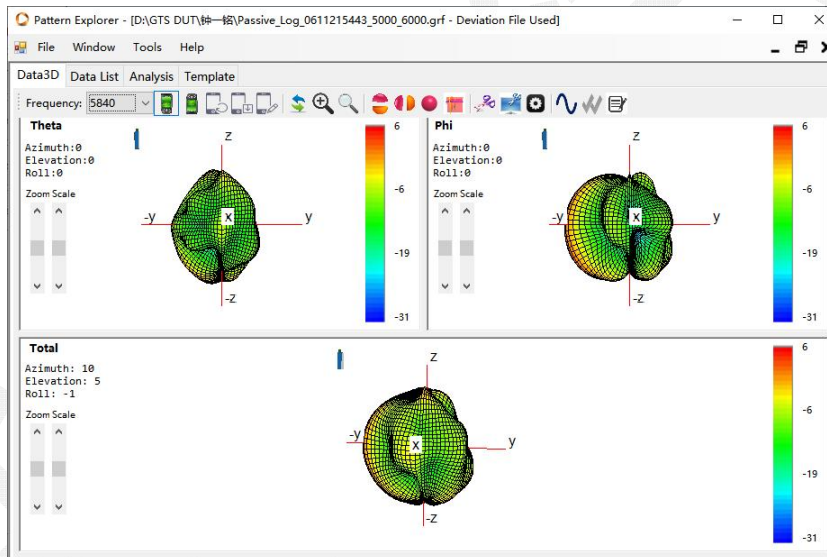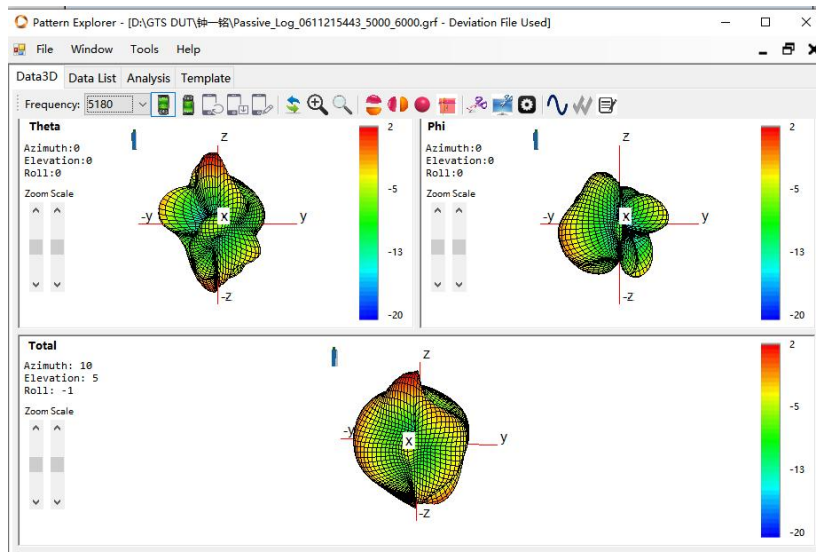

4 Antenna Engineer drawing

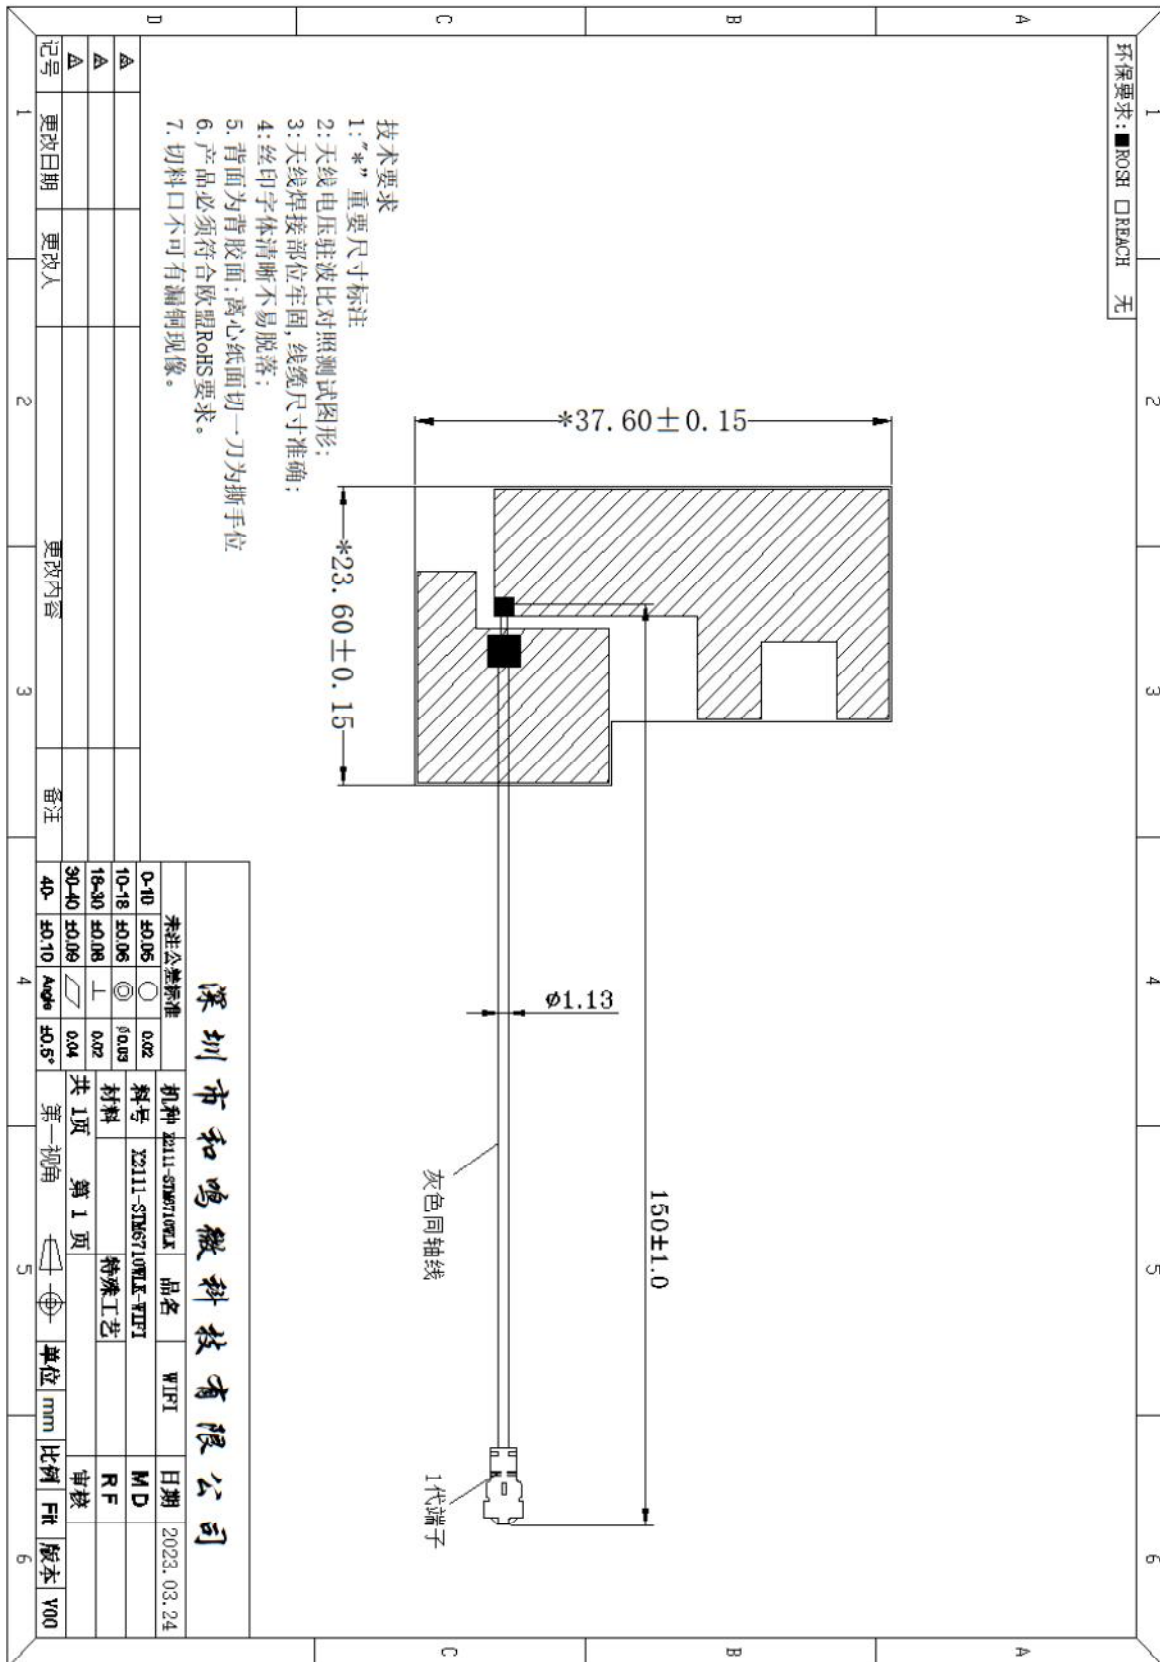

5. Reliability Testing Report

customer	星易美	part number	FPC	Work Date	2023.07.27
Test item	Test requirement			Test result	Evaluation
neutral Salt-Fog test	Hydrochloric fog through neutral testing: In the time of 24 hours, no rust corrosion, color fading or solder peel off to the antenna fpc sop in Nacl 5% ± 1% PH value 6.5-7.2, above 85% humidity. and 35℃ ± 2℃ Seals environment.			Norust corrosion, color fading or solder peel off on the antenna surface after testing	pass
tester: 伍海沅			approval: 伍海沅		