

TEST REPORT

FCC ID: 2BCBC-F98X

Product : Keyboard
F98X, F-NB98, L87, F98pro, K87, K87pro, LB-K01, F68, WIN68HE, WIN60HE, WIN68HEMAX,
Model Name : F75max, L75, F98max, F65, Fire75, L99, Fire98, S98, S98pro, S87pro, K81, K21, F21, F2088, F2088pro, F2058, F3261, AC210, AC306, H68, F3061, F2138, F2023, F99pro, T102
Brand : AULA
Report No. : NCT24045070XE

Prepared for

Guang Zhou Ya Shi Da Mao Yi You Xian Gong Si
Room 408, No. 906 Congyun Road, Yongping Street,
Baiyun District, Guangzhou, China

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

1 TEST RESULT CERTIFICATION

Applicant's name : Guang Zhou Ya Shi Da Mao Yi You Xian Gong Si
Address : Room 408, No. 906 Congyun Road, Yongping Street,
Baiyun District, Guangzhou, China
Manufacture's name : Dongguan Suoai Electronics CO., LTD
Address : SOAI industry Park Huayu Street ChanglongVillage Huangjiang Town
Dongguan CityGuangdong Province
Product name : Keyboard
Model name : F98X, F-NB98, L87, F98pro, K87, K87pro, LB-K01, F68, WIN68HE,
WIN60HE, WIN68HEMAX, F75max, L75, F98max, F65, Fire75, L99,
Fire98, S98, S98pro, S87pro, K81, K21, F21, F2088, F2088pro,
F2058, F3261, AC210, AC306, H68, F3061, F2138, F2023, F99pro,
T102
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10:2013
Date of test : Oct. 25, 2024 to Nov. 09, 2024
Date of Issue : Nov. 09, 2024

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:



Keven Wu / Engineer

Technical Manager:


Henry Wang, Manager


Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
2.1 TEST SITE	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF E.U.T.	7
3.2 CHANNEL LIST	8
3.3 TEST SETUP CONFIGURATION	9
3.4 TEST MODE	10
4 EQUIPMENT DURING TEST	11
4.1 EQUIPMENTS LIST	11
4.2 MEASUREMENT UNCERTAINTY	13
4.3 DESCRIPTION OF SUPPORT UNITS	13
5 CONDUCTED EMISSION	14
5.1 E.U.T. OPERATION	14
5.2 EUT SETUP	14
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
5.4 MEASUREMENT PROCEDURE	15
5.5 CONDUCTED EMISSION LIMIT	15
5.6 MEASUREMENT DESCRIPTION	15
5.7 CONDUCTED EMISSION TEST RESULT	15
6 RADIATED SPURIOUS EMISSIONS	20
6.1 EUT OPERATION	20
6.2 TEST SETUP	21
6.3 SPECTRUM ANALYZER SETUP	22
6.4 TEST PROCEDURE	23
6.5 SUMMARY OF TEST RESULTS	25
7 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT	38

7.1 TEST PROCEDURE	38
7.2 TEST RESULT	38
8 6DB BANDWIDTH MEASUREMENT	39
8.1 TEST PROCEDURE	39
8.2 TEST RESULT	39
9 MAXIMUM PEAK OUTPUT POWER	40
9.1 TEST PROCEDURE	40
9.2 TEST RESULT	40
10 POWER SPECTRAL DENSITY	41
10.1 TEST PROCEDURE	41
10.2 TEST RESULT	41
11 ANTENNA APPLICATION	42
11.1 ANTENNA REQUIREMENT	42
11.2 RESULT	42
12 TEST SETUP PHOTOS AND EUT PHOTOS	43

2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	FCC part 15.207	PASS
Radiated Spurious Emissions	FCC part 15.205/15.209	PASS
Conducted Spurious Emission	FCC part 15. 247(d)	PASS
Band edge	FCC part 15.247(d)	PASS
6dB&99% Bandwidth	FCC part 15.247 (a)(2)	PASS
Maximum Peak Output Power	FCC part 15.247 (b)(3)	PASS
Power Spectral Density	FCC part 15.247 (e)	PASS
Antenna Requirement	FCC part 15.203/15.247 (c)	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

2.1 Test Site

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

3 General Information

3.1 General Description of E.U.T.

Product Name	:	Keyboard
Model Name	:	F98X
Sample ID	:	NCT24045070-001#
Sample(s) Status:	:	Engineer sample
Series Model	:	F-NB98, L87, F98pro, K87, K87pro, LB-K01, F68, WIN68HE, WIN60HE, WIN68HEMAX, F75max, L75, F98max, F65, Fire75, L99, Fire98, S98, S98pro, S87pro, K81, K21, F21, F2088, F2088pro, F2058, F3261, AC210, AC306, H68, F3061, F2138, F2023, F99pro, T102
Model Different.:	:	All models have same Power circuits diagram, RF Chip and PCB Layout, Internal construction and rated power. Only the model name and appearance color were different.
Operating frequency	:	BLE: 2402-2480MHz, 2.4G: 2402-2480MHz
Number of Channels	:	40 channels
Type of Modulation	:	GFSK
Antenna installation	:	PCB Antenna
Antenna Gain	:	2.94 dBi
Power supply	:	DC 5V/2A from adapter input AC 120V/60Hz or DC 3.7V from Battery
Hardware Version	:	/
Software Version	:	/
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

BLE Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

2.4G Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	15	2430	29	2458
02	2404	16	2432	30	2460
03	2406	17	2434	31	2462
04	2408	18	2436	32	2464
05	2410	19	2438	33	2466
06	2412	20	2440	34	2468
07	2414	21	2442	35	2470
08	2416	22	2444	36	2472
09	2418	23	2446	37	2474
10	2420	24	2448	38	2476
11	2422	25	2450	39	2478
12	2424	26	2452	40	2480
13	2426	27	2454		
14	2428	28	2456		

Note:

Test of channel was included the lowest, middle and highest frequency in highest data rate and to perform the test, then record on this report.

BLE Test Channel:

	Channel	Frequency(MHz)
Low Channel	0	2402
Mid Channel	19	2440
High Channel	39	2480

2.4G Test Channel:

	Channel	Frequency(MHz)
Low Channel	1	2402
Mid Channel	20	2440
High Channel	40	2480

3.3 Test Setup Configuration

Conducted Emission



Radiated Emission & Radiated Spurious



Conducted measurement excluding Output power



Peak Output Power



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

BLE Test Software	RF Test Tool
-------------------	--------------



4 Equipment During Test

4.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	ENV 216	102796	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	VN1-13S	004023	CRANAGE	2024/6/17	2025/6/16
Cable	RG223-1500MM	NA	RG	2024/6/17	2025/6/16

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
Spectrum Analyze (10Hz-26.5GHz)	N9020A	MY50510202	Agilent	2024/6/17	2025/6/16
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNWARZBECK	2024/6/17	2025/6/16
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNWARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNWARZBECK	2023/3/19	2025/3/18
Preamplifier (1GHz-18GHz)	BBV 9718D	00042	SCHNWARZBECK	2024/6/17	2025/6/16
Spectrum Analyze (1GHz-40GHz)	FSV 40	100952	Rohde & Schwarz	2024/6/17	2025/6/16
Preamplifier (15GHz-40GHz)	BBV 9718D	0024	SCHNWARZBECK	2024/6/17	2025/6/16
Broadband Antenna (15GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNWARZBECK	2024/6/20	2025/6/19
Capacitive voltage probe	CVP 9222 C	00109	SCHNWARZBECK	2024/6/18	2025/6/17

MXG Signal Analyzer	N9020A	MY50510202	Agilent	2024/6/17	2025/6/16
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2024/6/17	2025/6/16
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2024/6/17	2025/6/16
Power Sensor	TR1029-2	512364	Techoy	2024/6/17	2025/6/16
RF Swith	TR1029-1	512364	Techoy	2024/6/17	2025/6/16
Cable	DA800-4000MM	NA	DA	2024/6/17	2025/6/16
Cable	DA800-11000MM	NA	DA	2024/6/17	2025/6/16

Peak Output Power Test Equipment

Peak Output Power					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
Power Meter	E4419B	230480	Agilent	2024/6/20	2025/6/19
RF Cable	MWX322	MY50510202	1305G006	2024/6/20	2025/6/19
10dB Attenuator	2AS102-K10S3	N/A	Rosenberger	2024/6/20	2025/6/19

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	AUDIX	e3	6.120718
2	EMC radiation test system	AUDIX	e3	6.120718
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(25GHz~40GHz)	±3.38dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Keyboard	N/A	F98X	N/A	EUT
E-2	Adapter	N/A	HJ-PD33W-US	N/A	Auxiliary

Note: (1)The support equipment was authorized by Declaration of Confirmation.

(2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5 Conducted Emission

Test Requirement : FCC CFR 47 Part 15 Section 15.207, RSS-Gen§8.8, RSS-247§ 3.1
Test Method : ANSI C63.10: 2013
Test Result : PASS
Frequency Range : 150kHz to 30MHz
Class/Severity : Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature : 25.5 °C
Humidity : 51 % RH
Atmospheric Pressure : 101.2kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

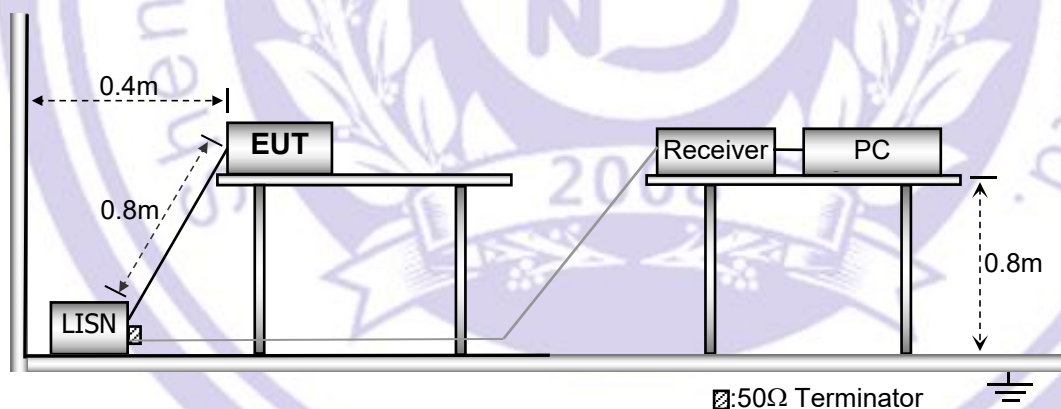

5.3 Test SET-UP (Block Diagram of Configuration)

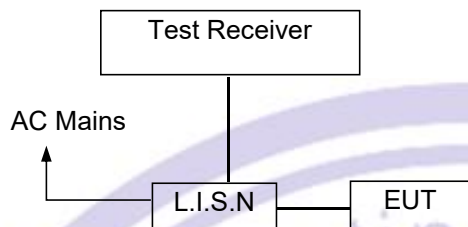

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

Pass


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (BLE Lowest channel and 2.4G Lowest channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Mode:	BLE: 2402MHz

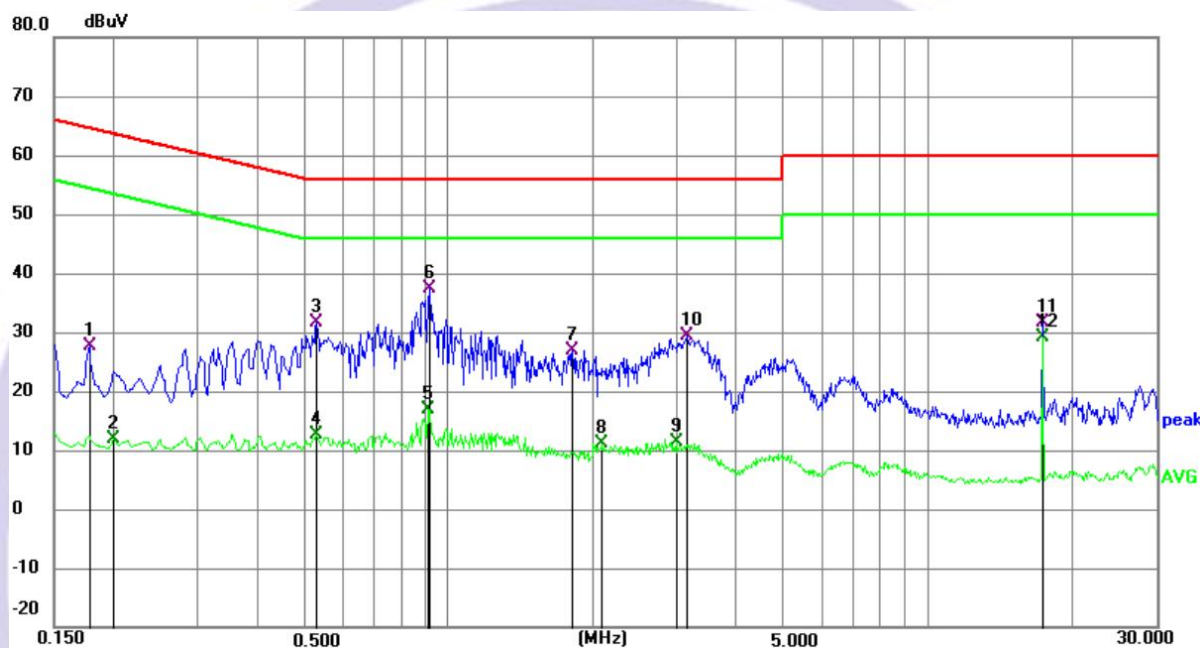

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1770	17.01	10.51	27.52	64.63	-37.11	QP
2	0.1995	1.32	10.56	11.88	53.63	-41.75	AVG
3	0.5280	21.12	10.59	31.71	56.00	-24.29	QP
4	0.5280	2.06	10.59	12.65	46.00	-33.35	AVG
5	0.9060	6.23	10.67	16.90	46.00	-29.10	AVG
6 *	0.9150	26.63	10.67	37.30	56.00	-18.70	QP
7	1.8104	16.27	10.67	26.94	56.00	-29.06	QP
8	2.0985	0.51	10.68	11.19	46.00	-34.81	AVG
9	2.9895	0.66	10.68	11.34	46.00	-34.66	AVG
10	3.1425	18.68	10.67	29.35	56.00	-26.65	QP
11	17.3535	20.72	11.00	31.72	60.00	-28.28	QP
12	17.3535	18.09	11.00	29.09	50.00	-20.91	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Mode:	BLE: 2402MHz

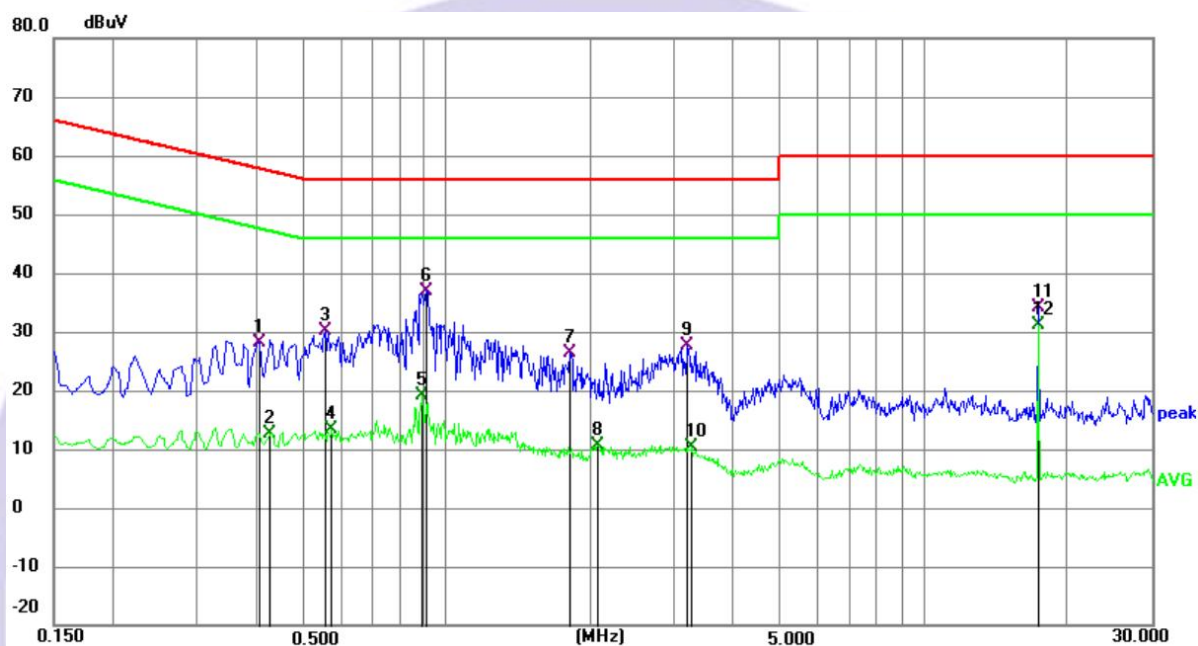


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4020	17.66	10.57	28.23	57.81	-29.58	QP
2	0.4245	1.95	10.57	12.52	47.36	-34.84	AVG
3	0.5550	19.52	10.61	30.13	56.00	-25.87	QP
4	0.5730	2.73	10.62	13.35	46.00	-32.65	AVG
5	0.8880	8.34	10.68	19.02	46.00	-26.98	AVG
6	0.9060	26.23	10.67	36.90	56.00	-19.10	QP
7	1.8150	15.77	10.67	26.44	56.00	-29.56	QP
8	2.0715	-0.04	10.68	10.64	46.00	-35.36	AVG
9	3.1920	16.99	10.66	27.65	56.00	-28.35	QP
10	3.2640	-0.35	10.65	10.30	46.00	-35.70	AVG
11	17.3535	23.14	10.95	34.09	60.00	-25.91	QP
12 *	17.3535	20.16	10.95	31.11	50.00	-18.89	AVG

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Mode:	2.4G: 2402MHz

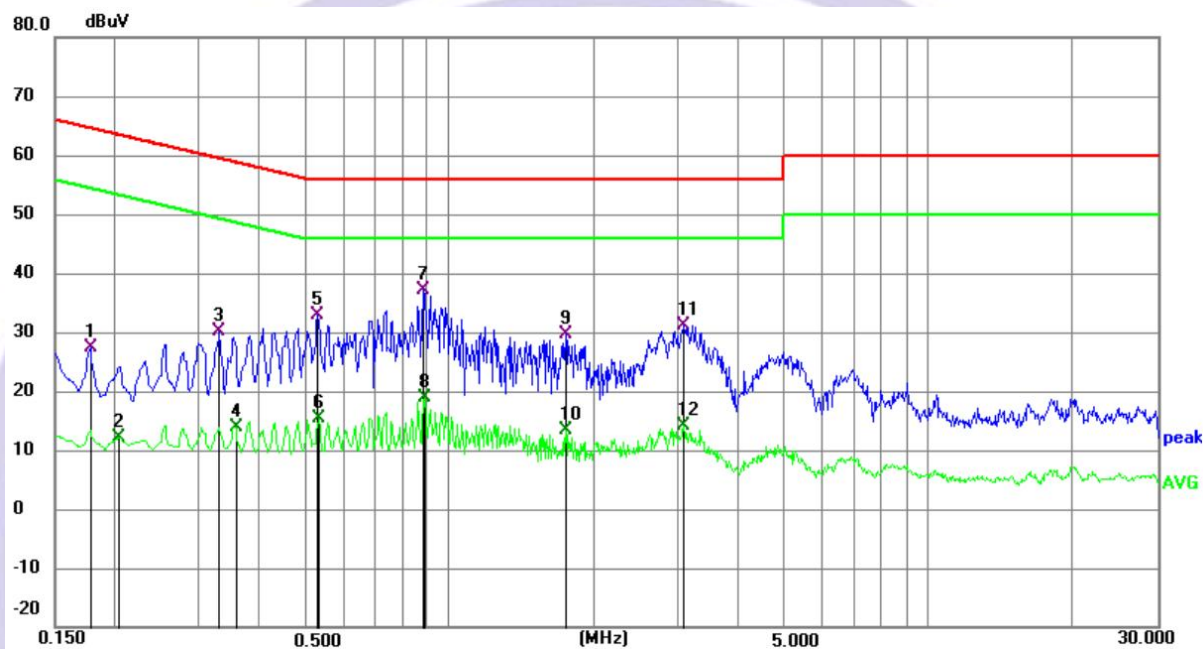

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1770	16.91	10.51	27.42	64.63	-37.21	QP
2	0.2040	1.61	10.56	12.17	53.45	-41.28	AVG
3	0.3300	19.64	10.57	30.21	59.45	-29.24	QP
4	0.3570	3.22	10.57	13.79	48.80	-35.01	AVG
5	0.5280	22.20	10.59	32.79	56.00	-23.21	QP
6	0.5324	4.67	10.60	15.27	46.00	-30.73	AVG
7 *	0.8834	26.35	10.68	37.03	56.00	-18.97	QP
8	0.8880	8.26	10.68	18.94	46.00	-27.06	AVG
9	1.7475	19.04	10.67	29.71	56.00	-26.29	QP
10	1.7475	2.64	10.67	13.31	46.00	-32.69	AVG
11	3.0884	20.58	10.67	31.25	56.00	-24.75	QP
12	3.0884	3.38	10.67	14.05	46.00	-31.95	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Mode:	2.4G: 2402MHz

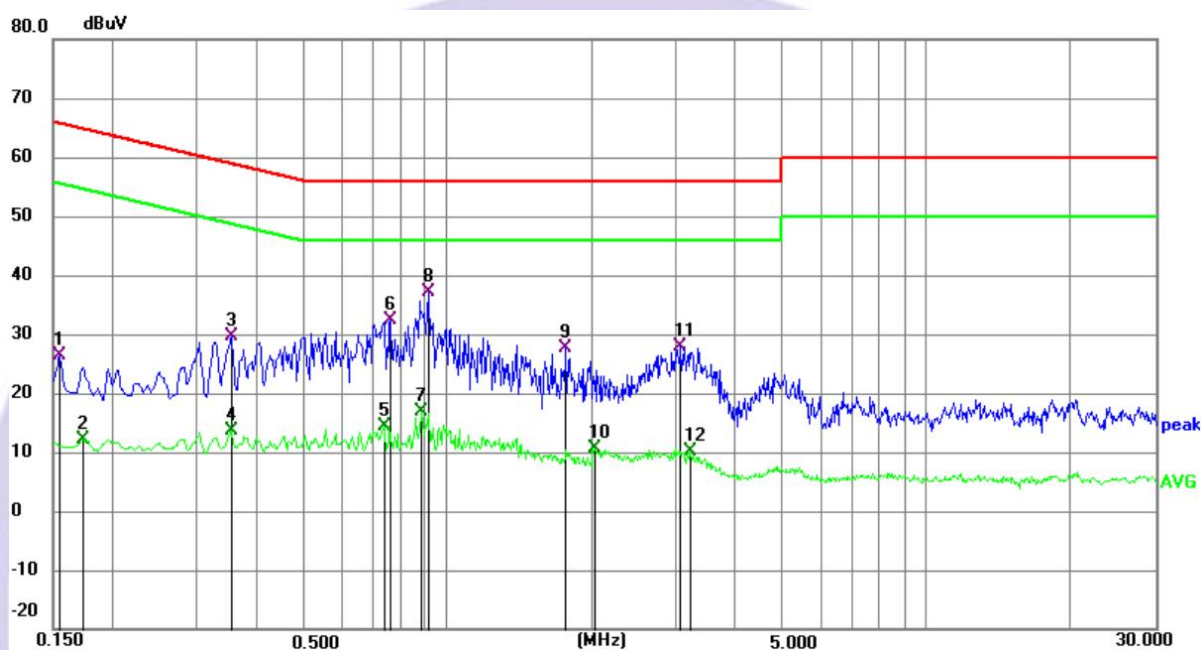

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1544	15.90	10.46	26.36	65.76	-39.40	QP
2	0.1724	1.70	10.49	12.19	54.84	-42.65	AVG
3	0.3524	18.94	10.57	29.51	58.91	-29.40	QP
4	0.3524	3.05	10.57	13.62	48.91	-35.29	AVG
5	0.7350	3.74	10.69	14.43	46.00	-31.57	AVG
6	0.7620	21.75	10.69	32.44	56.00	-23.56	QP
7	0.8834	6.13	10.68	16.81	46.00	-29.19	AVG
8 *	0.9104	26.46	10.67	37.13	56.00	-18.87	QP
9	1.7700	16.87	10.67	27.54	56.00	-28.46	QP
10	2.0264	0.05	10.68	10.73	46.00	-35.27	AVG
11	3.0705	17.24	10.67	27.91	56.00	-28.09	QP
12	3.2190	-0.42	10.66	10.24	46.00	-35.76	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247,
RSS-Gen §8.9, RSS-Gen §8.10

Test Method : ANSI C63.10:2013

Test Result : PASS

Measurement Distance : 3m

Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation

Operating Environment :

Temperature : 23.5 °C


Humidity : 51.1 % RH

Atmospheric Pressure : 101.2kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

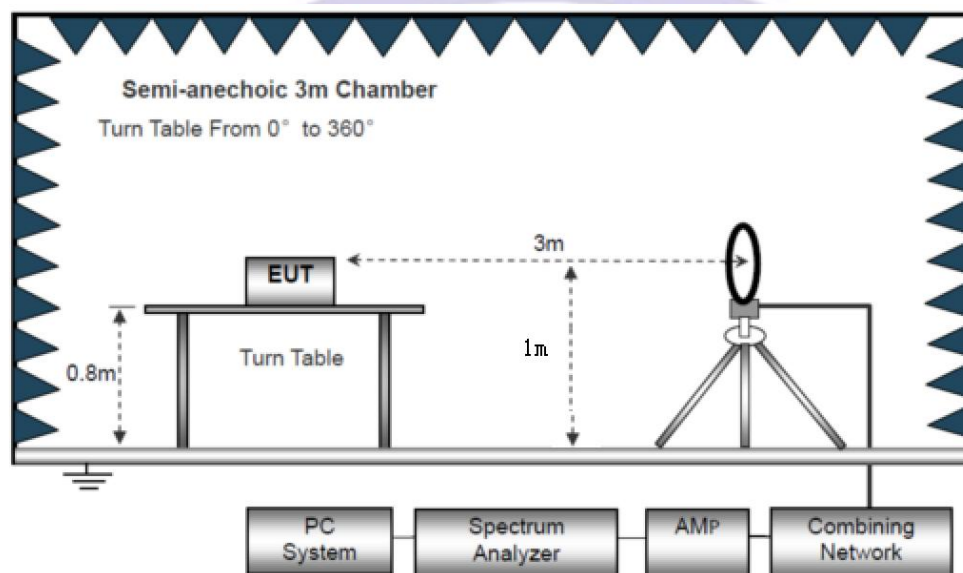

The test setup for emission measurement from 30 MHz to 1 GHz.

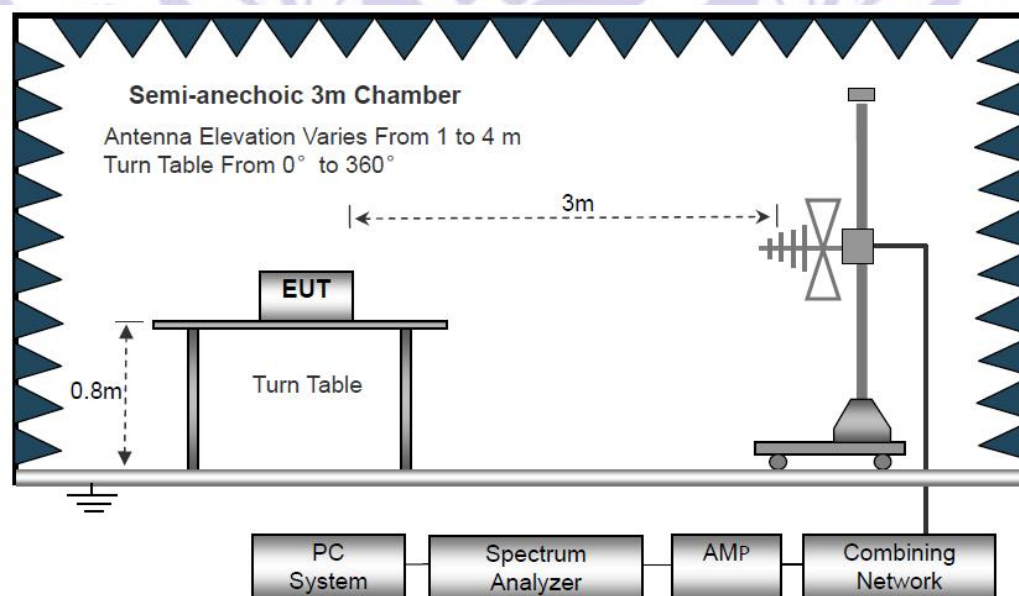

The test setup for emission measurement above 1 GHz

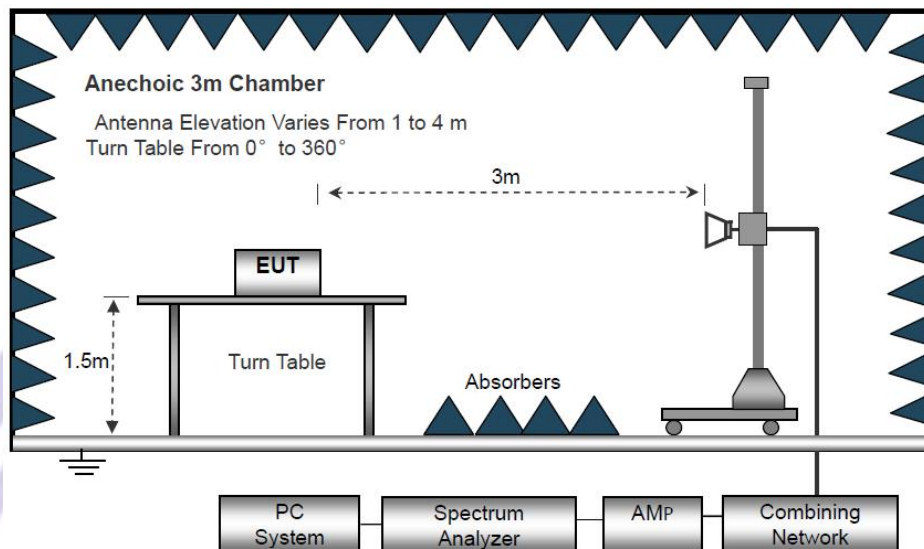

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value

6.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

For Average Measurement:

VBW=10Hz, when duty cycle is no less than 98 percent.

VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Pass.

All the modulation modes were tested the data of the worst mode (BLE Lowest channel and 2.4G Lowest channel) are recorded in the following pages and the others modulation methods do not exceed the limits.


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode:	BLE: 2402MHz

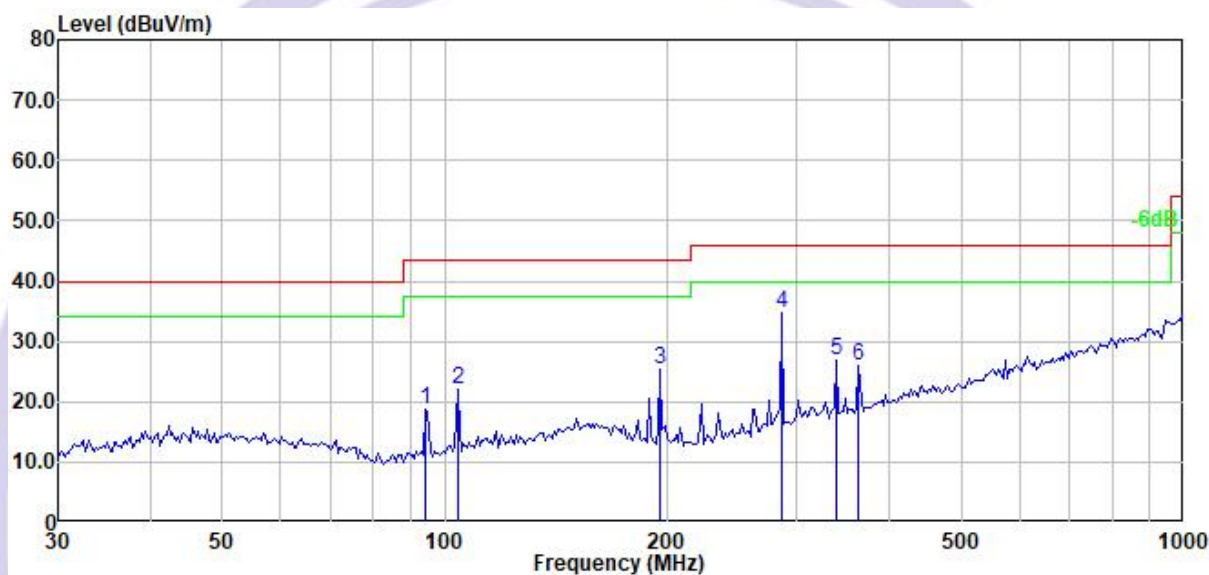

	Read				Limit	Over		
Freq	Level	Level	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dBuV/m	dB/m	dBuV/m	dB			
1	94.314	34.00	18.63	-15.37	43.50	-24.87	Horizontal	QP
2	104.064	36.78	22.00	-14.78	43.50	-21.50	Horizontal	QP
3	195.870	38.99	25.29	-13.70	43.50	-18.21	Horizontal	QP
4	286.265	45.54	34.65	-10.89	46.00	-11.35	Horizontal	QP
5	338.855	36.01	27.01	-9.00	46.00	-18.99	Horizontal	QP
6	363.523	34.72	26.01	-8.71	46.00	-19.99	Horizontal	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode:	BLE: 2402MHz

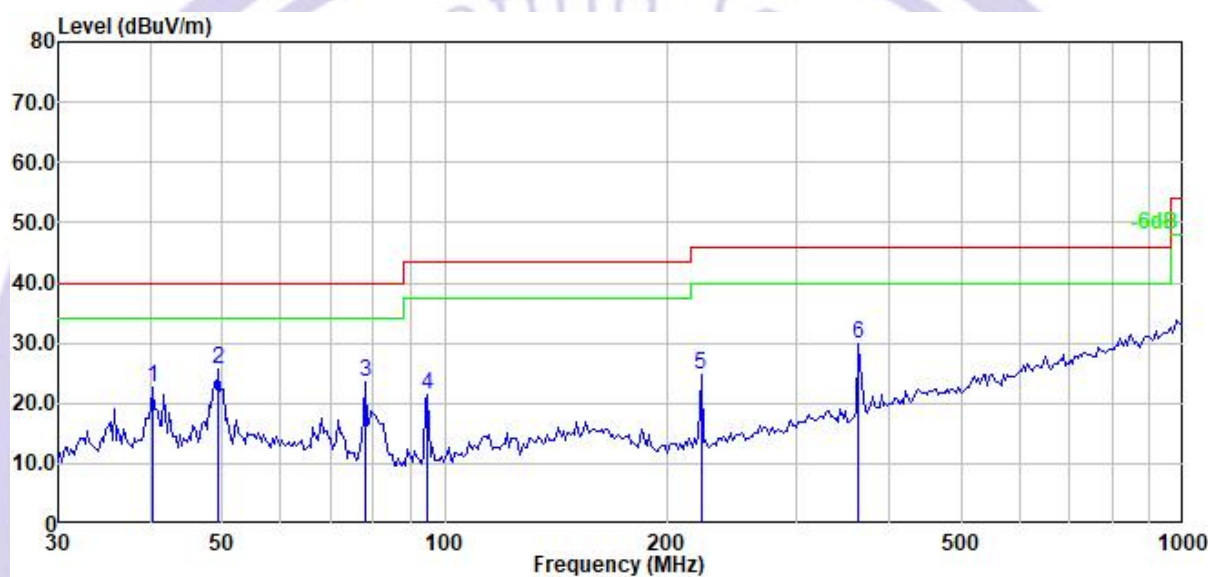

		Read			Limit	Over		
	Freq	Level	Level	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dBuV/m	dB/m	dBuV/m	dB		
1	40.299	34.98	22.59	-12.39	40.00	-17.41	Vertical	QP
2	49.409	38.26	25.78	-12.48	40.00	-14.22	Vertical	QP
3	78.014	39.44	23.68	-15.76	40.00	-16.32	Vertical	QP
4	94.979	36.65	21.34	-15.31	43.50	-22.16	Vertical	QP
5	222.281	38.26	24.62	-13.64	46.00	-21.38	Vertical	QP
6	363.523	38.59	29.88	-8.71	46.00	-16.12	Vertical	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode:	2.4G: 2402MHz

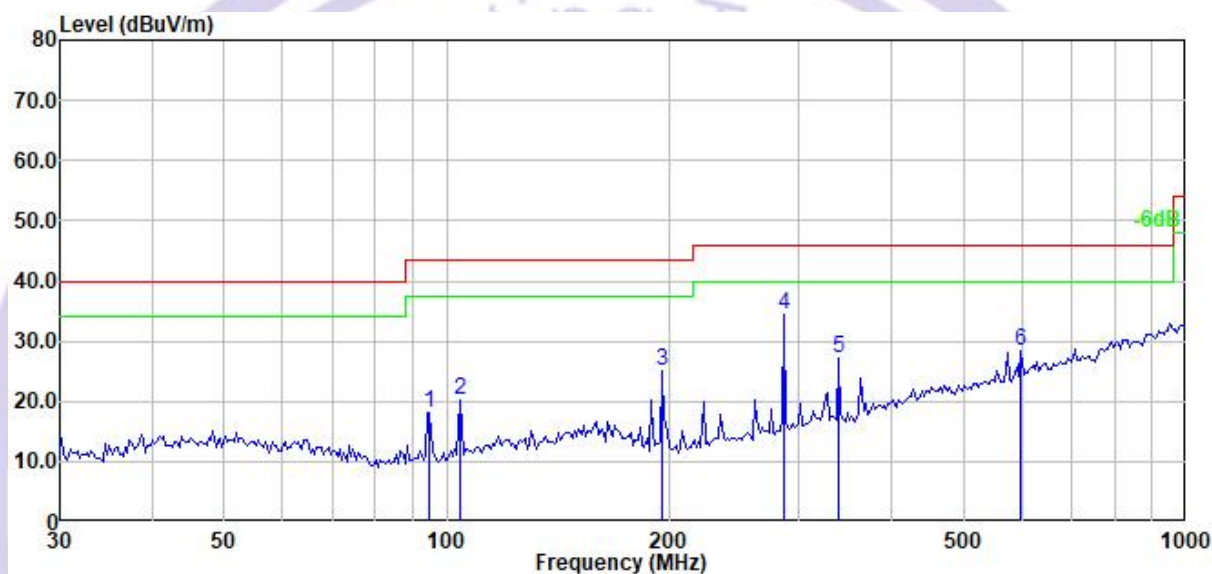

		Read			Limit	Over		
	Freq	Level	Level	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dBuV/m	dB/m	dBuV/m	dB		
1	94.979	33.55	18.24	-15.31	43.50	-25.26	Horizontal	QP
2	104.064	35.14	20.36	-14.78	43.50	-23.14	Horizontal	QP
3	195.870	38.66	24.96	-13.70	43.50	-18.54	Horizontal	QP
4	286.265	45.36	34.47	-10.89	46.00	-11.53	Horizontal	QP
5	338.855	36.07	27.07	-9.00	46.00	-18.93	Horizontal	QP
6	598.707	31.57	28.49	-3.08	46.00	-17.51	Horizontal	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode:	2.4G: 2402MHz

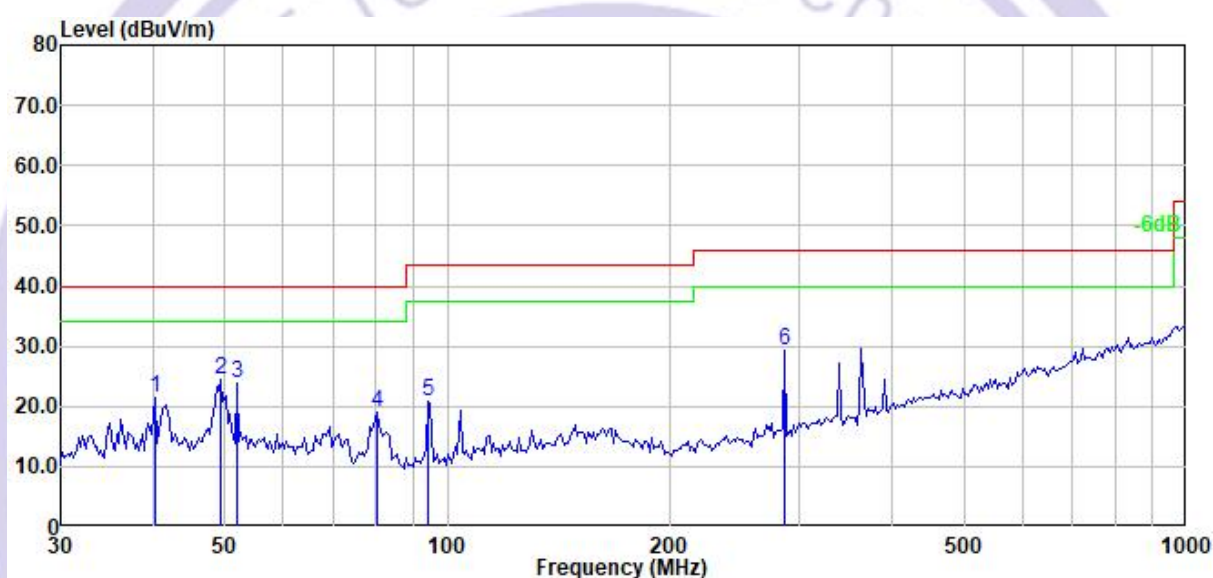

	Freq	Read Level	Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dBuV/m	dB/m	dBuV/m	dB		
1	40.299	33.74	21.35	-12.39	40.00	-18.65	Vertical	QP
2	49.409	37.05	24.57	-12.48	40.00	-15.43	Vertical	QP
3	51.900	36.44	23.96	-12.48	40.00	-16.04	Vertical	QP
4	80.238	35.36	19.02	-16.34	40.00	-20.98	Vertical	QP
5	94.314	36.06	20.69	-15.37	43.50	-22.81	Vertical	QP
6	286.265	40.20	29.31	-10.89	46.00	-16.69	Vertical	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor

Test Frequency 1GHz-25GHz:

BLE									
Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	51.15	34.12	5.03	32.39	54.45	74.00	-19.55	Pk
V	4804.00	39.67	34.12	5.03	32.39	42.97	54.00	-11.03	AV
V	7206.00	48.28	32.54	6.29	35.86	57.89	74.00	-16.11	Pk
V	7206.00	36.44	32.54	6.29	35.86	46.05	54.00	-7.95	AV
V	9608.00	45.16	32.98	7.55	38.40	58.13	74.00	-15.87	Pk
V	9608.00	33.79	32.98	7.55	38.40	46.76	54.00	-7.24	AV
V	12010.00	44.55	32.09	8.93	39.00	60.39	74.00	-13.61	Pk
V	12010.00	31.29	32.09	8.93	39.00	47.13	54.00	-6.87	AV
H	4804.00	49.56	34.12	5.03	32.39	52.86	74.00	-21.14	Pk
H	4804.00	38.18	34.12	5.03	32.39	41.48	54.00	-12.52	AV
H	7206.00	46.42	32.54	6.29	35.86	56.03	74.00	-17.97	Pk
H	7206.00	36.44	32.54	6.29	35.86	46.05	54.00	-7.95	AV
H	9608.00	46.15	32.98	7.55	38.40	59.12	74.00	-14.88	Pk
H	9608.00	31.66	32.98	7.55	38.40	44.63	54.00	-9.37	AV
H	12010.00	40.63	32.09	8.93	39.00	56.47	74.00	-17.53	Pk
H	12010.00	30.76	32.09	8.93	39.00	46.60	54.00	-7.40	AV

BLE									
Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	49.48	34.07	5.09	32.59	53.09	74.00	-20.91	Pk
V	4880.00	37.65	34.07	5.09	32.59	41.26	54.00	-12.74	AV
V	7320.00	44.69	32.63	6.34	35.96	54.36	74.00	-19.64	Pk
V	7320.00	34.78	32.63	6.34	35.96	44.45	54.00	-9.55	AV
V	9760.00	43.24	32.92	7.59	38.40	56.31	74.00	-17.69	Pk
V	9760.00	29.18	32.92	7.59	38.40	42.25	54.00	-11.75	AV
V	12200.00	40.46	31.96	8.88	39.04	56.42	74.00	-17.58	Pk
V	12200.00	29.68	31.96	8.88	39.04	45.64	54.00	-8.36	AV
H	4880.00	50.24	34.07	5.09	32.59	53.85	74.00	-20.15	Pk
H	4880.00	38.29	34.07	5.09	32.59	41.90	54.00	-12.10	AV
H	7320.00	45.95	32.63	6.34	35.96	55.62	74.00	-18.38	Pk
H	7320.00	34.46	32.63	6.34	35.96	44.13	54.00	-9.87	AV
H	9760.00	40.18	32.92	7.59	38.40	53.25	74.00	-20.75	Pk
H	9760.00	28.86	32.92	7.59	38.40	41.93	54.00	-12.07	AV
H	12200.00	38.64	31.96	8.88	39.04	54.60	74.00	-19.40	Pk
H	12200.00	27.49	31.96	8.88	39.04	43.45	54.00	-10.55	AV

BLE									
Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	47.96	34.02	5.15	32.80	51.89	74.00	-22.11	Pk
V	4960.00	37.32	34.02	5.15	32.80	41.25	54.00	-12.75	AV
V	7440.00	45.95	32.71	6.4	36.05	55.69	74.00	-18.31	Pk
V	7440.00	34.93	32.71	6.4	36.05	44.67	54.00	-9.33	AV
V	9920.00	40.34	32.86	7.62	38.40	53.50	74.00	-20.50	Pk
V	9920.00	29.29	32.86	7.62	38.40	42.45	54.00	-11.55	AV
V	12400.00	38.33	31.82	8.84	39.08	54.43	74.00	-19.57	Pk
V	12400.00	27.35	31.82	8.84	39.08	43.45	54.00	-10.55	AV
H	4960.00	46.77	34.02	5.15	32.80	50.70	74.00	-23.30	Pk
H	4960.00	38.22	34.02	5.15	32.80	42.15	54.00	-11.85	AV
H	7440.00	45.75	32.71	6.40	36.05	55.49	74.00	-18.51	Pk
H	7440.00	30.55	32.71	6.40	36.05	40.29	54.00	-13.71	AV
H	9920.00	38.18	32.86	7.62	38.40	51.34	74.00	-22.66	Pk
H	9920.00	27.62	32.86	7.62	38.40	40.78	54.00	-13.22	AV
H	12400.00	37.57	31.82	8.84	39.08	53.67	74.00	-20.33	Pk
H	12400.00	26.80	31.82	8.84	39.08	42.90	54.00	-11.10	AV

Note: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2.4G									
Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	51.23	34.12	5.03	32.39	54.53	74.00	-19.47	Pk
V	4804.00	39.62	34.12	5.03	32.39	42.92	54.00	-11.08	AV
V	7206.00	48.24	32.54	6.29	35.86	57.85	74.00	-16.15	Pk
V	7206.00	36.47	32.54	6.29	35.86	46.08	54.00	-7.92	AV
V	9608.00	45.18	32.98	7.55	38.40	58.15	74.00	-15.85	Pk
V	9608.00	33.83	32.98	7.55	38.40	46.80	54.00	-7.20	AV
V	12010.00	44.53	32.09	8.93	39.00	60.37	74.00	-13.63	Pk
V	12010.00	31.28	32.09	8.93	39.00	47.12	54.00	-6.88	AV
H	4804.00	49.59	34.12	5.03	32.39	52.89	74.00	-21.11	Pk
H	4804.00	38.13	34.12	5.03	32.39	41.43	54.00	-12.57	AV
H	7206.00	46.49	32.54	6.29	35.86	56.10	74.00	-17.90	Pk
H	7206.00	36.49	32.54	6.29	35.86	46.10	54.00	-7.90	AV
H	9608.00	46.14	32.98	7.55	38.40	59.11	74.00	-14.89	Pk
H	9608.00	31.65	32.98	7.55	38.40	44.62	54.00	-9.38	AV
H	12010.00	40.69	32.09	8.93	39.00	56.53	74.00	-17.47	Pk
H	12010.00	30.73	32.09	8.93	39.00	46.57	54.00	-7.43	AV

2.4G									
Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	49.46	34.07	5.09	32.59	53.07	74.00	-20.93	Pk
V	4880.00	37.59	34.07	5.09	32.59	41.20	54.00	-12.80	AV
V	7320.00	44.64	32.63	6.34	35.96	54.31	74.00	-19.69	Pk
V	7320.00	34.79	32.63	6.34	35.96	44.46	54.00	-9.54	AV
V	9760.00	43.24	32.92	7.59	38.40	56.31	74.00	-17.69	Pk
V	9760.00	29.15	32.92	7.59	38.40	42.22	54.00	-11.78	AV
V	12200.00	40.46	31.96	8.88	39.04	56.42	74.00	-17.58	Pk
V	12200.00	29.69	31.96	8.88	39.04	45.65	54.00	-8.35	AV
H	4880.00	50.24	34.07	5.09	32.59	53.85	74.00	-20.15	Pk
H	4880.00	38.25	34.07	5.09	32.59	41.86	54.00	-12.14	AV
H	7320.00	45.95	32.63	6.34	35.96	55.62	74.00	-18.38	Pk
H	7320.00	34.42	32.63	6.34	35.96	44.09	54.00	-9.91	AV
H	9760.00	40.14	32.92	7.59	38.40	53.21	74.00	-20.79	Pk
H	9760.00	28.82	32.92	7.59	38.40	41.89	54.00	-12.11	AV
H	12200.00	38.61	31.96	8.88	39.04	54.57	74.00	-19.43	Pk
H	12200.00	27.45	31.96	8.88	39.04	43.41	54.00	-10.59	AV

2.4G									
Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	47.99	34.02	5.15	32.80	51.92	74.00	-22.08	Pk
V	4960.00	37.35	34.02	5.15	32.80	41.28	54.00	-12.72	AV
V	7440.00	45.93	32.71	6.4	36.05	55.67	74.00	-18.33	Pk
V	7440.00	34.95	32.71	6.4	36.05	44.69	54.00	-9.31	AV
V	9920.00	40.43	32.86	7.62	38.40	53.59	74.00	-20.41	Pk
V	9920.00	29.34	32.86	7.62	38.40	42.50	54.00	-11.50	AV
V	12400.00	38.38	31.82	8.84	39.08	54.48	74.00	-19.52	Pk
V	12400.00	27.33	31.82	8.84	39.08	43.43	54.00	-10.57	AV
H	4960.00	46.72	34.02	5.15	32.80	50.65	74.00	-23.35	Pk
H	4960.00	38.27	34.02	5.15	32.80	42.20	54.00	-11.80	AV
H	7440.00	45.79	32.71	6.40	36.05	55.53	74.00	-18.47	Pk
H	7440.00	30.50	32.71	6.40	36.05	40.24	54.00	-13.76	AV
H	9920.00	38.14	32.86	7.62	38.40	51.30	74.00	-22.70	Pk
H	9920.00	27.68	32.86	7.62	38.40	40.84	54.00	-13.16	AV
H	12400.00	37.56	31.82	8.84	39.08	53.66	74.00	-20.34	Pk
H	12400.00	26.77	31.82	8.84	39.08	42.87	54.00	-11.13	AV

Note: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

BLE										
	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	57.46	35.17	3.48	27.49	53.26	74.00	PK	PASS
	H	2390.00	49.77	35.17	3.48	27.49	45.57	54.00	AV	PASS
	H	2400.00	58.64	35.16	3.49	27.52	54.49	74.00	PK	PASS
	H	2400.00	49.54	35.16	3.49	27.52	45.39	54.00	AV	PASS
	V	2390.00	56.73	35.17	3.48	27.49	52.53	74.00	PK	PASS
	V	2390.00	48.87	35.17	3.48	27.49	44.67	54.00	AV	PASS
	V	2400.00	58.68	35.16	3.49	27.52	54.53	74.00	PK	PASS
	V	2400.00	48.88	35.16	3.49	27.52	44.73	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	57.33	35.11	3.56	27.75	53.45	74.00	PK	PASS
	H	2483.50	48.76	35.11	3.56	27.75	44.88	54.00	AV	PASS
	H	2500.00	58.78	35.10	3.57	27.8	54.97	74.00	PK	PASS
	H	2500.00	48.96	35.10	3.57	27.8	45.15	54.00	AV	PASS
	V	2483.50	57.45	35.11	3.56	27.75	53.57	74.00	PK	PASS
	V	2483.50	50.18	35.11	3.56	27.75	46.30	54.00	AV	PASS
	V	2500.00	58.07	35.10	3.57	27.8	54.26	74.00	PK	PASS
	V	2500.00	49.07	35.10	3.57	27.8	45.26	54.00	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										

2.4G										
	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	57.49	35.17	3.48	27.49	53.29	74.00	PK	PASS
	H	2390.00	49.73	35.17	3.48	27.49	45.53	54.00	AV	PASS
	H	2400.00	58.68	35.16	3.49	27.52	54.53	74.00	PK	PASS
	H	2400.00	49.58	35.16	3.49	27.52	45.43	54.00	AV	PASS
	V	2390.00	56.79	35.17	3.48	27.49	52.59	74.00	PK	PASS
	V	2390.00	48.80	35.17	3.48	27.49	44.60	54.00	AV	PASS
	V	2400.00	58.64	35.16	3.49	27.52	54.49	74.00	PK	PASS
	V	2400.00	48.81	35.16	3.49	27.52	44.66	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	57.37	35.11	3.56	27.75	53.49	74.00	PK	PASS
	H	2483.50	48.72	35.11	3.56	27.75	44.84	54.00	AV	PASS
	H	2500.00	58.75	35.10	3.57	27.8	54.94	74.00	PK	PASS
	H	2500.00	48.92	35.10	3.57	27.8	45.11	54.00	AV	PASS
	V	2483.50	57.48	35.11	3.56	27.75	53.60	74.00	PK	PASS
	V	2483.50	50.24	35.11	3.56	27.75	46.36	54.00	AV	PASS
	V	2500.00	58.02	35.10	3.57	27.8	54.21	74.00	PK	PASS
	V	2500.00	49.15	35.10	3.57	27.8	45.34	54.00	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										

7 Conduct Band Edge And Spurious Emissions Measurement

- Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
RSS-247 § 5.5
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
RSS-247 § 5.5:
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.2 Test Result

Please see the Appendix for the FCC Test Data.

8 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247, RSS-247

Test Method : ANSI C63.10:2013

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

8.2 Test Result

Please see the Appendix for the FCC Test Data.

9 Maximum Peak Output Power

Test Requirement	: FCC CFR47 Part 15 Section 15.247, RSS-247 § 5.4
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. RSS-247 § 5.4 For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

9.1 Test Procedure

1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.

9.2 Test Result

Please see the Appendix for the FCC Test Data.

10 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247,RSS-247 §5.2 (b)
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. RSS-247 §5.2 (b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

10.2 Test Result

Please see the Appendix for the FCC Test Data.

11 Antenna Application

11.1 Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

According to RSS-GEN section 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

11.2 Result

The antenna is PCB antenna, the Max gain of the antennas is 2.94dBi, reference to the attachment for details.

12 Test Setup Photos and EUT Photos

Please see the attachment for details.

*****THE END REPORT*****

