

Test Report

Report No.: MTi230418006-02E5

Date of issue: 2023-09-06

Applicant: Shenzhen Binary Technology Co., Ltd.

Product: Car Multimedia Player

Model(s): 12-22ES, 13-21IS/RC, 15-21NX

FCC ID: 2BCC5-22ES

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.



Instructions


1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	6
1.3	Environmental conditions for testing	8
1.4	Description of support units	8
2	Measurement uncertainty	9
3	Summary of Test Result	10
4	Test Laboratory	11
5	Equipment List	12
6	Test Result.....	13
6.1	Antenna requirement	13
6.2	AC power line conducted emissions	14
6.3	Radiated spurious emission.....	15
6.4	Emission bandwidth (26dB bandwidth)	43
6.5	Emission bandwidth (6dB bandwidth).....	44
6.6	Duty Cycle.....	45
6.7	Maximum conducted output power.....	46
6.8	Power spectral density.....	47
6.9	Conducted spurious emissions.....	48
6.10	Conducted band edge	49
6.11	Frequency Stability	50
	Photographs of the Test Setup.....	51
	Photographs of the EUT.....	52


Test Result Certification	
Applicant:	Shenzhen Binary Technology Co., Ltd.
Address:	Room 1203-1205, No.5, Xiangzhao Building Longping Community, Dalang subdistrict, Longhua District, Shenzhen City
Manufacturer:	Longhua Branch of Shenzhen Binary Technology Co., Ltd.
Address:	Room 401, Floor 4, No.1 building, Guanghui Technology Park, Minqing Road, Fukang Community, Longhua District, Shenzhen City
Product description	
Product name:	Car Multimedia Player
Trademark:	BINARYTEK
Model name:	12-22ES
Series Model:	13-21IS/RC, 15-21NX
Standards:	FCC 47 CFR Part 15.407
Test method:	ANSI C63.10-2013 KDB 789033 D02 v02r01
Date of Test	
Date of test:	2023-07-10 to 2023-09-05
Test result:	Pass

Test Engineer :



(David Lee)

Reviewed By :



(Leon Chen)

Approved By :



(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	Car Multimedia Player
Model name:	12-22ES
Series Model:	13-21IS/RC, 15-21NX
Model difference:	All the models are electrical identical including the same software parameter and hardware design (i.e., circuit design, PCB Layout, RF module/circuit, antenna type(s) , components on PCB, etc.), the differences are the appearance, internal mechanical structure and design (such as antenna locaiton) and fixture.
Electrical rating:	Input: DC 12V/1A
Hardware version:	V1
Software version:	V1
Accessories:	N/A
Test sample(s) number:	MTi230418006-02S1001(12-22ES) MTi230418006-02S1002(13-21IS/RC) MTi230418006-02S1003(15-21NX)
RF specification:	
Operation frequency:	U-NII-1: 5150 MHz to 5250 MHz U-NII-3: 5725 MHz to 5850 MHz
Modulation type:	OFDM with BPSK/QPSK/16QAM/64QAM
Date Rate:	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40): MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40): NSS1, MCS0-MCS9 802.11ac(VHT80) :NSS1,MCS0-MCS9
Antenna(s) information:	Antenna type: FPC antenna Antenna Gain: U-NII-1 Gain: 3.45 dBi U-NII-3 Gain: 3.31 dBi

1.2 Description of test modes

1.2.1 Operation channel list

For U-NII-1 band:					
20 MHz bandwidth		40 MHz bandwidth		80 MHz bandwidth	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	--	--
44	5220	--	--	--	--
48	5240	--	--	--	--

For U-NII-3 band:					
20 MHz bandwidth		40 MHz bandwidth		80 MHz bandwidth	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795	--	--
157	5785	--	--	--	--
161	5805	--	--	--	--
165	5825	--	--	--	--

The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software:	QRCT3
----------------	-------

For U-NII-1 band:			
802.11a		802.11n20	
Channel	Power setting	Channel	Power setting
36	15	36	15
40	15	40	15
48	15	48	15
802.11n40		802.11ac20	
Channel	Power setting	Channel	Power setting
38	15	36	15
46	15	40	15
--	--	48	15
802.11ac40		802.11ac80	
38	15	42	15
46	15	--	--
--	--	--	--

For U-NII-3 band:			
802.11a		802.11n20	
Channel	Power setting	Channel	Power setting
149	15	149	15
157	15	157	15
165	15	165	15
802.11n40		802.11ac20	
Channel	Power setting	Channel	Power setting
151	15	149	15
159	15	157	15
--	--	165	15
802.11ac40		802.11ac80	
151	13	155	13
159	13	--	--
--	--	--	--

1.3 Environmental conditions for testing

Environment of test site:

Temperature:	15°C~35°C
Humidity:	20 % RH ~ 75 % RH

1.4 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
Accumulator	6-QW-45(370)-L	/	Camel Group Co., Ltd.
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Measurement uncertainty
AC power line conducted emission (9 kHz~30 MHz)	± 2.5 dB
Occupied Bandwidth	± 3 %
Conducted RF output power	± 0.16 dB
Conducted spurious emissions	± 0.21 dB
Radiated emission (9 kHz ~ 30 MHz)	± 4.0 dB
Radiated emission (30 MHz~1 GHz)	± 4.2 dB
Radiated emission (above 1 GHz)	± 4.3 dB
Power spectral density	± 0.16 dB
Frequency Stability	± 1 ppm

Note: the measurement uncertainty is calculated and correspond to a factor $k = 2$ (which provide confidence levels of 95.45 %)

3 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§15.203 & 15.407	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	N/A
4	§15.407(b)	Radiation Spurious Emissions	Pass
5	§15.407(a)	26dB emission bandwidth	Pass
6	§15.407(e)	6dB emission bandwidth	Pass
7	§15.407(a)	RF output power	Pass
8	§15.407(a)	Power spectral density	Pass
9	§15.407(b)	Conducted Spurious Emission	Pass
10	§15.407(b)	Conducted band edge	Pass
11	§15.407(g)	Frequency Stability	Pass

4 Test Laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

5 Equipment List

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTi-E002	EMI Test Receiver	R&S	ESCI3	101368	2023/04/26	2024/04/25
MTi-E023	Artificial power network	Schwarzbeck	NSLK8127	NSLK8127#841	2023/05/04	2024/05/03
MTi-E025	Artificial power network	Schwarzbeck	NSLK8127	8127183	2023/04/26	2024/04/25
MTi-E043	EMI test receiver	R&S	ESCI7	101166	2023/04/26	2024/04/25
MTi-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00044	2021/05/30	2024/05/29
MTi-E044	Broadband antenna	Schwarzbeck	VULB9163	9163-1338	2021/05/30	2024/05/29
MTi-E045	Horn antenna	Schwarzbeck	BBHA9120D	9120D-2278	2021/05/30	2024/05/29
MTi-E047	Pre-amplifier	Hewlett-Packard	8447F	3113A06184	2023/04/26	2024/04/25
MTi-E048	Pre-amplifier	Agilent	8449B	3008A01120	2023/05/04	2024/05/03
MTi-E120	Broadband antenna	Schwarzbeck	VULB9163	9163-1419	2021/05/30	2024/05/29
MTi-E121	Pre-amplifier	Hewlett-Packard	8447D	2944A09365	2023/05/04	2024/05/03
MTi-E123	Pre-amplifier	Agilent	8449B	3008A04723	2023/05/04	2024/05/03
MTi-E135	Horn antenna	Schwarzbeck	BBHA 9170	00987	2021/05/30	2024/05/29
MTi-E136	Pre-amplifier	Space-Dtronics	EWLAN1840 G-G45	210405001	/	/
MTi-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023/04/25	2024/04/24
MTi-E067	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023/04/26	2024/04/25
MTi-E068	RF Control Unit	Tonscend	JS0806-2	19D8060153	2023/04/26	2024/04/25
MTi-E069	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023/05/04	2024/05/03
MTi-E010S	EMI Measurement Software	Farad	EZ-EMC Ver. EMEC-3A1	/	/	/
MTi-E014S	RF Test System	Tonscend	TS@JS1120 V2.6.88.0330	/	/	/

Note: the calibration interval of the test equipment is 12 or 24 months and the calibrations are traceable to international system unit(SI)

6 Test Result

6.1 Antenna requirement

15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Description of the antenna of EUT

The antenna of the EUT is permanently attached.

There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of § 15.203.

6.2 AC power line conducted emissions

6.2.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB μ V	Limit-Average dB μ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

Note 1: the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

6.2.2 Test Procedures

- The test setup is refer to the standard ANSI C63.10-2013.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

6.2.3 Test setup

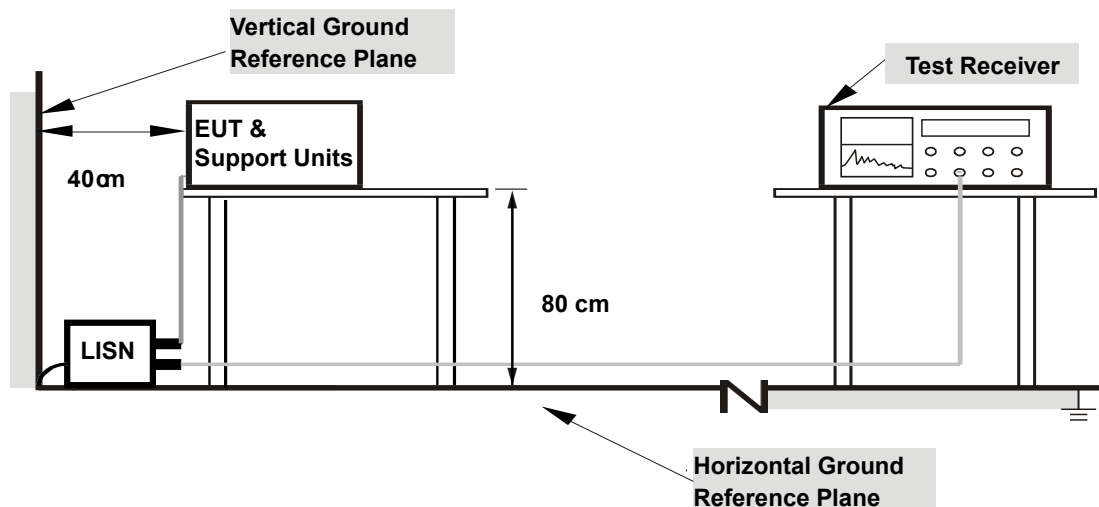

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.2.4 Test Result

Notes: N/A. the EUT is not intended to be connected to AC mains power. Therefore, this test is not applicable.

6.3 Radiated spurious emission

6.3.1 Limits

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

§ 15.209 Radiated emission limits at restricted bands:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note 1: the tighter limit applies at the band edges.

Note 2: the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

§ 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10-2013, the tests shall be performed in the frequency range shown in the following table:

Frequency range of measurements for unlicensed wireless device


Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Frequency range of measurements for unlicensed wireless device with digital device


Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower

6.3.2 Test setup


Below 30MHz:

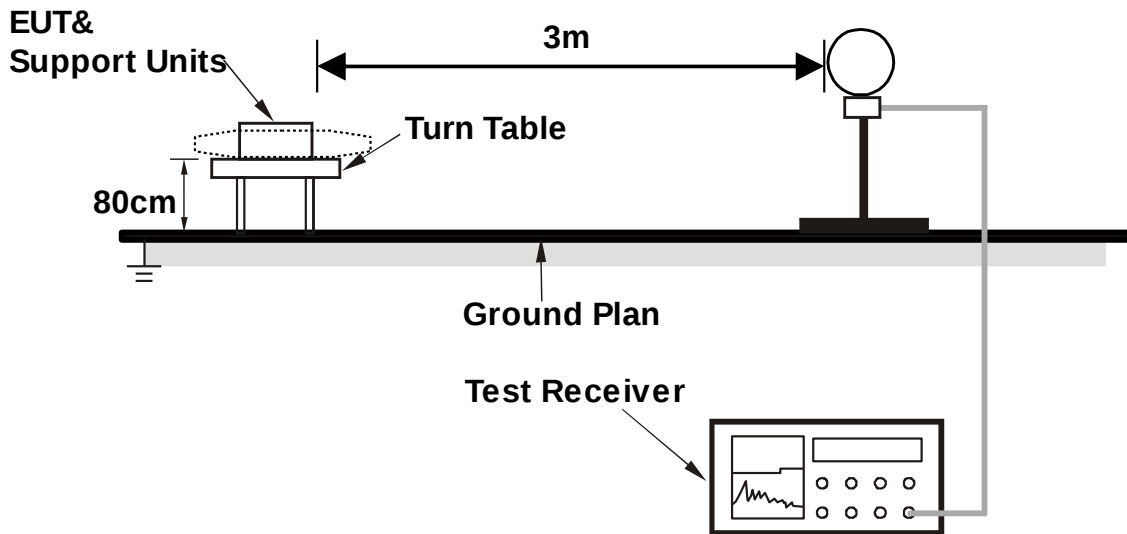

30MHz~1GHz:

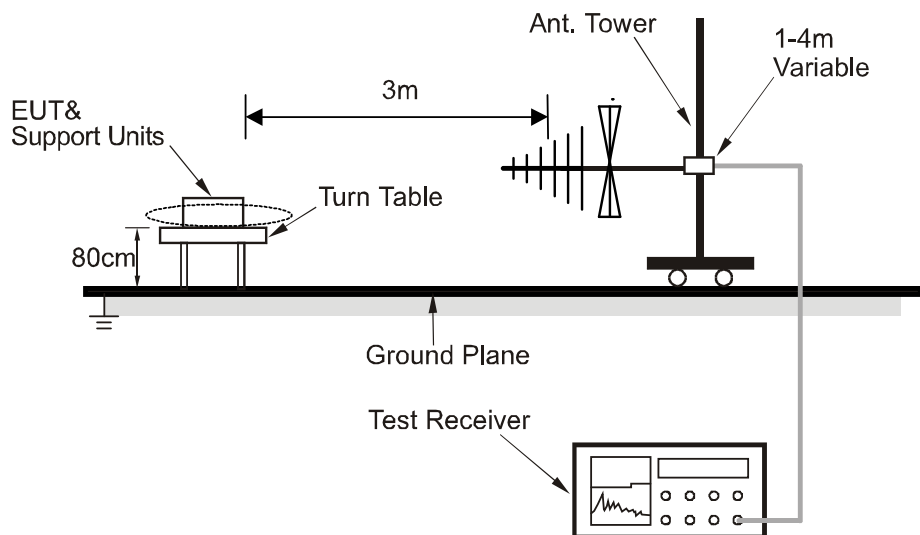

Above 1GHz:

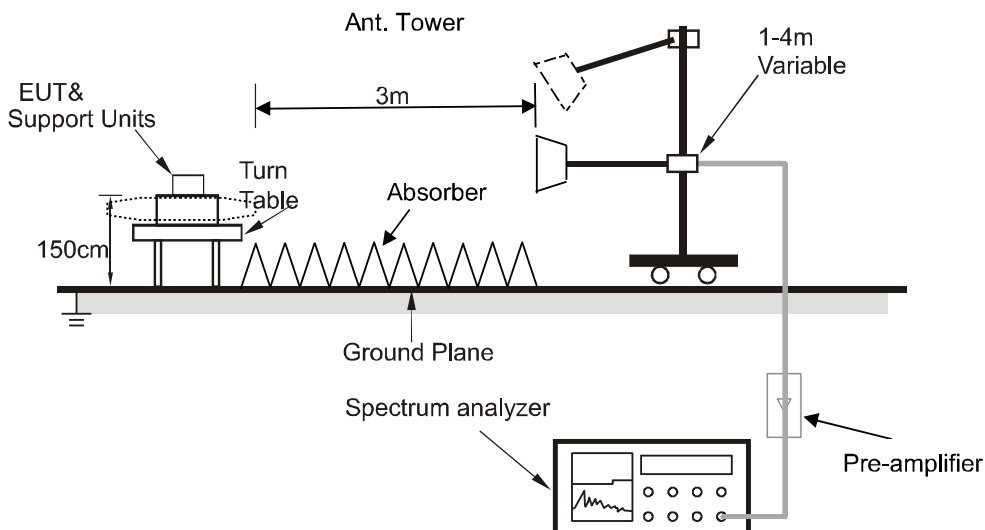

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.3.3 Test procedure

- a) Test method: ANSI C63.10-2013 Sections 6.3, 6.4, 6.5 and 6.6; KDB 789033 D02 v02r01 Sections G3, G4, G5, and G6.
- b) The EUT is placed on an on-conducting table 0.8 meters above the ground plane for measurement below 1GHz, 1.5 meters above the ground plane for measurement above 1GHz.
- c) Emission below 18 GHz were measured at a 3 meters test distance, above 18 GHz were measured at 1-meter test distance with the application of a distance correction factor
- d) The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / RBW: 200 Hz
150 kHz ~ 30 MHz	Quasi Peak / RBW: 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / RBW: 120 kHz
Above 1 GHz	Peak / RBW: 1 MHz, VBW: 3MHz, Peak detector AVG / RBW: 1 MHz, VBW: 3MHz, Average detector

6.3.4 Test results

Notes:

All emissions that are in the restricted bands specified in §15.205 are subject to the limit of §15.209.

All spurious emissions that are outside of the restricted bands are subject to a peak emission limit of § 15.407(b). And for above 1000 MHz, the field strength shall be computed as follows:

$E [dB\mu V/m] = EIRP [dBm] + 95.2$, for test distance = 3 m

All channels, modes and modulations/data rates were investigated among all U-NII bands. Only the worst-case results shown in the report.

For below 30MHz tests, there were no emissions found within 20dB of the limit.


Calculation formula:

Measurement (dB μ V/m) = Reading Level (dB μ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB μ V/m) – Limit (dB μ V/m)

Radiated emissions between 30MHz – 1GHz


Test mode:	TX U-NII-1-802.11a-5240	Polarization:	Horizontal
Power supply:	DC 12V	Test site:	RE chamber 2

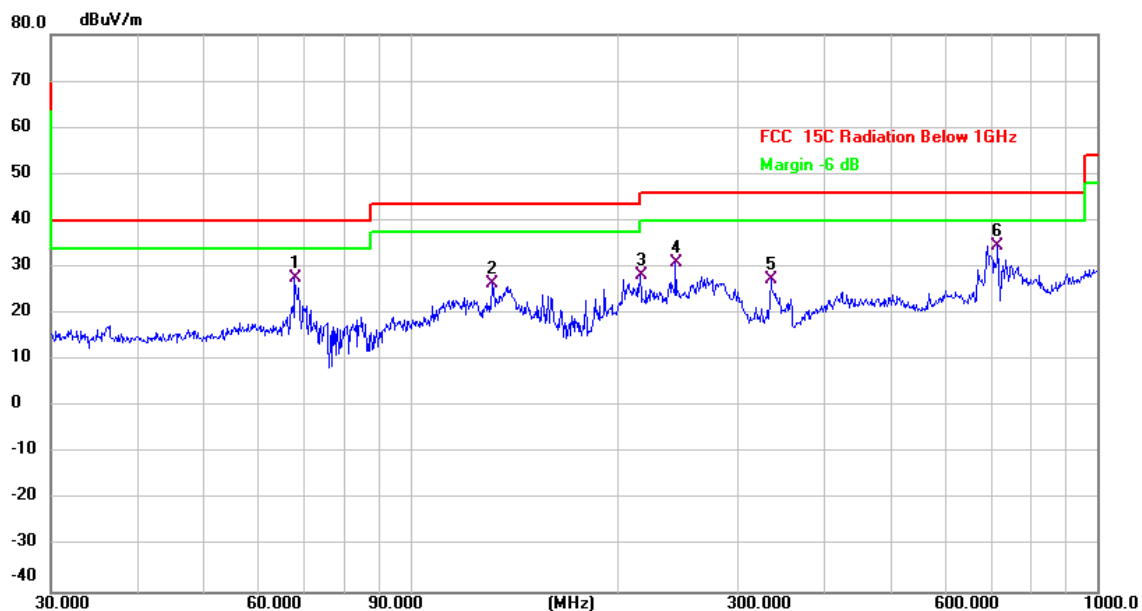

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		67.9129	36.65	-9.09	27.56	40.00	-12.44	QP
2		131.7577	38.84	-12.48	26.36	43.50	-17.14	QP
3		216.0240	34.99	-6.62	28.37	46.00	-17.63	QP
4		243.3772	37.77	-6.91	30.86	46.00	-15.14	QP
5		334.8589	33.21	-5.78	27.43	46.00	-18.57	QP
6	*	716.6820	34.09	0.45	34.54	46.00	-11.46	QP

Radiated emissions between 30MHz – 1GHz


Test mode:	TX U-NII-1-802.11a-5240	Polarization:	Vertical
Power supply:	DC 12V	Test site:	RE chamber 2

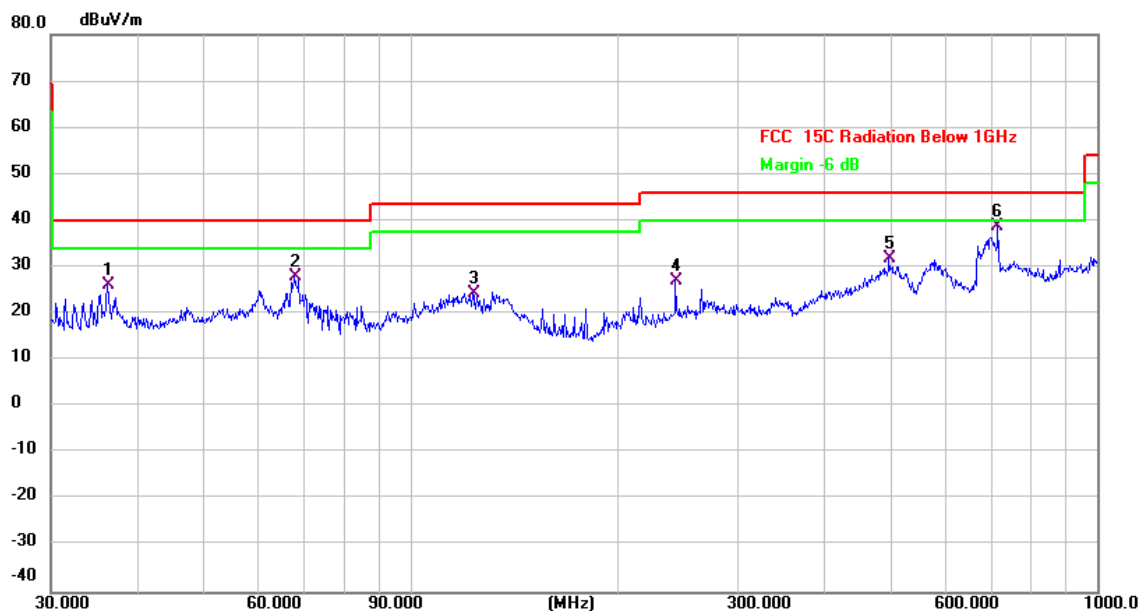

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		36.2541	33.74	-7.61	26.13	40.00	-13.87	QP
2		67.9129	36.94	-9.09	27.85	40.00	-12.15	QP
3		123.2655	35.35	-11.07	24.28	43.50	-19.22	QP
4		243.3772	33.91	-6.91	27.00	46.00	-19.00	QP
5		497.6765	34.44	-2.68	31.76	46.00	-14.24	QP
6	*	716.6820	38.32	0.45	38.77	46.00	-7.23	QP

Radiated emissions between 30MHz – 1GHz


Test mode:	TX U-NII-3-802.11a-5825	Polarization:	Horizontal
Power supply:	DC 12V	Test site:	RE chamber 2

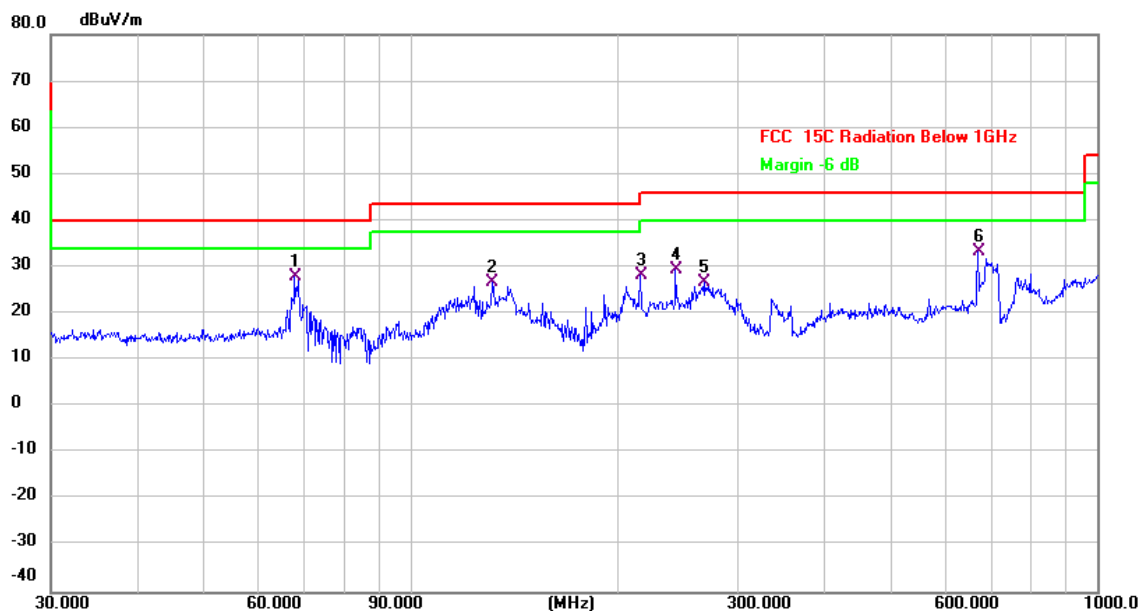

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	67.9129	36.99	-9.09	27.90	40.00	-12.10	QP
2		131.7577	39.09	-12.48	26.61	43.50	-16.89	QP
3		216.0240	34.87	-6.62	28.25	46.00	-17.75	QP
4		243.3772	36.30	-6.91	29.39	46.00	-16.61	QP
5		267.5455	34.63	-7.77	26.86	46.00	-19.14	QP
6		670.4893	36.12	-2.63	33.49	46.00	-12.51	QP

Radiated emissions between 30MHz – 1GHz

Test mode:	TX U-NII-3-802.11a-5825	Polarization:	Vertical
Power supply:	DC 12V	Test site:	RE chamber 2

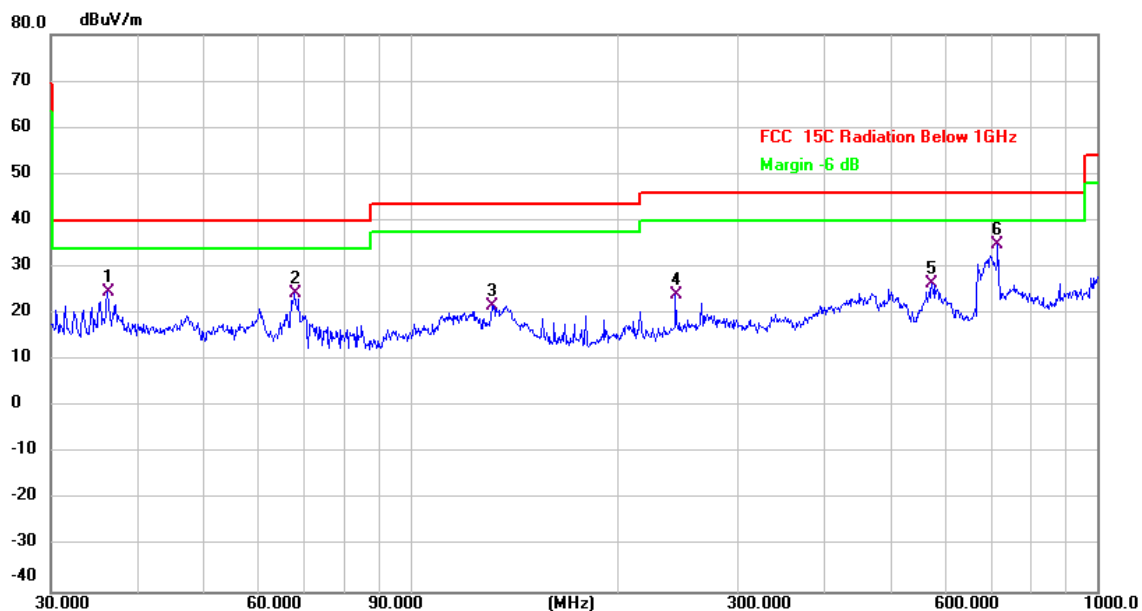

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		36.2541	32.24	-7.61	24.63	40.00	-15.37	QP
2		67.9129	33.49	-9.09	24.40	40.00	-15.60	QP
3		131.7577	34.12	-12.48	21.64	43.50	-21.86	QP
4		243.3772	30.91	-6.91	24.00	46.00	-22.00	QP
5		574.6258	25.74	0.79	26.53	46.00	-19.47	QP
6	*	716.6820	34.32	0.45	34.77	46.00	-11.23	QP

Radiated emissions between 30MHz – 1GHz
13-21IS/RC


Test mode:	TX U-NII-3-802.11a-5825	Polarization:	Horizontal
Power supply:	DC 12V	Test site:	RE chamber 2



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		80.0806	40.98	-13.00	27.98	40.00	-12.02	QP	
2		143.8295	44.67	-10.56	34.11	43.50	-9.39	QP	
3	*	197.8928	44.70	-8.10	36.60	43.50	-6.90	QP	
4		230.9068	41.03	-7.29	33.74	46.00	-12.26	QP	
5		298.2681	38.73	-4.76	33.97	46.00	-12.03	QP	
6		601.4265	33.50	-2.99	30.51	46.00	-15.49	QP	

Radiated emissions between 30MHz – 1GHz
13-21IS/RC


Test mode:	TX U-NII-3-802.11a-5825	Polarization:	Vertical
Power supply:	DC 12V	Test site:	RE chamber 2

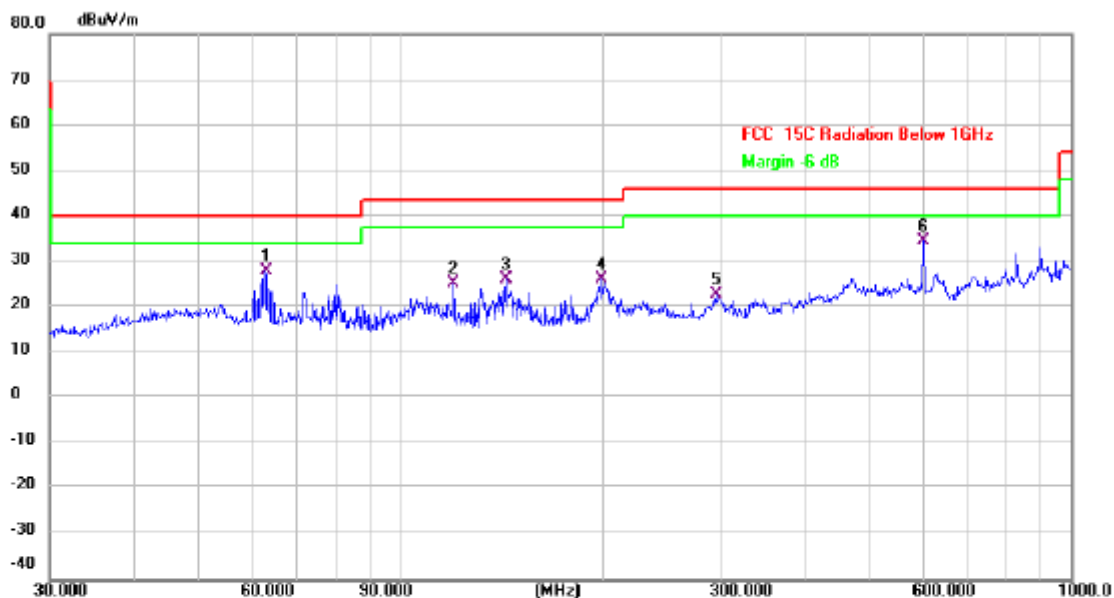

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		62.8708	37.72	-9.76	27.96	40.00	-12.04	QP	
2		119.8556	34.49	-9.22	25.27	43.50	-18.23	QP	
3		143.8295	36.61	-10.56	26.05	43.50	-17.45	QP	
4		199.2855	33.39	-7.14	26.25	43.50	-17.25	QP	
5		295.1469	27.75	-4.97	22.78	46.00	-23.22	QP	
6	*	601.4265	37.43	-2.99	34.44	46.00	-11.56	QP	

Radiated emissions between 30MHz – 1GHz
15-21NX


Test mode:	TX U-NII-3-802.11a-5825	Polarization:	Horizontal
Power supply:	DC 12V	Test site:	RE chamber 2

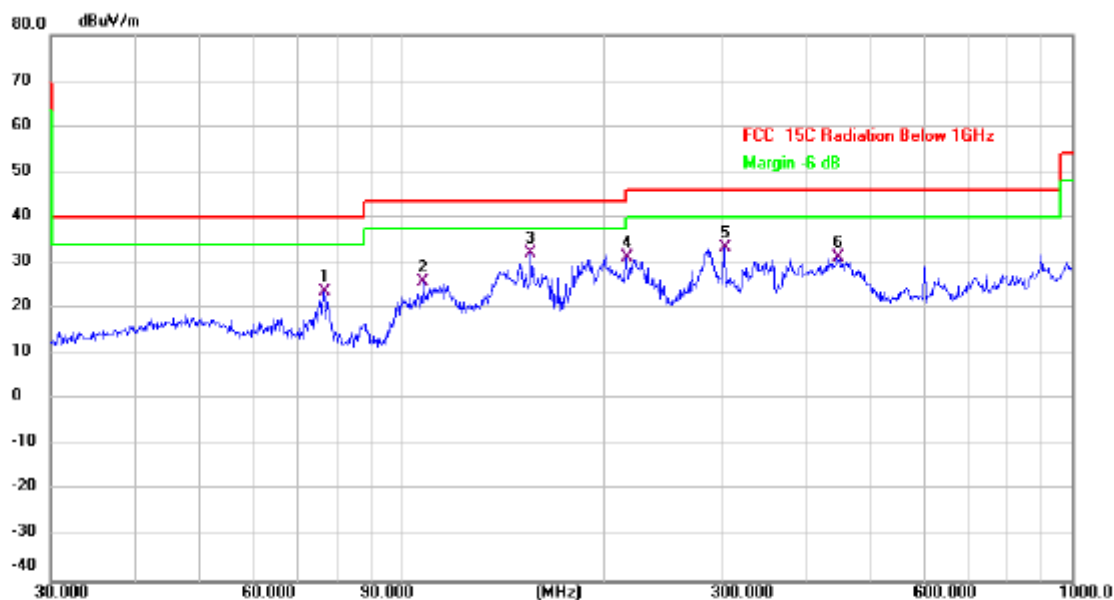

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		76.5121	36.44	-12.78	23.66	40.00	-16.34	QP	
2		107.8877	33.17	-7.26	25.91	43.50	-17.59	QP	
3	*	155.9101	42.47	-10.28	32.19	43.50	-11.31	QP	
4		216.0240	40.31	-8.98	31.33	46.00	-14.67	QP	
5		302.4812	38.48	-5.27	33.21	46.00	-12.79	QP	
6		446.4141	35.51	-4.22	31.29	46.00	-14.71	QP	

Radiated emissions between 30MHz – 1GHz
15-21NX

Test mode:	TX U-NII-3-802.11a-5825	Polarization:	Vertical
Power supply:	DC 12V	Test site:	RE chamber 2

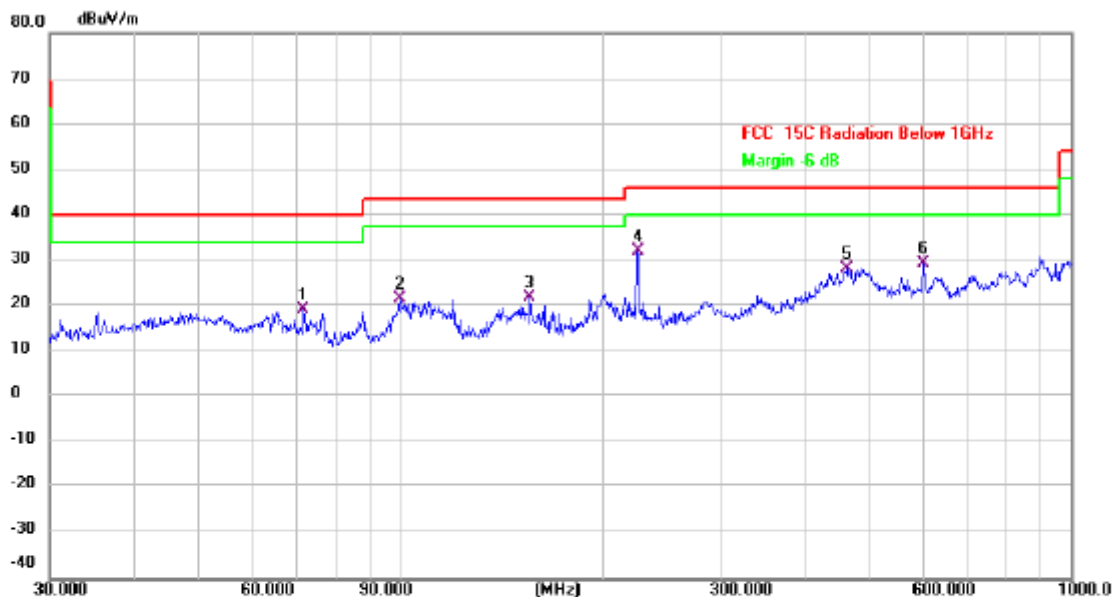

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		71.8320	30.58	-11.26	19.32	40.00	-20.68	QP	
2		99.8777	30.42	-8.76	21.66	43.50	-21.84	QP	
3		155.9101	32.21	-10.28	21.93	43.50	-21.57	QP	
4	*	225.3080	40.59	-8.38	32.21	46.00	-13.79	QP	
5		463.9696	32.23	-4.03	28.20	46.00	-17.80	QP	
6		601.4265	32.39	-2.99	29.40	46.00	-16.60	QP	

Radiated emissions 1 GHz ~ 18 GHz (U-NII-1 band)

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11a – CH36 (5180 MHz)							
10360.00	40.29	6.93	47.22	74.00	-26.78	Peak	V
10360.00	30.25	6.93	37.18	54.00	-16.82	AVG	V
15540.00	41.36	13.65	55.01	74.00	-18.99	Peak	V
15540.00	31.57	13.65	45.22	54.00	-8.78	AVG	V
10360.00	40.82	6.93	47.75	74.00	-26.25	Peak	H
10360.00	30.46	6.93	37.39	54.00	-16.61	AVG	H
15540.00	41.34	13.65	54.99	74.00	-19.01	Peak	H
15540.00	30.93	13.65	44.58	54.00	-9.42	AVG	H
802.11a – CH44 (5220 MHz)							
10440.00	39.74	6.98	46.72	74.00	-27.28	Peak	V
10440.00	29.35	6.98	36.33	54.00	-17.67	AVG	V
15660.00	39.97	13.69	53.66	74.00	-20.34	Peak	V
15660.00	29.90	13.69	43.59	54.00	-10.41	AVG	V
10440.00	39.93	6.98	46.91	74.00	-27.09	Peak	H
10440.00	29.41	6.98	36.39	54.00	-17.61	AVG	H
15660.00	40.85	13.69	54.54	74.00	-19.46	Peak	H
15660.00	30.60	13.69	44.29	54.00	-9.71	AVG	H
802.11a – CH48 (5240 MHz)							
10480.00	39.71	7.00	46.71	74.00	-27.29	Peak	V
10480.00	29.59	7.00	36.59	54.00	-17.41	AVG	V
15720.00	40.29	13.63	53.92	74.00	-20.08	Peak	V
15720.00	29.84	13.63	43.47	54.00	-10.53	AVG	V
10480.00	39.11	7.00	46.11	74.00	-27.89	Peak	H
10480.00	29.05	7.00	36.05	54.00	-17.95	AVG	H
15720.00	41.29	13.63	54.92	74.00	-19.08	Peak	H
15720.00	30.85	13.63	44.48	54.00	-9.52	AVG	H

Radiated emissions 18 GHz ~ 40 GHz (U-NII-1 band)

Frequency	Reading Level	Correct Factor	Dist. Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	dB	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11a – CH36 (5180 MHz)								
20720	63.13	-7.9	-9.5	45.73	74	-28.27	Peak	V
20720	52.77	-7.9	-9.5	35.37	54	-18.63	AVG	V
36430	60.53	4.44	-9.5	55.47	74	-18.53	Peak	V
36430	51.24	4.44	-9.5	46.18	54	-7.82	AVG	V
20720	63.14	-7.9	-9.5	45.74	74	-28.26	Peak	H
20720	51.52	-7.9	-9.5	34.12	54	-19.88	AVG	H
36430	60.02	4.44	-9.5	54.96	74	-19.04	Peak	H
36430	50.59	4.44	-9.5	45.53	54	-8.47	AVG	H
802.11a – CH44 (5220 MHz)								
20800	63.01	-7.89	-9.5	45.62	74	-28.38	Peak	V
20800	52.56	-7.89	-9.5	35.17	54	-18.83	AVG	V
36430	60.47	4.44	-9.5	55.41	74	-18.59	Peak	V
36430	49.69	4.44	-9.5	44.63	54	-9.37	AVG	V
20800	63.34	-7.89	-9.5	45.95	74	-28.05	Peak	H
20800	50.27	-7.89	-9.5	32.88	54	-21.12	AVG	H
36430	58.91	4.44	-9.5	53.85	74	-20.15	Peak	H
36430	51.96	4.44	-9.5	46.90	54	-7.1	AVG	H
802.11a – CH48 (5240 MHz)								
20960	64.07	-7.87	-9.5	46.70	74	-27.3	Peak	V
20960	52.47	-7.87	-9.5	35.10	54	-18.9	AVG	V
36430	60.19	4.44	-9.5	55.13	74	-18.87	Peak	V
36430	50.58	4.44	-9.5	45.52	54	-8.48	AVG	V
20960	63.62	-7.87	-9.5	46.25	74	-27.75	Peak	H
20960	51.24	-7.87	-9.5	33.87	54	-20.13	AVG	H
36430	59.13	4.44	-9.5	54.07	74	-19.93	Peak	H
36430	52.05	4.44	-9.5	46.99	54	-7.01	AVG	H

Notes:

For above 18GHz tests, the test distance is 1m.

Radiated emissions 1 GHz ~ 18 GHz (U-NII-3 band)

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11a – CH149 (5745 MHz)							
11490.000	39.65	9.24	48.89	74.00	-25.11	Peak	V
11490.000	29.33	9.24	38.57	54.00	-15.43	AVG	V
17235.000	39.94	13.34	53.28	74.00	-20.72	Peak	V
17235.000	30.01	13.34	43.35	54.00	-10.65	AVG	V
11490.000	39.60	9.24	48.84	74.00	-25.16	Peak	H
11490.000	29.30	9.24	38.54	54.00	-15.46	AVG	H
17235.000	42.08	13.34	55.42	74.00	-18.58	Peak	H
17235.000	31.84	13.34	45.18	54.00	-8.82	AVG	H
802.11a – CH157 (5785 MHz)							
11568.000	39.71	9.43	49.14	74.00	-24.86	Peak	V
11568.000	29.67	9.43	39.10	54.00	-14.90	AVG	V
17355.000	40.29	13.44	53.73	74.00	-20.27	Peak	V
17355.000	30.00	13.44	43.44	54.00	-10.56	AVG	V
11568.000	39.75	9.43	49.18	74.00	-24.82	Peak	H
11568.000	29.68	9.43	39.11	54.00	-14.89	AVG	H
17355.000	39.67	13.44	53.11	74.00	-20.89	Peak	H
17355.000	29.64	13.44	43.08	54.00	-10.92	AVG	H
802.11a – CH165 (5825 MHz)							
11650.000	40.35	9.51	49.86	74.00	-24.14	Peak	V
11650.000	29.82	9.51	39.33	54.00	-14.67	AVG	V
17475.000	41.90	13.76	55.66	74.00	-18.34	Peak	V
17475.000	31.72	13.76	45.48	54.00	-8.52	AVG	V
11650.000	39.78	9.51	49.29	74.00	-24.71	Peak	H
11650.000	29.82	9.51	39.33	54.00	-14.67	AVG	H
17475.000	41.23	13.76	54.99	74.00	-19.01	Peak	H
17475.000	30.53	13.76	44.29	54.00	-9.71	AVG	H

Radiated emissions 18 GHz ~ 40 GHz (U-NII-3 band)

Frequency	Reading Level	Correct Factor	Dist. Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	dB	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11a – CH149 (5745 MHz)								
22980	60.1	-5.22	-9.5	45.38	74	-28.62	Peak	V
22980	52.39	-5.22	-9.5	37.67	54	-16.33	AVG	V
36430	59.93	4.44	-9.5	54.87	74	-19.13	Peak	V
36430	51.53	4.44	-9.5	46.47	54	-7.53	AVG	V
20720	60.62	-7.9	-9.5	43.22	74	-30.78	Peak	H
20720	50.88	-7.9	-9.5	33.48	54	-20.52	AVG	H
36430	60.29	4.44	-9.5	55.23	74	-18.77	Peak	H
36430	51.11	4.44	-9.5	46.05	54	-7.95	AVG	H
802.11a – CH157 (5785 MHz)								
23140	60.87	-5.22	-9.5	46.15	74	-27.85	Peak	V
23140	60.63	-5.22	-9.5	45.91	54	-8.09	AVG	V
36430	60.73	4.44	-9.5	55.67	74	-18.33	Peak	V
36430	57.94	4.44	-9.5	52.88	54	-1.12	AVG	V
23140	60.65	-5.22	-9.5	45.93	74	-28.07	Peak	H
23140	60.9	-7.89	-9.5	43.51	54	-10.49	AVG	H
36430	61.09	4.44	-9.5	56.03	74	-17.97	Peak	H
36430	57.29	4.44	-9.5	52.23	54	-1.77	AVG	H
802.11a – CH165 (5825 MHz)								
23300	61.05	-5.25	-9.5	46.30	74	-27.7	Peak	V
23300	59.49	-5.25	-9.5	44.74	54	-9.26	AVG	V
36430	59.2	4.44	-9.5	54.14	74	-19.86	Peak	V
36430	56.35	4.44	-9.5	51.29	54	-2.71	AVG	V
23300	59.61	-7.87	-9.5	42.24	74	-31.76	Peak	H
23300	60.87	-7.87	-9.5	43.50	54	-10.5	AVG	H
36430	59.84	4.44	-9.5	54.78	74	-19.22	Peak	H
36430	57.75	4.44	-9.5	52.69	54	-1.31	AVG	H

Notes:

For above 18GHz tests, the test distance is 1m.

Radiated emissions at band edge – U-NII-1 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11a – CH36 (5180 MHz)							
4500.000	46.85	-0.91	45.94	74.00	-28.06	Peak	V
4500.000	36.31	-0.91	35.40	54.00	-18.60	AVG	V
5150.000	46.41	1.92	48.33	74.00	-25.67	Peak	V
5150.000	37.55	1.92	39.47	54.00	-14.53	AVG	V
4500.000	46.17	-0.91	45.26	74.00	-28.74	Peak	H
4500.000	36.26	-0.91	35.35	54.00	-18.65	AVG	H
5150.000	46.76	1.92	48.68	74.00	-25.32	Peak	H
5150.000	37.85	1.92	39.77	54.00	-14.23	AVG	H
802.11a – CH48 (5240 MHz)							
5350.000	46.16	2.03	48.19	74.00	-25.81	Peak	V
5350.000	36.67	2.03	38.70	54.00	-15.30	AVG	V
5460.000	46.66	2.14	48.80	74.00	-25.20	Peak	V
5460.000	37.08	2.14	39.22	54.00	-14.78	AVG	V
5350.000	46.96	2.03	48.99	74.00	-25.01	Peak	H
5350.000	36.68	2.03	38.71	54.00	-15.29	AVG	H
5460.000	46.76	2.14	48.90	74.00	-25.10	Peak	H
5460.000	37.15	2.14	39.29	54.00	-14.71	AVG	H

Radiated emissions at band edge – U-NII-1 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11n20 – CH36 (5180 MHz)							
4500.000	45.92	-0.91	45.01	74.00	-28.99	Peak	V
4500.000	36.41	-0.91	35.50	54.00	-18.50	AVG	V
5150.000	47.18	1.92	49.10	74.00	-24.90	Peak	V
5150.000	37.62	1.92	39.54	54.00	-14.46	AVG	V
4500.000	45.57	-0.91	44.66	74.00	-29.34	Peak	H
4500.000	36.29	-0.91	35.38	54.00	-18.62	AVG	H
5150.000	46.74	1.92	48.66	74.00	-25.34	Peak	H
5150.000	37.56	1.92	39.48	54.00	-14.52	AVG	H
802.11n20 – CH48 (5240 MHz)							
5350.000	46.66	2.03	48.69	74.00	-25.31	Peak	V
5350.000	36.77	2.03	38.80	54.00	-15.20	AVG	V
5460.000	46.99	2.14	49.13	74.00	-24.87	Peak	V
5460.000	37.23	2.14	39.37	54.00	-14.63	AVG	V
5350.000	46.65	2.03	48.68	74.00	-25.32	Peak	H
5350.000	36.94	2.03	38.97	54.00	-15.03	AVG	H
5460.000	46.43	2.14	48.57	74.00	-25.43	Peak	H
5460.000	37.30	2.14	39.44	54.00	-14.56	AVG	H

Radiated emissions at band edge – U-NII-1 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11n40 – CH38 (5190 MHz)							
4500.000	46.11	-0.91	45.20	74.00	-28.80	Peak	V
4500.000	36.13	-0.91	35.22	54.00	-18.78	AVG	V
5150.000	48.23	1.92	50.15	74.00	-23.85	Peak	V
5150.000	37.69	1.92	39.61	54.00	-14.39	AVG	V
4500.000	45.29	-0.91	44.38	74.00	-29.62	Peak	H
4500.000	36.36	-0.91	35.45	54.00	-18.55	AVG	H
5150.000	46.95	1.92	48.87	74.00	-25.13	Peak	H
5150.000	37.74	1.92	39.66	54.00	-14.34	AVG	H
802.11n40 – CH46 (5230 MHz)							
5350.000	46.79	2.03	48.82	74.00	-25.18	Peak	V
5350.000	36.60	2.03	38.63	54.00	-15.37	AVG	V
5460.000	46.89	2.14	49.03	74.00	-24.97	Peak	V
5460.000	37.40	2.14	39.54	54.00	-14.46	AVG	V
5350.000	46.75	2.03	48.78	74.00	-25.22	Peak	H
5350.000	36.91	2.03	38.94	54.00	-15.06	AVG	H
5460.000	46.67	2.14	48.81	74.00	-25.19	Peak	H
5460.000	37.11	2.14	39.25	54.00	-14.75	AVG	H

Radiated emissions at band edge – U-NII-1 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11ac20 – CH36 (5180 MHz)							
4500.000	47.41	-0.91	46.50	74.00	-27.50	Peak	V
4500.000	36.61	-0.91	35.70	54.00	-18.30	AVG	V
5150.000	48.91	1.92	50.83	74.00	-23.17	Peak	V
5150.000	38.11	1.92	40.03	54.00	-13.97	AVG	V
4500.000	46.02	-0.91	45.11	74.00	-28.89	Peak	H
4500.000	36.23	-0.91	35.32	54.00	-18.68	AVG	H
5150.000	46.98	1.92	48.90	74.00	-25.10	Peak	H
5150.000	38.11	1.92	40.03	54.00	-13.97	AVG	H
802.11ac20 – CH48 (5240 MHz)							
5350.000	46.32	2.03	48.35	74.00	-25.65	Peak	V
5350.000	36.85	2.03	38.88	54.00	-15.12	AVG	V
5460.000	45.62	2.14	47.76	74.00	-26.24	Peak	V
5460.000	37.01	2.14	39.15	54.00	-14.85	AVG	V
5350.000	47.54	2.03	49.57	74.00	-24.43	Peak	H
5350.000	36.89	2.03	38.92	54.00	-15.08	AVG	H
5460.000	48.01	2.14	50.15	74.00	-23.85	Peak	H
5460.000	37.37	2.14	39.51	54.00	-14.49	AVG	H

Radiated emissions at band edge – U-NII-1 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11ac40 – CH38 (5190 MHz)							
4500.000	46.71	-0.91	45.80	74.00	-28.20	Peak	V
4500.000	36.19	-0.91	35.28	54.00	-18.72	AVG	V
5150.000	47.16	1.92	49.08	74.00	-24.92	Peak	V
5150.000	37.74	1.92	39.66	54.00	-14.34	AVG	V
4500.000	46.50	-0.91	45.59	74.00	-28.41	Peak	H
4500.000	36.22	-0.91	35.31	54.00	-18.69	AVG	H
5150.000	47.27	1.92	49.19	74.00	-24.81	Peak	H
5150.000	37.71	1.92	39.63	54.00	-14.37	AVG	H
802.11ac40 – CH46 (5230 MHz)							
5350.000	46.36	2.03	48.39	74.00	-25.61	Peak	V
5350.000	36.44	2.03	38.47	54.00	-15.53	AVG	V
5460.000	46.88	2.14	49.02	74.00	-24.98	Peak	V
5460.000	37.38	2.14	39.52	54.00	-14.48	AVG	V
5350.000	46.61	2.03	48.64	74.00	-25.36	Peak	H
5350.000	36.89	2.03	38.92	54.00	-15.08	AVG	H
5460.000	47.46	2.14	49.60	74.00	-24.40	Peak	H
5460.000	37.39	2.14	39.53	54.00	-14.47	AVG	H

Radiated emissions at band edge – U-NII-1 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11ac80 – CH42 (5210 MHz)							
4500.000	46.78	-0.91	45.87	74.00	-28.13	Peak	V
4500.000	36.23	-0.91	35.32	54.00	-18.68	AVG	V
5150.000	49.18	1.92	51.10	74.00	-22.90	Peak	V
5150.000	37.62	1.92	39.54	54.00	-14.46	AVG	V
4500.000	46.15	-0.91	45.24	74.00	-28.76	Peak	H
4500.000	36.26	-0.91	35.35	54.00	-18.65	AVG	H
5150.000	50.83	1.92	52.75	74.00	-21.25	Peak	H
5150.000	38.00	1.92	39.92	54.00	-14.08	AVG	H
5350.000	45.98	2.03	48.01	74.00	-25.99	Peak	V
5350.000	36.66	2.03	38.69	54.00	-15.31	AVG	V
5460.000	46.39	2.14	48.53	74.00	-25.47	Peak	V
5460.000	37.30	2.14	39.44	54.00	-14.56	AVG	V
5350.000	47.46	2.03	49.49	74.00	-24.51	Peak	H
5350.000	36.92	2.03	38.95	54.00	-15.05	AVG	H
5460.000	48.31	2.14	50.45	74.00	-23.55	Peak	H
5460.000	37.30	2.14	39.44	54.00	-14.56	AVG	H

Radiated emissions at band edge – U-NII-3 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11a – CH149 (5745 MHz)							
5650.000	46.56	1.86	48.42	68.20	-19.78	Peak	V
5700.000	45.67	1.71	47.38	105.20	-57.82	Peak	V
5720.000	46.85	1.69	48.54	110.80	-62.26	Peak	V
5725.000	47.29	1.67	48.96	122.20	-73.24	Peak	V
5650.000	45.32	1.86	47.18	68.20	-21.02	Peak	H
5700.000	46.28	1.71	47.99	105.20	-57.21	Peak	H
5720.000	46.89	1.69	48.58	110.80	-62.22	Peak	H
5725.000	49.55	1.67	51.22	122.20	-70.98	Peak	H
802.11a – CH165 (5825 MHz)							
5850.000	47.92	1.54	49.46	122.20	-72.74	Peak	V
5855.000	48.08	1.55	49.63	110.80	-61.17	Peak	V
5875.000	48.06	1.53	49.59	105.20	-55.61	Peak	V
5925.000	46.78	1.44	48.22	68.20	-19.98	Peak	V
5850.000	47.53	1.54	49.07	122.20	-73.13	Peak	H
5855.000	47.43	1.55	48.98	110.80	-61.82	Peak	H
5875.000	46.88	1.53	48.41	105.20	-56.79	Peak	H
5925.000	47.13	1.44	48.57	68.20	-19.63	Peak	H

Radiated emissions at band edge – U-NII-3 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11n20 – CH149 (5745 MHz)							
5650.000	45.76	1.86	47.62	68.20	-20.58	Peak	V
5700.000	46.14	1.71	47.85	105.20	-57.35	Peak	V
5720.000	46.29	1.69	47.98	110.80	-62.82	Peak	V
5725.000	47.27	1.67	48.94	122.20	-73.26	Peak	V
5650.000	48.42	1.86	50.28	68.20	-17.92	Peak	H
5700.000	46.08	1.71	47.79	105.20	-57.41	Peak	H
5720.000	45.85	1.69	47.54	110.80	-63.26	Peak	H
5725.000	49.53	1.67	51.20	122.20	-71.00	Peak	H
802.11 n20 – CH165 (5825 MHz)							
5850.000	47.56	1.54	49.10	122.20	-73.10	Peak	V
5855.000	46.62	1.55	48.17	110.80	-62.63	Peak	V
5875.000	46.84	1.53	48.37	105.20	-56.83	Peak	V
5925.000	46.98	1.44	48.42	68.20	-19.78	Peak	V
5850.000	47.56	1.54	49.10	122.20	-73.10	Peak	H
5855.000	47.21	1.55	48.76	110.80	-62.04	Peak	H
5875.000	47.56	1.53	49.09	105.20	-56.11	Peak	H
5925.000	46.99	1.44	48.43	68.20	-19.77	Peak	H

Radiated emissions at band edge – U-NII-3 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11n40 – CH151 (5755 MHz)							
5650.000	45.60	1.86	47.46	68.20	-20.74	Peak	V
5700.000	47.44	1.71	49.15	105.20	-56.05	Peak	V
5720.000	47.76	1.69	49.45	110.80	-61.35	Peak	V
5725.000	49.13	1.67	50.80	122.20	-71.40	Peak	V
5650.000	46.77	1.86	48.63	68.20	-19.57	Peak	H
5700.000	46.79	1.71	48.50	105.20	-56.70	Peak	H
5720.000	47.29	1.69	48.98	110.80	-61.82	Peak	H
5725.000	48.98	1.67	50.65	122.20	-71.55	Peak	H
802.11 n40 – CH159 (5795 MHz)							
5850.000	49.00	1.54	50.54	122.20	-71.66	Peak	V
5855.000	47.58	1.55	49.13	110.80	-61.67	Peak	V
5875.000	46.76	1.53	48.29	105.20	-56.91	Peak	V
5925.000	46.88	1.44	48.32	68.20	-19.88	Peak	V
5850.000	47.74	1.54	49.28	122.20	-72.92	Peak	H
5855.000	47.47	1.55	49.02	110.80	-61.78	Peak	H
5875.000	46.82	1.53	48.35	105.20	-56.85	Peak	H
5925.000	48.05	1.44	49.49	68.20	-18.71	Peak	H

Radiated emissions at band edge – U-NII-3 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11ac20 – CH149 (5745 MHz)							
5650.000	46.11	1.86	47.97	68.20	-20.23	Peak	V
5700.000	45.72	1.71	47.43	105.20	-57.77	Peak	V
5720.000	46.42	1.69	48.11	110.80	-62.69	Peak	V
5725.000	47.98	1.67	49.65	122.20	-72.55	Peak	V
5650.000	46.78	1.86	48.64	68.20	-19.56	Peak	H
5700.000	46.20	1.71	47.91	105.20	-57.29	Peak	H
5720.000	46.16	1.69	47.85	110.80	-62.95	Peak	H
5725.000	47.84	1.67	49.51	122.20	-72.69	Peak	H
802.11ac20 – CH165 (5825 MHz)							
5850.000	46.78	1.54	48.32	122.20	-73.88	Peak	V
5855.000	47.53	1.55	49.08	110.80	-61.72	Peak	V
5875.000	46.24	1.53	47.77	105.20	-57.43	Peak	V
5925.000	45.86	1.44	47.30	68.20	-20.90	Peak	V
5850.000	47.96	1.54	49.50	122.20	-72.70	Peak	H
5855.000	47.64	1.55	49.19	110.80	-61.61	Peak	H
5875.000	47.75	1.53	49.28	105.20	-55.92	Peak	H
5925.000	47.14	1.44	48.58	68.20	-19.62	Peak	H

Radiated emissions at band edge – U-NII-3 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11ac40 – CH151 (5755 MHz)							
5650.000	45.82	1.86	47.68	68.20	-20.52	Peak	V
5700.000	45.60	1.71	47.31	105.20	-57.89	Peak	V
5720.000	48.91	1.69	50.60	110.80	-60.20	Peak	V
5725.000	48.74	1.67	50.41	122.20	-71.79	Peak	V
5650.000	47.30	1.86	49.16	68.20	-19.04	Peak	H
5700.000	47.26	1.71	48.97	105.20	-56.23	Peak	H
5720.000	49.25	1.69	50.94	110.80	-59.86	Peak	H
5725.000	49.92	1.67	51.59	122.20	-70.61	Peak	H
802.11ac40 – CH159 (5795 MHz)							
5850.000	47.42	1.54	48.96	122.20	-73.24	Peak	V
5855.000	47.38	1.55	48.93	110.80	-61.87	Peak	V
5875.000	47.27	1.53	48.80	105.20	-56.40	Peak	V
5925.000	45.97	1.44	47.41	68.20	-20.79	Peak	V
5850.000	46.92	1.54	48.46	122.20	-73.74	Peak	H
5855.000	47.65	1.55	49.20	110.80	-61.60	Peak	H
5875.000	47.46	1.53	48.99	105.20	-56.21	Peak	H
5925.000	46.29	1.44	47.73	68.20	-20.47	Peak	H

Radiated emissions at band edge – U-NII-3 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11ac80 – CH155 (5775 MHz)							
5650.000	46.92	1.86	48.78	68.20	-19.42	Peak	V
5700.000	50.23	1.71	51.94	105.20	-53.26	Peak	V
5720.000	54.90	1.69	56.59	110.80	-54.21	Peak	V
5725.000	56.20	1.67	57.87	122.20	-64.33	Peak	V
5650.000	46.78	1.86	48.64	68.20	-19.56	Peak	H
5700.000	53.56	1.71	55.27	105.20	-49.93	Peak	H
5720.000	57.86	1.69	59.55	110.80	-51.25	Peak	H
5725.000	59.55	1.67	61.22	122.20	-60.98	Peak	H
5850.000	53.50	1.54	55.04	122.20	-67.16	Peak	V
5855.000	54.33	1.55	55.88	110.80	-54.92	Peak	V
5875.000	48.53	1.53	50.06	105.20	-55.14	Peak	V
5925.000	47.00	1.44	48.44	68.20	-19.76	Peak	V
5850.000	56.38	1.54	57.92	122.20	-64.28	Peak	H
5855.000	55.29	1.55	56.84	110.80	-53.96	Peak	H
5875.000	49.24	1.53	50.77	105.20	-54.43	Peak	H
5925.000	47.85	1.44	49.29	68.20	-18.91	Peak	H


Note: Spurious radiations (above 1GHz) for 12-22ES,13-21IS/RC, 15-21NX have been tested. The report only shows the worst product(12-22ES).

6.4 Emission bandwidth (26dB bandwidth)

6.4.1 Limits

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 , and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

6.4.2 Test setup



6.4.3 Test procedure

Test method: KDB 789033 D02 v02r01 Section C.1.

6.4.4 Test results


Note: See the Appendix A1

6.5 Emission bandwidth (6dB bandwidth)

6.5.1 Limits

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

6.5.2 Test setup



6.5.3 Test procedure

Test method: KDB 789033 D02 v02r01 Section C.2.

6.5.4 Test results


Note: See the Appendix A2

6.6 Duty Cycle

6.6.1 Limits

None, for reporting purposes only.

6.6.2 Test setup



6.6.3 Test procedure

Test method: ANSI C63.10 section 12.2.

6.6.4 Test Results

Note: see the Appendix B

6.7 Maximum conducted output power

6.7.1 Limits

5.15 - 5.25 GHz band

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


5.25-5.35 GHz and 5.47-5.725 GHz band

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.725-5.85 GHz band

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.7.2 Test setup



6.7.3 Test procedure

Test method: 789033 D02 v02r01 Section E.3.a (Method PM)

6.7.4 Test results

Note: See the Appendix C

6.8 Power spectral density

6.8.1 Limits

5.15 - 5.25 GHz band

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


5.25-5.35 GHz and 5.47-5.725 GHz band

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.725-5.85 GHz band

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.8.2 Test setup



6.8.3 Test procedure

Test method: KDB 789033 D02 v02r01 Section F.

6.8.4 Test results

Note: See the Appendix D

6.9 Conducted spurious emissions

6.9.1 Limits

Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

6.9.2 Test setup



6.9.3 Test procedure

Spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

6.9.4 Test results

Note: See the Appendix E

6.10 Conducted band edge

6.10.1 Limits

Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

6.10.2 Test setup



6.10.3 Test procedure

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

6.10.4 Test results

Note: See the Appendix F

6.11 Frequency Stability

6.11.1 Limits

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.11.2 Test Procedures

Test method: ANSI C63.10-2013 Clause 6.8.

6.11.3 Test results

Note: See the Appendix G

Photographs of the Test Setup

See the Appendix – Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----