

SPECIFICATION FOR APPROVAL

CUSTOMER:	Shenzhen Kechongbao Technology Co., Ltd.
CUST P/N:	
FINE P/N:	Pure copper wire wrapped wire 0.1*10P 6.5UH 10% / 43.5*0.65 slotted self-adhesive backing
DATE:	2025/6/1
Version:	A.0

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
Dai Xiongbiao	Wei Hongyan	Wei Hongyan	

SPECIFICATION

CUST: 331
Fine P/N: FYD331003
CUST P/N:


Rev: A.0
DESC: Φ43.5x20.5 - 10Ts - 0.08 * 48P Slotted Back Adhesive
一、 DIMENSION:(mm)

- A 32.5±1
- B 20.5±0.5
- C 0.65 thickness
- D1 90mm±2
- D2 85mm±2
- F 43.5±0.5
- G 8±3
- H 1.6-2.0
- E 3-4mm

二、 SCHEMATIC DIAGRAM:



三、 Winding Specification:

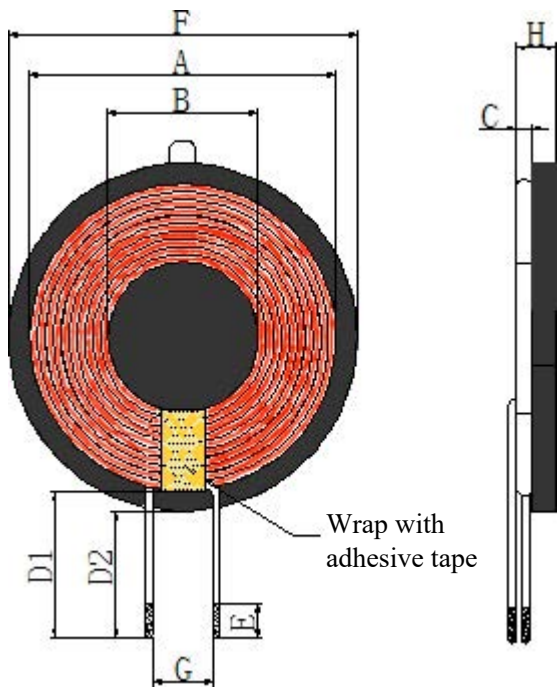

- Note:
- 1. Coil with magnetic sheet, magnetic sheet size: 43.5 ± 0.5 mm, thickness 0.65 mm.
 - 2. The outlet position of the coil is wrapped with 6mm (ref) width high-temperature adhesive tape 1-2Ts.
 - 3. The reverse side of the magnetic sheet is pasted with a circular part with a diameter of 43 mm (ref) and ordinary double-sided adhesive tape, with an inner hole of 20.5 mm (ref).

NO.	TERMINAL		WIRE	Turns	Winding Direction
1	S	F	Pure copper wire wrapped wire 0.1*10P	10Ts	CCW

PREPARED BY/DATE	CHECKED BY/DATE
2025/6/11	2025/6/13

Building C, Industrial Zone of Liantangkeng, Fenghuanggang Community, Xixiang Sub-district, Bao'an District, Shenzhen City